


ONA-800A-MF

Base Module

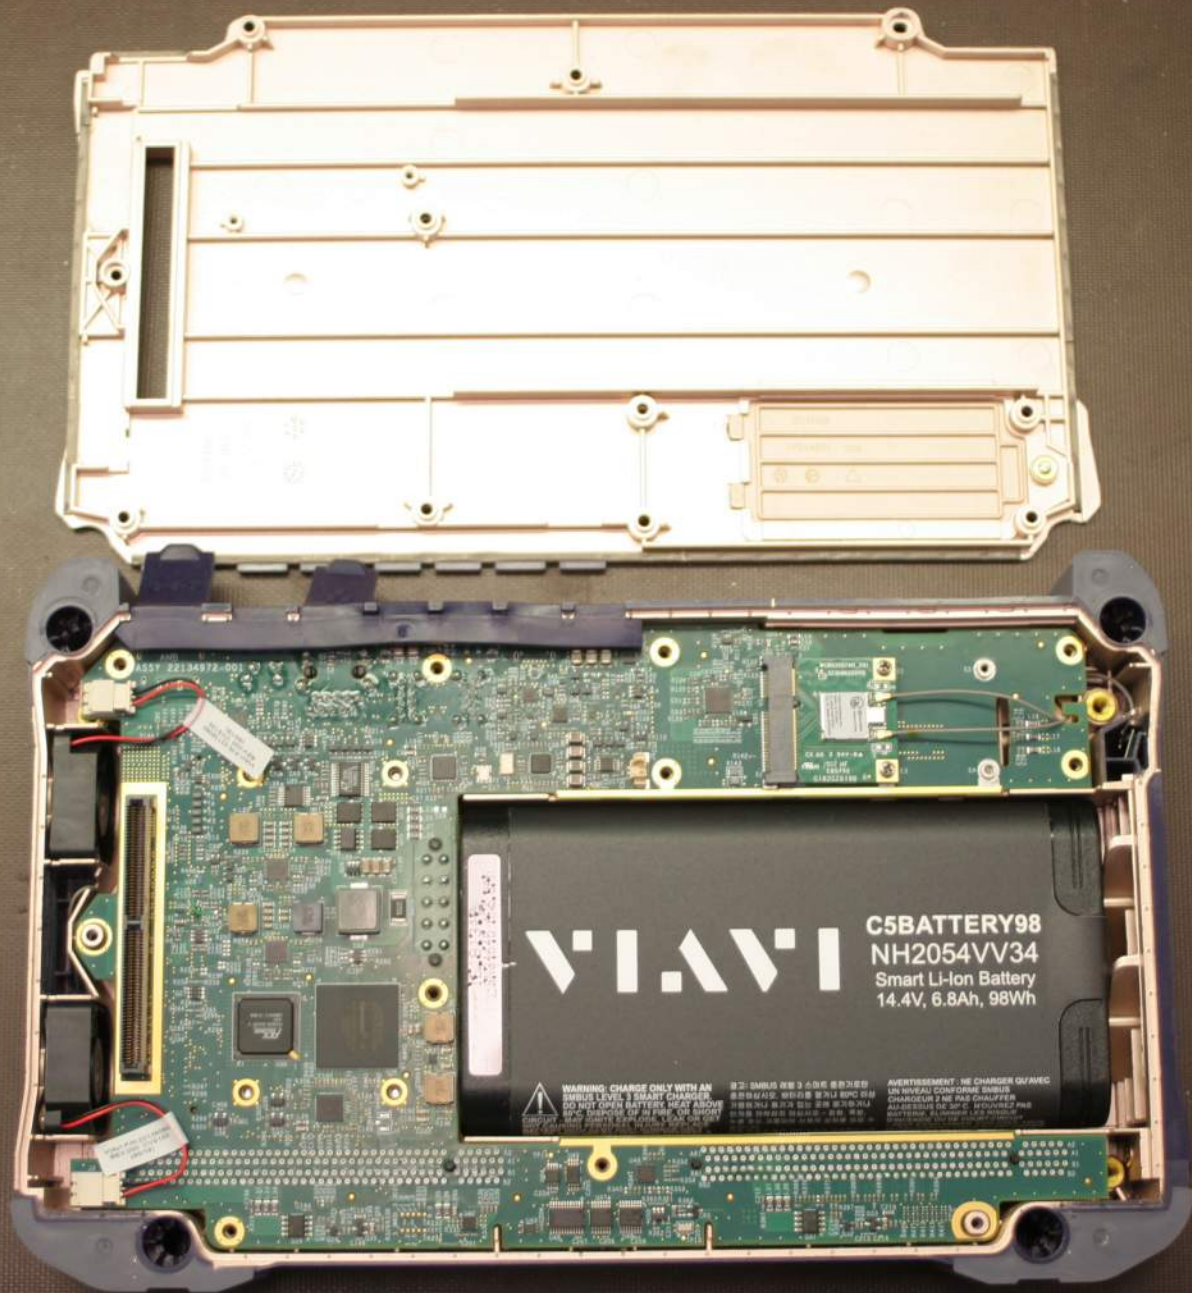

VIAVI

C5BATTERY98
NH2054VV34
Smart LI-Ion Battery
14.4V, 6.8Ah, 98Wh

WARNING: CHARGE ONLY WITH AN
ORIGINS LI-Ion BATTERY CHARGER
DO NOT OPEN BATTERY HEAT ABOVE
100°C (212°F) OR SHORT
CIRCUIT BATTERY LEAD OR ONLY


警告：僅能用原廠
提供的鋰離子電池充電器
充電，請勿拆解電池，溫度
超過100°C (212°F) 或
短路電池導線，或僅能

AVERTISSEMENT: NE CHARGER QU'AVEC
UN CHARGEUR CONFORME ORIGINE
CHARGEUR 2 NE PAS CHAUFFER
AU-DESSUS DE 100°C (212°F) PAS
CIRCUITER BATTERIE LEAD SEUL





CHAIN 1
ANTENNA

RADIO
MODULE

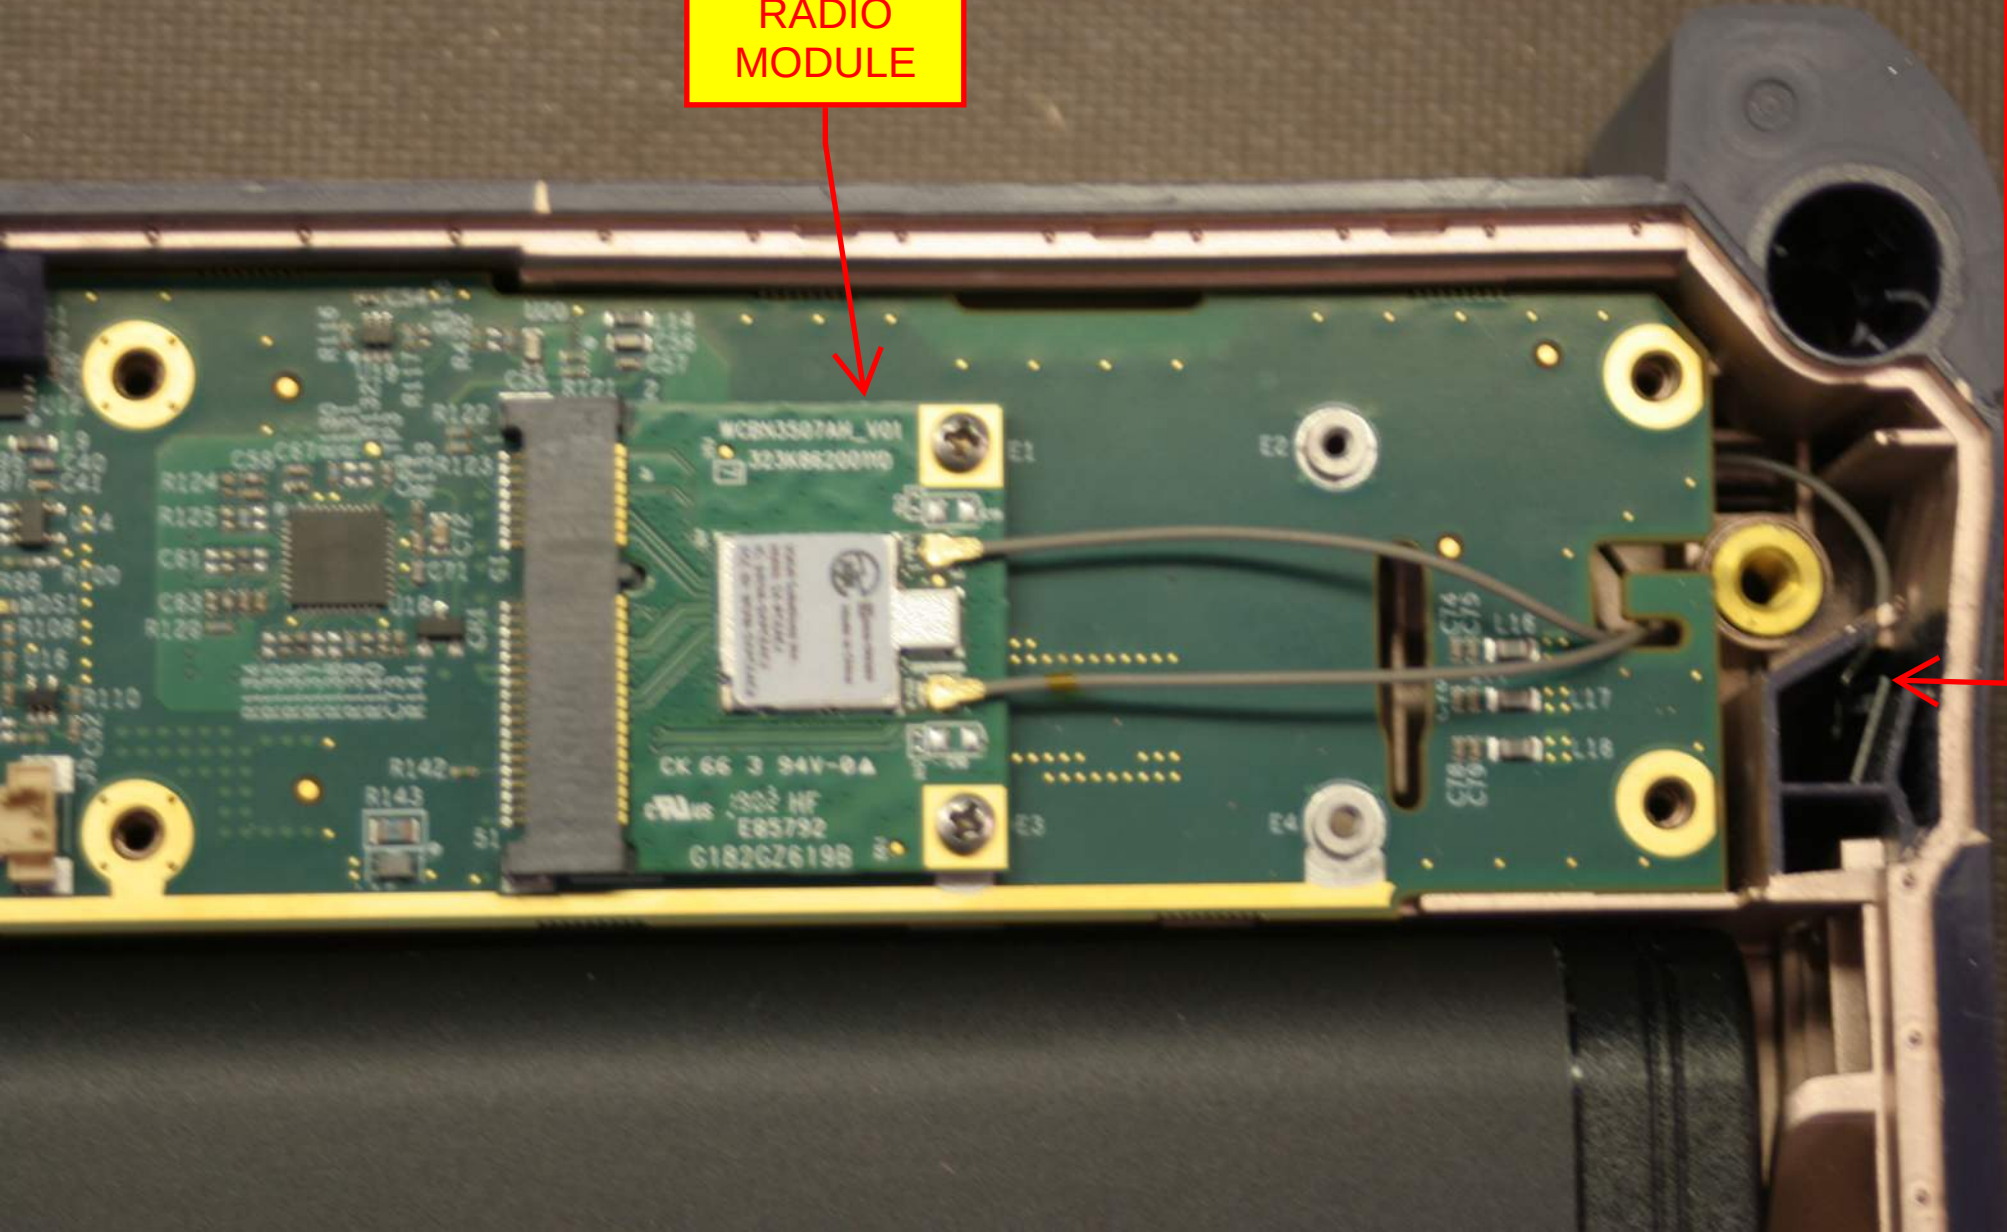


CHAIN 0
ANTENNA

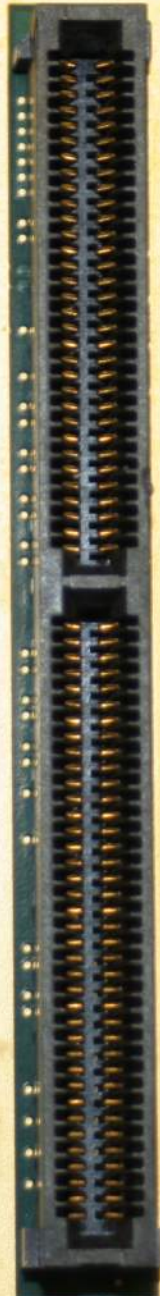

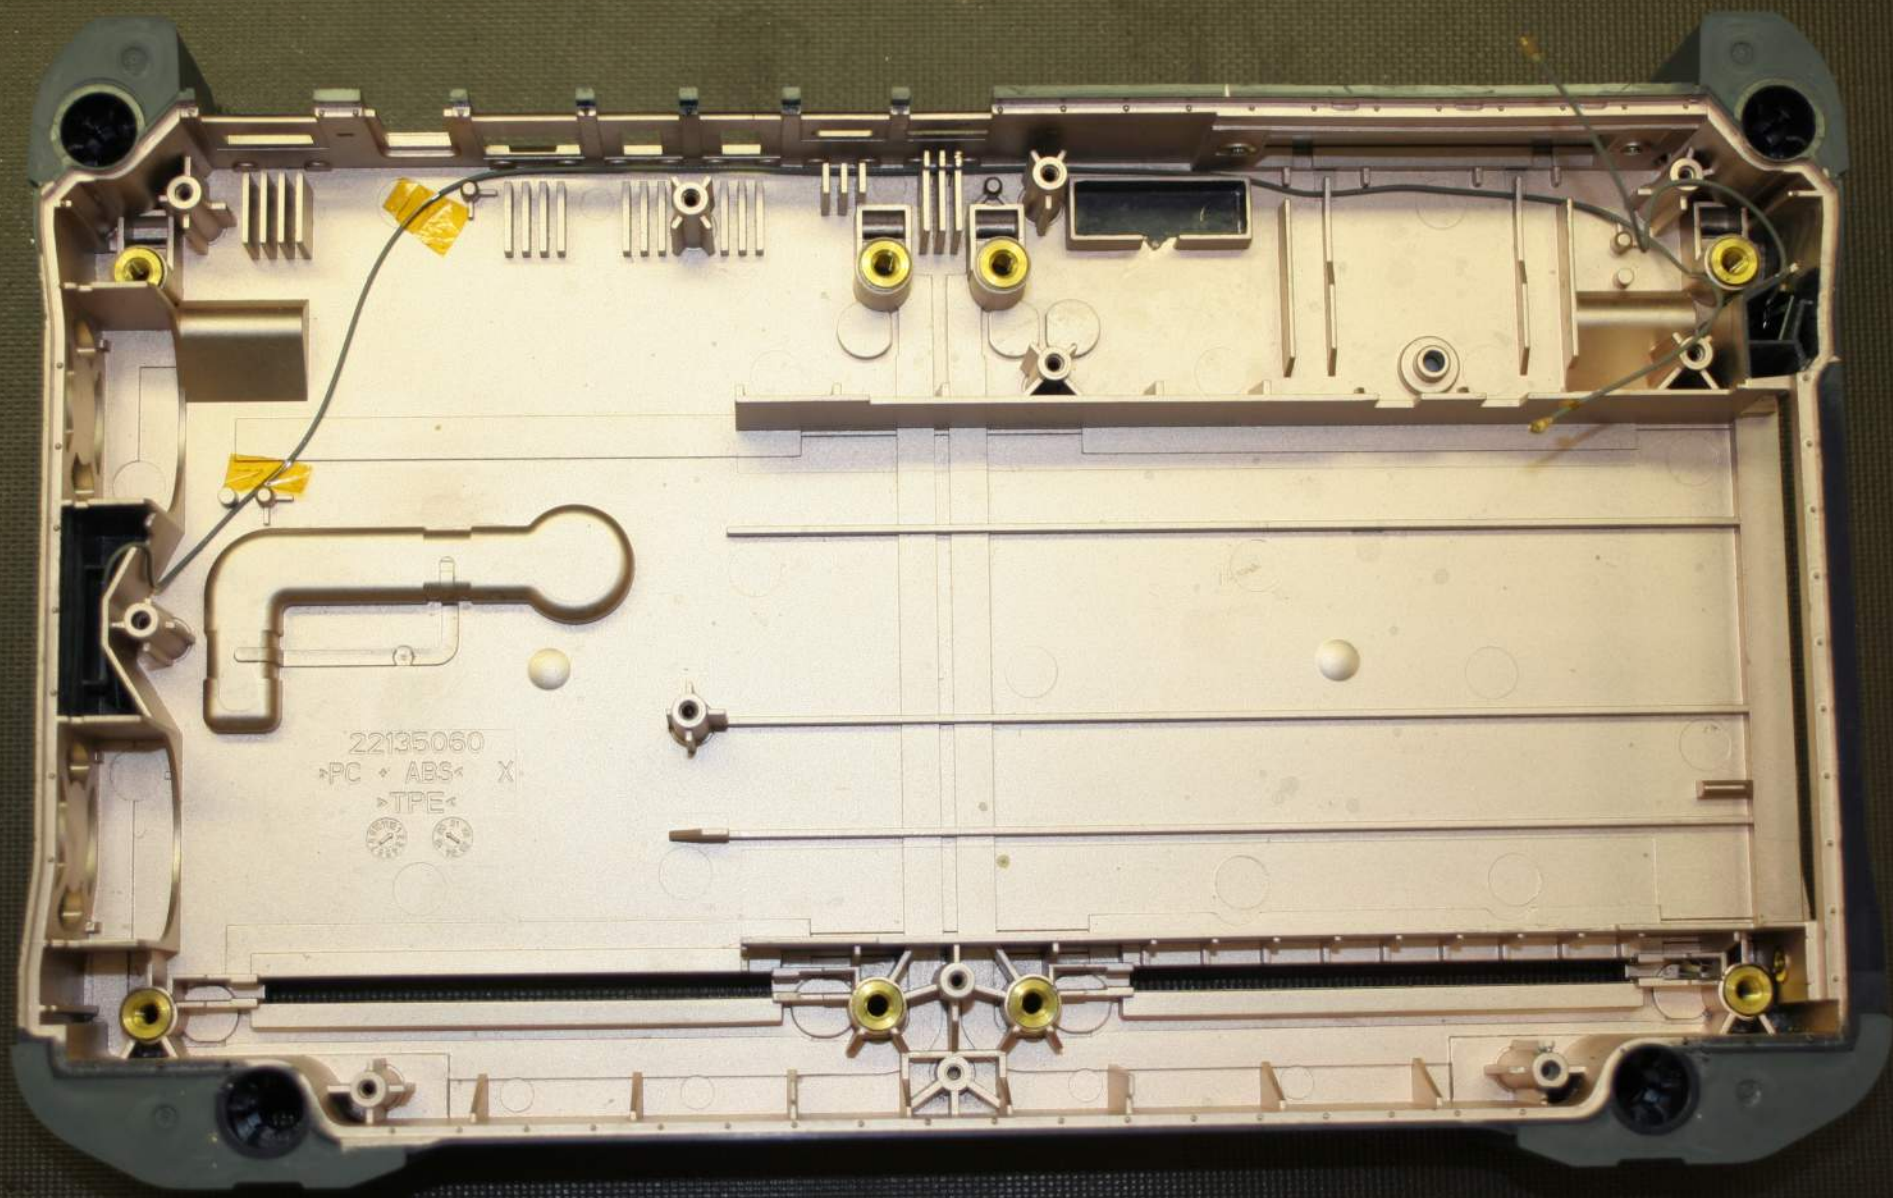

22135060
PC ABS X
TPE



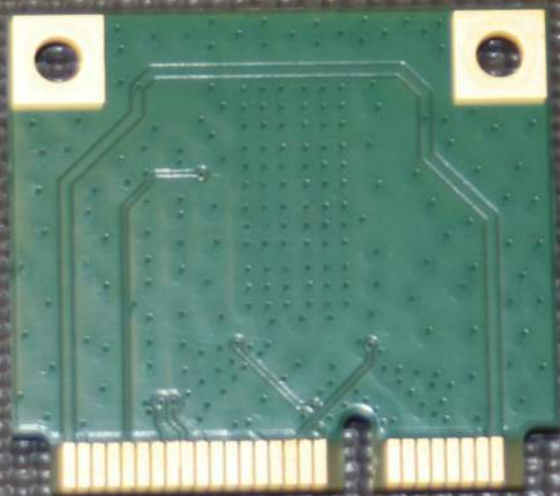










MSC Technologies
MSC SM25-IMXRM-QC-
13N0600 PC8FTX
073303 A0






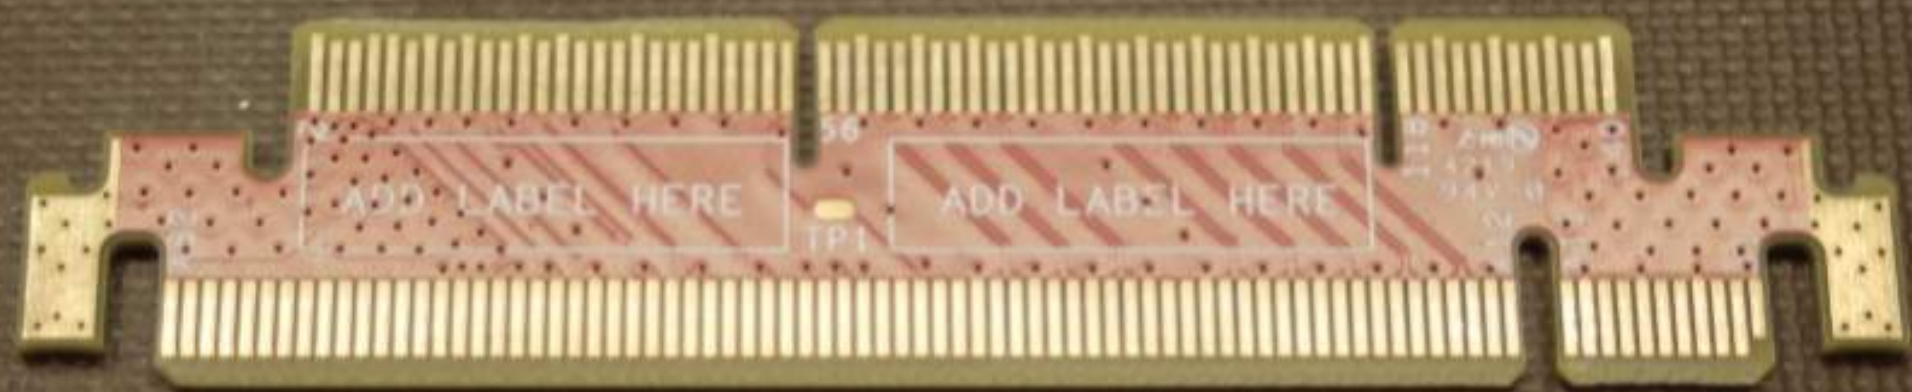

ONA-800A-MF
Display Module
(ONA-800A-DISPL)





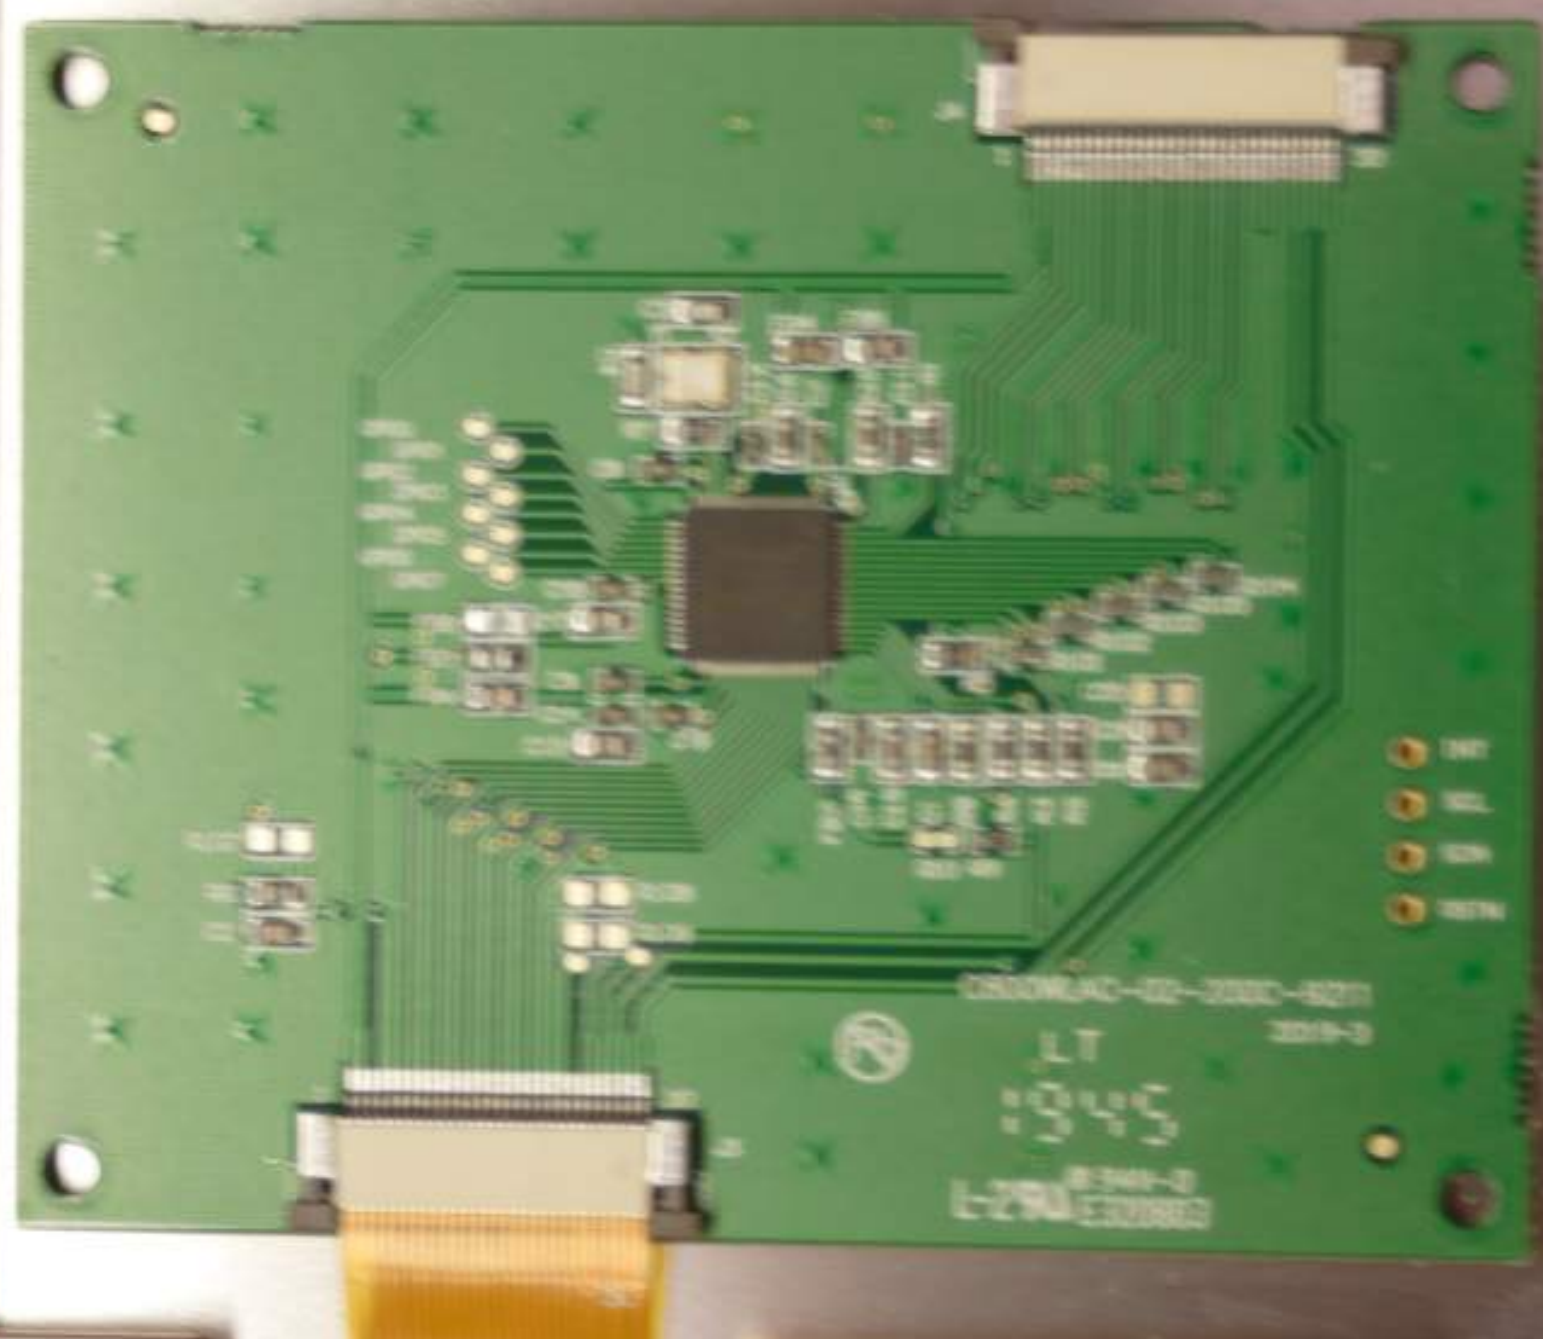

CH00WAC-02-0000-6271

2019-9

LT

1345

18-340-0
L279A E000863

TWT
SCL
SDA
TEST



22130419-101 REV000 VIAVI IFDV2

510-800

51-4338







Radio Controls



Favorite



Tests



Job Manager



System



System >



Network

Version 1.1.0.fad386c.dev

LAN

Wi-Fi

Certificat...

Proxy

☒ Enable wireless adapterMAC address: **84:25:3F:61:1F:AD**☒ VS-WIFIIP address: **10.12.39.9**

ALHN-CCF0-5

CBCI-4C2A-5

NSC-TESTER-5G

XFINITY

TP-Link_C6E0_5G

CBCI-4C2A-2.4

NSC-TESTER-2G

TP-Link_C6E0

NVG599 - 2.4GHz

cpn84

net4guest

VS-Visitor

TP-Link_FA58_5G

TP-Link_FA58

xfinitywifi

ALHN-CCF0

NETGEAR80

VERSAR CONTROL

Other...

Subnet mask: **255.255.254.0**Gateway: **10.12.38.1**DNS server: **10.107.135.50**Status: **Associated**

Forget Network

[Favorite](#)[Tests](#)[Job Manager](#)[System](#)

System > Bluetooth

Version 1.1.0.fad386c.dev

[Start Scanning](#)

Paired devices

Discovered devices

DESKTOP-LKIGHJV

BXXXP1

tb5800-928faf

03:45:F4:7C:65:B8

33:9B:E2:BD:F6:7F

47:3E:FF:7D:88:4B

OneExpert (2670148)

OneExpert (0160728)

Settings

☒ Enable bluetooth☒ Allow other devices to pair with this deviceDevice name: **tb-6e579b**