

588 West Jindu Road, Xingiao, Songjiang, 201612 Shanghai, China

Telephone: +86 (0) 21 6191 5666 Fax: +86 (0) 21 6191 5678

ee.shanghai@sgs.com

Report No.: SHEM180600465301

Page: 1 of 45

### TEST REPORT

Application No.: SHEM1806004653CR

FCC ID: WWIMD2000C

Applicant: Beijing Choice Electronic Technology Co., Ltd.

Address of Applicant: Room 4104, No.A12 Yuquan Road Haidian District, 100043 Beijing, P.R.

China

Manufacturer: Beijing Choice Electronic Technology Co., Ltd.

Address of Manufacturer: Room 4104, No.A12 Yuquan Road Haidian District, 100043 Beijing, P.R.

China

Factory: 1, Beijing Choice Electronic Technology Co., Ltd.

2, Shijingshan District Second Branch

Address of Factory: No.9 Shuangyuan Road, Shijingshan District, 100041 Beijing, P.R. China

**Equipment Under Test (EUT):** 

**EUT Name:** Vital Sign Monitor

Model No.: MD2000C

Trade mark: Choicemmed

Standard(s): 47 CFR Part 15, Subpart C 15.247

**Date of Receipt:** 2018-06-12

**Date of Test:** 2018-08-23 to 2018-08-27

**Date of Issue:** 2018-08-31

Test Result: Pass\*



Parlam Zhan E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized atteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: SHEM180600465301

Page: 2 of 45

Revision Record								
Version Description Date Remark								
00	Original	2018-08-31	/					

Authorized for issue by:		
	Bril Wu	
	Bill Wu / Project Engineer	
	Parlam Zhan	
	Parlam Zhan /Reviewer	



Report No.: SHEM180600465301

Page: 3 of 45

### 2 Test Summary

Radio Spectrum Technical Requirement								
Item Standard Method Requirement Resu								
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Customer Declaration				

Radio Spectrum Matter Part								
Item	Standard	Method	Requirement	Result				
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass				
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass				
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass				
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass				
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass				
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass				
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass				
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass				



Report No.: SHEM180600465301

Page: 4 of 45

### 3 Contents

			Page
1	COVE	R PAGE	1
2	TEST	SUMMARY	3
3	CONT	ENTS	4
4	GENE	RAL INFORMATION	
		DETAILS OF E.U.T.	
		DESCRIPTION OF SUPPORT UNITS	
		MEASUREMENT UNCERTAINTY	
		TEST LOCATION	
		TEST FACILITY	
		DEVIATION FROM STANDARDS	
		ABNORMALITIES FROM STANDARD CONDITIONS	
5	EQUIF	PMENT LIST	8
6	RADIO	O SPECTRUM TECHNICAL REQUIREMENT	9
		ANTENNA REQUIREMENT	
	6.1.1	Test Requirement:	
	6.1.2	Conclusion	
7	RADIO	O SPECTRUM MATTER TEST RESULTS	
•			
		CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz)	10
	7.1.1 7.1.2	E.U.T. Operation Test Setup Diagram	
	7.1.2 7.1.3	Measurement Procedure and Data	
		Minimum 6dB Bandwidth	
	7.2.1		
	7.2.2	Test Setup Diagram	
	7.2.3	Measurement Procedure and Data	
		CONDUCTED PEAK OUTPUT POWER	
	7.3.1		
	7.3.2	Test Setup Diagram	
	7.3.3	Measurement Procedure and Data	15
	7.4 F	Power Spectrum Density	16
	7.4.1	E.U.T. Operation	
	7.4.2	Test Setup Diagram	
	7.4.3	Measurement Procedure and Data	
		CONDUCTED BAND EDGES MEASUREMENT	
	7.5.1	E.U.T. Operation	
	7.5.2	Test Setup Diagram	
	7.5.3	Measurement Procedure and Data	
	7.6 ( 7.6.1	CONDUCTED SPURIOUS EMISSIONS	
	7.6.1 7.6.2	E.U.T. Operation	
	7.6.2 7.6.3	Test Setup Diagram  Measurement Procedure and Data	
		RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	
	7.7.1	E.U.T. Operation	
	7.7.2	Test Setup Diagram	
	7.7.3	Measurement Procedure and Data	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SHEM180600465301

Page: 5 of 45

	7.8 R	ADIATED SPURIOUS EMISSIONS	25
	7.8.1	E.U.T. Operation	25
	7.8.2	Test Setup Diagram	25
	7.8.3	Measurement Procedure and Data	26
8	TEST	SETUP PHOTOGRAPHS	28
9	EUT C	ONSTRUCTIONAL DETAILS	28
ΔΕ	PPFNDIX	A FOR SHEM180600465301	29



Report No.: SHEM180600465301

Page: 6 of 45

### 4 General Information

#### 4.1 Details of E.U.T.

Power supply: DC 9V,3A By adapter

Adapter: Model LXCP30-009A

Input 100-240V~50/60Hz 0.8A

Output 9V 3A

Battery:DC 7.2V 1300mAh rechargeable Li-ion battery

Test voltage: AC 120V/60Hz
Cable: DC Cable 1.8m

Antenna Gain 0dBi

Antenna Type PCB Antenna

Channel Spacing 2MHz
Modulation Type GFSK
Number of Channels 40

Operation Frequency 2402MHz to 2480MHz

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
BT test board	/	Test Plate 2	/
Laptop	LENOVO	R400	/

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10-8
2	Timeout	2s
3	Duty cycle	0.37%
4	Occupied Bandwidth	3%
5	RF conducted power	0.75dB
6	RF power density	2.84dB
7	Conducted Spurious emissions	0.75dB
0	DE Dodieted novem	4.5dB (Below 1GHz)
8	RF Radiated power	4.8dB (Above 1GHz)
		4.2dB (Below 30MHz)
	Dedicted Courieus emission test	4.4dB (30MHz-1GHz)
9	Radiated Spurious emission test	4.6dB (1GHz-18GHz)
		5.2dB (Above 18GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Report No.: SHEM180600465301

Page: 7 of 45

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shanghai Branch

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L0599)

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### • NVLAP (Certificate No. 201034-0)

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the National Voluntary Laboratory Accreditation Program(NVLAP). Certificate No. 201034-0.

#### • FCC -Designation Number: CN5033

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

Designation Number: CN5033. Test Firm Registration Number: 479755.

#### • Industry Canada (IC) - IC Assigned Code: 8617A

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1.

#### VCCI (Member No.: 3061)

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None



Report No.: SHEM180600465301

Page: 8 of 45

### 5 Equipment List

Fauinment	Equipment Manufacturer Model No Inventory No Cal Date Cal Due Date								
Conducted Emission at AC		inouch ito	miremony no	oui buio	our Due Dute				
EMI test receiver	R&S	ESR7	SHEM162-1	2017-12-20	2018-12-19				
LISN	Schwarzbeck	NSLK8127	SHEM061-1	2017-12-20	2018-12-19				
LISN	EMCO	3816/2	SHEM019-1	2017-12-20	2018-12-19				
Pulse limiter	R&S	ESH3-Z2	SHEM029-1	2017-12-20	2018-12-19				
CE test Cable	/	CE01	/	2017-12-26	2018-12-19				
Conducted Test	/	CEUI	/	2017-12-20	2010-12-23				
	R&S	FSP-30	SHEM002-1	2017-12-20	2018-12-19				
Spectrum Analyzer		N9020A	SHEM181-1	2018-08-13	2019-08-12				
Spectrum Analyzer	Agilent								
Signal Generator	R&S	SMR20	SHEM006-1	2018-08-13	2019-08-12				
Signal Generator	Agilent	N5182A	SHEM182-1	2018-08-13	2019-08-12				
Communication Tester	R&S	CMW270	SHEM183-1	2018-08-13	2019-08-12				
Switcher	Tonscend	JS0806	SHEM184-1	2018-08-13	2019-08-12				
Power Sensor	Keysight	U2021XA * 4	SHEM184-1	2018-08-13	2019-08-12				
Splitter	Anritsu	MA1612A	SHEM185-1	/	/				
Coupler	e-meca	803-S-1	SHEM186-1	/	/				
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2018-08-13	2019-08-12				
AC Power Stabilizer	WOCEN	6100	SHEM045-1	2017-12-26	2018-12-25				
DC Power Supply	QJE	QJ30003SII	SHEM046-1	2017-12-26	2018-12-25				
Conducted test Cable	/	RF01~RF04	/	2017-12-26	2018-12-25				
Radiated Test	1			T	1				
EMI test Receiver	R&S	ESU40	SHEM051-1	2017-12-20	2018-12-19				
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2017-12-20	2018-12-19				
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2017-04-10	2020-04-09				
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2017-02-28	2020-02-27				
Antenna (25MHz-3GHz)	Schwarzbeck	HL562	SHEM010-1	2017-02-28	2020-02-27				
Horn Antenna (1-8GHz)	Schwarzbeck	HF906	SHEM009-1	2017-10-24	2020-10-23				
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2017-01-14	2020-01-13				
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2017-12-03	2020-12-02				
Pre-amplifier (9KHz-2GHz)	CLAVIIO	BDLNA-0001	SHEM164-1	2018-08-13	2019-08-12				
Pre-amplifier (1-18GHz)	CLAVIIO	BDLNA-0118	SHEM050-2	2018-08-13	2019-08-12				
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2017-12-20	2018-12-19				
Signal Generator	R&S	SMR40	SHEM058-1	2018-08-13	2019-08-12				
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/				
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/				
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/				
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/				
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/				
High pass Filter	Wainwright	WHKS1700	SHEM157-3	1	/				
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2017-07-22	2020-07-21				
RE test Cable	/	RE01, RE02, RE06	/	2017-12-26	2018-12-25				



Report No.: SHEM180600465301

Page: 9 of 45

### 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

#### 6.1.2 Conclusion

#### Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.





Report No.: SHEM180600465301

Page: 10 of 45

### 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

	Conducted	limit(dBµV)		
Frequency of emission(MHz)	Quasi-peak	Average		
0.15-0.5	66 to 56*	56 to 46*		
0.5-5	56	46		
5-30	60	50		
*Decreases with the logarithm of the frequency.				

#### 7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation

#### 7.1.2 Test Setup Diagram

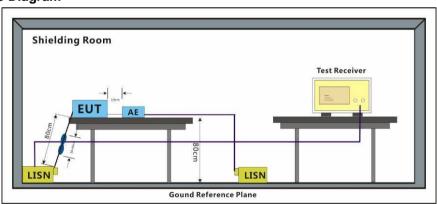



Report No.: SHEM180600465301

Page: 11 of 45

#### 7.1.3 Measurement Procedure and Data


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50 \text{ohm}/50 \mu\text{H} + 5 \text{ohm}$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Report No.: SHEM180600465301

Page: 12 of 45

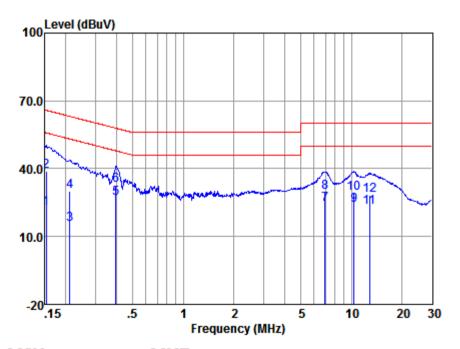

LISN : LINE EUT/Project No : 4652CR

Test mode : a


	Freq	Read	LISN	Cable	Emission		0ver	
		level	Factor	Loss	Level	Limit	Limit	Remark
	(MHz)	(dBuV)	(dB)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.15	12.81	0.05	9.82	22.68	55.87	-33.19	Average
2	0.15	29.14	0.05	9.82	39.01	65.87	-26.86	QP
3	0.21	5.67	0.05	9.83	15.55	53.18	-37.63	Average
4	0.21	20.33	0.05	9.83	30.21	63.18	-32.97	QP
5	0.40	17.17	0.05	9.85	27.07	47.95	-20.88	Average
6	0.40	22.95	0.05	9.85	32.85	57.95	-25.10	QP
7	6.99	14.22	0.11	9.83	24.16	50.00	-25.84	Average
8	6.99	19.62	0.11	9.83	29.56	60.00	-30.44	QP
9	10.40	13.99	0.21	9.75	23.95	50.00	-26.05	Average
10	10.40	19.26	0.21	9.75	29.22	60.00	-30.78	QP
11	12.85	12.72	0.21	9.99	22.92	50.00	-27.08	Average
12	12.85	18.23	0.21	9.99	28.43	60.00	-31.57	QP

Notes: Emission Level = Read Level +LISN Factor + Cable loss



Report No.: SHEM180600465301

Page: 13 of 45

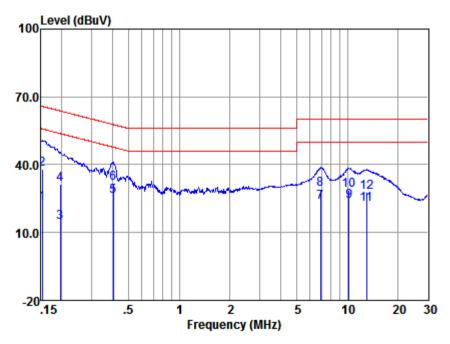

LISN : NEUTRAL EUT/Project No : 4652CR

Test mode : a

	Freq (MHz)	Read level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Emission Level (dBuV)	Limit (dBuV)	Over Limit (dB)	Remark
		(ubuv)	(45)		(ubuv)		(ub)	
1	0.15	13.04	0.06	9.82	22.92	55.87	-32.95	Average
2	0.15	28.20	0.06	9.82	38.08	65.87	-27.79	QP
3	0.20	4.68	0.06	9.83	14.57	53.80	-39.23	Average
4	0.20	21.53	0.06	9.83	31.42	63.80	-32.38	QP
5	0.40	16.08	0.05	9.85	25.98	47.77	-21.79	Average
6	0.40	21.90	0.05	9.85	31.80	57.77	-25.97	QP
7	6.91	13.54	0.12	9.82	23.48	50.00	-26.52	Average
8	6.91	19.21	0.12	9.82	29.15	60.00	-30.85	QP
9	10.23	13.80	0.21	9.69	23.70	50.00	-26.30	Average
10	10.23	18.85	0.21	9.69	28.75	60.00	-31.25	QP
11	12.99	12.16	0.22	9.93	22.31	50.00	-27.69	Average
12	12.99	17.50	0.22	9.93	27.65	60.00	-32.35	QP

Notes: Emission Level = Read Level +LISN Factor + Cable loss



Report No.: SHEM180600465301

Page: 14 of 45

#### 7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit: ≥500 kHz

#### 7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation

#### 7.2.2 Test Setup Diagram

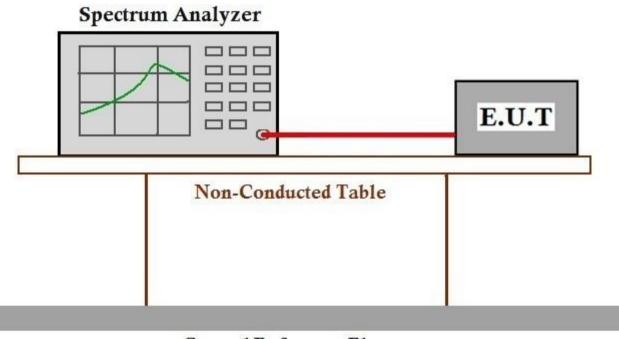

### Ground Reference Plane

#### 7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix A SHEM180600465301



Report No.: SHEM180600465301

Page: 15 of 45

### 7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
	1 for ≥50 hopping channels
902-928	0.25 for 25≤ hopping channels <50
	1 for digital modulation
	1 for ≥75 non-overlapping hopping channels
2400-2483.5	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation

#### 7.3.2 Test Setup Diagram

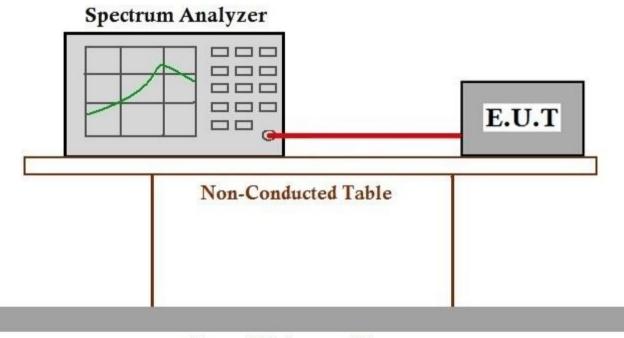

### Ground Reference Plane

#### 7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix A SHEM180600465301

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of its advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SHEM180600465301

Page: 16 of 45

### 7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit: ≤8dBm in any 3 kHz band during any time interval of continuous

transmission

#### 7.4.1 E.U.T. Operation


**Operating Environment:** 

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation

#### 7.4.2 Test Setup Diagram

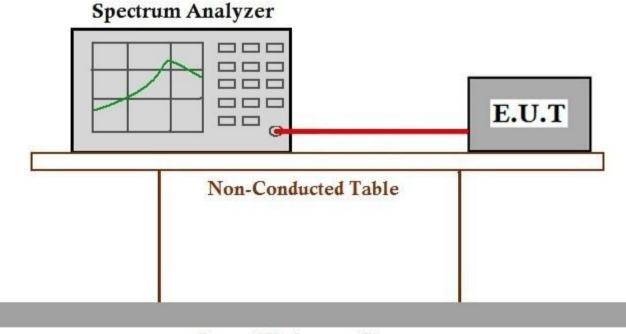

### Ground Reference Plane

### 7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix A SHEM180600465301



Report No.: SHEM180600465301

Page: 17 of 45

### 7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in

§15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)

### 7.5.1 E.U.T. Operation


**Operating Environment:** 

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation

#### 7.5.2 Test Setup Diagram

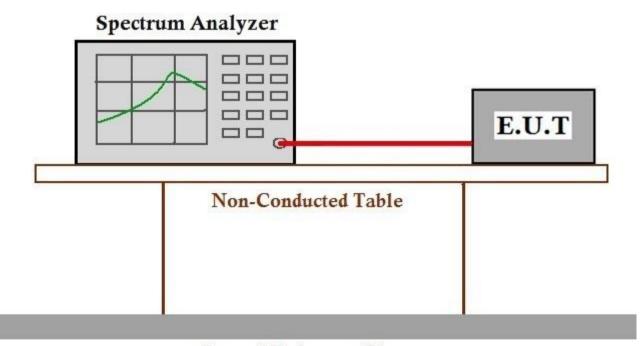

### Ground Reference Plane

#### 7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix A SHEM180600465301

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indeminification and jurisdiction issues defined therein. Any holder of its advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SHEM180600465301

Page: 18 of 45

#### 7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.11

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread

spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition,

radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in

§15.209(a) (see §15.205(c)

#### 7.6.1 E.U.T. Operation


**Operating Environment:** 

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation

#### 7.6.2 Test Setup Diagram

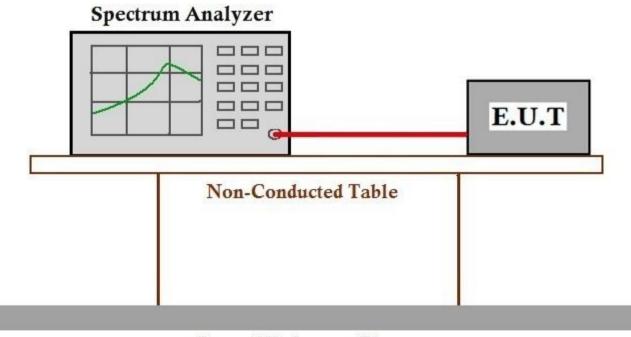

### Ground Reference Plane

#### 7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix A SHEM180600465301

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indeminification and jurisdiction issues defined therein. Any holder of its advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SHEM180600465301

Page: 19 of 45

#### 7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

#### 7.7.1 E.U.T. Operation


Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar


Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation

#### 7.7.2 Test Setup Diagram

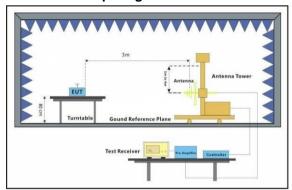

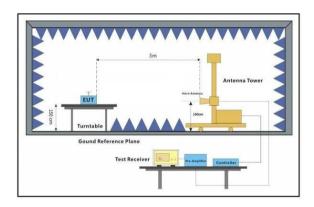

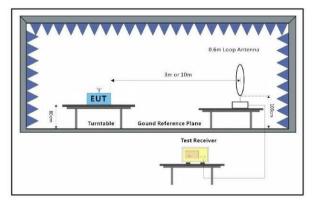

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indeminification and jurisdiction issues defined therein. Any holder of its advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SHEM180600465301

Page: 20 of 45

#### 7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Report No.: SHEM180600465301

Page: 21 of 45

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

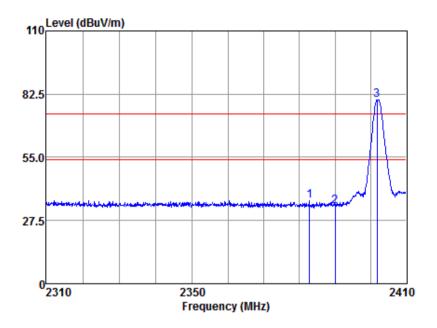

### Antenna Polarity : HORIZONTAL


Freq					Emission Level			Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2382.78	41.08	26.02	6.45	37.36	36.19	74.00	-37.81	Peak
2390.00	38.67	26.03	6.47	37.36	33.81	74.00	-40.19	Peak
2401.84	84.83	26.05	6.50	37.35	80.03	74.00	6.03	Peak



Report No.: SHEM180600465301

Page: 22 of 45

Mode:a; Polarization: Vertical; Modulation: GFSK; ; Channel: Low

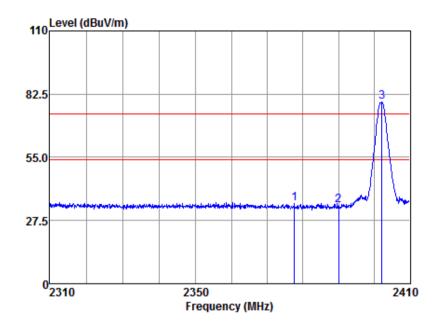

### Antenna Polarity : VERTICAL


Freq					Emission Level			Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2377.54	39.61	26.02	6.45	37.36	34.72	74.00	-39.28	Peak
2390.00	38.91	26.03	6.47	37.36	34.05	74.00	-39.95	Peak
2402.25	83.76	26.05	6.50	37.35	78.96	74.00	4.96	Peak



Report No.: SHEM180600465301

Page: 23 of 45

Mode:a; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

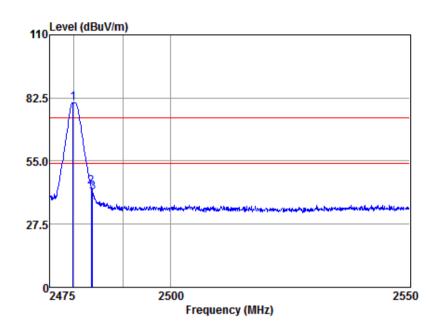

### Antenna Polarity : HORIZONTAL


Freq					Emission Level			Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
					80.44	•		Peak
2483.50	48.51	26.18	6.80	37.51	43.98	74.00	-30.02	Peak
2483.81	45.85	26.18	6.80	37.51	41.32	74.00	-32.68	Peak



Report No.: SHEM180600465301

Page: 24 of 45

Mode:a; Polarization:Vertical; Modulation:GFSK; ; Channel:High

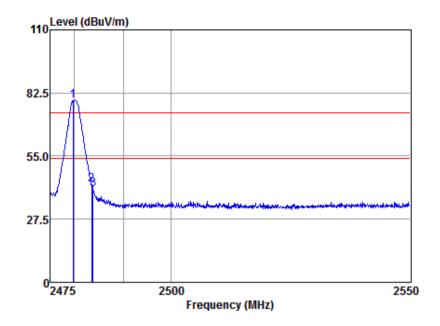

### Antenna Polarity : VERTICAL

Freq					Emission Level			Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2479.66	83.75	26.17	6.74	37.49	79.17	74.00	5.17	Peak
2483.50	47.30	26.18	6.80	37.51	42.77	74.00	-31.23	Peak
2483.81	44.92	26.18	6.80	37.51	40.39	74.00	-33.61	Peak



Report No.: SHEM180600465301

Page: 25 of 45

### 7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

#### 7.8.1 E.U.T. Operation


Operating Environment:


Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar


Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with GFSK

modulation

#### 7.8.2 Test Setup Diagram

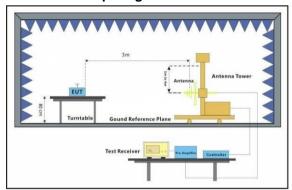

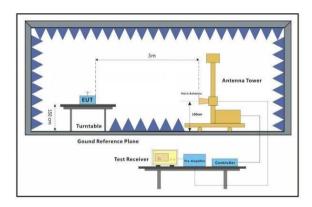

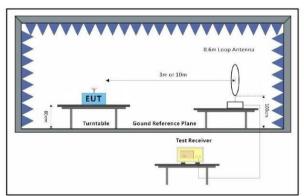

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indeminification and jurisdiction issues defined therein. Any holder of its advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful of offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SHEM180600465301

Page: 26 of 45

#### 7.8.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

#### Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown



Report No.: SHEM180600465301

Page: 27 of 45

Mode:a; Pol	arization:H	lorizontal;	Modulation:0	GFSK; ; (	Channel:Low	
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4804	39.37	6.18	45.55	54	-8.45	peak
7206	36.45	10.63	47.08	54	-6.92	peak
9608	33.88	14.38	48.26	54	-5.74	peak
Mode:a; Pol	arization:\	/ertical; M	odulation:GF	SK; ; Cha	annel:Low	
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4804	35.65	6.18	41.83	54	-12.17	peak
7206	35.92	10.63	46.55	54	-7.45	peak
9608	34.25	14.38	48.63	54	-5.37	peak
Mode:a; Pol	arization:F	Horizontal;	Modulation:	GFSK; ; (	Channel:midd	le
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4880	38.42	6.97	45.39	54	-8.61	peak
7320	34.08	11.12	45.2	54	-8.8	peak
9760	31.37	14.35	45.72	54	-8.28	peak
Mode:a; Pol	arization:\	/ertical; M	odulation:GF	SK; ; Cha	annel:middle	
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4880	36.75	6.97	43.72	54	-10.28	peak
7320	36.25	11.12	47.37	54	-6.63	peak
9760	33.02	14.35	47.37	54	-6.63	peak
Mode:a; Pol	arization:F	Horizontal;	Modulation:	GFSK; ; (	Channel:High	
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4960	38.96	7.49	46.45	54	-7.55	peak
7440	38.04	11.65	49.69	54	-4.31	peak
9920	34.15	14.4	48.55	54	-5.45	peak
Mode:a; Pol	arization:\	/ertical; M	odulation:GF	SK; ; Cha	annel:High	
Frequency	RX_R	Factor	Emission	Limit	Over Limit	Detector
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
4960	35.07	7.49	42.56	54	-11.44	peak
7440	37.42	11.65	49.07	54	-4.93	peak
9920	33.67	14.4	48.07	54	-5.93	peak



Report No.: SHEM180600465301

Page: 28 of 45

### 8 Test Setup Photographs

Refer to the < Test Setup photos-FCC>.

### 9 EUT Constructional Details

Refer to the < External Photos > & < Internal Photos >.



Report No.: SHEM180600465301

Page: 29 of 45

### Appendix A for SHEM180600465301


#### 1.6dB Bandwidth

Test Mode	Test Channel	EBW[MHz]	Limit	Verdict
BLE	2402	0.68	0.5	PASS
BLE	2442	0.68	0.5	PASS
BLE	2480	0.68	0.5	PASS



Report No.: SHEM180600465301


Page: 30 of 45

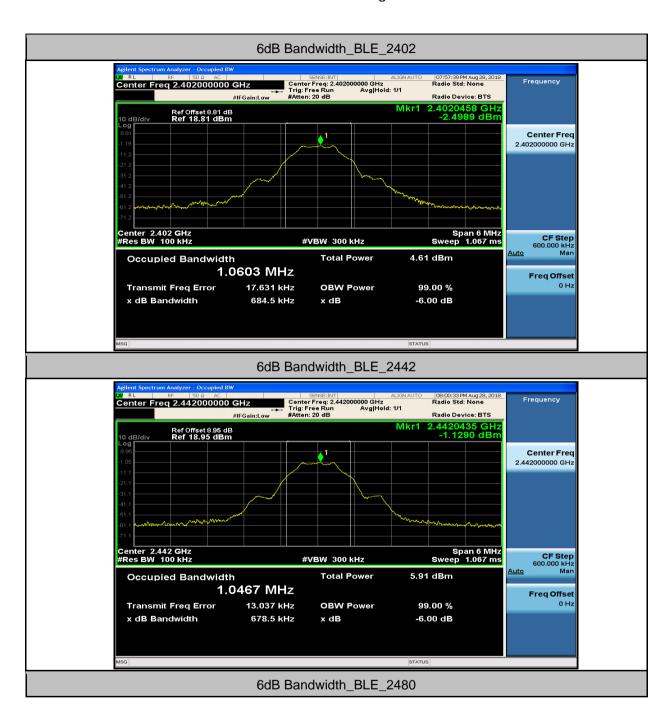



Report No.: SHEM180600465301

Page: 31 of 45

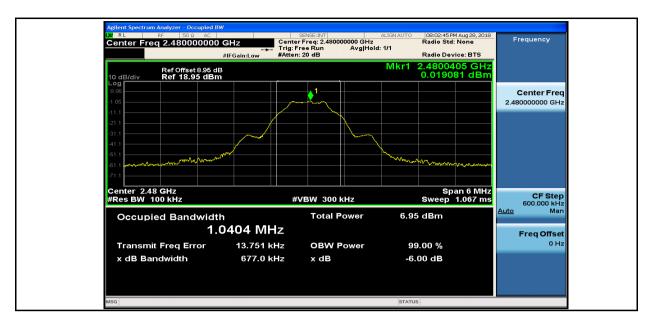



Report No.: SHEM180600465301

Page: 32 of 45


#### 2.Maximum peak conducted output power

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	-1.90	30	PASS
BLE	2442	-0.61	30	PASS
BLE	2480	0.42	30	PASS



Report No.: SHEM180600465301


Page: 33 of 45

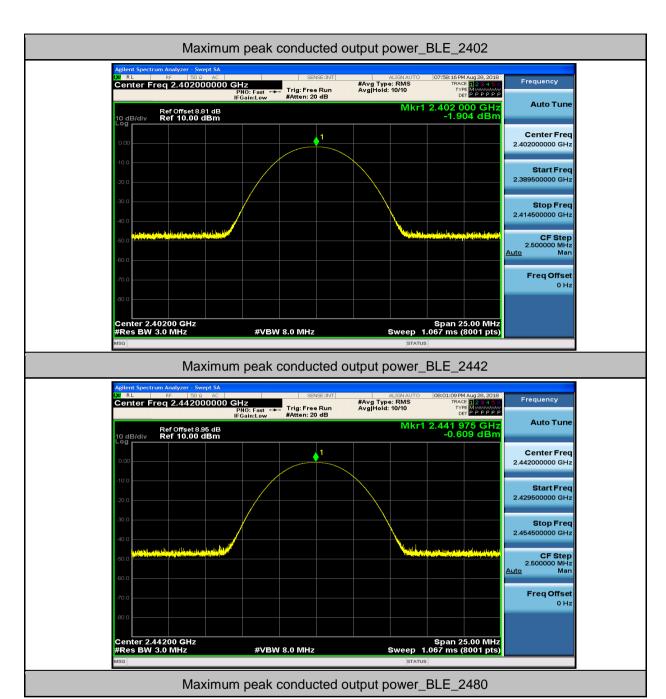



Report No.: SHEM180600465301

Page: 34 of 45

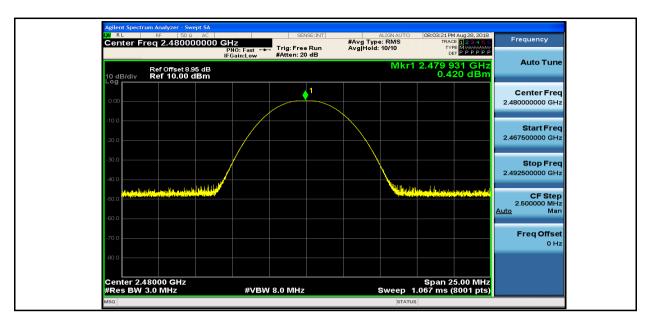



Report No.: SHEM180600465301

Page: 35 of 45


#### 3.Maximum Peak power spectral density

Test Mode	Test Channel	PSD[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	2402	-17.25	8.00	PASS
BLE	2442	-15.81	8.00	PASS
BLE	2480	-14.95	8.00	PASS



Report No.: SHEM180600465301


Page: 36 of 45

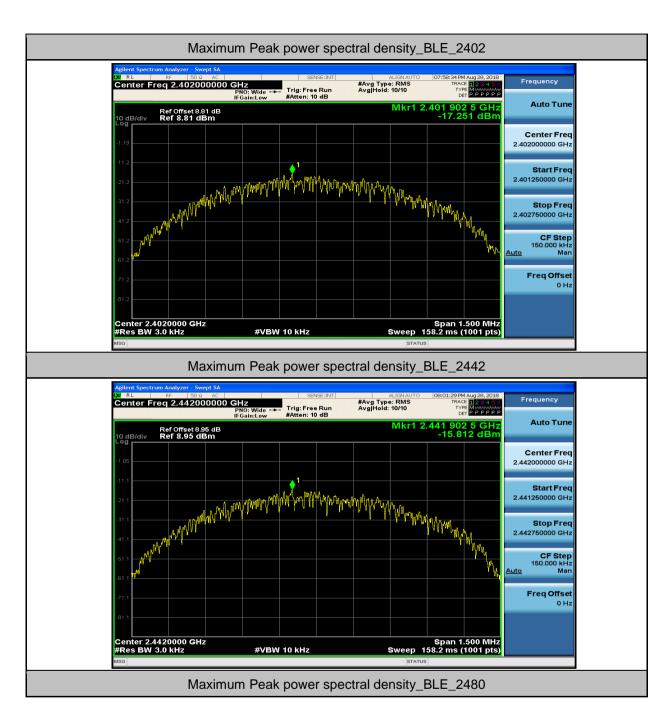



Report No.: SHEM180600465301

Page: 37 of 45

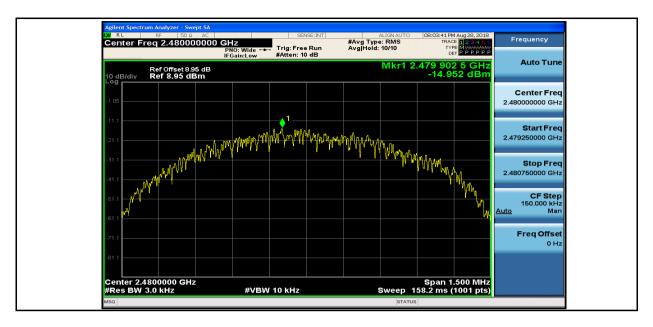



Report No.: SHEM180600465301

Page: 38 of 45


### 4.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	2402	-2.40	-56.69	-22.40	PASS
BLE	2480	0.05	-64.21	-19.95	PASS



Report No.: SHEM180600465301

Page: 39 of 45

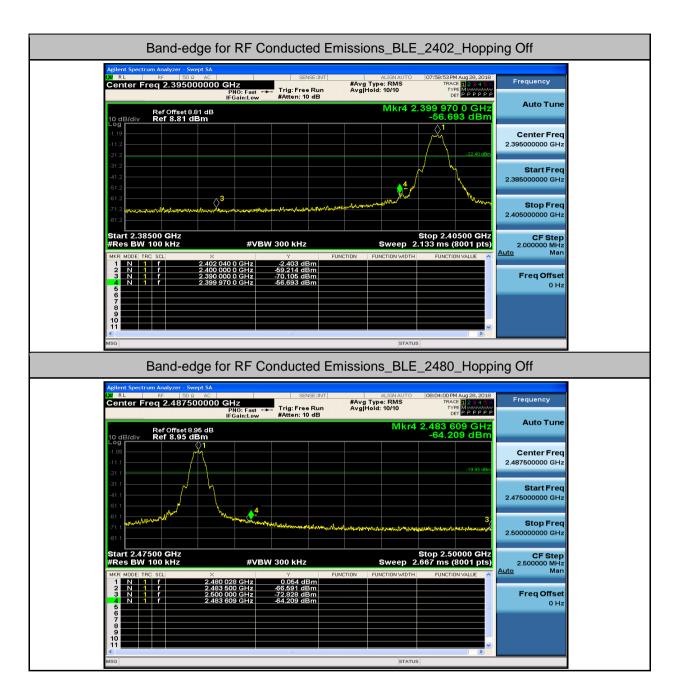



Report No.: SHEM180600465301

Page: 40 of 45


### **5.RF Conducted Spurious Emissions**

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BLE	2402	30	10000	100	300	-2.54	-50.84	<-22.54	PASS
BLE	2402	10000	26000	100	300	-2.543	-43.766	<- 22.543	PASS
BLE	2442	30	10000	100	300	-1.10	-52.83	<-21.10	PASS
BLE	2442	10000	26000	100	300	-1.098	-42.928	<- 21.098	PASS
BLE	2480	30	10000	100	300	-0.20	-51.21	<-20.20	PASS
BLE	2480	10000	26000	100	300	-0.199	-44.046	<- 20.199	PASS



Report No.: SHEM180600465301


Page: 41 of 45

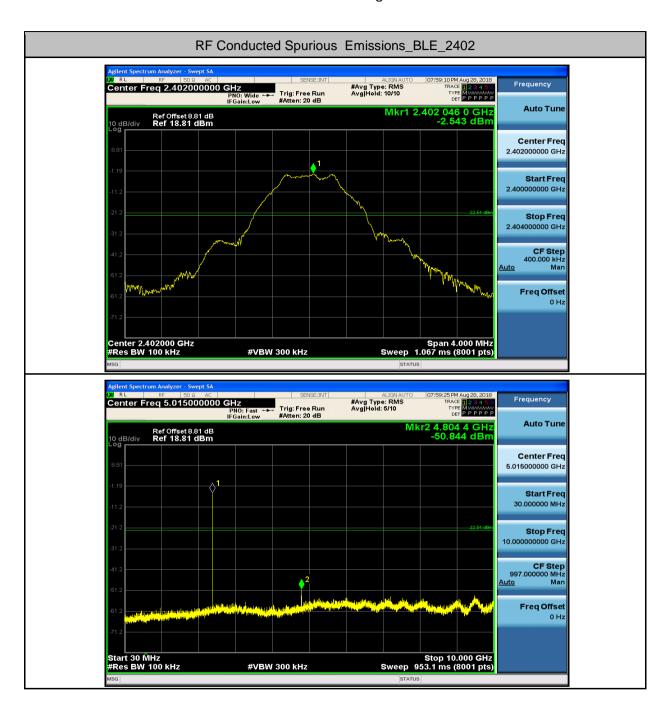




Report No.: SHEM180600465301

Page: 42 of 45

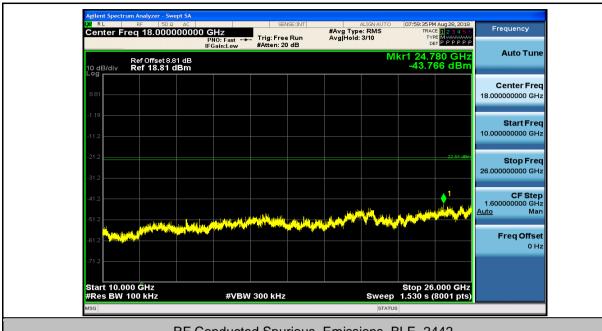


#### RF Conducted Spurious Emissions\_BLE\_2442

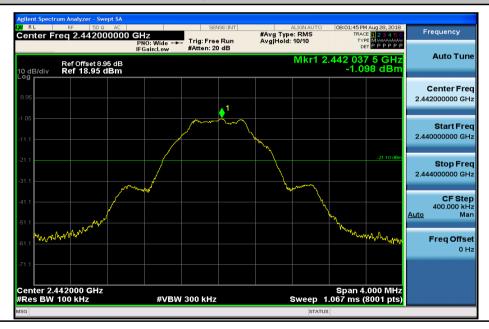



Report No.: SHEM180600465301


Page: 43 of 45

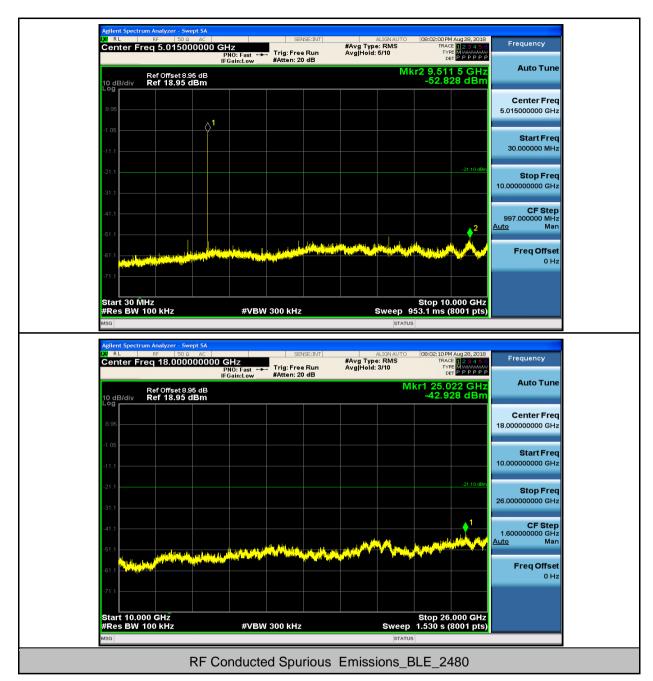



Report No.: SHEM180600465301


Page: 44 of 45

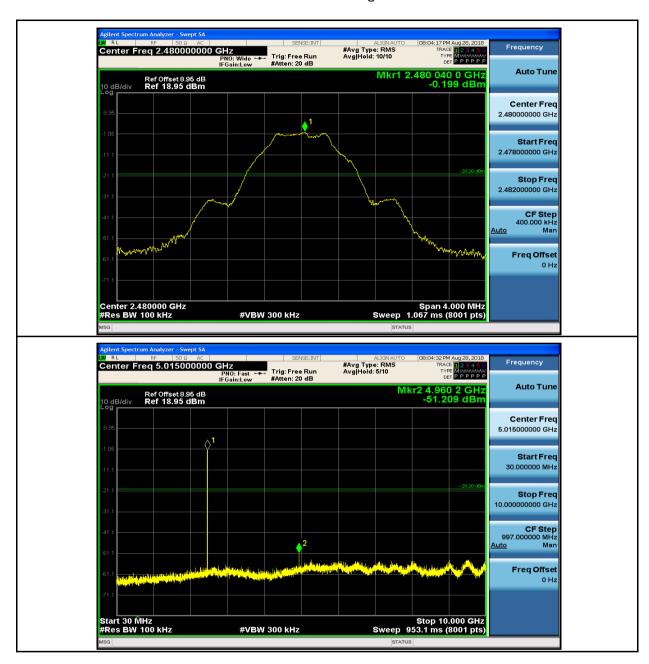



Report No.: SHEM180600465301

Page: 45 of 45

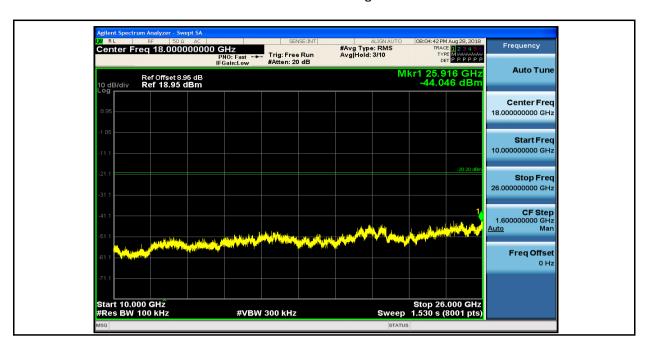

- End of the Report -