



# FCC RF Test Report

**APPLICANT** : PASSTIME  
**EQUIPMENT** : Dock device  
**BRAND NAME** : Distracted Driving Device  
**MODEL NAME** : DDD-1  
**MARKETING NAME** : DDD  
**FCC ID** : WXT-DDD1RX  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

This is a variant report. The product was received on Nov. 28, 2017 and testing was completed on Nov. 29, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



## TABLE OF CONTENTS

<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1    Applicant .....	5
1.2    Manufacturer.....	5
1.3    Product Feature of Equipment Under Test.....	5
1.4    Modification of EUT .....	5
1.5    Testing Location .....	6
1.6    Applicable Standards.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1    Carrier Frequency Channel .....	7
2.2    Test Mode.....	8
2.3    Connection Diagram of Test System.....	9
2.4    EUT Operation Test Setup .....	9
<b>3 TEST RESULT .....</b>	<b>10</b>
3.1    Peak Output Power Measurement .....	10
3.2    Radiated Band Edges and Spurious Emission Measurement .....	11
3.3    Antenna Requirements .....	15
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>16</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>17</b>

**APPENDIX A. CONDUCTED TEST RESULTS****APPENDIX B. RADIATED SPURIOUS EMISSION****APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS****APPENDIX D. DUTY CYCLE PLOTS****APPENDIX E. SETUP PHOTOGRAPHS**



# REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Not required	-
-	-	99% Bandwidth	-	Not required	-
3.1	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
-	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Not required	-
-	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Not required	-
3.2	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 8.81 dB at 2382.450 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not required	-
3.3	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

**Note:**

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by adding changing Bluetooth Antenna. All the test cases were performed on original report which can be referred to Sporton Report Number FR772705. Based on the original report, the Peak Output Power and Radiated Band Edges and Spurious Emission test cases were verified.



## 1 General Description

### 1.1 Applicant

**PASSTIME**

861 Southpark Dr #200 Littleton, CO 80120

### 1.2 Manufacturer

**Wistron NeWeb Corp.**

20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C

### 1.3 Product Feature of Equipment Under Test

Bluetooth

Product Specification subjective to this standard	
Antenna Type	Bluetooth: Loop Antenna

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.5 Testing Location

Sportun Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sportun Site No.</b>
	03CH13-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-




## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated:, radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps

## 2.3 Connection Diagram of Test System

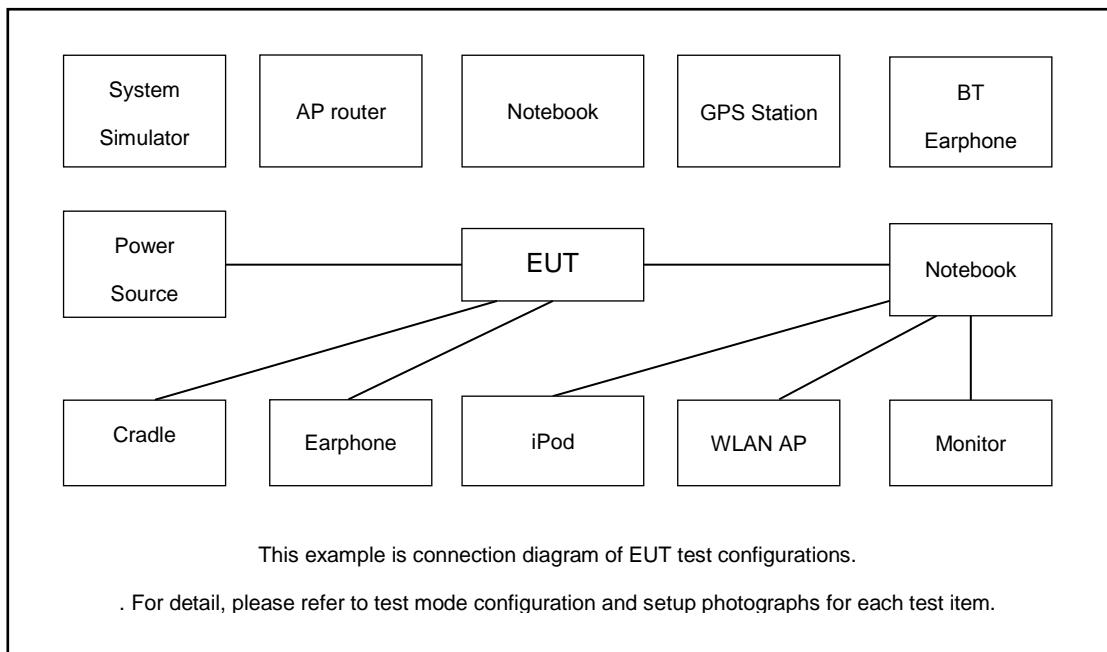

## 2.4 EUT Operation Test Setup

The RF test items, programmed RF utility, “nRFgo” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

### 3 Test Result

#### 3.1 Peak Output Power Measurement

##### 3.1.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

##### 3.1.4 Test Setup

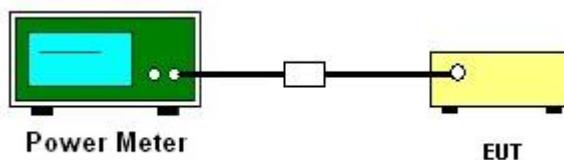

##### 3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.



## 3.2 Radiated Band Edges and Spurious Emission Measurement

### 3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



### 3.2.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.2.4 Test Setup


For radiated emissions below 30MHz

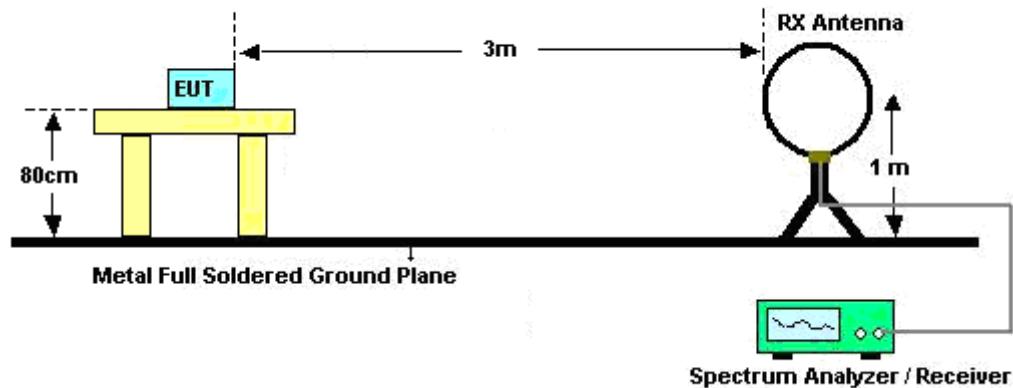

For radiated emissions from 30MHz to 1GHz

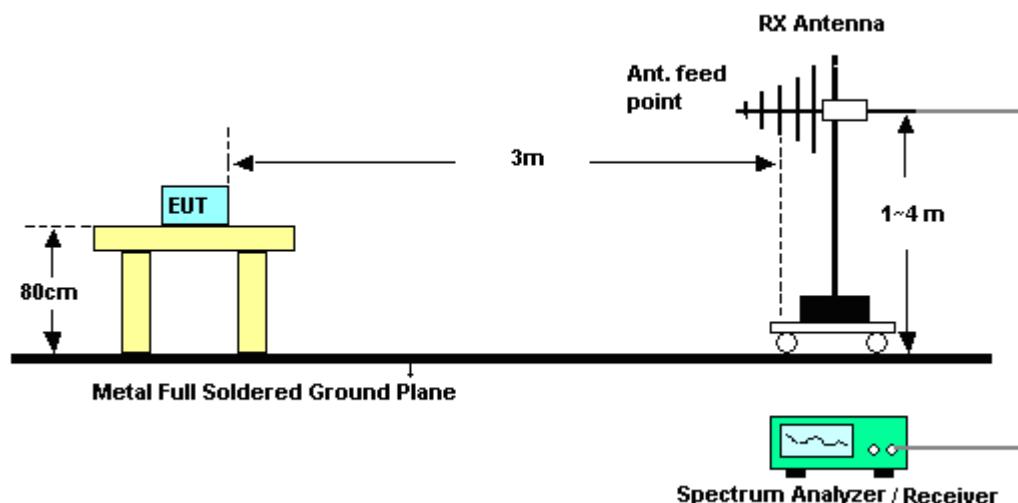

For radiated emissions above 1GHz

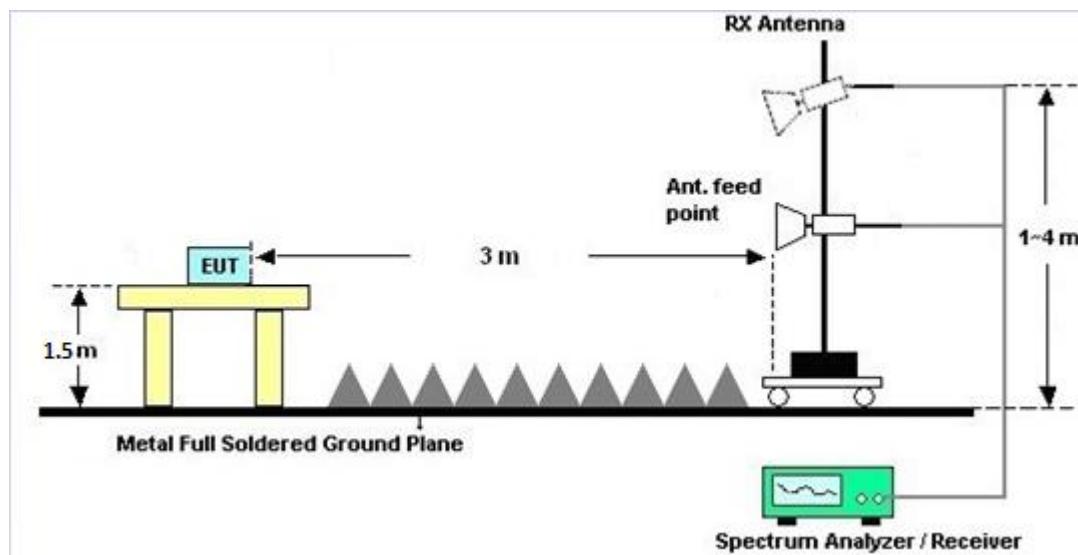

### 3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### 3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

### 3.2.7 Duty Cycle

Please refer to Appendix D.

### 3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



### 3.3 Antenna Requirements

#### 3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	NA	Dec. 26, 2016	Nov. 29, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 26, 2016	Nov. 29, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	May 15, 2017	Nov. 29, 2017	May 14, 2019	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	40103&04	30MHz to 1GHz	Jan. 07, 2017	Nov. 29, 2017	Jan. 06, 2018	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-124 1	1GHz ~ 18GHz	Jun. 15, 2017	Nov. 29, 2017	Jun. 14, 2018	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 576	18GHz ~ 40GHz	Apr. 27, 2017	Nov. 29, 2017	Apr. 26, 2018	Radiation (03CH13-HY)
Amplifier	Sonoma-Instrument	310 N	187282	9KHz~1GHz	Dec. 21, 2016	Nov. 29, 2017	Dec. 20, 2017	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 22, 2017	Nov. 29, 2017	May 21, 2018	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY532701 47	1GHz~26.5GHz	Jan. 09, 2017	Nov. 29, 2017	Jan. 08, 2018	Radiation (03CH13-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Nov. 29, 2017	Jul. 17, 2018	Radiation (03CH13-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY532900 53	20Hz to 26.5GHz	Jan. 12, 2017	Nov. 29, 2017	Jan. 11, 2018	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY553705 26	N/A	Mar. 15, 2017	Nov. 29, 2017	Mar. 14, 2018	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Nov. 29, 2017	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Nov. 29, 2017	N/A	Radiation (03CH13-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	4.90
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	5.40
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	4.30
---	------

## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Aking chang	Temperature:	21~25	°C
Test Date:	2017/11/29	Relative Humidity:	51~54	%

<b><u>TEST RESULTS DATA</u></b>										
<b><u>Peak Power Table</u></b>										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-0.70	30.00	3.35	2.65	36.00	Pass
BLE	1Mbps	1	19	2440	-0.65	30.00	3.35	2.70	36.00	Pass
BLE	1Mbps	1	39	2480	-0.50	30.00	3.35	2.85	36.00	Pass

<b><u>TEST RESULTS DATA</u></b>							
<b><u>Average Power Table</u></b>							
<b><u>(Reporting Only)</u></b>							
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	
BLE	1Mbps	1	0	2402	1.70	-4.18	
BLE	1Mbps	1	19	2440	1.70	-3.52	
BLE	1Mbps	1	39	2480	1.70	-3.43	



## Appendix B. Radiated Spurious Emission

Test Engineer :	Bill Chang	Temperature :		25~26°C
		Relative Humidity :		45~50%

### 2.4GHz 2400~2483.5MHz

#### BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol.
BLE CH 00 2402MHz		2382.45	57.8	-16.2	74	47.19	26.84	4.83	30.99	400	334	P	H
		2382.45	45.19	-8.81	54	34.58	26.84	4.83	30.99	400	334	A	H
	*	2402	88.1	-	-	77.42	26.89	4.85	30.99	400	334	P	H
	*	2402	87.59	-	-	76.91	26.89	4.85	30.99	400	334	A	H
													H
		2382.24	53.28	-20.72	74	42.67	26.84	4.83	30.99	350	256	P	V
		2382.24	43.59	-10.41	54	32.98	26.84	4.83	30.99	350	256	A	V
	*	2402	86.19	-	-	75.51	26.89	4.85	30.99	350	256	P	V
	*	2402	85.67	-	-	74.99	26.89	4.85	30.99	350	256	A	V
													V
BLE CH 19 2440MHz		2322.32	51.22	-22.78	74	40.86	26.68	4.76	31.01	387	339	P	H
		2381.12	42.08	-11.92	54	31.47	26.84	4.83	30.99	387	339	A	H
	*	2440	88.96	-	-	78.08	27.04	4.88	30.97	387	339	P	H
	*	2440	88.52	-	-	77.64	27.04	4.88	30.97	387	339	A	H
		2493.98	52.65	-21.35	74	41.55	27.2	4.93	30.96	387	339	P	H
		2494.75	42.23	-11.77	54	31.13	27.2	4.93	30.96	387	339	A	H
		2310.42	51.9	-22.1	74	41.61	26.63	4.74	31.01	350	293	P	V
		2373.14	42.2	-11.8	54	31.62	26.84	4.8	30.99	350	293	A	V
	*	2440	85.9	-	-	75.02	27.04	4.88	30.97	350	293	P	V
	*	2440	85.45	-	-	74.57	27.04	4.88	30.97	350	293	A	V
		2487.68	51.31	-22.69	74	40.21	27.2	4.93	30.96	350	293	P	V
		2486.77	42.42	-11.58	54	31.38	27.15	4.93	30.97	350	293	A	V



BLE CH 39 2480MHz	*	2480	88.88	-	-	77.85	27.15	4.92	30.97	381	332	P	H
	*	2480	87.71	-	-	76.68	27.15	4.92	30.97	381	332	A	H
		2495.88	54.04	-19.96	74	42.94	27.2	4.93	30.96	381	332	P	H
		2496.2	42.59	-11.41	54	31.49	27.2	4.93	30.96	381	332	A	H
													H
													H
	*	2480	85.91	-	-	74.88	27.15	4.92	30.97	211	304	P	V
	*	2480	84.92	-	-	73.89	27.15	4.92	30.97	211	304	A	V
		2493.04	52.35	-21.65	74	41.25	27.2	4.93	30.96	211	304	P	V
		2494	42.27	-11.73	54	31.17	27.2	4.93	30.96	211	304	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	46.18	-27.82	74	64.1	31.53	7.3	57.27	100	0	P	H
													H
													H
													H
		4804	45.69	-28.31	74	63.61	31.53	7.3	57.27	100	0	P	V
													V
													V
													V
BLE CH 19 2440MHz		4880	46.01	-27.99	74	63.61	31.63	7.44	57.17	100	0	P	H
		7320	43.53	-30.47	74	55.03	36.19	9.14	57.29	100	0	P	H
													H
													H
		4880	45.27	-28.73	74	62.87	31.63	7.44	57.17	100	0	P	V
		7320	42.81	-31.19	74	54.31	36.19	9.14	57.29	100	0	P	V
													V
													V
BLE CH 39 2480MHz		4960	45.56	-28.44	74	62.78	31.75	7.59	57.05	100	0	P	H
		7440	43.43	-30.57	74	54.79	36.41	9.21	57.44	100	0	P	H
													H
													H
		4960	46.95	-27.05	74	64.17	31.75	7.59	57.05	100	0	P	V
		7440	44.03	-29.97	74	55.39	36.41	9.21	57.44	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Emission below 1GHz

## 2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
												Limit	Line
												Level	Factor
2.4GHz BLE LF		58.08	14.64	-25.36	40	37	9.12	0.84	32.32	-	-	P	H
		129.09	20.94	-22.56	43.5	38.87	13.11	1.19	32.28	-	-	P	H
		288.12	18.77	-27.23	46	33.67	15.51	1.68	32.15	-	-	P	H
		673.8	25.06	-20.94	46	31.19	23.37	2.57	32.18	-	-	P	H
		841.8	28.21	-17.79	46	30.71	26.32	2.84	31.79	-	-	P	H
		955.9	30.45	-15.55	46	29.91	28.33	3.07	31	100	0	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													V
		32.43	31.48	-8.52	40	43.11	20.14	0.59	32.34	100	0	P	V
		58.08	25.74	-14.26	40	48.1	9.12	0.84	32.32	-	-	P	V
		119.91	26.7	-16.8	43.5	44.33	13.51	1.09	32.29	-	-	P	V
		604.5	25.2	-20.8	46	32.16	22.73	2.42	32.21	-	-	P	V
		734	31.71	-14.29	46	36.33	24.73	2.66	32.11	-	-	P	V
		901.3	29.08	-16.92	46	31.05	26.48	2.94	31.5	-	-	P	V
													V
													V
													V
													V
													V
													V
	Remark	1. No other spurious found. 2. All results are PASS against limit line.											

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak or Average</b>
H/V	<b>Horizontal or Vertical</b>



**A calculation example for radiated spurious emission is shown as below:**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dB $\mu$ V/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

**For Peak Limit @ 2390MHz:**

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB $\mu$ V) – 35.86 (dB)

= 55.45 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 55.45(dB $\mu$ V/m) – 74(dB $\mu$ V/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB $\mu$ V) – 35.86 (dB)

= 43.54 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 43.54(dB $\mu$ V/m) – 54(dB $\mu$ V/m)

= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Bill Chang	Temperature :	25~26°C
		Relative Humidity :	45~50%


### Note symbol


-L	Low channel location
-R	High channel location




## 2.4GHz 2400~2483.5MHz



## BLE (Band Edge @ 3m)

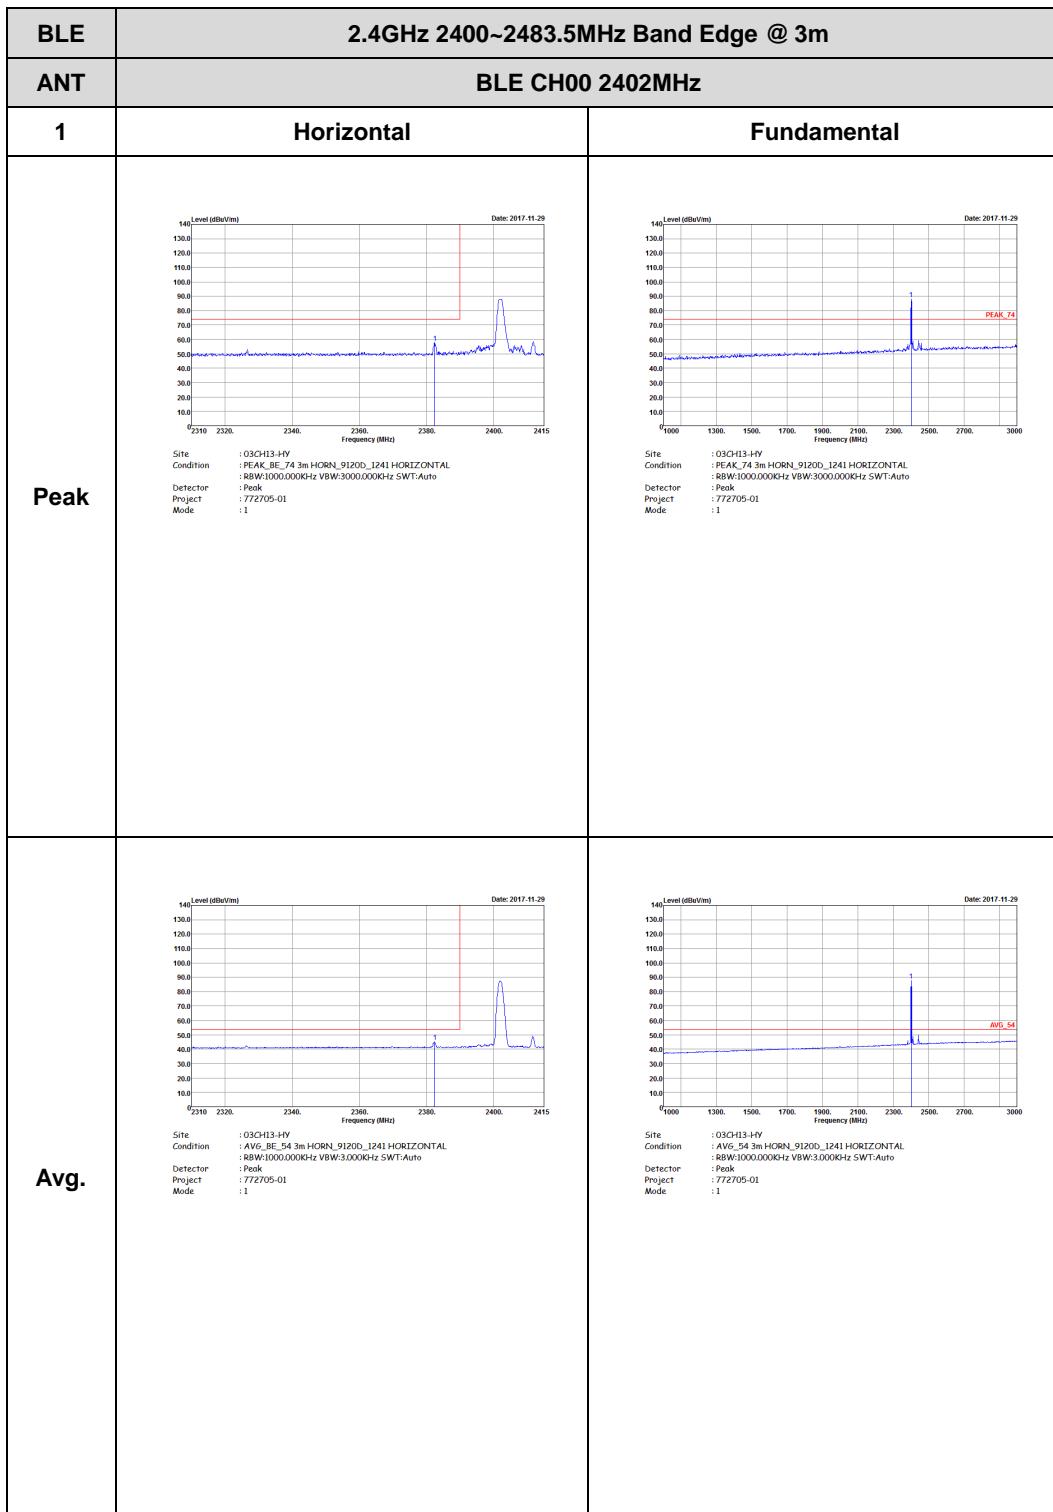


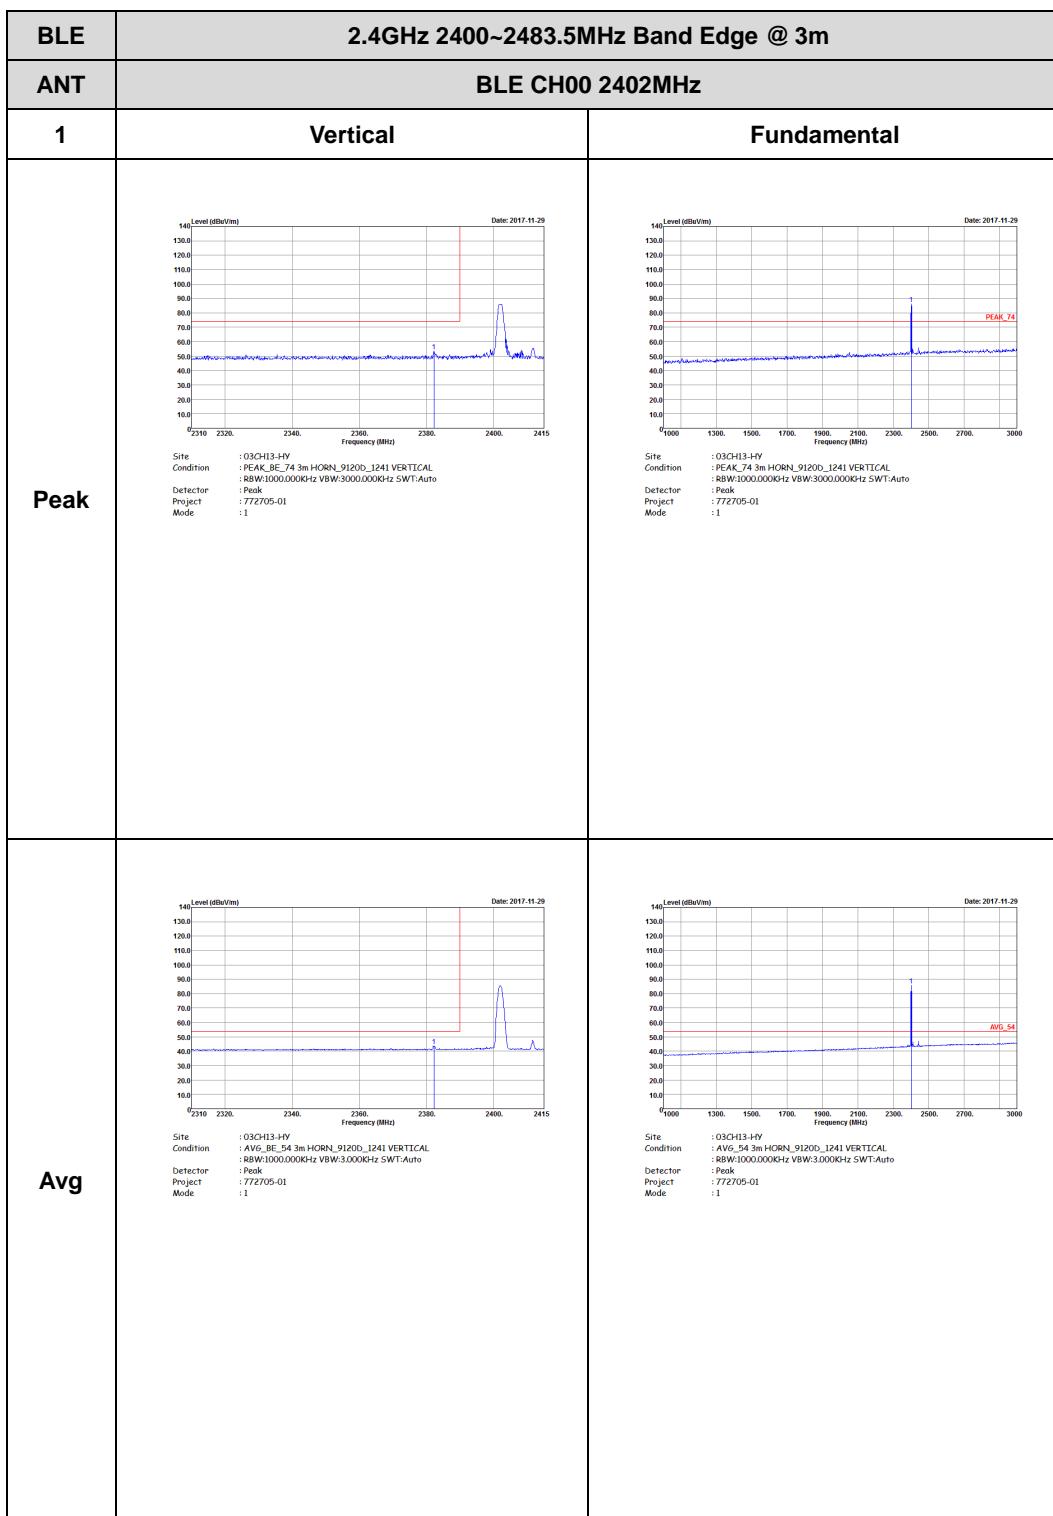


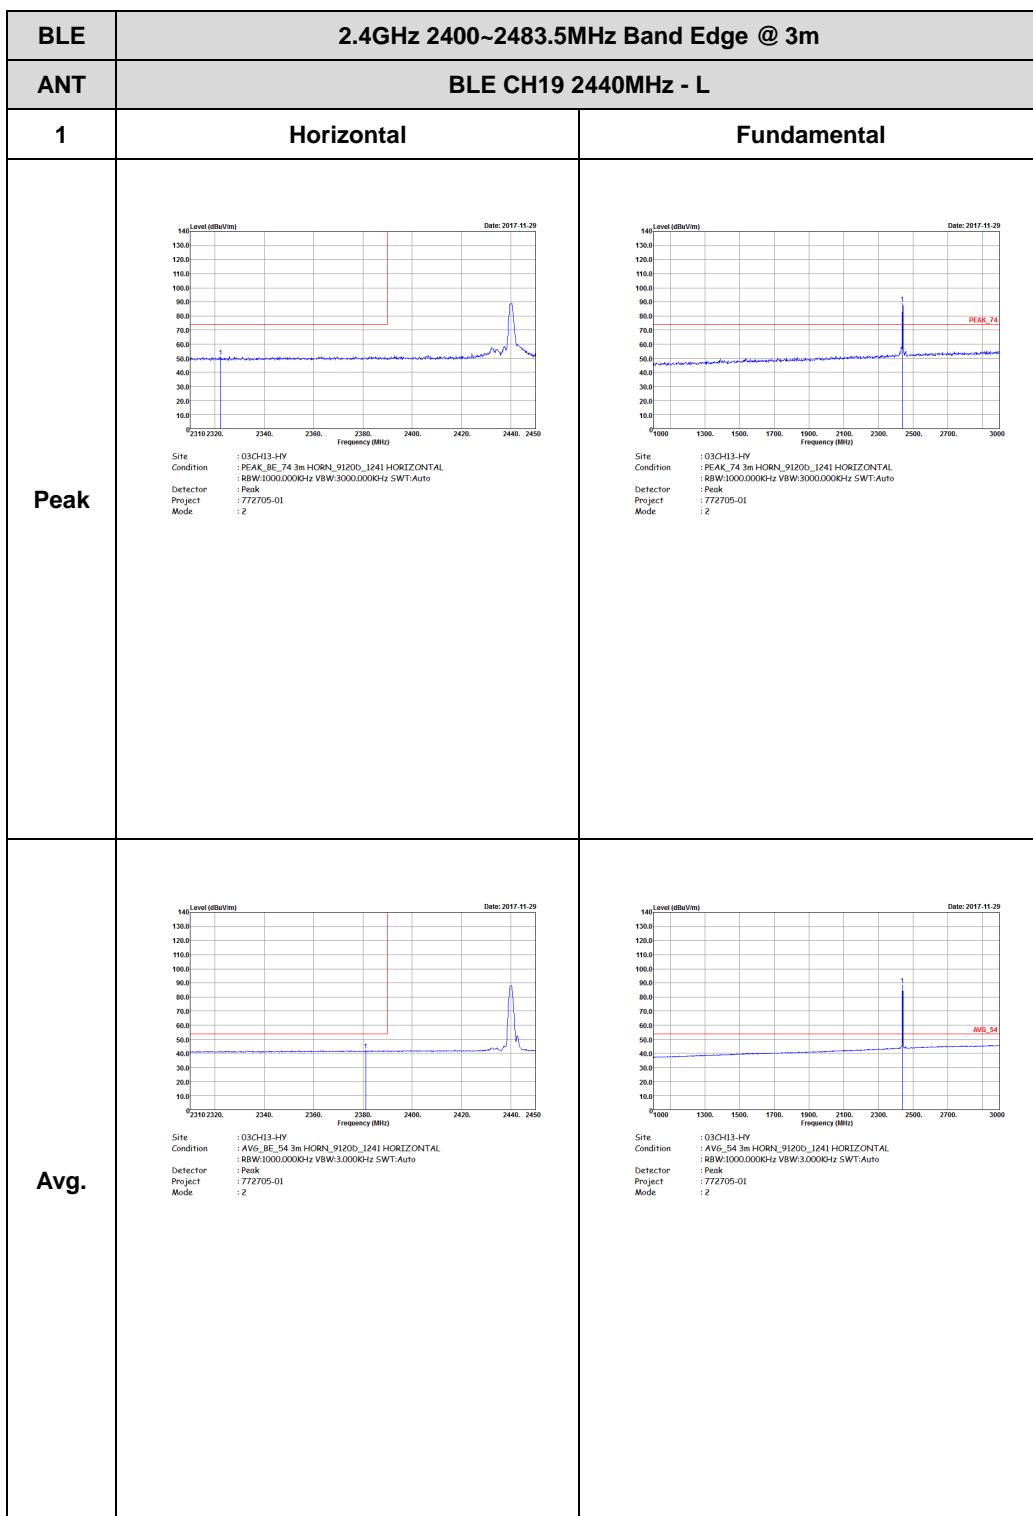


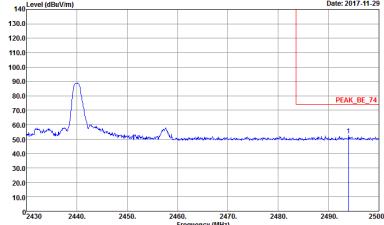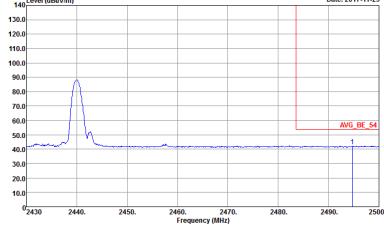



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 <p>Level (dBm/V/m)</p> <p>Date: 2017.11.29</p> <p>Site : 03CH13-HV Condition : PCMK_BE_74 3m HORN_91200_1241 HORIZONTAL Detector : R8W:1000.000KHz VBW:3.000KHz SWF:Auto Project : Peak Mode : 2</p>	Left blank
Avg.	 <p>Level (dBm/V/m)</p> <p>Date: 2017.11.29</p> <p>Site : 03CH13-HV Condition : AVG_BE_54 3m HORN_91200_1241 HORIZONTAL Detector : R8W:1000.000KHz VBW:3.000KHz SWF:Auto Project : Peak Mode : 2</p>	Left blank

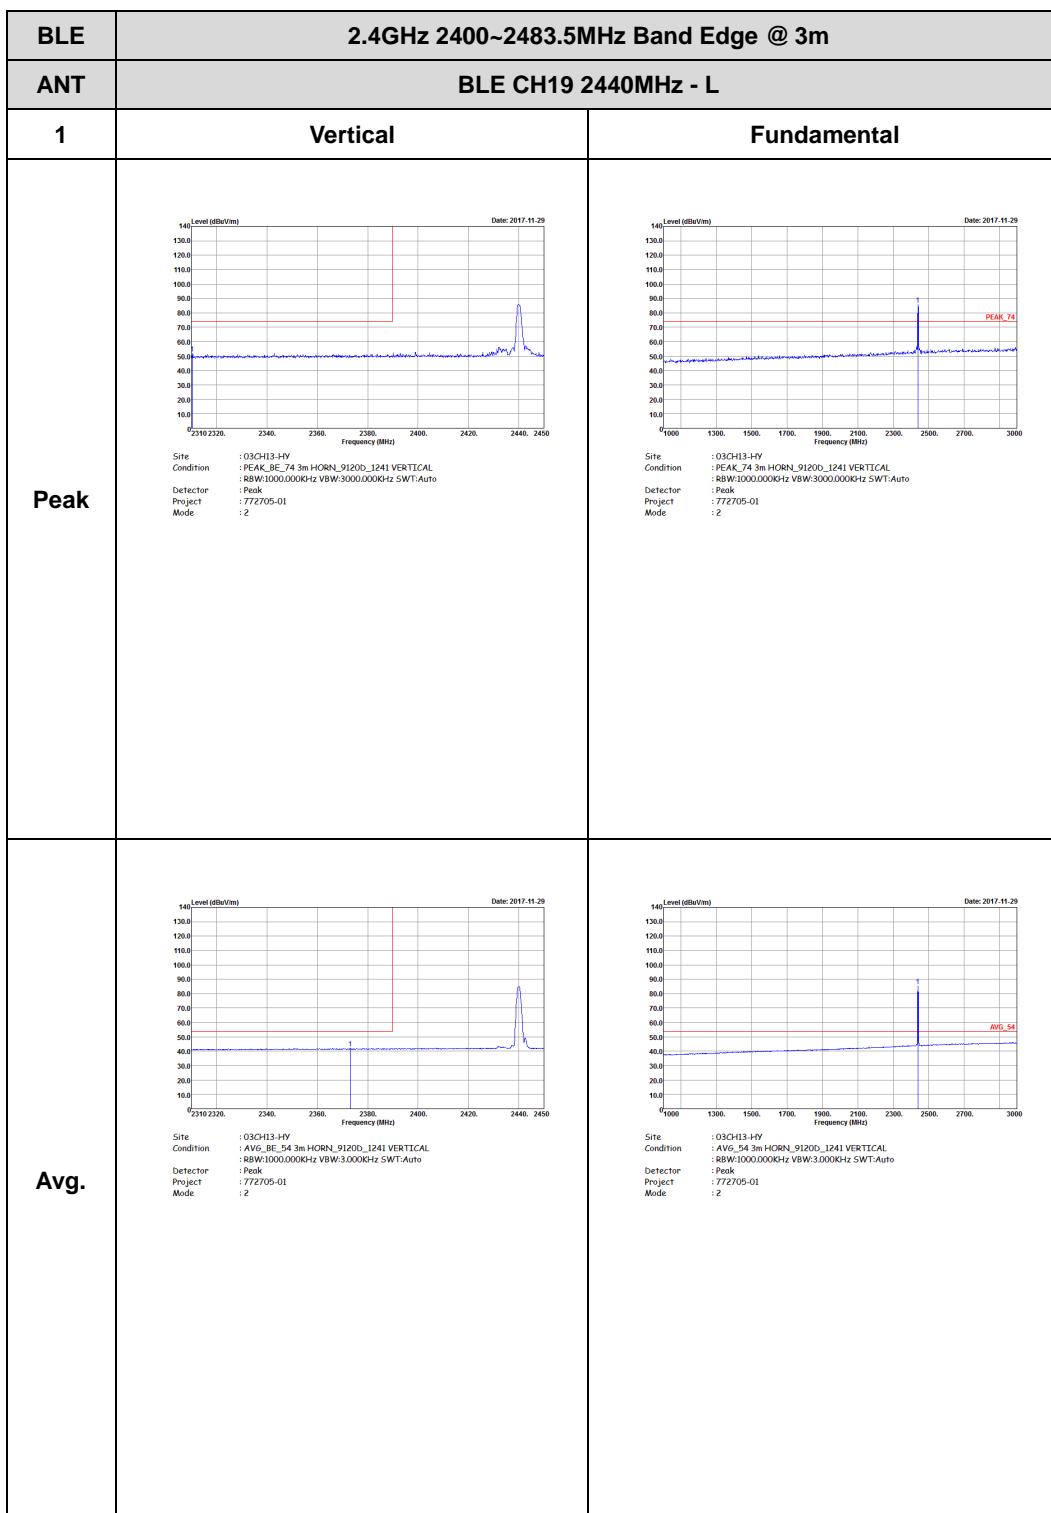

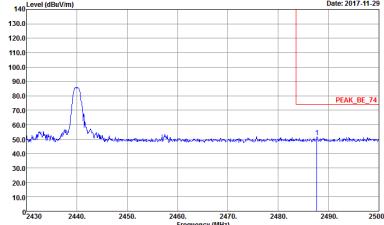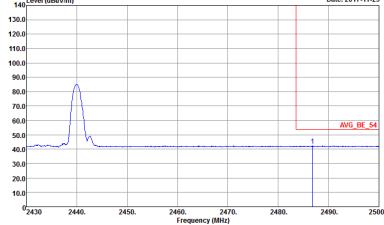

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	 <p>Level (dBmV/m)</p> <p>Date: 2017.11.29</p> <p>Site : 03CH13-HV Condition : PCMK_BE_74 3m HORN_91200_1241 VERTICAL Detector : R8W:1000.000KHz VBW:3.000KHz SWT:Auto Project : Peak Mode : 772705-01 : 2</p>	Left blank
Avg.	 <p>Level (dBmV/m)</p> <p>Date: 2017.11.29</p> <p>Site : 03CH13-HV Condition : AVG_BE_54 3m HORN_91200_1241 VERTICAL Detector : R8W:1000.000KHz VBW:3.000KHz SWT:Auto Project : Peak Mode : 772705-01 : 2</p>	Left blank

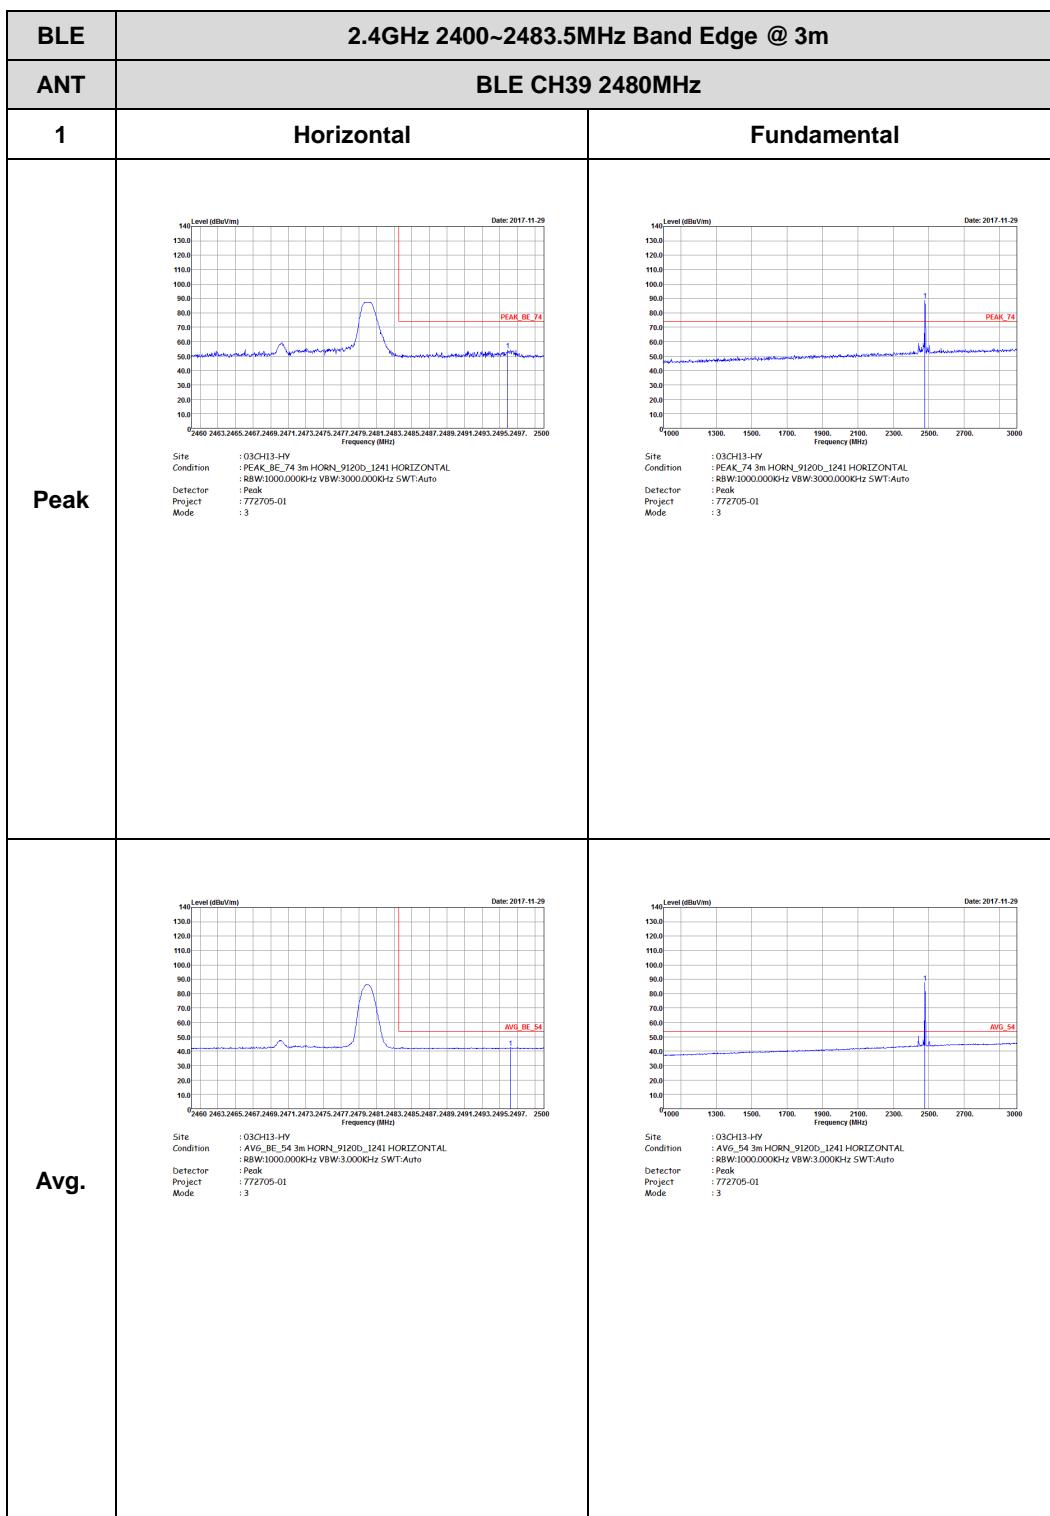


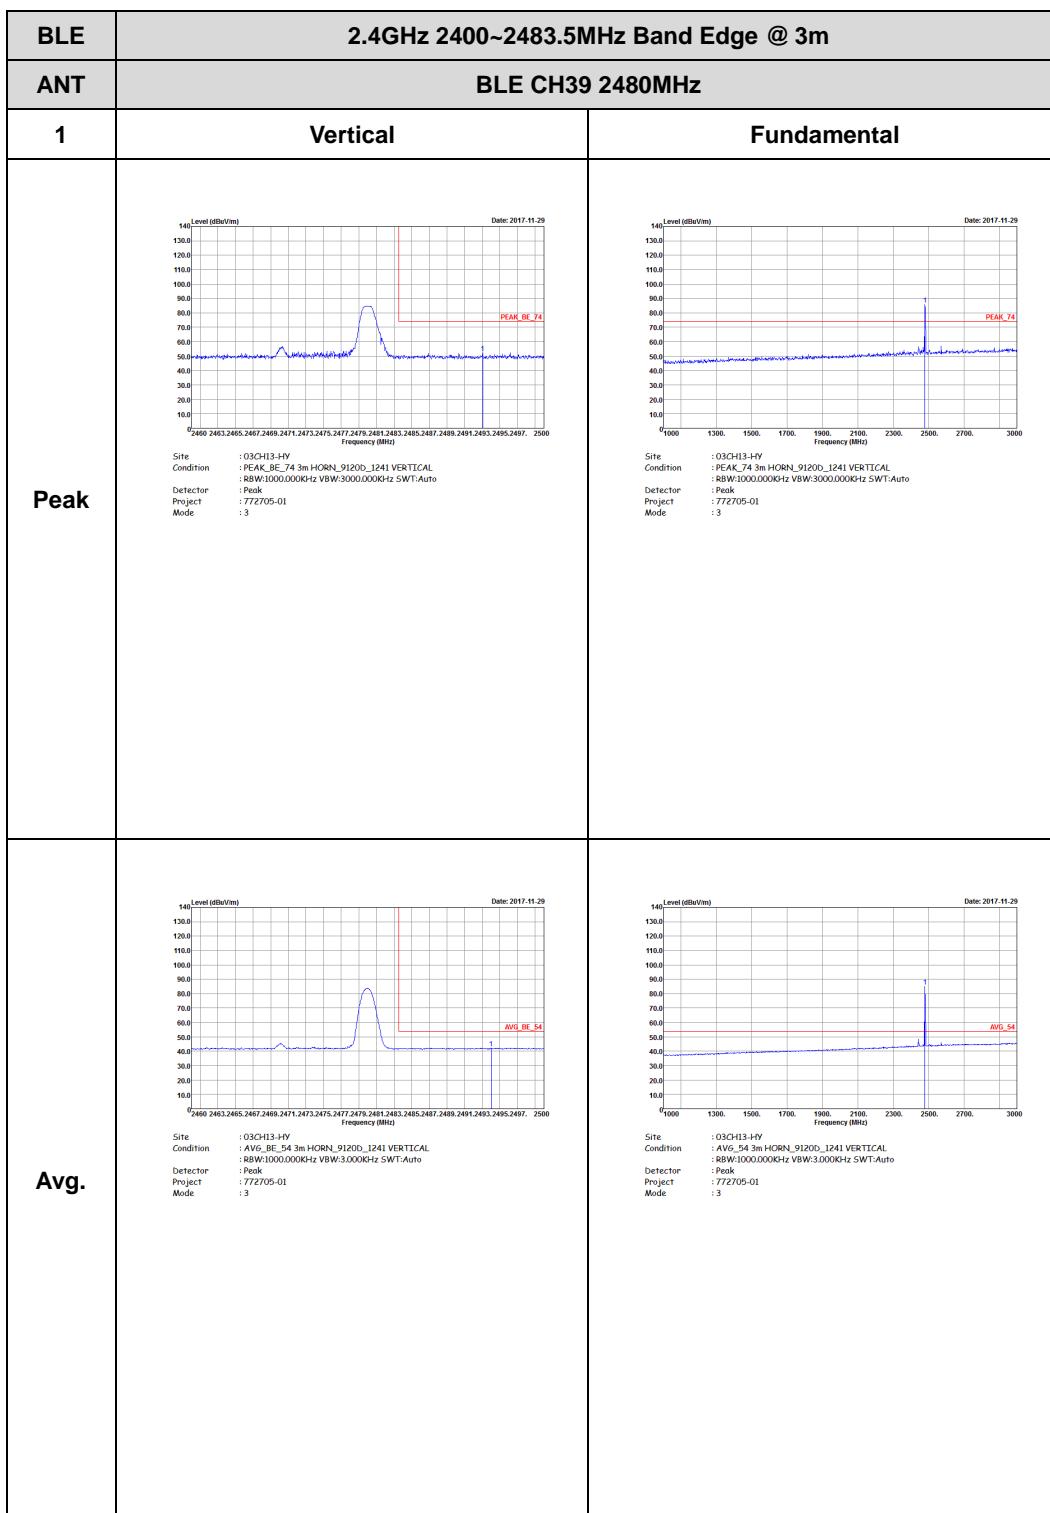





## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

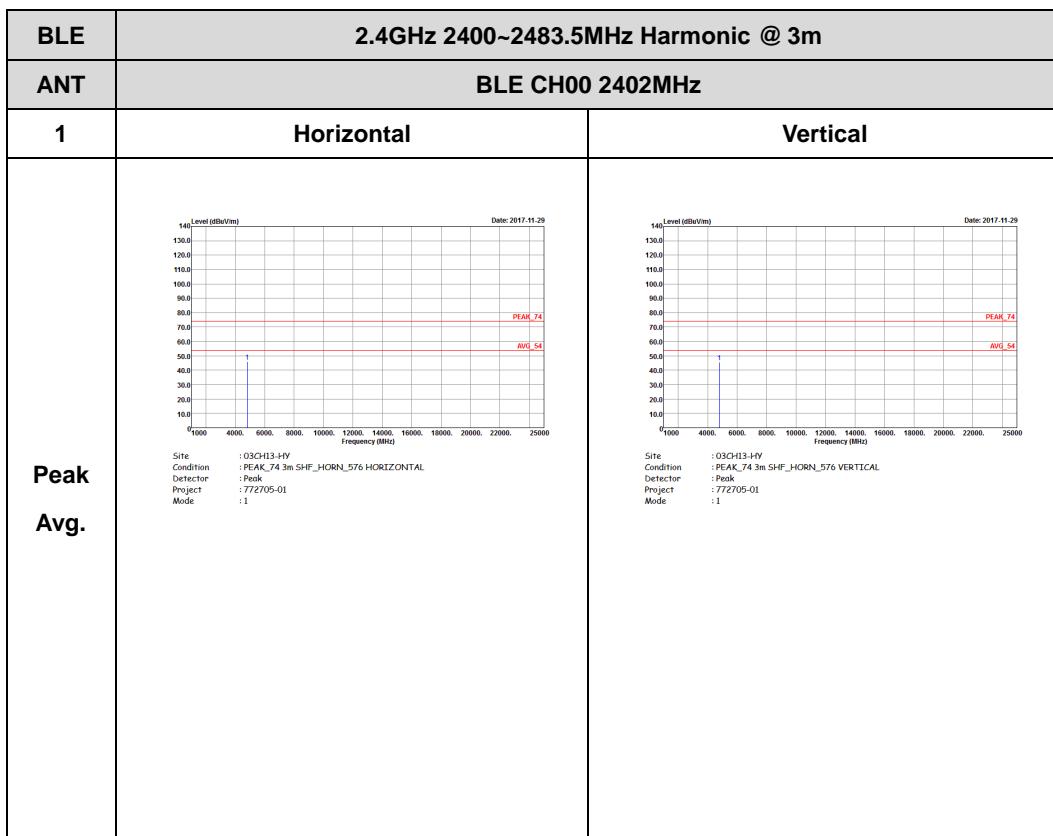

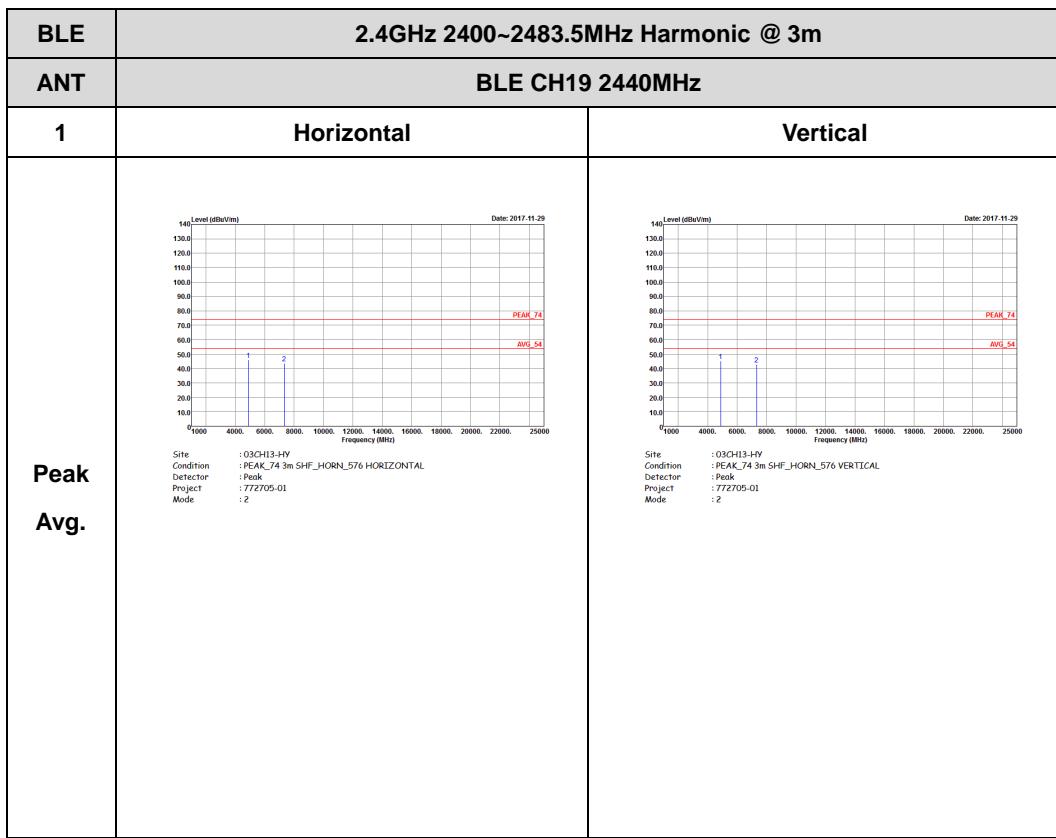


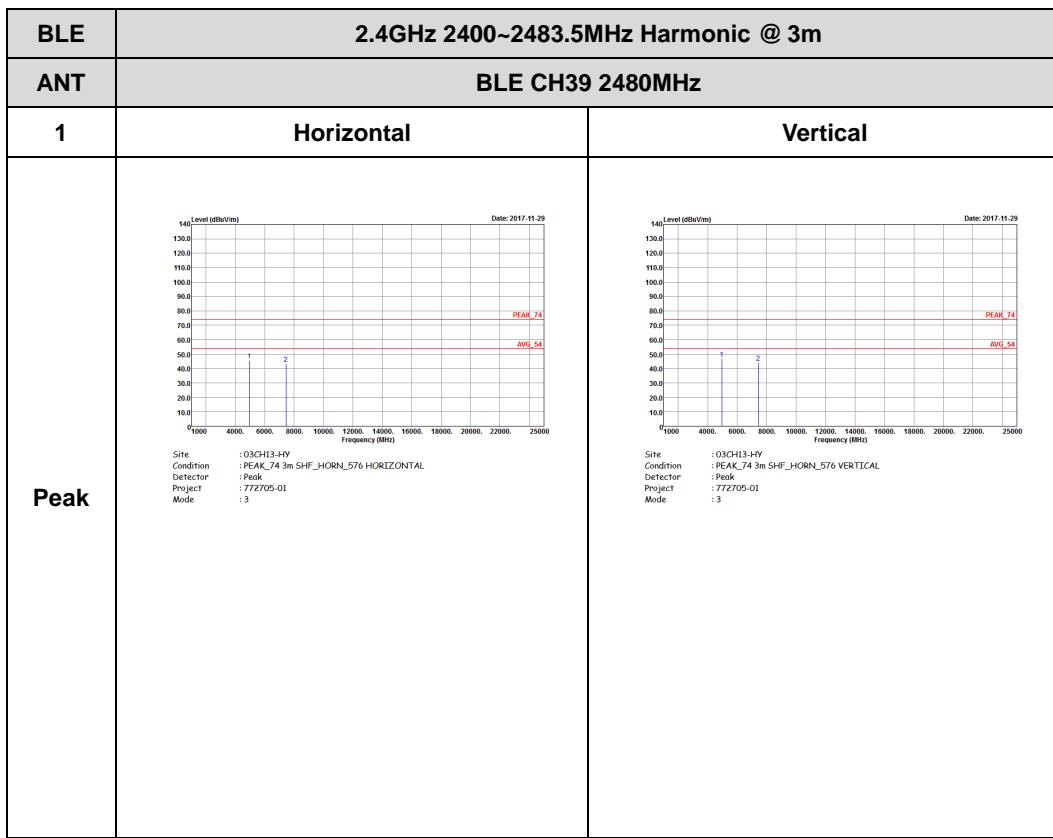



## Emission below 1GHz


## 2.4GHz BLE (LF)

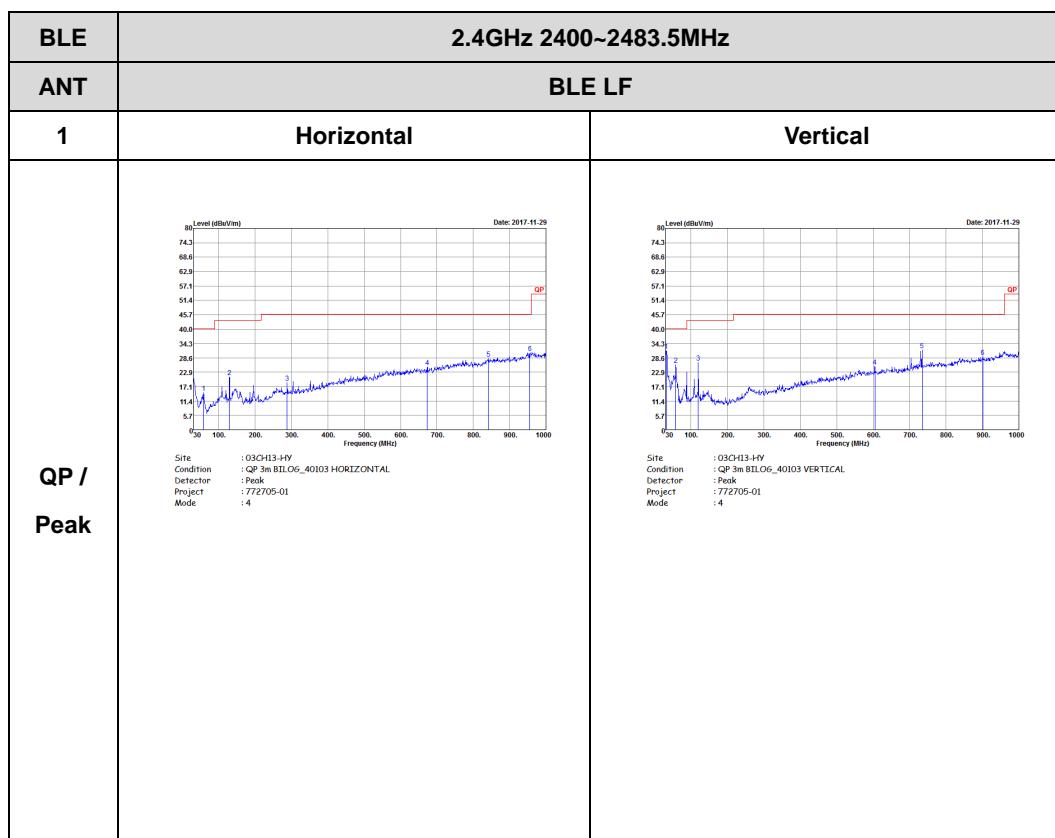

## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth -LE	67.62	426	2.35	3kHz

### Bluetooth - LE

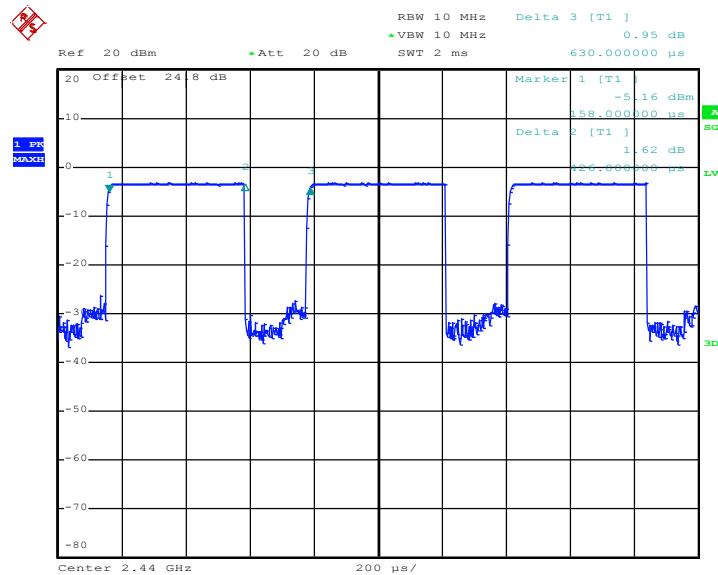

Date: 29.NOV.2017 00:34:38