



## MEASUREMENT REPORT

### FCC PART 15.247 BLE

Report No.: S2025072289100102

Issue Date: 08-27-2025

**Applicant:** Faurecia Clarion Electronics (Xiamen) Co., Ltd.  
**Address:** 6F, No.40, Guanri Road, Software Park Stage II, Xiamen, China  
**FCC ID:** WY2Q000  
**Product:** IVI Assy  
**Model No.:** Q000  
**FCC Classification:** Digital Transmission System (DTS)  
**FCC Rule Part(s):** Part 15 Subpart C (15.247)  
**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v05r02  
**Result:** Pass  
**Item Receipt Date:** Jul. 19, 2025  
**Test Date:** Jul. 21, 2025~ Aug. 19, 2025

Compiled By

Stone Zhang

(Stone Zhang)  
Senior Test Engineer

Approved By

Line Chen

(Line Chen)  
Engineer Manager



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) The test report shall not be reproduced except in full without the written approval of Fangguang Inspection & Testing Co., Ltd. Wuxi Branch

The test report must not be used by the client to claim product certifications, approval, or endorsement by NVLAP, NIST or any agency of U.S. Government.

## Revision History

| Report No.        | Version | Description | Issue Date |
|-------------------|---------|-------------|------------|
| S2025072289100102 | Rev. 01 | /           | 08-27-2025 |

## CONTENTS

| Description                                                             | Page      |
|-------------------------------------------------------------------------|-----------|
| <b>§2.1033 General Information .....</b>                                | <b>5</b>  |
| <b>1. Introduction .....</b>                                            | <b>6</b>  |
| 1.1. Scope .....                                                        | 6         |
| 1.2. Fangguang Test Location .....                                      | 6         |
| <b>2. Product Information .....</b>                                     | <b>7</b>  |
| 2.1. Equipment Description .....                                        | 7         |
| 2.2. Product Specification Subjective to this Report .....              | 8         |
| 2.3. Operation Frequency / Channel List .....                           | 8         |
| 2.4. Device Capabilities .....                                          | 8         |
| 2.5. Description of Test Software .....                                 | 10        |
| 2.6. Test Mode .....                                                    | 10        |
| 2.7. Test Configuration .....                                           | 10        |
| 2.8. EMI Suppression Device(s)/Modifications .....                      | 10        |
| 2.9. EUT Photo .....                                                    | 10        |
| 2.10. Labeling Requirements .....                                       | 10        |
| 2.11. Calculation with all conversion and correction factors used ..... | 11        |
| <b>3. Description of Test .....</b>                                     | <b>12</b> |
| 3.1. Evaluation Procedure .....                                         | 12        |
| 3.2. AC Line Conducted Emissions .....                                  | 12        |
| 3.3. Radiated Emissions .....                                           | 13        |
| <b>4. Antenna Requirements .....</b>                                    | <b>14</b> |
| <b>5. Test Equipment Calibration Date .....</b>                         | <b>15</b> |
| <b>6. Measurement Uncertainty .....</b>                                 | <b>17</b> |
| <b>7. Test Result .....</b>                                             | <b>18</b> |
| 7.1. Summary .....                                                      | 18        |
| 7.2. 6dB Bandwidth Measurement .....                                    | 19        |
| 7.2.1. Test Limit .....                                                 | 19        |
| 7.2.2. Test Procedure used .....                                        | 19        |
| 7.2.3. Test Setting .....                                               | 19        |
| 7.2.4. Test Setup .....                                                 | 19        |
| 7.2.5. Test Result .....                                                | 20        |
| 7.3. Output Power Measurement .....                                     | 22        |

|           |                                                     |           |
|-----------|-----------------------------------------------------|-----------|
| 7.3.1.    | Test Limit .....                                    | 22        |
| 7.3.2.    | Test Procedure Used .....                           | 22        |
| 7.3.3.    | Test Setting .....                                  | 22        |
| 7.3.4.    | Test Setup .....                                    | 23        |
| 7.3.5.    | Test Result .....                                   | 23        |
| 7.4.      | Power Spectral Density Measurement .....            | 26        |
| 7.4.1.    | Test Limit .....                                    | 26        |
| 7.4.2.    | Test Procedure Used .....                           | 26        |
| 7.4.3.    | Test Setting .....                                  | 26        |
| 7.4.4.    | Test Setup .....                                    | 27        |
| 7.4.5.    | Test Result .....                                   | 28        |
| 7.5.      | Conducted Band Edge and Out-of-Band Emissions ..... | 31        |
| 7.5.1.    | Test Limit .....                                    | 31        |
| 7.5.2.    | Test Procedure Used .....                           | 31        |
| 7.5.3.    | Test Setting .....                                  | 31        |
| 7.5.4.    | Test Setup .....                                    | 31        |
| 7.5.5.    | Test Result .....                                   | 32        |
| 7.6.      | Radiated Spurious Emission Measurement .....        | 39        |
| 7.6.1.    | Test Limit .....                                    | 39        |
| 7.6.2.    | Test Procedure Used .....                           | 39        |
| 7.6.3.    | Test Setting .....                                  | 39        |
| 7.6.4.    | Test Setup .....                                    | 41        |
| 7.6.5.    | Test Result .....                                   | 43        |
| 7.7.      | Radiated Restricted Band Edge Measurement .....     | 57        |
| 7.7.1.    | Test Limit .....                                    | 57        |
| 7.7.2.    | Test Procedure Used .....                           | 58        |
| 7.7.3.    | Test Setting .....                                  | 58        |
| 7.7.4.    | Test Setup .....                                    | 59        |
| 7.7.5.    | Test Result .....                                   | 60        |
| 7.8.      | AC Conducted Emissions Measurement .....            | 64        |
| 7.8.1.    | Test Limit .....                                    | 64        |
| 7.8.2.    | Test Setup .....                                    | 64        |
| 7.8.3.    | Test Result .....                                   | 65        |
| <b>8.</b> | <b>Conclusion .....</b>                             | <b>66</b> |

## §2.1033 General Information

|                                 |                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>               | Faurecia Clarion Electronics (Xiamen) Co., Ltd.                                                                                        |
| <b>Applicant Address:</b>       | 6F, No.40, Guanri Road, Software Park Stage II, Xiamen, China                                                                          |
| <b>Manufacturer:</b>            | Faurecia Clarion Electronics (Xiamen) Co., Ltd.                                                                                        |
| <b>Manufacturer Address:</b>    | 6F, No.40, Guanri Road, Software Park Stage II, Xiamen, China                                                                          |
| <b>Factory:</b>                 | Faurecia Clarion Electronics (Fengcheng) Co., Ltd.                                                                                     |
| <b>Factory Address:</b>         | No.12 High-Tech Road, Fengcheng High Technology Industry Park, Yichun City, Jiangxi                                                    |
| <b>Test Site:</b>               | Fanguang Inspection & Testing Co., Ltd.                                                                                                |
| <b>LAB ID:</b>                  | CN5037                                                                                                                                 |
| <b>LAB registration number:</b> | 600222-0                                                                                                                               |
| <b>Test Site Address:</b>       | No.8 Ningyun Rd., Xinwu District Wuxi, Jiangsu 214000 China                                                                            |
| <b>FCC Rule Part(s):</b>        | Part 15 Subpart C (15.247)                                                                                                             |
| <b>FCC ID:</b>                  | WY2Q000                                                                                                                                |
| <b>Test Device Serial No.:</b>  | S/N.: /<br><input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering |
| <b>FCC Classification:</b>      | Digital Transmission System (DTS)                                                                                                      |

## **1. Introduction**

### **1.1. Scope**

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### **1.2. Fangguang Test Location**

These measurement tests were performed at the Fangguang Inspection and testing Co.,LTD located at No.8 Ningyun Rd., Xinwu District Wuxi, Jiangsu 214000 China. The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.10-2013.

## 2. Product Information

### 2.1. Equipment Description

|                      |                                                                   |
|----------------------|-------------------------------------------------------------------|
| Product Name:        | IVI Assy                                                          |
| Test Model:          | Q000                                                              |
| Trade Mark:          | clarion                                                           |
| Input Voltage Range: | DC 9V~16V, typical voltage: DC 13.2V                              |
| Bluetooth Version:   | 4.2                                                               |
| Software Version:    | C.0.9.JB                                                          |
| Hardware Version:    | A                                                                 |
| EUT sample number:   | S20250722891001-1-1 (Conducted)<br>S20250722891001-1-2 (Radiated) |

Note:

1. This information is provided by the Customer and its authenticity is the responsibility of the Customer.
2. The two configurations are consistent in terms of schematic, circuit design, circuit layout, hardware version, and software version, except for the addition of a DAB circuit board in the maximum configuration.

The differences are not affecting the RF performance.

For specific differences please refer to the following table.

| Function     | Product name: IVI Assy |                       |
|--------------|------------------------|-----------------------|
|              | Model:Q000             |                       |
|              | Minimum Configuration  | Maximum Configuration |
| BT (4.2)     | √                      | √                     |
| WIFI 2.4G    | √                      | √                     |
| WIFI 5G (B4) | √                      | √                     |
| FM/AM        | √                      | √                     |
| DAB          | X                      | √                     |
| HSD socket   | √                      | √                     |
| Memory(RAM)  | √                      | √                     |

3. The maximum configuration of the model was tested and recorded in this report.

## 2.2. Product Specification Subjective to this Report

|                     |                   |
|---------------------|-------------------|
| Bluetooth Frequency | BLE: 2402~2480MHz |
| Number of Channels  | BLE: 40           |
| Channel Spacing     | 2MHz              |
| Type of modulation  | GFSK              |
| Data Rate           | 1Mbps             |
| Antenna Type:       | PCB Antenna       |
| Antenna Gain:       | 3.98dBi           |

Note: The maximum Antenna Gain was declared by the manufacturer.

## 2.3. Operation Frequency / Channel List

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 00      | 2402 MHz  | 01      | 2404 MHz  | 02      | 2406 MHz  |
| 03      | 2408 MHz  | 04      | 2410 MHz  | 05      | 2412 MHz  |
| 06      | 2414 MHz  | 07      | 2416 MHz  | 08      | 2418 MHz  |
| 09      | 2420 MHz  | 10      | 2422 MHz  | 11      | 2424 MHz  |
| 12      | 2426 MHz  | 13      | 2428 MHz  | 14      | 2430 MHz  |
| 15      | 2432 MHz  | 16      | 2434 MHz  | 17      | 2436 MHz  |
| 18      | 2438 MHz  | 19      | 2440 MHz  | 20      | 2442 MHz  |
| 21      | 2444 MHz  | 22      | 2446 MHz  | 23      | 2448 MHz  |
| 24      | 2450 MHz  | 25      | 2452 MHz  | 26      | 2454 MHz  |
| 27      | 2456 MHz  | 28      | 2458 MHz  | 29      | 2460 MHz  |
| 30      | 2462 MHz  | 31      | 2464 MHz  | 32      | 2466 MHz  |
| 33      | 2468 MHz  | 34      | 2470 MHz  | 35      | 2472 MHz  |
| 36      | 2474 MHz  | 37      | 2476 MHz  | 38      | 2478 MHz  |
| 39      | 2480 MHz  | --      | --        | --      | --        |

EUT was tested with Channel 0, 19 and 39.

## 2.4. Device Capabilities

This device contains the following capabilities: Bluetooth (4.2)

**Note:** The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 8MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles of BLE are 63.49%.


| Test Mode | Antenna | Frequency<br>(MHz) | ON Time<br>[ms] | Period<br>[ms] | X      | DC [%] | xFactor |
|-----------|---------|--------------------|-----------------|----------------|--------|--------|---------|
| BLE_1M    | Ant1    | 2402               | 0.39            | 0.63           | 0.6190 | 61.90  | 2.08    |
|           |         | 2440               | 0.39            | 0.63           | 0.6190 | 61.90  | 2.08    |
|           |         | 2480               | 0.39            | 0.63           | 0.6190 | 61.90  | 2.08    |

BLE\_1M\_Ant1\_2402



BLE\_1M\_Ant1\_2440



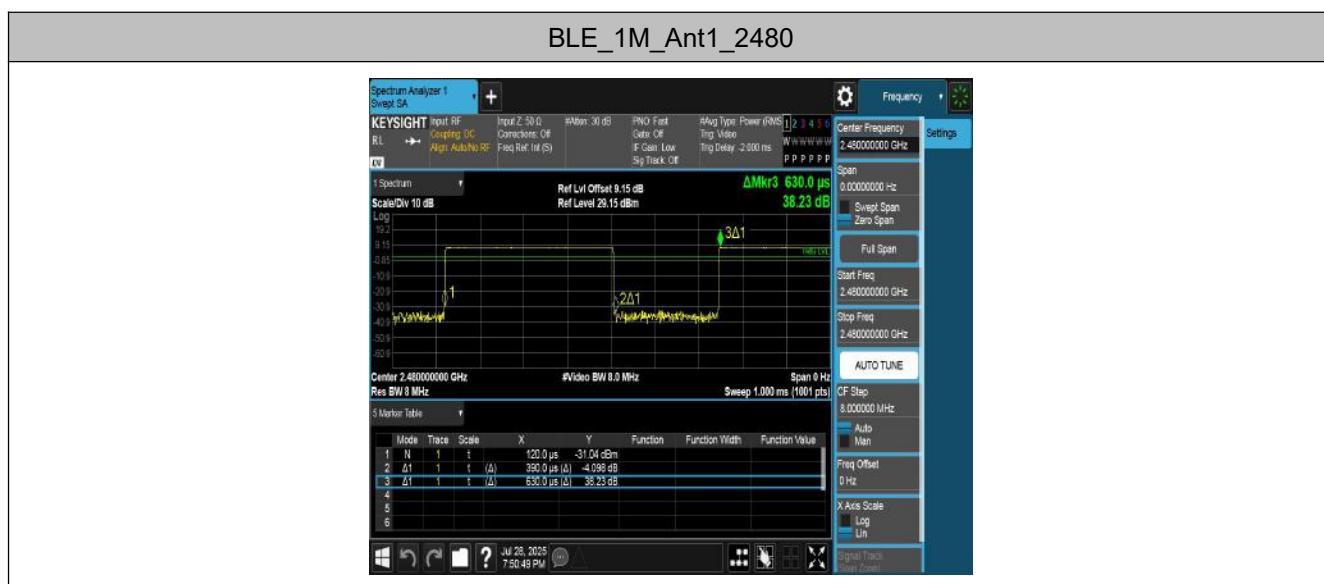

## 2.5. Description of Test Software

The test utility software used during testing was “Engineering Mode”, and the test software power level setting is Default.

## 2.6. Test Mode

|           |                         |
|-----------|-------------------------|
| Test Mode | Mode 1: Transmit by BLE |
|-----------|-------------------------|

## 2.7. Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.9. EUT Photo

The EUT external photo, internal photo and test setup photo, please refer to the plots in the S20250722891001-A1/A2/A3.

## 2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or

pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

## **2.11. Calculation with all conversion and correction factors used**

For AC Line Conducted Emissions Test:

Measure Level (dB $\mu$ V) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

For Radiated Emissions Below 1GHz Test:

Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

For Radiated Emissions Above 1GHz Test:

Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

### 3. Description of Test

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. The turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. Antenna Requirements

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- Use a unique coupling to the intentional radiator.

## 5. Test Equipment Calibration Date

### Conducted Emissions

| Instrument         | Manufacturer | Type No. | Asset No.       | Cali. Interval | Cali. Due Date |
|--------------------|--------------|----------|-----------------|----------------|----------------|
| EMI Test Receiver  | R&S          | ESR3     | FWXGJC-2016-181 | 1 year         | 2026/07/08     |
| Two-Line V-Network | R&S          | ENV 216  | FWXGJC-2016-182 | 1 year         | 2026/07/09     |
| Thermohygrometer   | Yuhuaze      | HTC-1    | FWXDA-2016-387  | 1 year         | 2025/09/03     |

### Radiated Emission

| Instrument             | Manufacturer | Type No.    | Asset No.          | Cali. Interval | Cali. Due Date |
|------------------------|--------------|-------------|--------------------|----------------|----------------|
| Loop Antenna           | Schwarzbeck  | FMZB 1519B  | FWXGJC-2018-015    | 1 year         | 2026/06/21     |
| Bi-Log Antenna         | R&S          | VULB 9168   | FGZZ-2024-036      | 1 year         | 2026/06/21     |
| Broadband Horn Antenna | R&S          | HF907       | FWXGJC-2016-267-07 | 1 year         | 2026/06/21     |
| Broadband Horn Antenna | Schwarzbeck  | BBHA 9170   | FWXGJC-2018-016    | 1 year         | 2026/06/21     |
| EMI Receiver           | R&S          | ESR26       | FWXGJC-2016-267-01 | 1 year         | 2026/07/16     |
| EXA Signal Analyzer    | Keysight     | N9010B      | FWXGJC-2018-010    | 1 year         | 2026/07/16     |
| Pre-Amplifier          | Tonscend     | TAP0118048  | FWXGJC-2024-037    | 1 year         | 2026/06/21     |
| Pre-Amplifier          | Chengyi      | EMC184055SE | FWXGJC-2018-018    | 1 year         | 2026/06/21     |
| Thermohygrometer       | Yuhuaze      | HTC-1       | FWXDA-2016-385     | 1 year         | 2025/09/03     |
| Anechoic Chamber       | SAEMC        | FSAC318     | FWXGJC-2024-035    | 3 year         | 2027/06/02     |

### Conducted Test Equipment

| Instrument          | Manufacturer | Type No. | Asset No.       | Cali. Interval | Cali. Due Date |
|---------------------|--------------|----------|-----------------|----------------|----------------|
| EXA Signal Analyzer | Keysight     | N9010B   | FWXGJC-2018-010 | 1 year         | 2026/07/16     |
| RF Control Unit     | Tonscend     | JS0806-2 | FWXGJC-2018-013 | 1 year         | 2026/07/25     |
| Thermohygrometer    | Yuhuaze      | HTC-1    | FWXDA-2016-386  | 1 year         | 2025/09/03     |

| Test Software        | Manufacturer | Version | Asset No. | Function           |
|----------------------|--------------|---------|-----------|--------------------|
| JS1120-3 Test System | tonscend     | V3.3.10 | /         | Conducted Test     |
| JS32                 | tonscend     | V5.0.0  | /         | Radiated Emission  |
| EMI Test Software    | R&S          | 9.26.00 | /         | Conducted Emission |

## Auxiliary Equipment

| Instrument | Manufacturer | Type No. | Asset No. | Cali. Interval | Cali. Due Date |
|------------|--------------|----------|-----------|----------------|----------------|
| Filter     | Tonscend     | ZBSF6    | 07247867  | 1 year         | 2026/07/16     |
| Filter     | Tonscend     | ZHPF6    | 07233297  | 1 year         | 2026/07/16     |
| Attenuator | Tonscend     | 10dB     | /         | 1 year         | 2026/07/16     |
| RF Cable   | Tonscend     | T-1      | /         | 1 year         | 2026/07/16     |

## 6. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------|
| <b>AC Conducted Emission Measurement</b>                                                                                |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>2.68dB                                        |
| <b>Radiated Emission Measurement (9kHz - 30MHz)</b>                                                                     |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>3.06dB                                        |
| <b>Radiated Emission Measurement (30MHz -1GHz)</b>                                                                      |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>4.01dB                                        |
| <b>Radiated Emission Measurement (1-18GHz)</b>                                                                          |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>4.97dB                                        |
| <b>Radiated Emission Measurement (18-40GHz)</b>                                                                         |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>5.32dB                                        |
| <b>Spurious Emissions, Conducted</b>                                                                                    |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>30MHz-1GHz: 1.00 dB<br>1GHz-12.75GHz: 1.30 dB |
| <b>Output Power</b>                                                                                                     |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.60dB                                        |
| <b>Power Spectrum Density</b>                                                                                           |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.80dB                                        |
| <b>Occupied Bandwidth</b>                                                                                               |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.20MHz                                       |
| <b>Frequency Stability</b>                                                                                              |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>$0.1 \times 10^{-6}$ MHz                      |

## 7. Test Result

### 7.1. Summary

| FCC Part Section(s) | Test Description                                                              | Test Limit                                                                     | Test Condition | Test Result    | Reference       |
|---------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|----------------|-----------------|
| 15.247(a)(2)        | 6dB Bandwidth                                                                 | $\geq 500\text{kHz}$                                                           | Conducted      | Pass           | Section 7.2     |
| 15.247(b)(3)        | Output Power                                                                  | $\leq 30\text{dBm}$                                                            |                | Pass           | Section 7.3     |
| 15.247(e)           | Power Spectral Density                                                        | $\leq 8\text{dBm}/3\text{kHz}$                                                 |                | Pass           | Section 7.4     |
| 15.247(d)           | Band Edge                                                                     | $\geq 20\text{dBc}$                                                            |                | Pass           | Section 7.5     |
| 15.247(d)           | Out-of-Band Emissions                                                         | $\geq 20\text{dBc}$                                                            |                | Pass           | Section 7.5     |
| 15.205<br>15.209    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | Radiated       | Pass           | Section 7.6&7.7 |
| 15.207              | AC Conducted Emissions<br>150kHz - 30MHz                                      | < FCC 15.207 limits                                                            | Line Conducted | Not Applicable | Section 7.8     |

#### Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum permissible 6dB bandwidth is 500 kHz.

### 7.2.2. Test Procedure used


ANSI C63.10-2013 Section 11.8.2 Option 1

KDB 558074 D01 v05r02 – Section 8.2

### 7.2.3. Test Setting

1. Set RBW = 100 kHz
2. VBW  $\geq 3 \times$  RBW
3. Detector = peak
4. Trace mode = max hold
5. Sweep = auto couple
6. Allow the trace was allowed to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.2.4. Test Setup

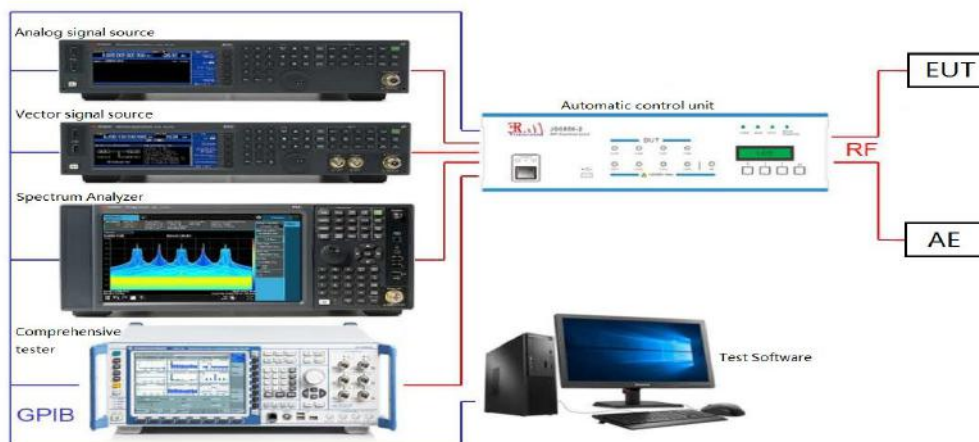

### 7.2.5. Test Result

|                    |                    |
|--------------------|--------------------|
| Temperature:       | 20.1-30.5 °C       |
| Relative Humidity: | 25-50 %            |
| ATM Pressure:      | 99.2-100.8 kPa     |
| Test Data:         | 2025-07-23 ~ 07-28 |
| Test Engineer:     | Stone Zhang        |

| Test Mode | Antenna | Frequency (MHz) | DTS BW [MHz] | FL [MHz] | FH [MHz] | Limit [MHz] | OCB [MHz] | Verdict |
|-----------|---------|-----------------|--------------|----------|----------|-------------|-----------|---------|
| BLE_1M    | Ant1    | 2402            | 0.684        | 2401.656 | 2402.340 | 0.5         | 1.0428    | PASS    |
|           |         | 2440            | 0.680        | 2439.660 | 2440.340 | 0.5         | 1.0421    | PASS    |
|           |         | 2480            | 0.680        | 2479.660 | 2480.340 | 0.5         | 1.0409    | PASS    |

### Test Graphs



### BLE\_1M\_Ant1\_2440



### BLE\_1M\_Ant1\_2480



### **7.3. Output Power Measurement**

#### **7.3.1. Test Limit**

The maximum permissible conducted output power is 1 Watt (30dBm). And for antenna gain greater than 6dBi the limit shall reduce by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **7.3.2. Test Procedure Used**


ANSI C63.10-2013 – Section 11.9.1.1

KDB 558074 D01 v05r02 – Section 8.3.1.2

#### **7.3.3. Test Setting**

- 1.Set the RBW  $\geq$  DTS bandwidth.
- 2.Set the VBW  $\geq$   $[3 \times \text{RBW}]$ .
- 3.Set the span  $\geq$   $[3 \times \text{RBW}]$ .
- 4.Detector = peak.
- 5.Sweep time = auto couple.
- 6.Trace mode = max hold.
- 7.Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

### 7.3.4. Test Setup

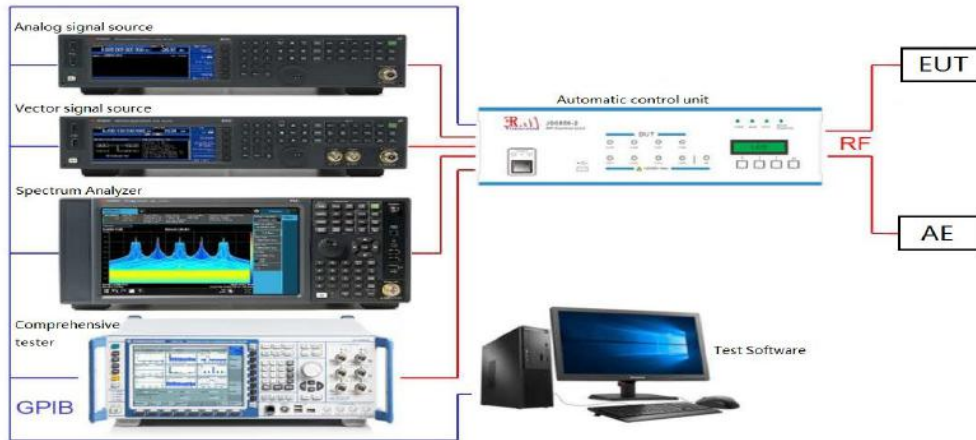

### 7.3.5. Test Result

|                    |                    |
|--------------------|--------------------|
| Temperature:       | 20.1-30.5 °C       |
| Relative Humidity: | 25-50 %            |
| ATM Pressure:      | 99.2-100.8 kPa     |
| Test Data:         | 2025-07-23 ~ 07-28 |
| Test Engineer:     | Stone Zhang        |

| Test Mode | Antenna | Frequency (MHz) | Conducted Peak Power [dBm] | Conducted Limit[dBm] | Verdict |
|-----------|---------|-----------------|----------------------------|----------------------|---------|
| BLE_1M    | Ant1    | 2402            | 6.54                       | ≤30                  | PASS    |
|           |         | 2440            | 6.50                       | ≤30                  | PASS    |
|           |         | 2480            | 7.52                       | ≤30                  | PASS    |

## Test Graphs

BLE\_1M\_Ant1\_2402



BLE\_1M\_Ant1\_2440



# BLE\_1M\_Ant1\_2480



## **7.4. Power Spectral Density Measurement**

### **7.4.1. Test Limit**

The maximum permissible power spectral density is 8dBm in any 3 kHz band. And for antenna gain greater than 6dBi the limit shall reduce by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **7.4.2. Test Procedure Used**


KDB 558074 D01 v05r02 - Section 8.4

ANSI C63.10 – Section 11.10.2

### **7.4.3. Test Setting**

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.

#### 7.4.4. Test Setup

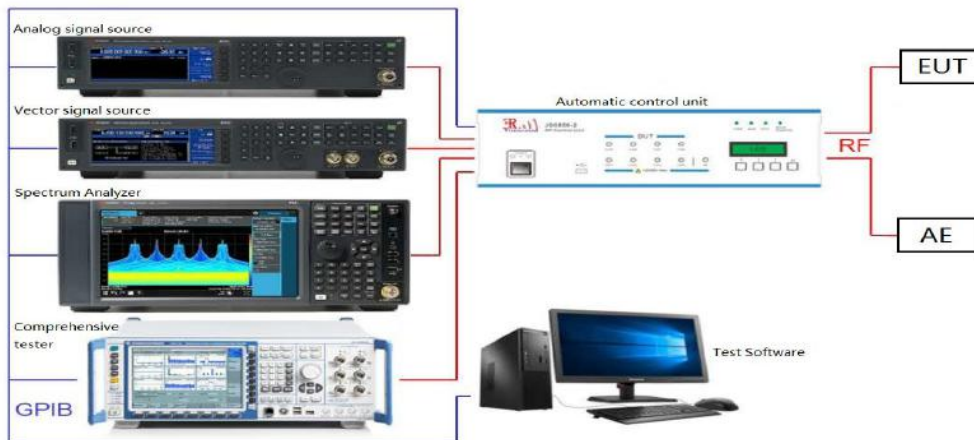

#### 7.4.5. Test Result

|                    |                    |
|--------------------|--------------------|
| Temperature:       | 20.1-30.5 °C       |
| Relative Humidity: | 25-50 %            |
| ATM Pressure:      | 99.2-100.8 kPa     |
| Test Data:         | 2025-07-23 ~ 07-28 |
| Test Engineer:     | Stone Zhang        |

| Test Mode | Antenna | Frequency<br>(MHz) | Result<br>[dBm/3kHz] | Limit<br>[dBm/3kHz] | Verdict |
|-----------|---------|--------------------|----------------------|---------------------|---------|
| BLE_1M    | Ant1    | 2402               | -7.86                | ≤8.00               | PASS    |
|           |         | 2440               | -8.12                | ≤8.00               | PASS    |
|           |         | 2480               | -7.67                | ≤8.00               | PASS    |

## Test Graphs

BLE\_1M\_Ant1\_2402



BLE\_1M\_Ant1\_2440



# BLE\_1M\_Ant1\_2480



## 7.5. Conducted Band Edge and Out-of-Band Emissions

### 7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### 7.5.2. Test Procedure Used


KDB 558074 D01 v05r02 - Section 8.5 & Section 8.6

ANSI C63.10 – Section 11.11&11.12

### 7.5.3. Test Setting

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize

### 7.5.4. Test Setup

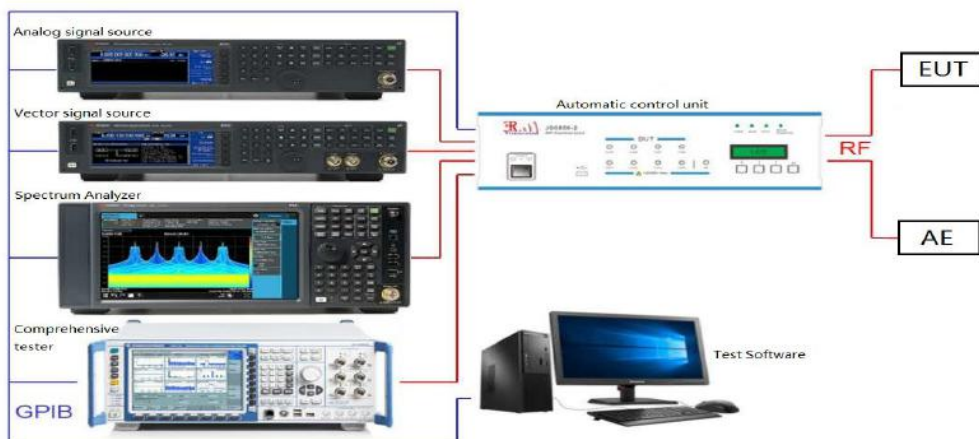

### 7.5.5. Test Result

|                    |                    |
|--------------------|--------------------|
| Temperature:       | 20.1-30.5 °C       |
| Relative Humidity: | 25-50 %            |
| ATM Pressure:      | 99.2-100.8 kPa     |
| Test Data:         | 2025-07-23 ~ 07-28 |
| Test Engineer:     | Stone Zhang        |

### Band edge

| Test Mode | Antenna | Channel Name | Frequency (MHz) | Ref Level [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|-----------|---------|--------------|-----------------|-----------------|--------------|-------------|---------|
| BLE_1M    | Ant1    | Low          | 2402            | 6.20            | -49.13       | ≤-13.80     | PASS    |
|           |         | High         | 2480            | 6.58            | -48.73       | ≤-13.42     | PASS    |

### Conducted Spurious Emission

| Test Mode | Antenna | Frequency (MHz) | Frequency Range [MHz] | Ref Level [dBm] | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|-----------------|-----------------------|-----------------|-------------|------------|---------|
| BLE_1M    | Ant1    | 2402            | Reference             | 6.10            | 6.10        | ---        | PASS    |
|           |         |                 | 30~1000               | 6.10            | -40.72      | ≤-13.9     | PASS    |
|           |         |                 | 1000~26500            | 6.10            | -31.51      | ≤-13.9     | PASS    |
|           |         | 2440            | Reference             | 6.06            | 6.06        | ---        | PASS    |
|           |         |                 | 30~1000               | 6.06            | -40.58      | ≤-13.94    | PASS    |
|           |         |                 | 1000~26500            | 6.06            | -31.78      | ≤-13.94    | PASS    |
|           |         | 2480            | Reference             | 6.54            | 6.54        | ---        | PASS    |
|           |         |                 | 30~1000               | 6.54            | -40.79      | ≤-13.46    | PASS    |
|           |         |                 | 1000~26500            | 6.54            | -30.34      | ≤-13.46    | PASS    |

## Test Graphs of Band Edge

BLE\_1M\_Ant1\_Low\_2402



BLE\_1M\_Ant1\_High\_2480



## Test Graphs of Out-of-Band Emissions

BLE\_1M\_Ant1\_2402\_0~Reference



BLE\_1M\_Ant1\_2402\_30~1000




### BLE\_1M\_Ant1\_2402\_1000~26500



### BLE\_1M\_Ant1\_2440\_0~Reference



### BLE\_1M\_Ant1\_2440\_30~1000

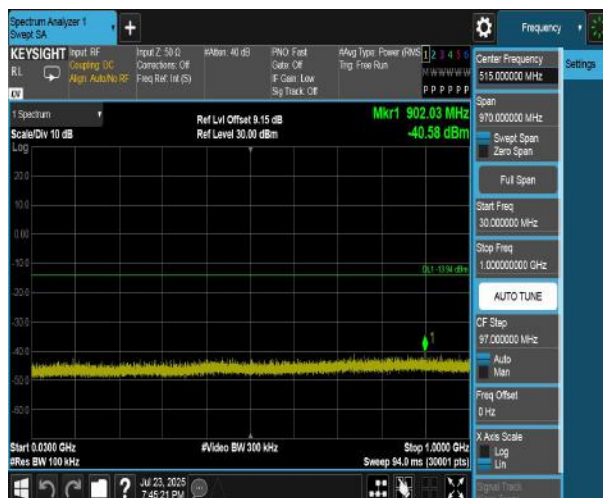

### BLE\_1M\_Ant1\_2440\_1000~26500



### BLE\_1M\_Ant1\_2480\_0~Reference



### BLE\_1M\_Ant1\_2480\_30~1000



# BLE\_1M\_Ant1\_2480\_1000~26500



## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                       |                            |
|----------------------------------------|-----------------------|----------------------------|
| Frequency [MHz]                        | Field Strength [uV/m] | Measured Distance [Meters] |
| 0.009 – 0.490                          | 2400/F (kHz)          | 300                        |
| 0.490 – 1.705                          | 24000/F (kHz)         | 30                         |
| 1.705 - 30                             | 30                    | 30                         |
| 30 - 88                                | 100                   | 3                          |
| 88 - 216                               | 150                   | 3                          |
| 216 - 960                              | 200                   | 3                          |
| Above 960                              | 500                   | 3                          |

### 7.6.2. Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

### 7.6.3. Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

- Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

**Average Field Strength Measurements**


- Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- RBW = 1MHz
- VBW = 3MHz
- Detector = Power Average (RMS)
- Number of sweep point = 2001 (Number of sweep points must be  $\geq 2 \times \text{span} / \text{RBW}$ )
- Sweep time = auto
- Trace (RMS) averaging was performed over at least 100 traces.

#### 7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

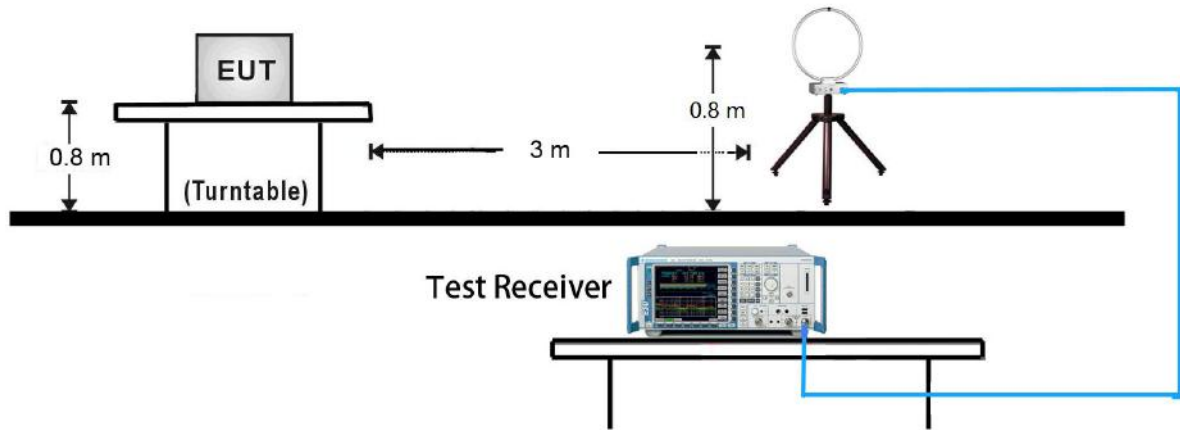

30MHz ~ 1GHz Test Setup:

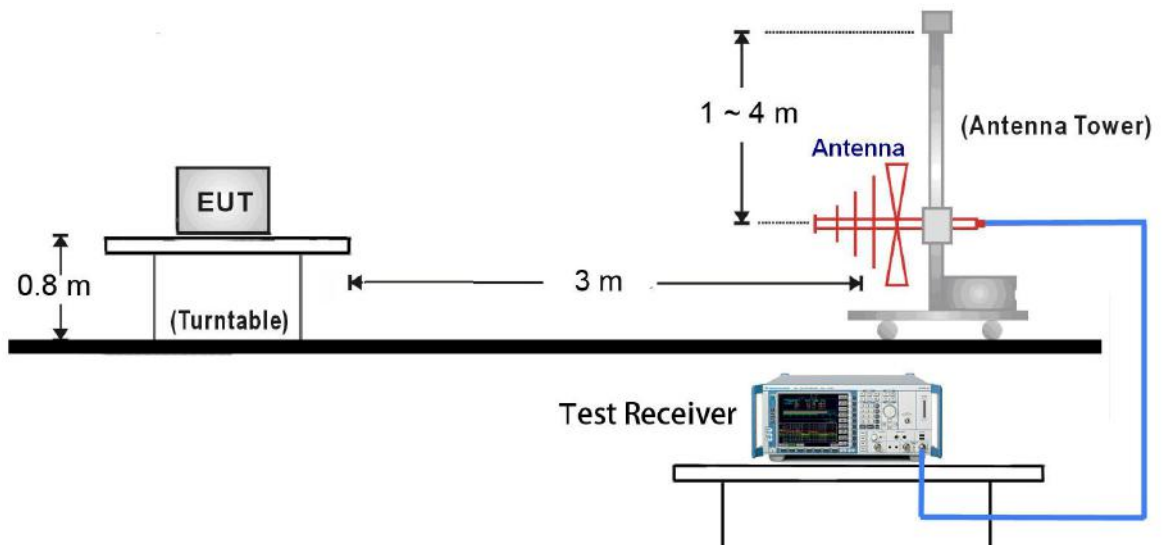

### 1GHz ~ 26.5GHz Test Setup:

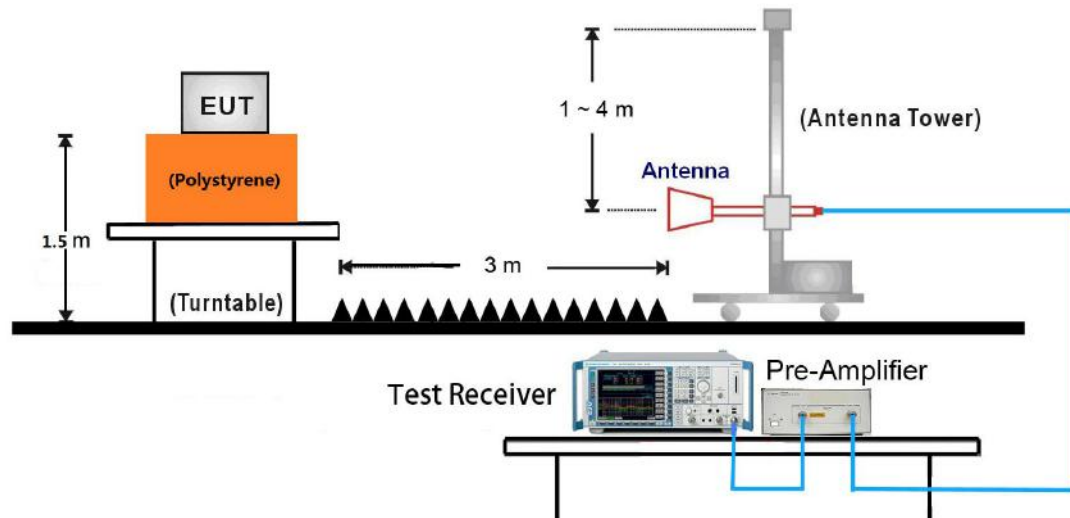


### 7.6.5. Test Result

The worst case of Radiated Emission below 1GHz:

#### 30MHz – 1GHz Test Data

|              |                            |            |             |
|--------------|----------------------------|------------|-------------|
| EUT:         | IVI Assy                   | Polarity:  | Horizontal  |
| Model:       | Q000                       | Test Date: | 2025-08-13  |
| Mode:        | Transmit at BLE Channel 00 | Voltage:   | DC13.2 V    |
| Environment: | Temp: 22.6°C; Humi:58%     | Engineer:  | Stone Zhang |

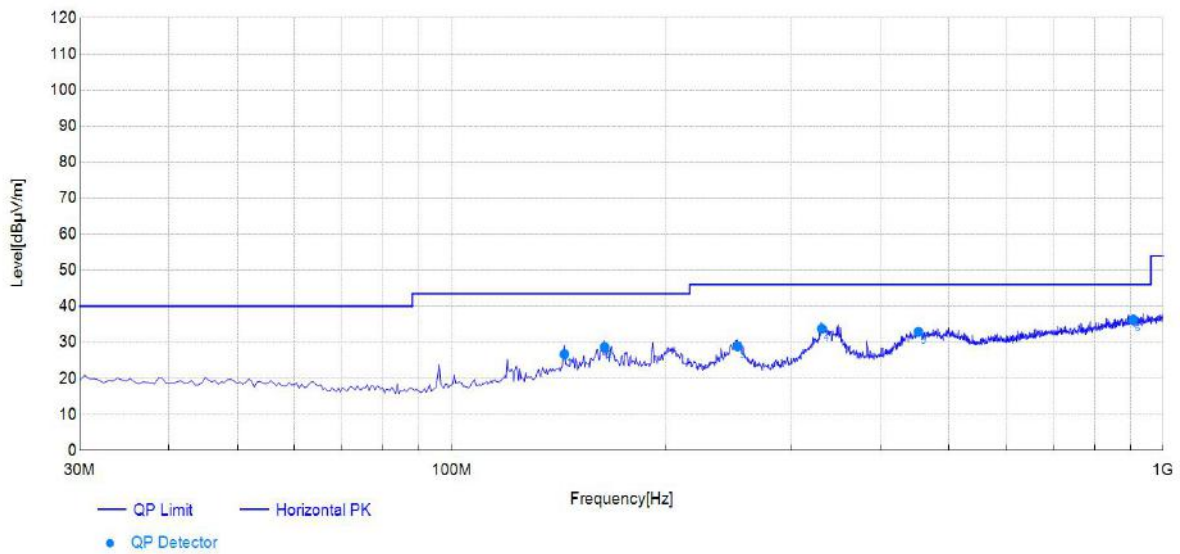

| Final Data List |                 |               |                   |                   |                   |                |             |           |            |         |
|-----------------|-----------------|---------------|-------------------|-------------------|-------------------|----------------|-------------|-----------|------------|---------|
| NO.             | Frequency [MHz] | Factor [dB/m] | QP Reading [dBμV] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Pol        | Verdict |
| 1               | 144.03          | 16.71         | 9.97              | 26.68             | 43.50             | 16.82          | 150         | 38        | Horizontal | PASS    |
| 2               | 163.93          | 17.75         | 10.99             | 28.74             | 43.50             | 14.76          | 150         | 9         | Horizontal | PASS    |
| 3               | 252.24          | 16.08         | 12.88             | 28.96             | 46.00             | 17.04          | 100         | 56        | Horizontal | PASS    |
| 4               | 330.85          | 17.47         | 16.34             | 33.81             | 46.00             | 12.19          | 100         | 360       | Horizontal | PASS    |
| 5               | 452.65          | 20.82         | 12.12             | 32.94             | 46.00             | 13.06          | 150         | 44        | Horizontal | PASS    |
| 6               | 907.32          | 28.29         | 8.01              | 36.30             | 46.00             | 9.70           | 150         | 315       | Horizontal | PASS    |


Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

(3) The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

|              |                            |            |             |
|--------------|----------------------------|------------|-------------|
| EUT:         | IVI Assy                   | Polarity:  | Vertical    |
| Model:       | Q000                       | Test Date: | 2025-08-13  |
| Mode:        | Transmit at BLE Channel 00 | Voltage:   | DC13.2 V    |
| Environment: | Temp: 22.6°C; Humi:58%     | Engineer:  | Stone Zhang |

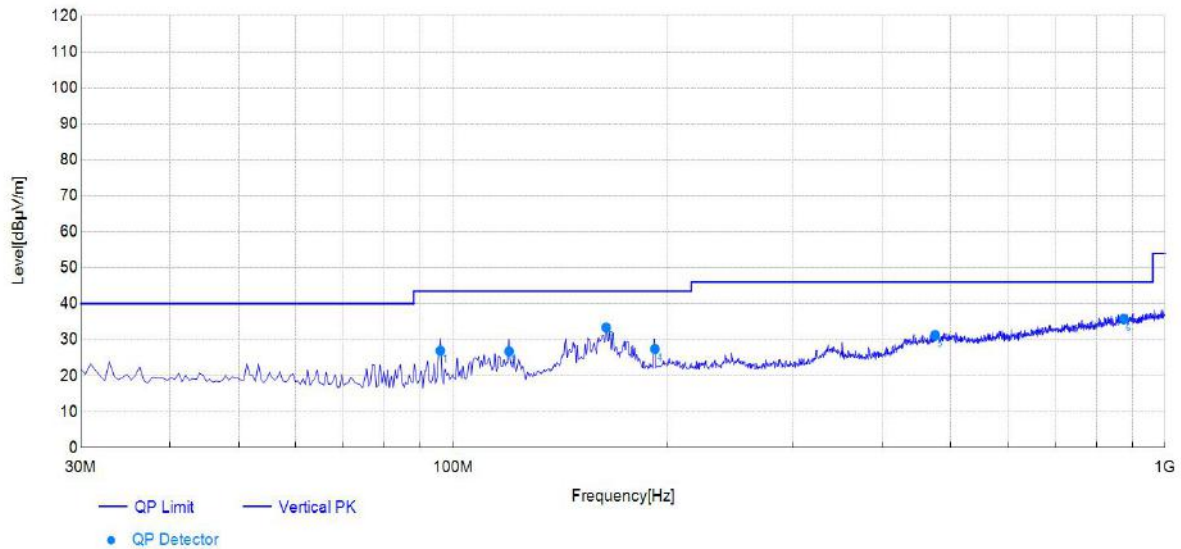

| Final Data List |                 |               |                   |                   |                   |                |             |           |          |         |
|-----------------|-----------------|---------------|-------------------|-------------------|-------------------|----------------|-------------|-----------|----------|---------|
| NO.             | Frequency [MHz] | Factor [dB/m] | QP Reading [dBμV] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Pol      | Verdict |
| 1               | 95.99           | 11.81         | 15.11             | 26.92             | 43.50             | 16.58          | 100         | 42        | Vertical | PASS    |
| 2               | 119.77          | 14.38         | 12.38             | 26.76             | 43.50             | 16.74          | 150         | 54        | Vertical | PASS    |
| 3               | 163.93          | 17.75         | 15.67             | 33.42             | 43.50             | 10.08          | 100         | 244       | Vertical | PASS    |
| 4               | 192.07          | 15.39         | 12.02             | 27.41             | 43.50             | 16.09          | 100         | 237       | Vertical | PASS    |
| 5               | 474.97          | 21.38         | 9.91              | 31.29             | 46.00             | 14.71          | 100         | 26        | Vertical | PASS    |
| 6               | 873.84          | 27.88         | 7.89              | 35.77             | 46.00             | 10.23          | 150         | 227       | Vertical | PASS    |

Note:


(1) Level=Reading + Factor

(2) Margin=Limit-Level

(3) The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 1GHz-6GHz

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 00  | Test Engineer: | Stone Zhang |

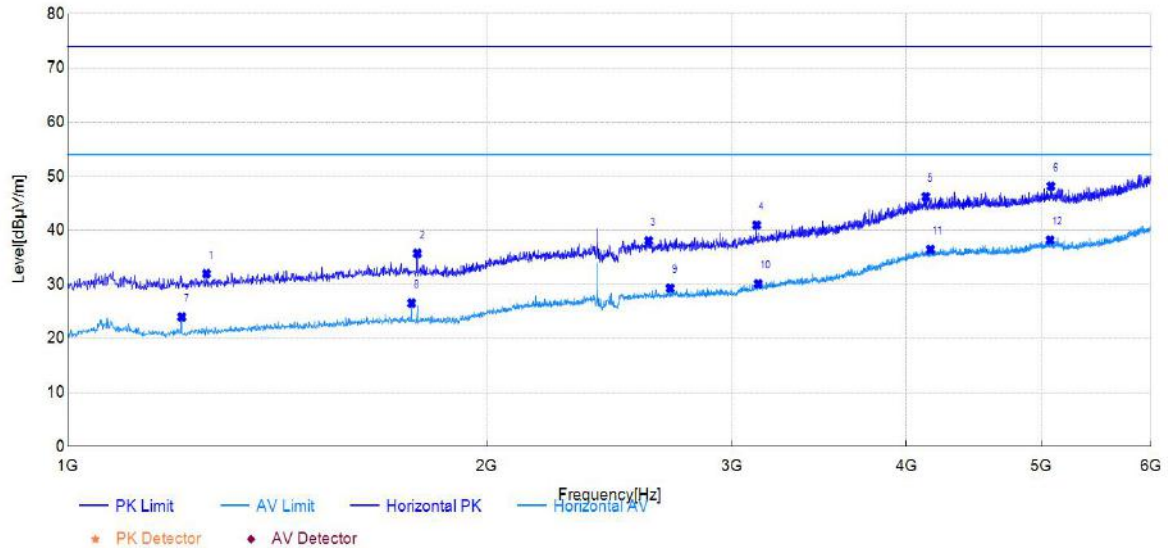

### Suspected Data List


| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol        | Verdict |
|-----|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------------|---------|
| 1   | 1258.00         | 55.09          | 31.97          | -23.12        | 74.00          | 42.03       | 150         | 112       | PK  | Horizontal | PASS    |
| 2   | 1783.00         | 55.33          | 35.71          | -19.62        | 74.00          | 38.29       | 150         | 275       | PK  | Horizontal | PASS    |
| 3   | 2613.00         | 53.54          | 38.06          | -15.48        | 74.00          | 35.94       | 100         | 6         | PK  | Horizontal | PASS    |
| 4   | 3124.00         | 54.92          | 40.95          | -13.97        | 74.00          | 33.05       | 150         | 23        | PK  | Horizontal | PASS    |
| 5   | 4132.00         | 54.24          | 46.18          | -8.06         | 74.00          | 27.82       | 100         | 172       | PK  | Horizontal | PASS    |
| 6   | 5082.00         | 54.22          | 48.16          | -6.06         | 74.00          | 25.84       | 100         | 82        | PK  | Horizontal | PASS    |
| 7   | 1208.00         | 47.35          | 23.95          | -23.40        | 54.00          | 30.05       | 150         | 49        | AV  | Horizontal | PASS    |
| 8   | 1766.00         | 46.27          | 26.50          | -19.77        | 54.00          | 27.50       | 150         | 241       | AV  | Horizontal | PASS    |
| 9   | 2708.00         | 44.46          | 29.27          | -15.19        | 54.00          | 24.73       | 100         | 149       | AV  | Horizontal | PASS    |
| 10  | 3133.00         | 44.01          | 30.08          | -13.93        | 54.00          | 23.92       | 150         | 319       | AV  | Horizontal | PASS    |
| 11  | 4164.00         | 44.46          | 36.43          | -8.03         | 54.00          | 17.57       | 100         | 17        | AV  | Horizontal | PASS    |
| 12  | 5075.00         | 44.25          | 38.19          | -6.06         | 54.00          | 15.81       | 100         | 10        | AV  | Horizontal | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 00  | Test Engineer: | Stone Zhang |

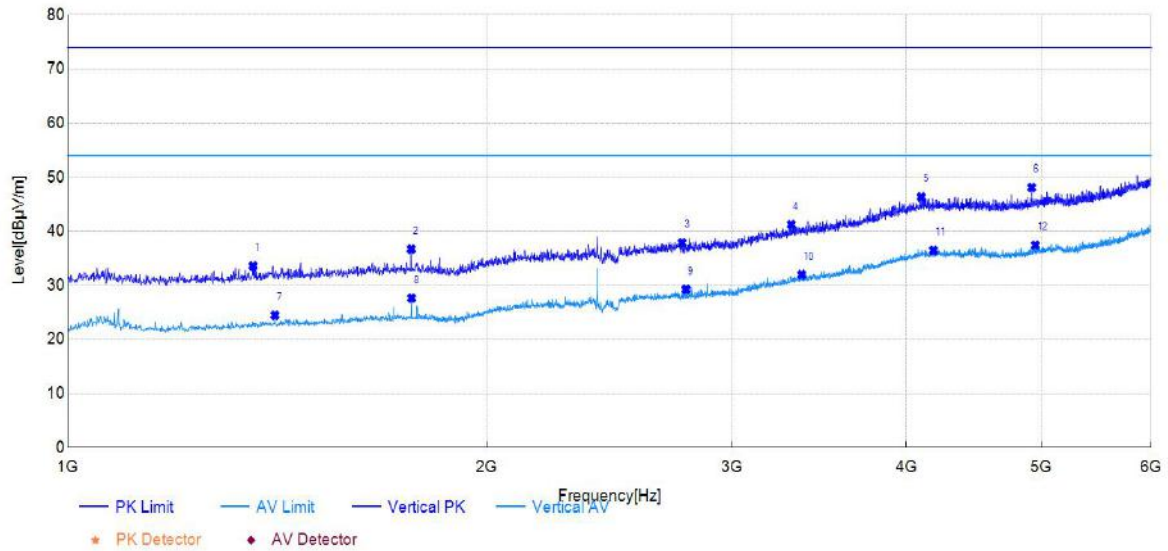


| Suspected Data List |                 |                |                |               |                |             |             |           |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|----------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol      | Verdict |
| 1                   | 1359.00         | 55.15          | 33.56          | -21.59        | 74.00          | 40.44       | 100         | 350       | PK  | Vertical | PASS    |
| 2                   | 1765.00         | 55.88          | 36.69          | -19.19        | 74.00          | 37.31       | 150         | 144       | PK  | Vertical | PASS    |
| 3                   | 2762.00         | 53.08          | 37.87          | -15.21        | 74.00          | 36.13       | 100         | 49        | PK  | Vertical | PASS    |
| 4                   | 3308.00         | 53.76          | 41.24          | -12.52        | 74.00          | 32.76       | 150         | 66        | PK  | Vertical | PASS    |
| 5                   | 4101.00         | 54.24          | 46.33          | -7.91         | 74.00          | 27.67       | 150         | 66        | PK  | Vertical | PASS    |
| 6                   | 4923.00         | 55.14          | 48.11          | -7.03         | 74.00          | 25.89       | 150         | 97        | PK  | Vertical | PASS    |
| 7                   | 1409.00         | 45.73          | 24.44          | -21.29        | 54.00          | 29.56       | 150         | 66        | AV  | Vertical | PASS    |
| 8                   | 1766.00         | 46.80          | 27.61          | -19.19        | 54.00          | 26.39       | 150         | 144       | AV  | Vertical | PASS    |
| 9                   | 2780.00         | 44.42          | 29.23          | -15.19        | 54.00          | 24.77       | 100         | 235       | AV  | Vertical | PASS    |
| 10                  | 3365.00         | 44.25          | 31.98          | -12.27        | 54.00          | 22.02       | 100         | 72        | AV  | Vertical | PASS    |
| 11                  | 4184.00         | 44.38          | 36.45          | -7.93         | 54.00          | 17.55       | 150         | 309       | AV  | Vertical | PASS    |
| 12                  | 4952.00         | 44.33          | 37.41          | -6.92         | 54.00          | 16.59       | 100         | 346       | AV  | Vertical | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 19  | Test Engineer: | Stone Zhang |

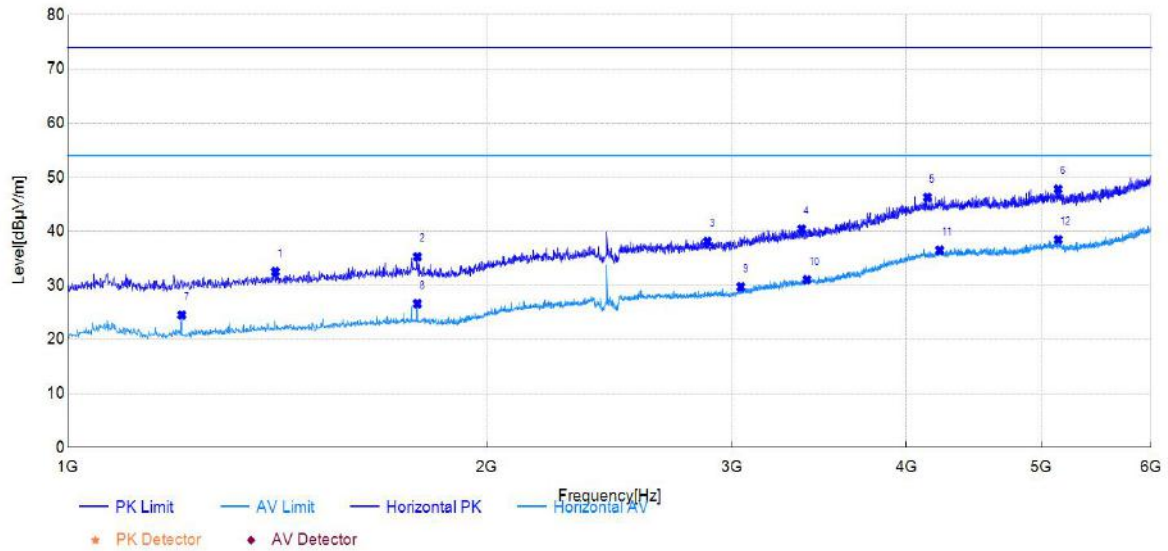


| Suspected Data List |                 |                |                |               |                |             |             |           |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol        | Verdict |
| 1                   | 1410.00         | 54.63          | 32.49          | -22.14        | 74.00          | 41.51       | 100         | 48        | PK  | Horizontal | PASS    |
| 2                   | 1783.00         | 54.91          | 35.29          | -19.62        | 74.00          | 38.71       | 150         | 313       | PK  | Horizontal | PASS    |
| 3                   | 2880.00         | 52.95          | 38.12          | -14.83        | 74.00          | 35.88       | 150         | 147       | PK  | Horizontal | PASS    |
| 4                   | 3365.00         | 53.29          | 40.39          | -12.90        | 74.00          | 33.61       | 150         | 47        | PK  | Horizontal | PASS    |
| 5                   | 4143.00         | 54.31          | 46.26          | -8.05         | 74.00          | 27.74       | 150         | 250       | PK  | Horizontal | PASS    |
| 6                   | 5143.00         | 53.95          | 47.80          | -6.15         | 74.00          | 26.20       | 100         | 85        | PK  | Horizontal | PASS    |
| 7                   | 1208.00         | 47.88          | 24.48          | -23.40        | 54.00          | 29.52       | 150         | 47        | AV  | Horizontal | PASS    |
| 8                   | 1783.00         | 46.20          | 26.58          | -19.62        | 54.00          | 27.42       | 150         | 313       | AV  | Horizontal | PASS    |
| 9                   | 3044.00         | 44.04          | 29.70          | -14.34        | 54.00          | 24.30       | 150         | 309       | AV  | Horizontal | PASS    |
| 10                  | 3395.00         | 43.83          | 31.03          | -12.80        | 54.00          | 22.97       | 100         | 336       | AV  | Horizontal | PASS    |
| 11                  | 4228.00         | 44.36          | 36.48          | -7.88         | 54.00          | 17.52       | 150         | 1         | AV  | Horizontal | PASS    |
| 12                  | 5144.00         | 44.62          | 38.47          | -6.15         | 54.00          | 15.53       | 100         | 85        | AV  | Horizontal | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 19  | Test Engineer: | Stone Zhang |

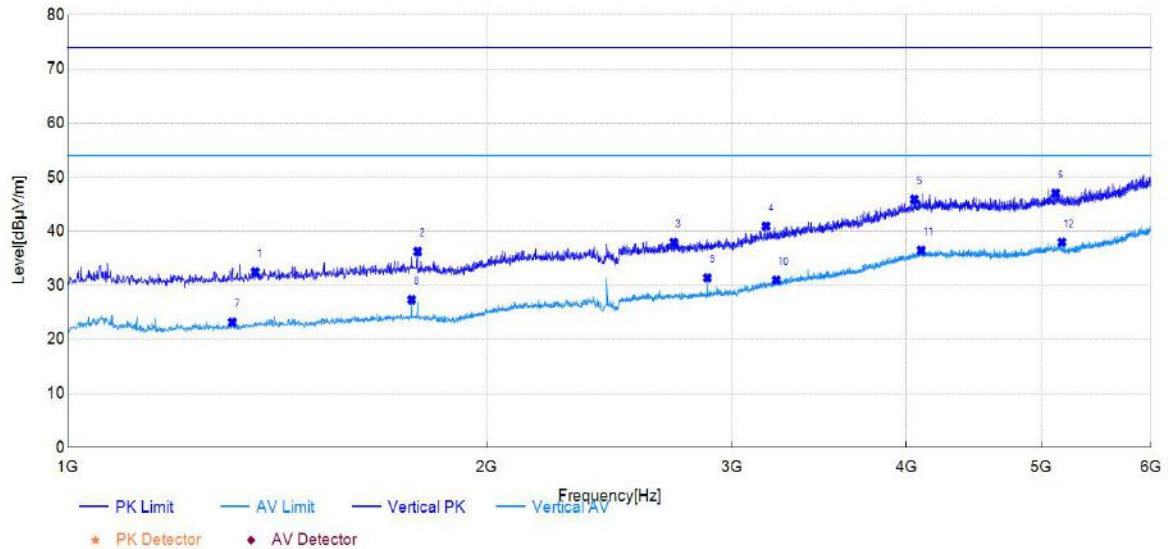


| Suspected Data List |                 |                |                |               |                |             |             |           |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|----------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol      | Verdict |
| 1                   | 1364.00         | 54.02          | 32.46          | -21.56        | 74.00          | 41.54       | 100         | 206       | PK  | Vertical | PASS    |
| 2                   | 1784.00         | 55.28          | 36.24          | -19.04        | 74.00          | 37.76       | 100         | 80        | PK  | Vertical | PASS    |
| 3                   | 2724.00         | 53.23          | 37.97          | -15.26        | 74.00          | 36.03       | 100         | 35        | PK  | Vertical | PASS    |
| 4                   | 3173.00         | 54.27          | 40.94          | -13.33        | 74.00          | 33.06       | 100         | 247       | PK  | Vertical | PASS    |
| 5                   | 4055.00         | 53.98          | 45.90          | -8.08         | 74.00          | 28.10       | 150         | 92        | PK  | Vertical | PASS    |
| 6                   | 5122.00         | 53.67          | 47.03          | -6.64         | 74.00          | 26.97       | 100         | 177       | PK  | Vertical | PASS    |
| 7                   | 1313.00         | 45.05          | 23.16          | -21.89        | 54.00          | 30.84       | 150         | 199       | AV  | Vertical | PASS    |
| 8                   | 1766.00         | 46.52          | 27.33          | -19.19        | 54.00          | 26.67       | 100         | 217       | AV  | Vertical | PASS    |
| 9                   | 2880.00         | 46.13          | 31.38          | -14.75        | 54.00          | 22.62       | 100         | 35        | AV  | Vertical | PASS    |
| 10                  | 3228.00         | 43.94          | 30.95          | -12.99        | 54.00          | 23.05       | 100         | 39        | AV  | Vertical | PASS    |
| 11                  | 4100.00         | 44.38          | 36.47          | -7.91         | 54.00          | 17.53       | 100         | 10        | AV  | Vertical | PASS    |
| 12                  | 5175.00         | 44.64          | 37.98          | -6.66         | 54.00          | 16.02       | 100         | 0         | AV  | Vertical | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 39  | Test Engineer: | Stone Zhang |

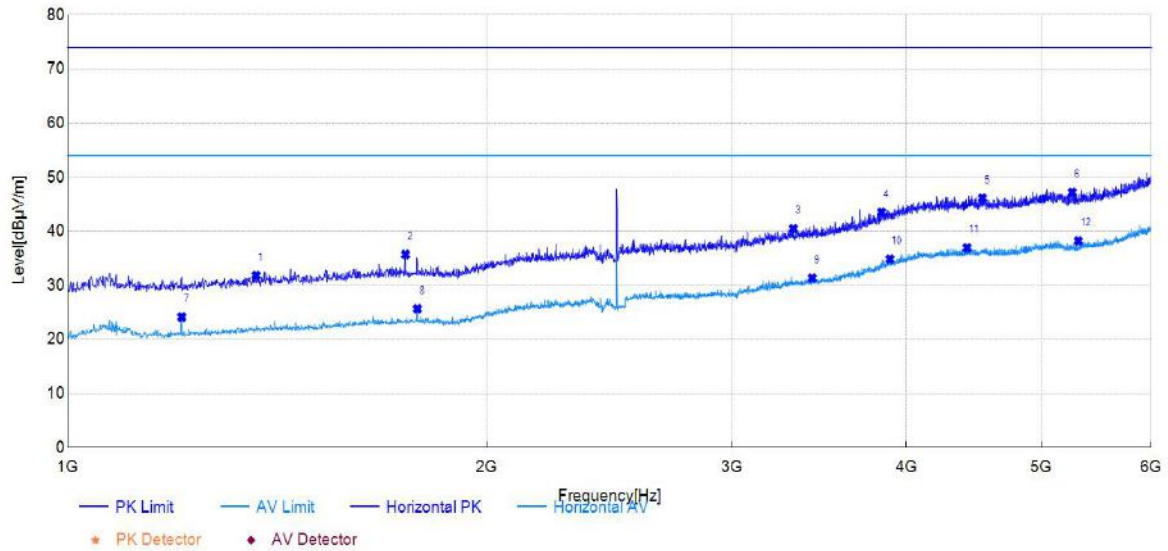


| Suspected Data List |                 |                |                |               |                |             |             |           |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol        | Verdict |
| 1                   | 1366.00         | 54.27          | 31.84          | -22.43        | 74.00          | 42.16       | 150         | 290       | PK  | Horizontal | PASS    |
| 2                   | 1748.00         | 55.63          | 35.71          | -19.92        | 74.00          | 38.29       | 150         | 28        | PK  | Horizontal | PASS    |
| 3                   | 3320.00         | 53.51          | 40.46          | -13.05        | 74.00          | 33.54       | 150         | 84        | PK  | Horizontal | PASS    |
| 4                   | 3840.00         | 53.33          | 43.51          | -9.82         | 74.00          | 30.49       | 100         | 115       | PK  | Horizontal | PASS    |
| 5                   | 4536.00         | 53.30          | 46.12          | -7.18         | 74.00          | 27.88       | 150         | 191       | PK  | Horizontal | PASS    |
| 6                   | 5263.00         | 53.45          | 47.21          | -6.24         | 74.00          | 26.79       | 100         | 0         | PK  | Horizontal | PASS    |
| 7                   | 1208.00         | 47.53          | 24.13          | -23.40        | 54.00          | 29.87       | 150         | 50        | AV  | Horizontal | PASS    |
| 8                   | 1783.00         | 45.29          | 25.67          | -19.62        | 54.00          | 28.33       | 150         | 43        | AV  | Horizontal | PASS    |
| 9                   | 3424.00         | 44.03          | 31.35          | -12.68        | 54.00          | 22.65       | 150         | 357       | AV  | Horizontal | PASS    |
| 10                  | 3894.00         | 44.15          | 34.84          | -9.31         | 54.00          | 19.16       | 150         | 287       | AV  | Horizontal | PASS    |
| 11                  | 4424.00         | 44.38          | 36.93          | -7.45         | 54.00          | 17.07       | 100         | 355       | AV  | Horizontal | PASS    |
| 12                  | 5317.00         | 44.38          | 38.20          | -6.18         | 54.00          | 15.80       | 150         | 210       | AV  | Horizontal | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 39  | Test Engineer: | Stone Zhang |

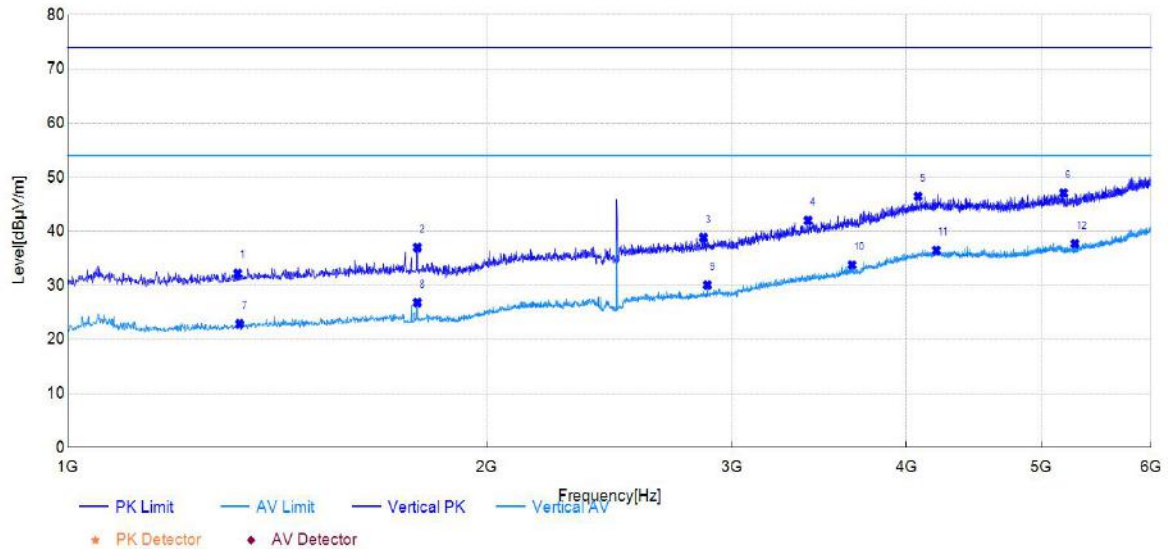

| Suspected Data List |                 |                |                |               |                |             |             |           |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|----------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol      | Verdict |
| 1                   | 1325.00         | 53.99          | 32.18          | -21.81        | 74.00          | 41.82       | 100         | 120       | PK  | Vertical | PASS    |
| 2                   | 1783.00         | 56.05          | 37.00          | -19.05        | 74.00          | 37.00       | 150         | 320       | PK  | Vertical | PASS    |
| 3                   | 2861.00         | 53.68          | 38.82          | -14.86        | 74.00          | 35.18       | 100         | 27        | PK  | Vertical | PASS    |
| 4                   | 3401.00         | 54.08          | 41.98          | -12.10        | 74.00          | 32.02       | 150         | 124       | PK  | Vertical | PASS    |
| 5                   | 4079.00         | 54.42          | 46.43          | -7.99         | 74.00          | 27.57       | 100         | 198       | PK  | Vertical | PASS    |
| 6                   | 5188.00         | 53.74          | 47.08          | -6.66         | 74.00          | 26.92       | 100         | 67        | PK  | Vertical | PASS    |
| 7                   | 1329.00         | 44.64          | 22.86          | -21.78        | 54.00          | 31.14       | 100         | 324       | AV  | Vertical | PASS    |
| 8                   | 1783.00         | 45.85          | 26.80          | -19.05        | 54.00          | 27.20       | 150         | 284       | AV  | Vertical | PASS    |
| 9                   | 2880.00         | 44.78          | 30.03          | -14.75        | 54.00          | 23.97       | 150         | 40        | AV  | Vertical | PASS    |
| 10                  | 3658.00         | 44.34          | 33.74          | -10.60        | 54.00          | 20.26       | 150         | 291       | AV  | Vertical | PASS    |
| 11                  | 4204.00         | 44.37          | 36.45          | -7.92         | 54.00          | 17.55       | 100         | 31        | AV  | Vertical | PASS    |
| 12                  | 5288.00         | 44.21          | 37.69          | -6.52         | 54.00          | 16.31       | 100         | 336       | AV  | Vertical | PASS    |


Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

## 6GHz-18GHz

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 00  | Test Engineer: | Stone Zhang |

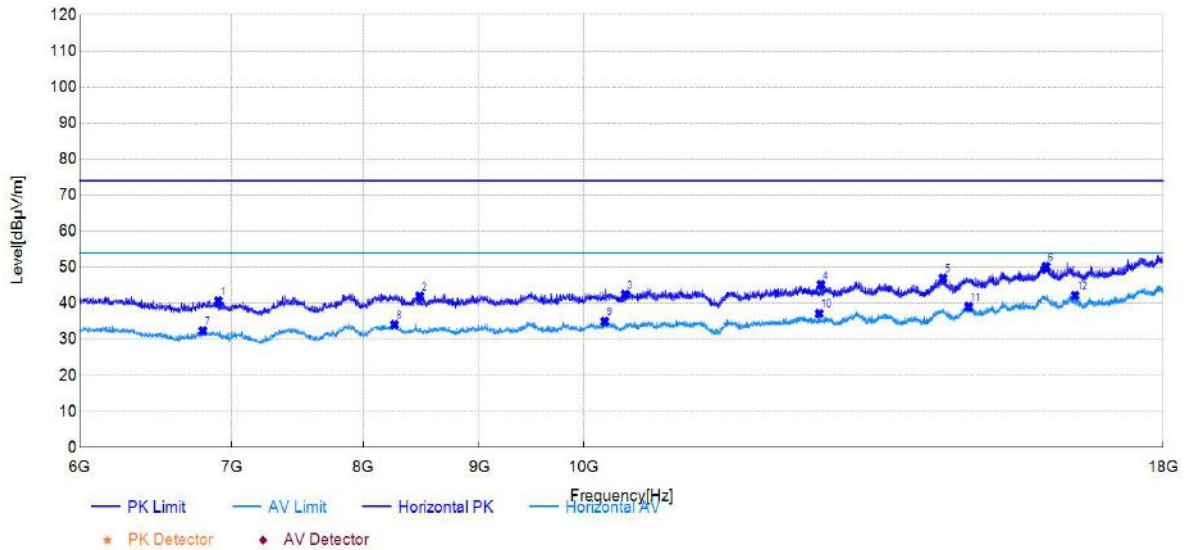

### Suspected Data List


| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol        | Verdict |
|-----|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------------|---------|
| 1   | 6906.00         | 45.09          | 40.67          | -4.42         | 74.00          | 33.33       | 150         | 137       | PK  | Horizontal | PASS    |
| 2   | 8470.50         | 43.42          | 41.99          | -1.43         | 74.00          | 32.01       | 150         | 275       | PK  | Horizontal | PASS    |
| 3   | 10431.00        | 42.07          | 42.47          | 0.40          | 74.00          | 31.53       | 100         | 126       | PK  | Horizontal | PASS    |
| 4   | 12720.00        | 43.54          | 45.14          | 1.60          | 74.00          | 28.86       | 150         | 91        | PK  | Horizontal | PASS    |
| 5   | 14397.00        | 41.83          | 46.98          | 5.15          | 74.00          | 27.02       | 100         | 55        | PK  | Horizontal | PASS    |
| 6   | 15979.50        | 40.40          | 50.18          | 9.78          | 74.00          | 23.82       | 100         | 300       | PK  | Horizontal | PASS    |
| 7   | 6799.50         | 37.27          | 32.36          | -4.91         | 54.00          | 21.64       | 100         | 328       | AV  | Horizontal | PASS    |
| 8   | 8256.00         | 35.38          | 34.09          | -1.29         | 54.00          | 19.91       | 150         | 173       | AV  | Horizontal | PASS    |
| 9   | 10216.50        | 34.99          | 34.96          | -0.03         | 54.00          | 19.04       | 150         | 21        | AV  | Horizontal | PASS    |
| 10  | 12699.00        | 35.67          | 37.16          | 1.49          | 54.00          | 16.84       | 100         | 215       | AV  | Horizontal | PASS    |
| 11  | 14775.00        | 33.60          | 39.04          | 5.44          | 54.00          | 14.96       | 100         | 359       | AV  | Horizontal | PASS    |
| 12  | 16456.50        | 32.98          | 42.16          | 9.18          | 54.00          | 11.84       | 100         | 84        | AV  | Horizontal | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 00  | Test Engineer: | Stone Zhang |

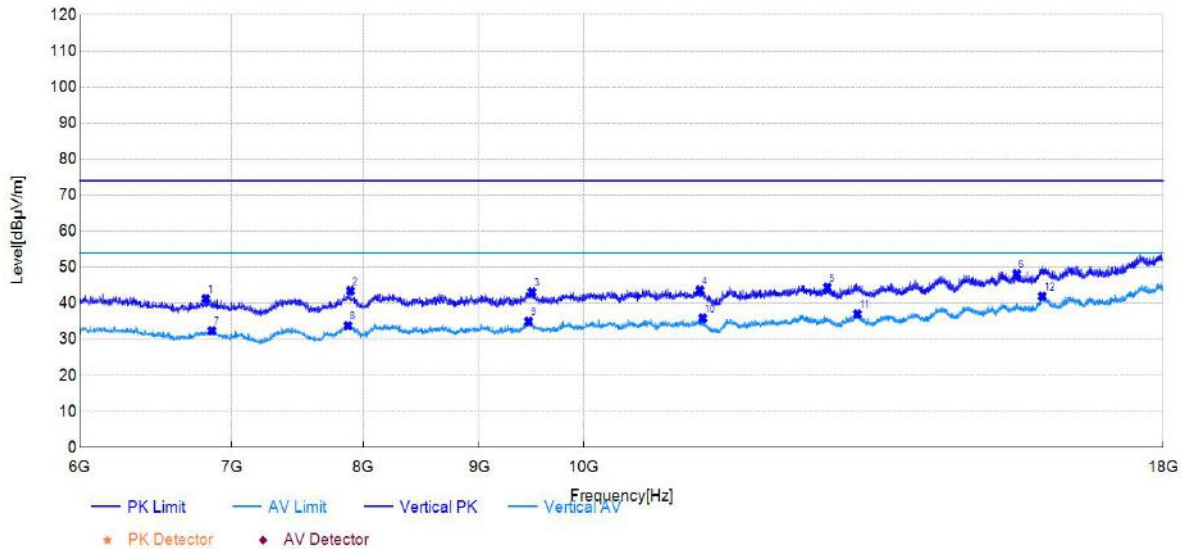


| Suspected Data List |                 |                |                |               |                |             |             |           |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol        | Verdict |
| 1                   | 6819.00         | 45.93          | 41.23          | -4.70         | 74.00          | 32.77       | 100         | 146       | PK  | Vertical   | PASS    |
| 2                   | 7896.00         | 44.49          | 43.45          | -1.04         | 74.00          | 30.55       | 100         | 309       | PK  | Vertical   | PASS    |
| 3                   | 9490.50         | 43.15          | 43.13          | -0.02         | 74.00          | 30.87       | 150         | 58        | PK  | Vertical   | PASS    |
| 4                   | 11253.00        | 42.55          | 43.62          | 1.07          | 74.00          | 30.38       | 150         | 215       | PK  | Vertical   | PASS    |
| 5                   | 12804.00        | 42.53          | 44.40          | 1.87          | 74.00          | 29.60       | 100         | 255       | PK  | Vertical   | PASS    |
| 6                   | 15514.50        | 41.05          | 48.15          | 7.10          | 74.00          | 25.85       | 150         | 211       | PK  | Vertical   | PASS    |
| 7                   | 6862.50         | 36.86          | 32.36          | -4.50         | 54.00          | 21.64       | 150         | 360       | AV  | Vertical   | PASS    |
| 8                   | 7876.50         | 35.27          | 33.81          | -1.46         | 54.00          | 20.19       | 150         | 199       | AV  | Vertical   | PASS    |
| 9                   | 9459.00         | 35.22          | 34.95          | -0.27         | 54.00          | 19.05       | 150         | 250       | AV  | Vertical   | PASS    |
| 10                  | 11284.50        | 34.74          | 35.86          | 1.12          | 54.00          | 18.14       | 150         | 293       | AV  | Vertical   | PASS    |
| 11                  | 13198.50        | 34.05          | 37.01          | 2.96          | 54.00          | 16.99       | 100         | 87        | AV  | Vertical   | PASS    |
| 12                  | 15921.00        | 32.64          | 41.94          | 9.30          | 54.00          | 12.06       | 150         | 254       | AV  | Horizontal | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 19  | Test Engineer: | Stone Zhang |

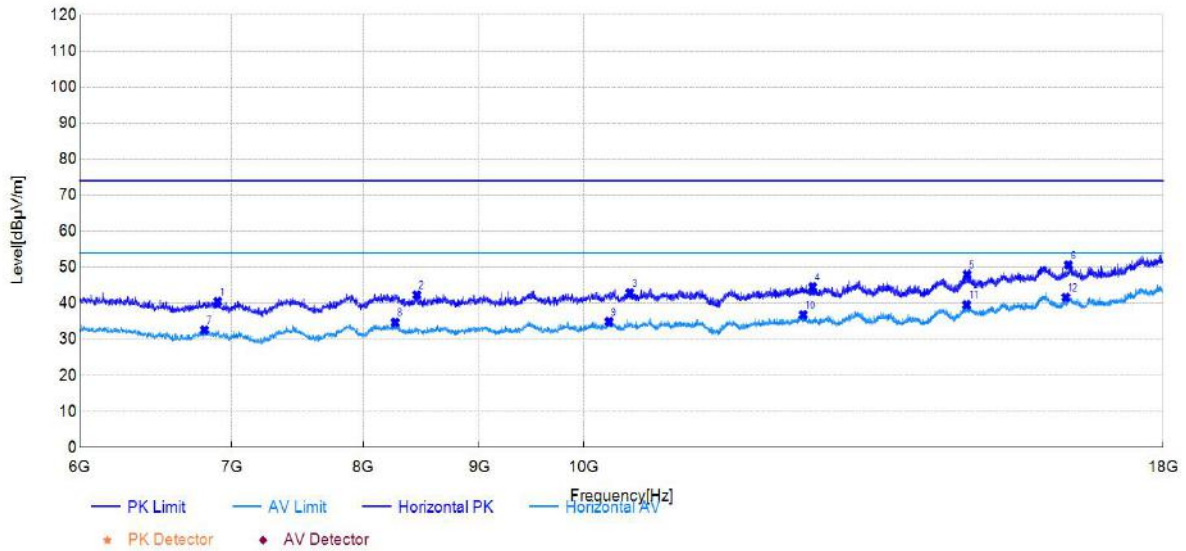


| Suspected Data List |                 |                |                |               |                |             |             |           |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol        | Verdict |
| 1                   | 6901.50         | 44.87          | 40.47          | -4.40         | 74.00          | 33.53       | 150         | 2         | PK  | Horizontal | PASS    |
| 2                   | 8445.00         | 43.58          | 42.32          | -1.26         | 74.00          | 31.68       | 100         | 165       | PK  | Horizontal | PASS    |
| 3                   | 10480.50        | 42.18          | 42.92          | 0.74          | 74.00          | 31.08       | 150         | 126       | PK  | Horizontal | PASS    |
| 4                   | 12613.50        | 42.38          | 44.52          | 2.14          | 74.00          | 29.48       | 150         | 225       | PK  | Horizontal | PASS    |
| 5                   | 14751.00        | 42.58          | 47.99          | 5.41          | 74.00          | 26.01       | 150         | 75        | PK  | Horizontal | PASS    |
| 6                   | 16348.50        | 41.22          | 50.59          | 9.37          | 74.00          | 23.41       | 100         | 287       | PK  | Horizontal | PASS    |
| 7                   | 6810.00         | 37.45          | 32.59          | -4.86         | 54.00          | 21.41       | 100         | 294       | AV  | Horizontal | PASS    |
| 8                   | 8262.00         | 35.98          | 34.70          | -1.28         | 54.00          | 19.30       | 150         | 349       | AV  | Horizontal | PASS    |
| 9                   | 10263.00        | 34.89          | 34.90          | 0.01          | 54.00          | 19.10       | 150         | 91        | AV  | Horizontal | PASS    |
| 10                  | 12493.50        | 34.38          | 36.82          | 2.44          | 54.00          | 17.18       | 150         | 275       | AV  | Horizontal | PASS    |
| 11                  | 14743.50        | 34.16          | 39.57          | 5.41          | 54.00          | 14.43       | 150         | 194       | AV  | Horizontal | PASS    |
| 12                  | 16303.50        | 32.36          | 41.62          | 9.26          | 54.00          | 12.38       | 100         | 329       | AV  | Horizontal | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 19  | Test Engineer: | Stone Zhang |

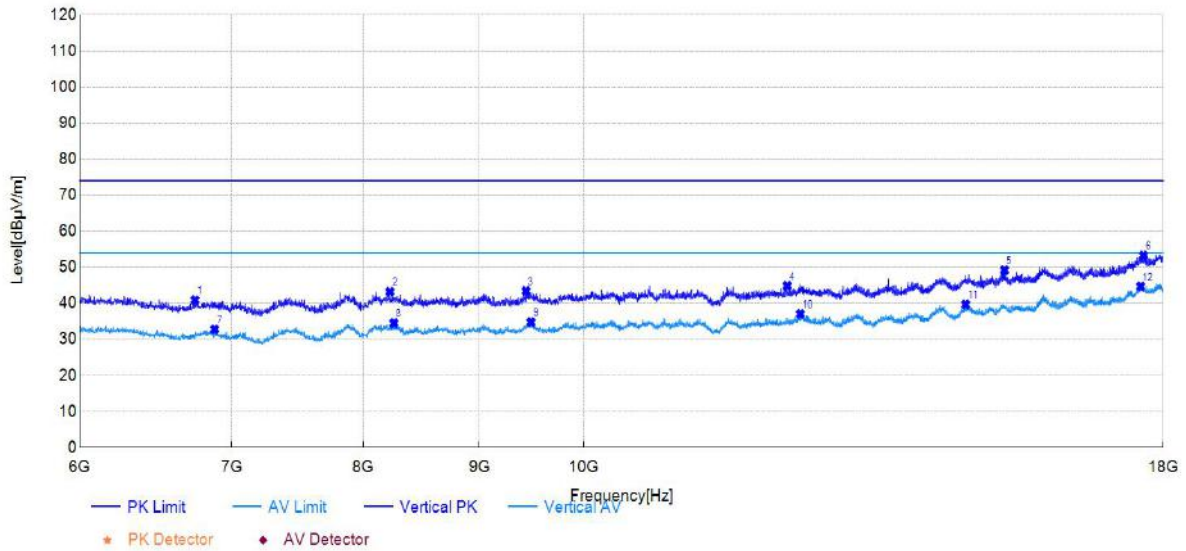


| Suspected Data List |                 |                |                |               |                |             |             |           |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|----------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol      | Verdict |
| 1                   | 6745.50         | 46.09          | 40.86          | -5.23         | 74.00          | 33.14       | 150         | 211       | PK  | Vertical | PASS    |
| 2                   | 8218.50         | 44.63          | 43.23          | -1.40         | 74.00          | 30.77       | 100         | 108       | PK  | Vertical | PASS    |
| 3                   | 9433.50         | 43.90          | 43.43          | -0.47         | 74.00          | 30.57       | 150         | 360       | PK  | Vertical | PASS    |
| 4                   | 12294.00        | 43.18          | 44.83          | 1.65          | 74.00          | 29.17       | 150         | 360       | PK  | Vertical | PASS    |
| 5                   | 15321.00        | 42.19          | 49.18          | 6.99          | 74.00          | 24.82       | 150         | 0         | PK  | Vertical | PASS    |
| 6                   | 17638.50        | 39.04          | 53.31          | 14.27         | 74.00          | 20.69       | 150         | 137       | PK  | Vertical | PASS    |
| 7                   | 6880.50         | 37.20          | 32.78          | -4.42         | 54.00          | 21.22       | 150         | 360       | AV  | Vertical | PASS    |
| 8                   | 8251.50         | 35.81          | 34.50          | -1.31         | 54.00          | 19.50       | 150         | 249       | AV  | Vertical | PASS    |
| 9                   | 9481.50         | 34.87          | 34.78          | -0.09         | 54.00          | 19.22       | 100         | 193       | AV  | Vertical | PASS    |
| 10                  | 12459.00        | 34.57          | 37.04          | 2.47          | 54.00          | 16.96       | 150         | 87        | AV  | Vertical | PASS    |
| 11                  | 14730.00        | 34.06          | 39.67          | 5.61          | 54.00          | 14.33       | 150         | 194       | AV  | Vertical | PASS    |
| 12                  | 17592.00        | 30.25          | 44.67          | 14.42         | 54.00          | 9.33        | 150         | 160       | AV  | Vertical | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 39  | Test Engineer: | Stone Zhang |

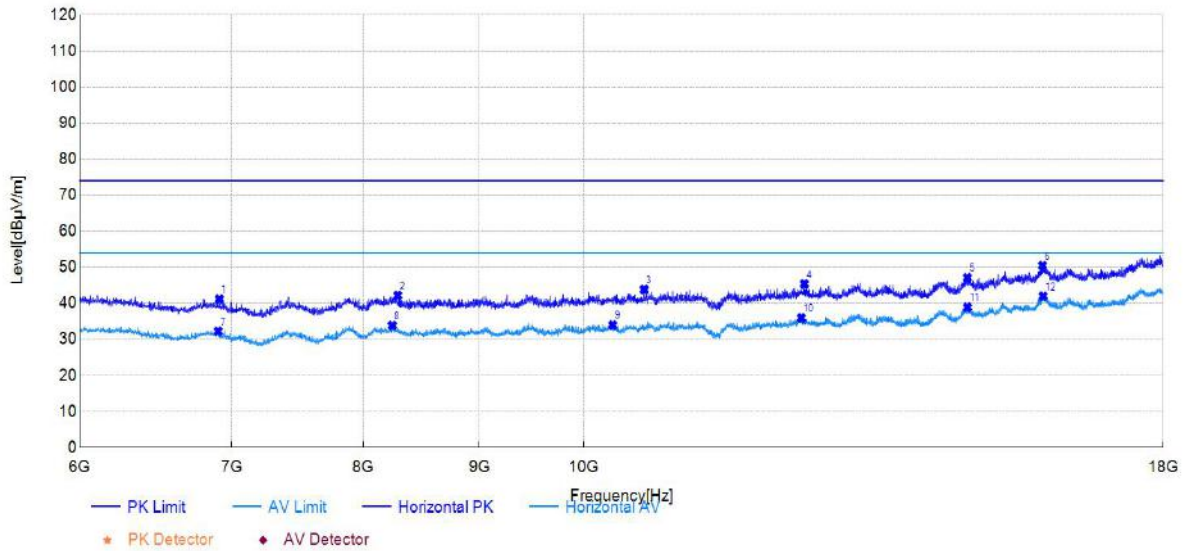


| Suspected Data List |                 |                |                |               |                |             |             |           |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol        | Verdict |
| 1                   | 6913.50         | 45.60          | 41.15          | -4.45         | 74.00          | 32.85       | 100         | 140       | PK  | Horizontal | PASS    |
| 2                   | 8283.00         | 43.41          | 42.19          | -1.22         | 74.00          | 31.81       | 100         | 15        | PK  | Horizontal | PASS    |
| 3                   | 10635.00        | 43.16          | 43.80          | 0.64          | 74.00          | 30.20       | 100         | 107       | PK  | Horizontal | PASS    |
| 4                   | 12508.50        | 42.94          | 45.37          | 2.43          | 74.00          | 28.63       | 100         | 116       | PK  | Horizontal | PASS    |
| 5                   | 14754.00        | 41.72          | 47.13          | 5.41          | 74.00          | 26.87       | 100         | 171       | PK  | Horizontal | PASS    |
| 6                   | 15925.50        | 40.66          | 50.44          | 9.78          | 74.00          | 23.56       | 100         | 147       | PK  | Horizontal | PASS    |
| 7                   | 6904.50         | 36.66          | 32.25          | -4.41         | 54.00          | 21.75       | 100         | 8         | AV  | Horizontal | PASS    |
| 8                   | 8238.00         | 35.23          | 33.88          | -1.35         | 54.00          | 20.12       | 100         | 95        | AV  | Horizontal | PASS    |
| 9                   | 10300.50        | 33.94          | 33.99          | 0.05          | 54.00          | 20.01       | 100         | 111       | AV  | Horizontal | PASS    |
| 10                  | 12471.00        | 33.54          | 35.94          | 2.40          | 54.00          | 18.06       | 100         | 0         | AV  | Horizontal | PASS    |
| 11                  | 14755.50        | 33.49          | 38.91          | 5.42          | 54.00          | 15.09       | 100         | 128       | AV  | Horizontal | PASS    |
| 12                  | 15934.50        | 32.21          | 41.99          | 9.78          | 54.00          | 12.01       | 100         | 76        | AV  | Horizontal | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

|               |     |                |             |
|---------------|-----|----------------|-------------|
| Test Mode:    | BLE | Test Date:     | 2025-08-13  |
| Test Channel: | 39  | Test Engineer: | Stone Zhang |

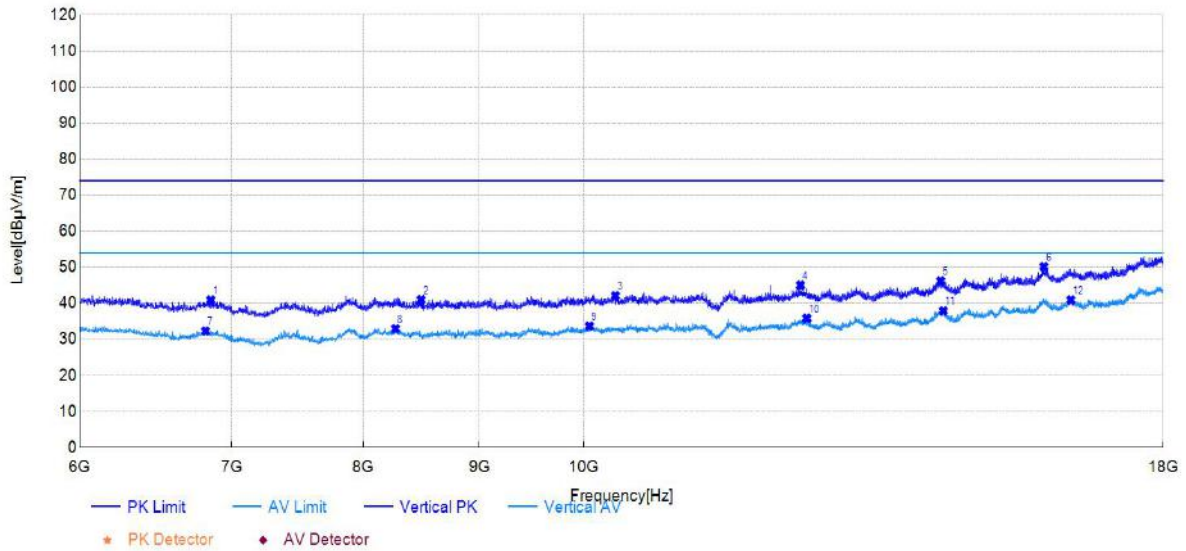

| Suspected Data List |                 |                |                |               |                |             |             |           |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|----------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol      | Verdict |
| 1                   | 6853.50         | 45.44          | 40.89          | -4.55         | 74.00          | 33.11       | 100         | 39        | PK  | Vertical | PASS    |
| 2                   | 8482.50         | 42.47          | 40.97          | -1.50         | 74.00          | 33.03       | 150         | 327       | PK  | Vertical | PASS    |
| 3                   | 10327.50        | 41.64          | 42.10          | 0.46          | 74.00          | 31.90       | 150         | 343       | PK  | Vertical | PASS    |
| 4                   | 12460.50        | 42.51          | 44.99          | 2.48          | 74.00          | 29.01       | 100         | 108       | PK  | Vertical | PASS    |
| 5                   | 14359.50        | 40.70          | 46.19          | 5.49          | 74.00          | 27.81       | 100         | 219       | PK  | Vertical | PASS    |
| 6                   | 15946.50        | 40.85          | 50.14          | 9.29          | 74.00          | 23.86       | 150         | 346       | PK  | Vertical | PASS    |
| 7                   | 6817.50         | 37.00          | 32.29          | -4.71         | 54.00          | 21.71       | 150         | 141       | AV  | Vertical | PASS    |
| 8                   | 8265.00         | 34.23          | 32.96          | -1.27         | 54.00          | 21.04       | 150         | 97        | AV  | Vertical | PASS    |
| 9                   | 10059.00        | 33.24          | 33.68          | 0.44          | 54.00          | 20.32       | 150         | 287       | AV  | Vertical | PASS    |
| 10                  | 12538.50        | 33.40          | 35.83          | 2.43          | 54.00          | 18.17       | 150         | 97        | AV  | Vertical | PASS    |
| 11                  | 14401.50        | 32.34          | 37.93          | 5.59          | 54.00          | 16.07       | 100         | 177       | AV  | Vertical | PASS    |
| 12                  | 16389.00        | 31.24          | 40.91          | 9.67          | 54.00          | 13.09       | 100         | 326       | AV  | Vertical | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

#### **For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)  | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|---------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423      | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475 | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67        | 1300 - 1427        | 8.25 - 8.5         |
| 4.17725 - 4.17775          | 37.5 - 38.25        | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6           | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2         | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94        | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138           | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05      | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52480 - 156.525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9       | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17   | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2      | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285           | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4         | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                  | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

#### 7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

#### 7.7.3. Test Setting


##### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be  $\geq 2 \times \text{span} / \text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

#### 7.7.4. Test Setup

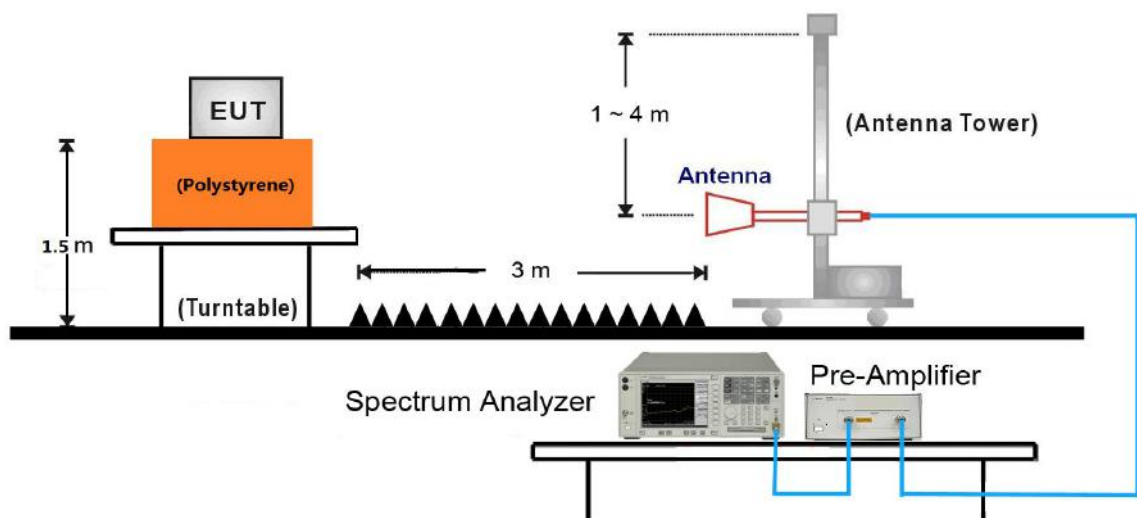

### 7.7.5. Test Result

| Project Information |                                    |           |             |
|---------------------|------------------------------------|-----------|-------------|
| EUT:                | IVI Assy                           | Model:    | Q000        |
| Test Date:          | 2025-08-13                         | Voltage:  | DC13.2 V    |
| Environment:        | Temp: 22.6°C; Humi:58%             | Engineer: | Stone Zhang |
| Remark:             | Transmit by BLE at Channel 2402MHz |           |             |

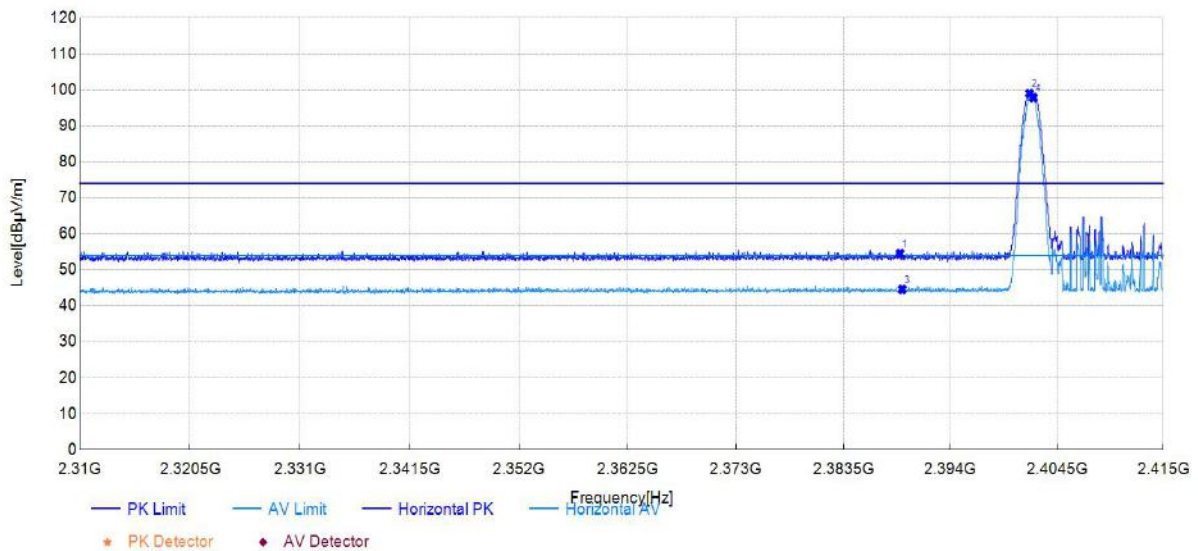


| Suspected Data List |                 |                |                |               |                |             |             |           |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol        | Verdict |
| 1                   | 2389.06         | 19.03          | 54.51          | 35.48         | 74.00          | 19.49       | 150         | 132       | PK  | Horizontal | PASS    |
| 2                   | 2401.77         | 63.53          | 99.00          | 35.47         | /              | /           | 150         | 324       | PK  | Horizontal | PASS    |
| 3                   | 2389.27         | 9.07           | 44.55          | 35.48         | 54.00          | 9.45        | 150         | 58        | AV  | Horizontal | PASS    |
| 4                   | 2402.16         | 62.36          | 97.85          | 35.49         | /              | /           | 150         | 327       | AV  | Horizontal | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

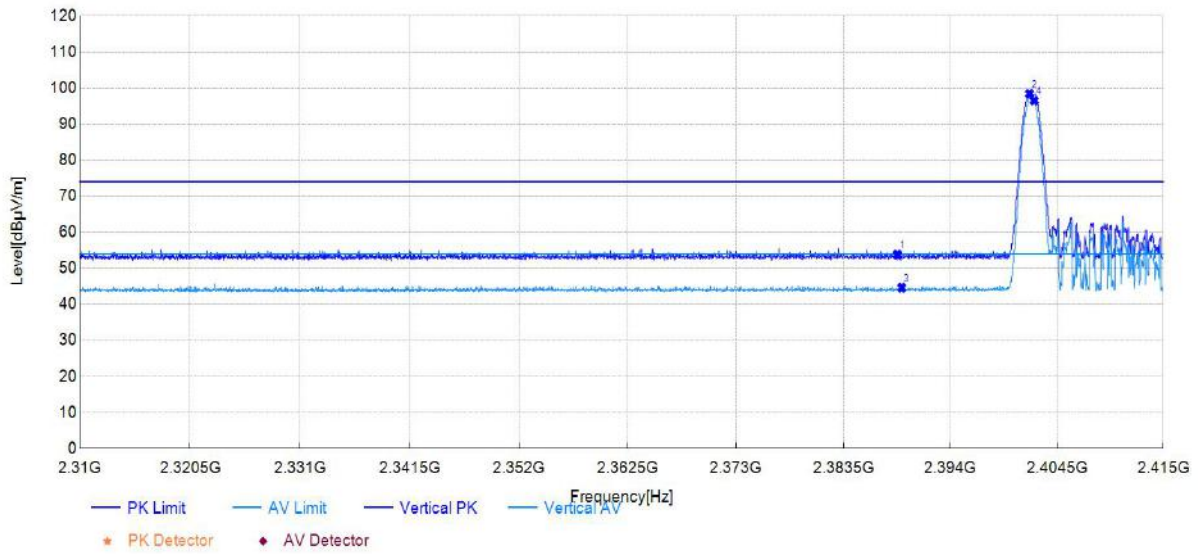

#### Suspected Data List


| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol      | Verdict |
|-----|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|----------|---------|
| 1   | 2388.80         | 18.45          | 53.79          | 35.34         | 74.00          | 20.21       | 150         | 187       | PK  | Vertical | PASS    |
| 2   | 2401.77         | 63.10          | 98.41          | 35.31         | /              | /           | 150         | 0         | PK  | Vertical | PASS    |
| 3   | 2389.22         | 9.27           | 44.61          | 35.34         | 54.00          | 9.39        | 150         | 303       | AV  | Vertical | PASS    |
| 4   | 2402.24         | 61.24          | 96.56          | 35.32         | /              | /           | 150         | 3         | AV  | Vertical | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

| Project Information |                                    |           |             |
|---------------------|------------------------------------|-----------|-------------|
| EUT:                | IVI Assy                           | Model:    | Q000        |
| Test Date:          | 2025-08-13                         | Voltage:  | DC13.2 V    |
| Environment:        | Temp: 22.6°C; Humi:58%             | Engineer: | Stone Zhang |
| Remark:             | Transmit by BLE at Channel 2480MHz |           |             |

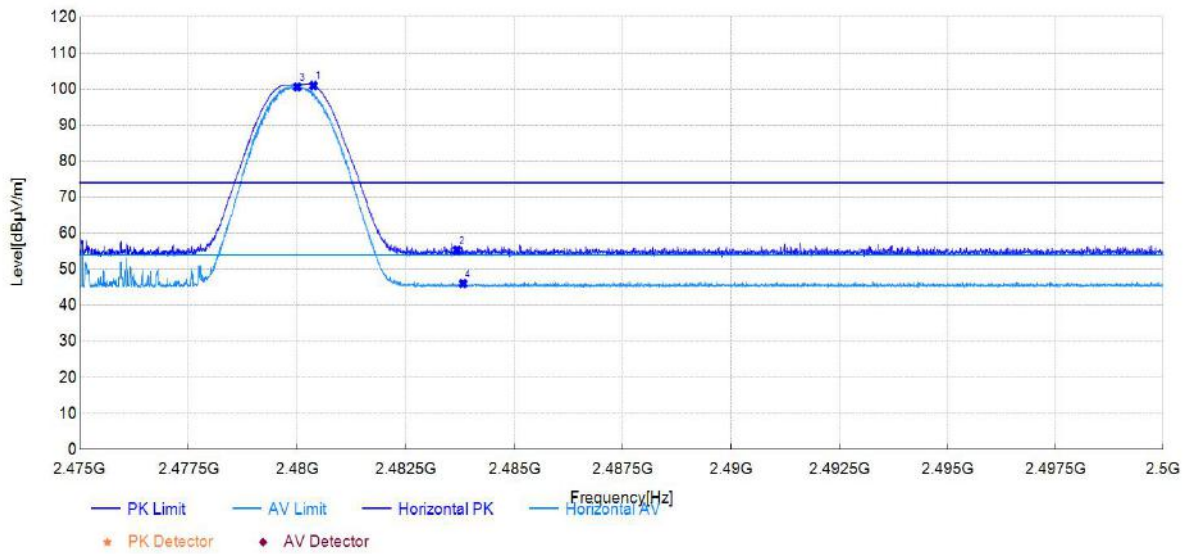


| Suspected Data List |                 |                |                |               |                |             |             |           |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|------------|---------|
| NO.                 | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol        | Verdict |
| 1                   | 2480.38         | 64.73          | 100.99         | 36.26         | /              | /           | 150         | 328       | PK  | Horizontal | PASS    |
| 2                   | 2483.68         | 18.99          | 55.29          | 36.30         | 74.00          | 18.71       | 150         | 360       | PK  | Horizontal | PASS    |
| 3                   | 2480.00         | 64.35          | 100.61         | 36.26         | /              | /           | 150         | 328       | AV  | Horizontal | PASS    |
| 4                   | 2483.81         | 9.70           | 46.00          | 36.30         | 54.00          | 8.00        | 150         | 359       | AV  | Horizontal | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

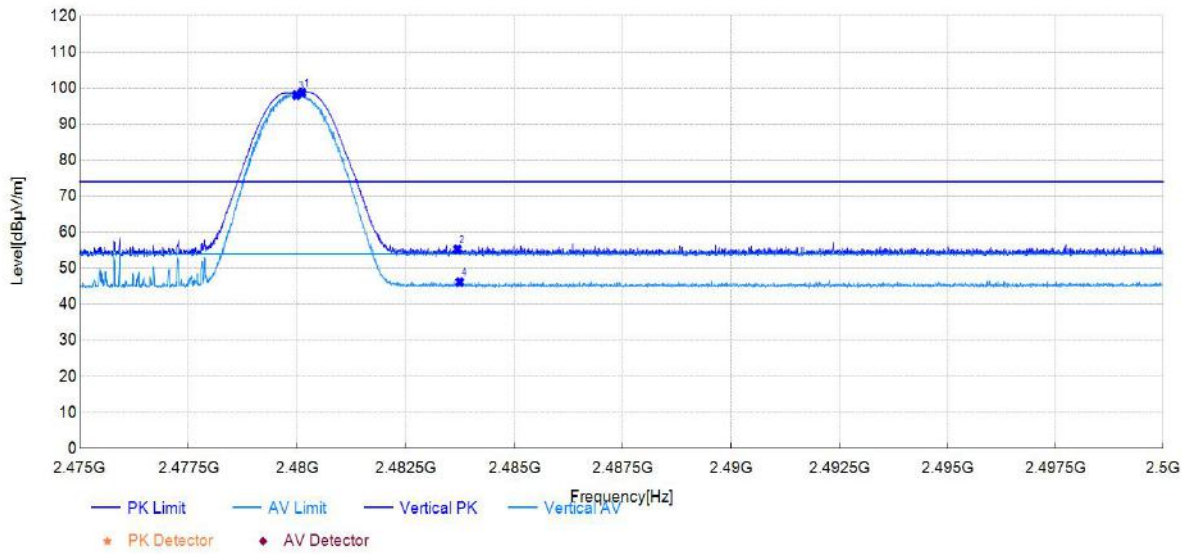

#### Suspected Data List

| NO. | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Det | Pol      | Verdict |
|-----|-----------------|----------------|----------------|---------------|----------------|-------------|-------------|-----------|-----|----------|---------|
| 1   | 2480.11         | 62.73          | 98.72          | 35.99         | /              | /           | 150         | 235       | PK  | Vertical | PASS    |
| 2   | 2483.69         | 19.27          | 55.29          | 36.02         | 74.00          | 18.71       | 150         | 228       | PK  | Vertical | PASS    |
| 3   | 2479.98         | 62.08          | 98.07          | 35.99         | /              | /           | 150         | 235       | AV  | Vertical | PASS    |
| 4   | 2483.74         | 10.15          | 46.17          | 36.02         | 54.00          | 7.83        | 150         | 296       | AV  | Vertical | PASS    |

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50                                   | 66 - 56   | 56 - 46   |
| 0.50 - 5.0                                    | 56        | 46        |
| 5.0 - 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

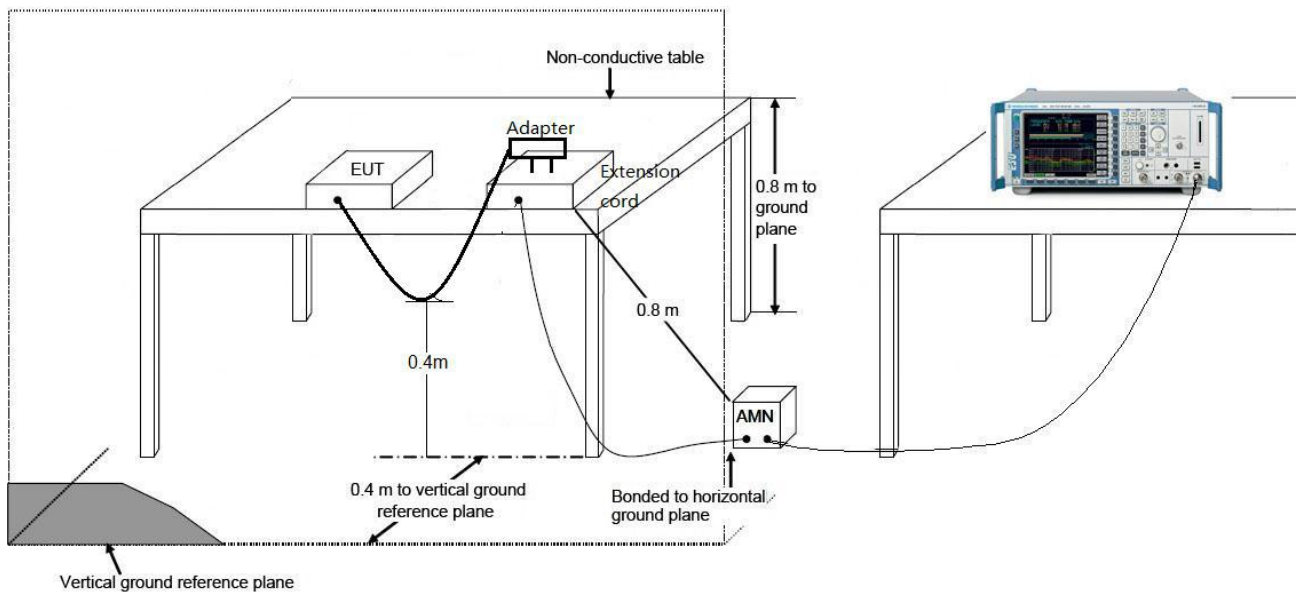

### **7.8.3. Test Result**

The EUT is DC 13.2V supply, this item only for the EUT is designed to be connected to the public utility (AC) power line. Not applicable.

## 8. Conclusion

The data collected relate only the item(s) tested and show that the **IVI Assy** is in compliance with Part 15C of the FCC Rules.

## Statement

1. This report is invalid for the following states: without the special inspection and testing stamp or the official stamp of our institution; without the signature of the report authorized officer; if the report is altered.
2. It is forbidden to copy partial contents of the report except in full without the approval of our institution.
3. The client shall provide the test sample(s) and commission information and be responsible for their authenticity.
4. The report content is only applicable to the tested sample(s) this time.
5. If there are any objections to the report content, please submit them to our company in writing within 15 days from the date of receiving the report.
6. If the reports include both Chinese and English versions, when there are any inconsistencies caused by language, the Chinese version shall prevail.
7. This report is issued by the following laboratory premises:

No.8 Ningyun Rd., Xinwu District Wuxi, Jiangsu 214000 China

——This page is blank below this line ——