


Appendix D. SAR Test Setup Photos


Body Exposure Condition




Front, Test Separation 10 mm

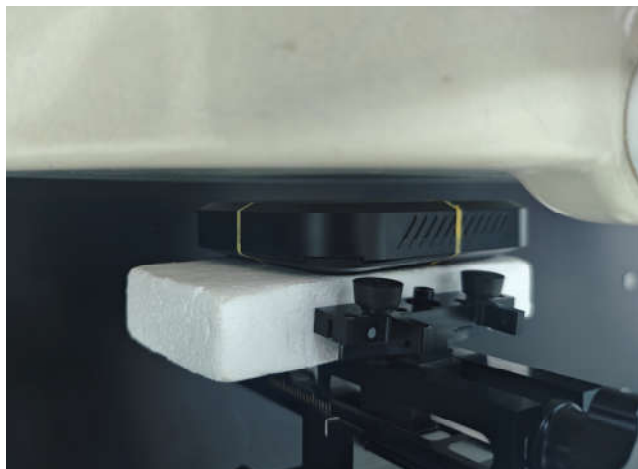


Back, Test Separation 10 mm

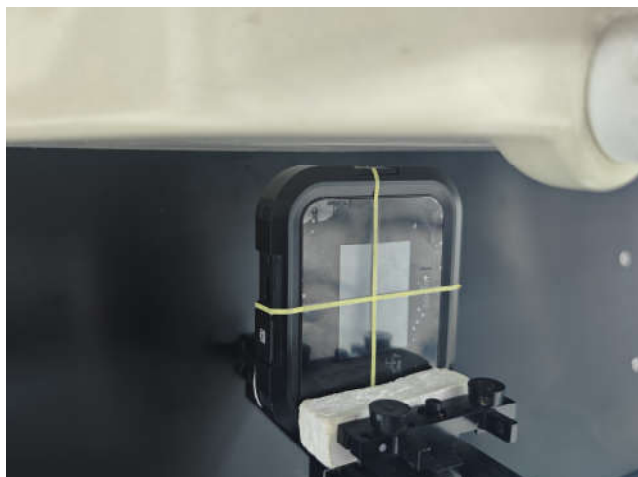


Right Side, Test Separation 10 mm

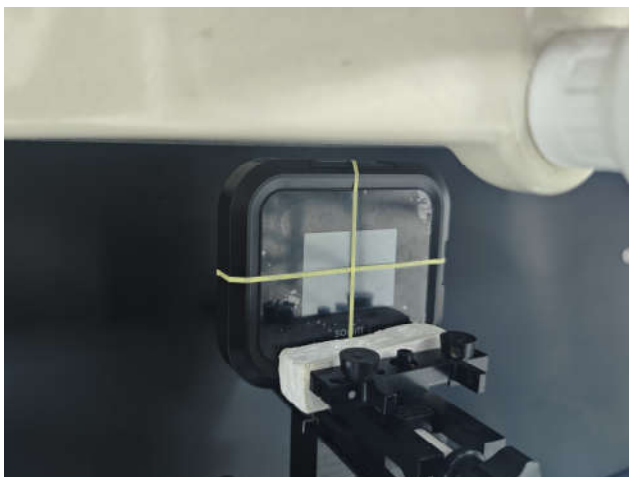

Top Side, Test Separation 10 mm

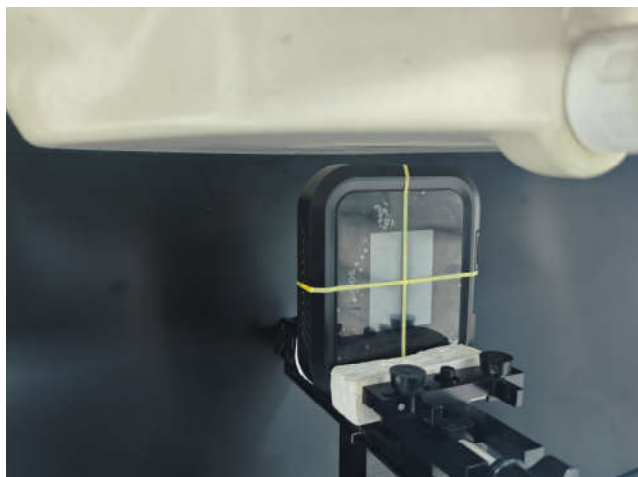


Left Side, Test Separation 10 mm

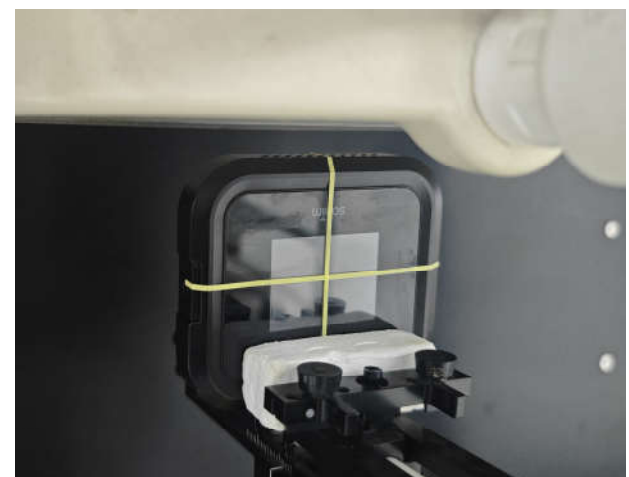


Bottom Side, Test Separation 10 mm


Appendix D. PD Test Setup Photos

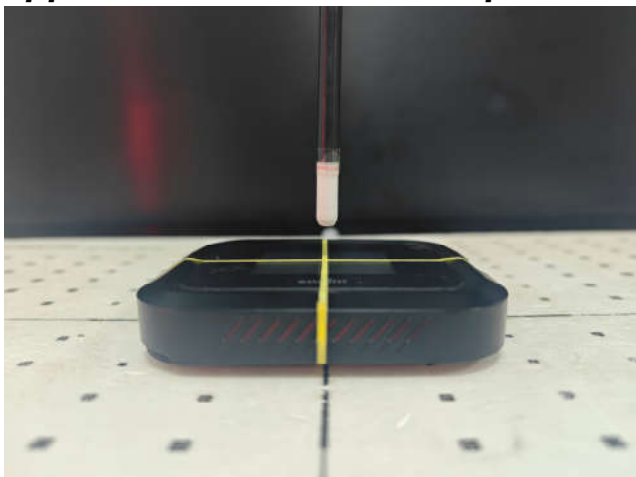

Front, Test Separation 10 mm

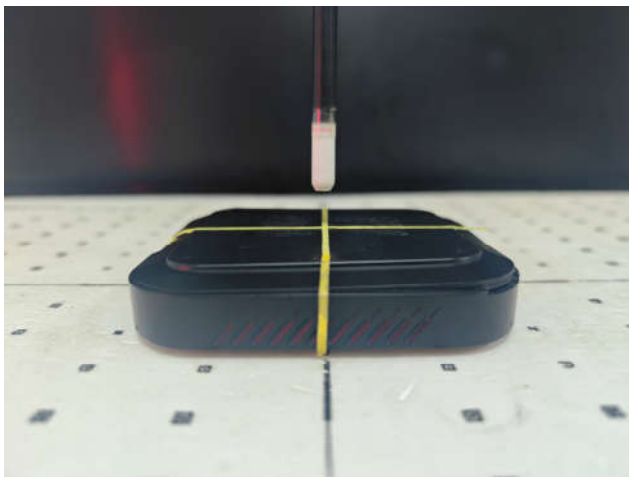

Back, Test Separation 10 mm

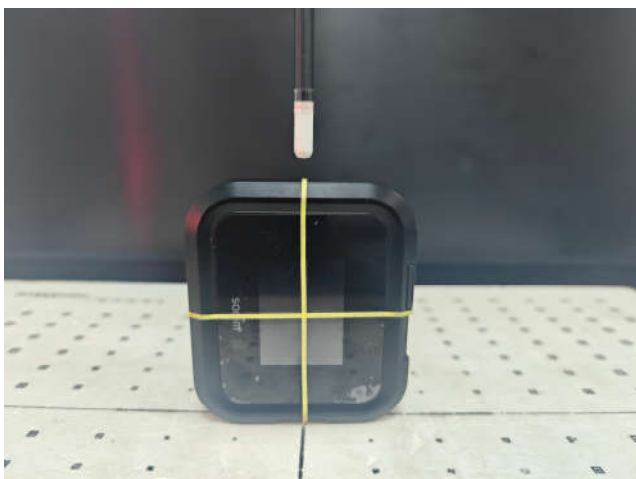


Left Side, Test Separation 10 mm



Right Side, Test Separation 10 mm




Top Side, Test Separation 10 mm

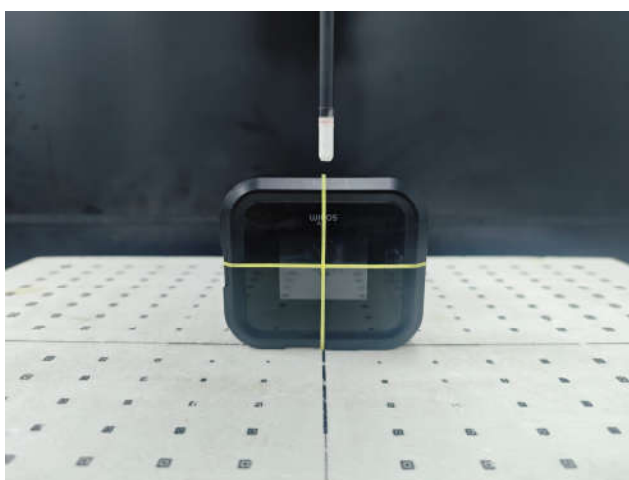

Bottom Side, Test Separation 10 mm

Antenna Location

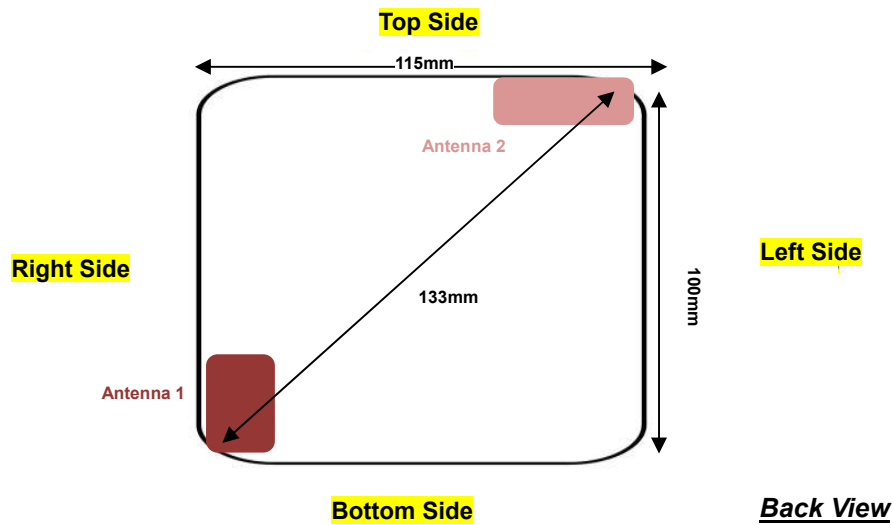

Antenna	Support Band
Antenna 1	WLAN 6GHz <TX/RX>
Antenna 2	WLAN 6GHz <TX/RX>

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
Antenna 1	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	>25mm
Antenna 2	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
Antenna 1	Yes	Yes	No	Yes	Yes	No
Antenna 2	Yes	Yes	Yes	No	No	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge