



FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : Mobile Hotspot
BRAND NAME : Sonim
MODEL NAME : H700B
FCC ID : WYPH700B
STANDARD : 47 CFR Part 22(H), 27(F), 27(H), 27(N)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Aug. 17, 2024 ~ Apr. 17, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	7
1.6 Maximum ERP Power and Emission Designator	7
1.7 Testing Location	8
1.8 Test Software	9
1.9 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	11
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example	12
2.5 Frequency List of Low/Middle/High Channels	12
3 CONDUCTED TEST ITEMS	14
3.1 Measuring Instruments	14
3.2 Test Setup	14
3.3 Test Result of Conducted Test	14
3.4 Conducted Output Power and ERP	15
3.5 Peak-to-Average Ratio	16
3.6 Occupied Bandwidth	17
3.7 Conducted Band Edge	18
3.8 Conducted Spurious Emission	20
3.9 Frequency Stability	21
4 RADIATED TEST ITEMS	22
4.1 Measuring Instruments	22
4.2 Test Setup	22
4.3 Test Result of Radiated Test	23
4.4 Radiated Spurious Emission	24
5 LIST OF MEASURING EQUIPMENT	25
6 MEASUREMENT UNCERTAINTY	26
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG480204C	Rev. 01	Initial issue of report	May 27, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§22.913(a)(5)	Effective Radiated Power (Band 5) (Band 26)	ERP < 7 Watt	PASS	-
	§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12) (Band 13) (Band 71)	ERP < 3 Watt		-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	-	Report Only	-
3.7	§2.1051 §22.917(a) §27.53(c)(2)(4) §27.53(g)	Conducted Band Edge Measurement (Band 5) (Band 12) (Band 13) (Band 26) (Band 71)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §27.53(c)(2) §27.53(g)	Conducted Spurious Emission (Band 5) (Band 12) (Band 13) (Band 26) (Band 71)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §27.53(c)(2) §27.53(f) §27.53(g)	Radiated Spurious Emission (Band 5) (Band 12) (Band 13) (Band 26) (Band 71)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 19.19 dB at 1559.50 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200, San Diego, CA92121, USA

1.2 Manufacturer

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200, San Diego, CA92121, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Hotspot
Brand Name	Sonim
Model Name	H700B
FCC ID	WYPH700B
IMEI Code	Conducted: 351393280000468 Radiation: 351393280007273
HW Version	V3.0
SW Version	H70.0-01-22.3.0-10.25.00
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 12 : 699 MHz ~ 716 MHz LTE Band 13 : 777 MHz ~ 787 MHz LTE Band 26 : 824 MHz ~ 849 MHz LTE Band 71: 663 MHz ~ 698 MHz
Rx Frequency	LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 12 : 729 MHz ~ 746 MHz LTE Band 13 : 746 MHz ~ 756 MHz LTE Band 26 : 869 MHz ~ 894 MHz LTE Band 71: 617 MHz ~ 652 MHz
Bandwidth	LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 13 : 5MHz / 10MHz LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz LTE Band 71 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	<ANT0>: LTE Band 5 : 23.41 dBm LTE Band 12 : 23.47 dBm LTE Band 13 : 23.46 dBm LTE Band 26 : 23.79 dBm LTE Band 71 : 23.58 dBm <ANT1>: LTE Band 5 : 22.90 dBm
Antenna Gain	<External Antenna> <ANT0>: LTE Band 5 : 5.0 dBi LTE Band 12 : 3.5 dBi LTE Band 13 : 5.0 dBi LTE Band 26 : 5.0 dBi LTE Band 71 : 3.5 dBi <ANT1>: LTE Band 5 : 5.0 dBi <Internal Antenna> <ANT0>: LTE Band 5 : -1.95 dBi LTE Band 12 : -3.84 dBi LTE Band 13 : -1.75 dBi LTE Band 26 : -1.95 dBi LTE Band 71 : -5.60 dBi <ANT1>: LTE Band 5 : -4.83 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

Note:

1. The device supports two types of WWAN antennas: Internal Antenna and External Antenna, they share the same RF test port, and the two antennas cannot work at the same time. After evaluation, the antenna difference does not affect the Conducted measurement. For RSE, only the test results of the worse External Antenna are shown.
2. The maximum ERP is calculated from max output power and max antenna gain, so only the



maximum ERP of Antenna 0 (External Antenna) are shown in the report.

3. LTE Band 5 support two PAs: main PA on Ant0 and other PA on Ant1, both the PAs are full tested,. only the worst ERP is shown.
4. RSE test data for LTE Band 5 other PA is shown in the LTE inter CA test report FG480204K.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP Power and Emission Designator

LTE Band 5		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	824.7 ~ 848.3	0.4178	1M09G7D	0.3281	1M10W7D
3	825.5 ~ 847.5	0.4188	2M73G7D	0.3289	2M73W7D
5	826.5 ~ 846.5	0.4178	4M50G7D	0.3311	4M48W7D
10	829.0 ~ 844.0	0.4227	9M13G7D	0.3327	9M05W7D
LTE Band 12		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	699.7 ~ 715.3	0.2344	1M09G7D	0.2339	1M10W7D
3	700.5 ~ 714.5	0.3013	2M73G7D	0.2344	2M74W7D
5	701.5 ~ 713.5	0.3020	4M51G7D	0.2366	4M50W7D
10	704.0 ~ 711.0	0.3034	9M07G7D	0.2371	9M07W7D
LTE Band 13		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	779.5 ~ 784.5	0.4256	4M50G7D	0.2649	4M52W7D
10	782.0	0.4276	9M03G7D	0.2661	8M99W7D



LTE Band 26		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	824.7 ~ 848.3	0.4335	1M09G7D	0.3381	1M10W7D
3	825.5 ~ 847.5	0.4305	2M73G7D	0.3350	2M73W7D
5	826.5 ~ 846.5	0.4325	4M50G7D	0.3357	4M47W7D
10	829.0 ~ 844.0	0.4325	9M13G7D	0.3381	9M05W7D
15	831.5 ~ 841.5	0.4345	13M6G7D	0.3388	13M4W7D
CH26790	824.0	0.4613	13M5G7D	0.3890	13M5W7D
LTE Band 71		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	665.5 ~ 695.5	0.3076	4M50G7D	0.2443	4M50W7D
10	668.0 ~ 693.0	0.3090	9M07G7D	0.2443	9M05W7D
15	670.5 ~ 690.5	0.3083	13M4G7D	0.2432	13M4W7D
20	673.0 ~ 688.0	0.3112	17M9G7D	0.2472	17M9W7D

Note:

1. LTE Band 26 overlaps the entire frequency range of LTE Band 5. Therefore, the test results provided in this report covers Band 5 and the portion of Band 26 subject to Part 22, except for Band5 other PA test results.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ 03CH02-SZ	CN1256	421272



1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22(H), 27(F), 27(H), 27(N)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	5				v	-	-	v	v	v				v		v	
	12				v	-	-	v	v	v				v		v	
	13	-	-		v	-	-	v	v	v				v		v	
	26				v		-	v	v	v				v		v	
	71	-	-				v	v	v	v				v		v	
26dB and 99% Bandwidth	5	v	v	v	v	-	-	v	v					v		v	
	12	v	v	v	v	-	-	v	v					v		v	
	13	-	-	v	v	-	-	v	v					v		v	
	26	v	v	v	v	v	-	v	v					v		v	
	71	-	-	v	v	v	v	v	v					v		v	
Conducted Band Edge	5	v	v	v	v	-	-	v	v	v		v		v	v		v
	12	v	v	v	v	-	-	v	v	v		v		v	v		v
	13	-	-	v	v	-	-	v	v	v		v		v	v		v
	26	v	v	v	v	v	-	v	v	v		v		v	v		v
	71	-	-	v	v	v	v	v	v	v		v		v	v		v
Conducted Spurious Emission	5	v	v	v	v	-	-	v				v			v	v	v
	12	v	v	v	v	-	-	v				v			v	v	v
	13	-	-	v	v	-	-	v				v			v	v	v
	26	v	v	v	v	v	-	v				v			v	v	v
	71	-	-	v	v	v	v	v				v			v	v	v
Frequency Stability	5				v	-	-	v						v		v	
	12				v			v						v		v	
	13				v			v						v		v	
	26				v	-	-	v						v		v	
	71	-	-		v			v						v		v	
E.R.P / E.I.R.P	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v	v	v



Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	12	Worst Case														v	
	13	Worst Case														v	
	26	Worst Case														v	
	71	Worst Case														v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. For QAM modulation mode, the whole testing has assessed 16QAM&64QAM mode by referring to the higher conducted power.																

2.2 Connection Diagram of Test System

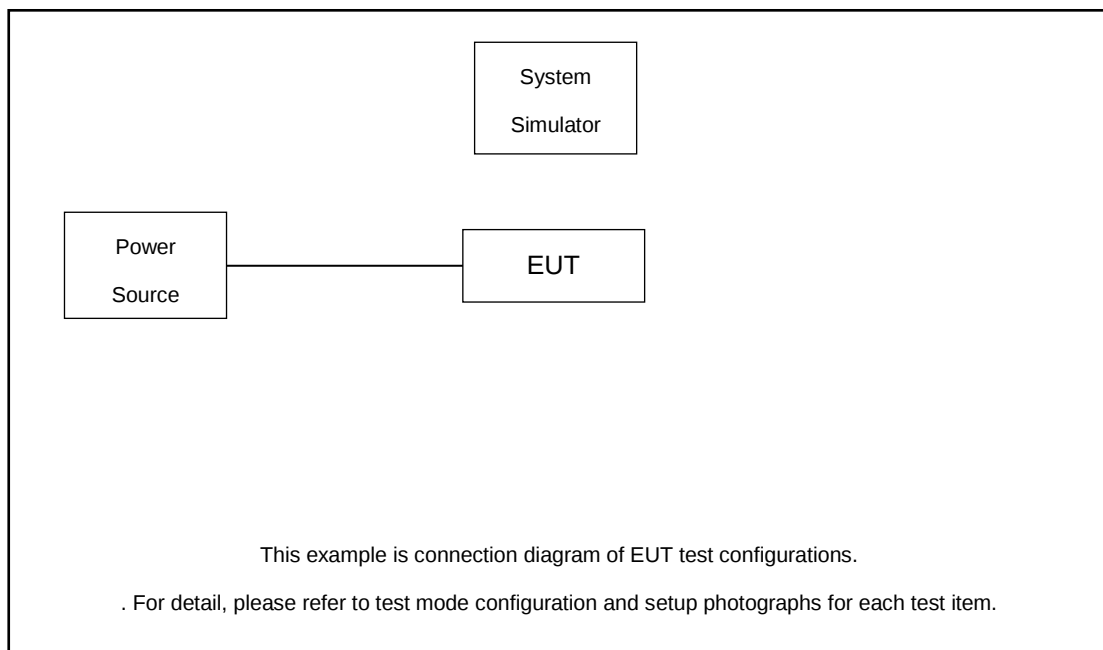

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	External Antenna	N/A	N/A	N/A	N/A	N/A



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.0 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.0 + 10 = 17.0 \text{ (dB)}\end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3



LTE Band 13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23230	-
	Frequency	-	782	-
5	Channel	23205	23230	23255
	Frequency	779.5	782	784.5

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5
10	Channel	26840	26915	26990
	Frequency	829	836.5	844
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3

LTE Band 71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	133222	133322	133372
	Frequency	673.0	680.5	688.0
15	Channel	133197	133297	133397
	Frequency	670.5	680.5	690.5
10	Channel	133172	133272	133422
	Frequency	668.0	678.0	693.0
5	Channel	133147	133247	133447
	Frequency	665.5	675.5	695.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

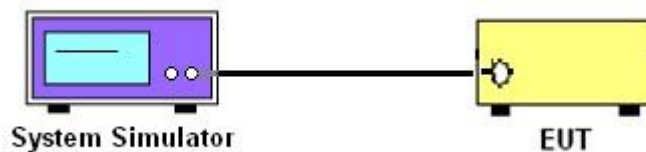

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

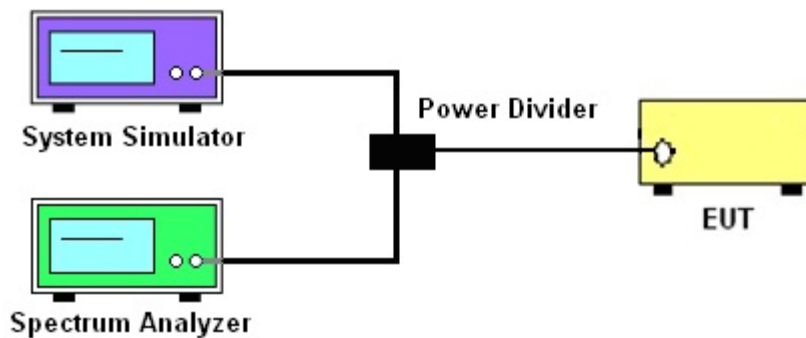

3.2.3 Frequency Stability

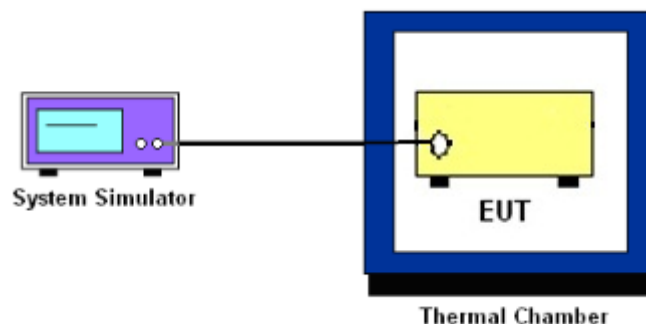

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP

3.4.1 Description of the Conducted Output Power Measurement and ERP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5 and Band 26.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12, Band 13 and Band 71.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least $65 + 10 \log_{10} p(\text{watts})$, dB, for mobile and portable equipment.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$= P(W) - [43 + 10\log(P)] \text{ (dB)}$

$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$

8. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

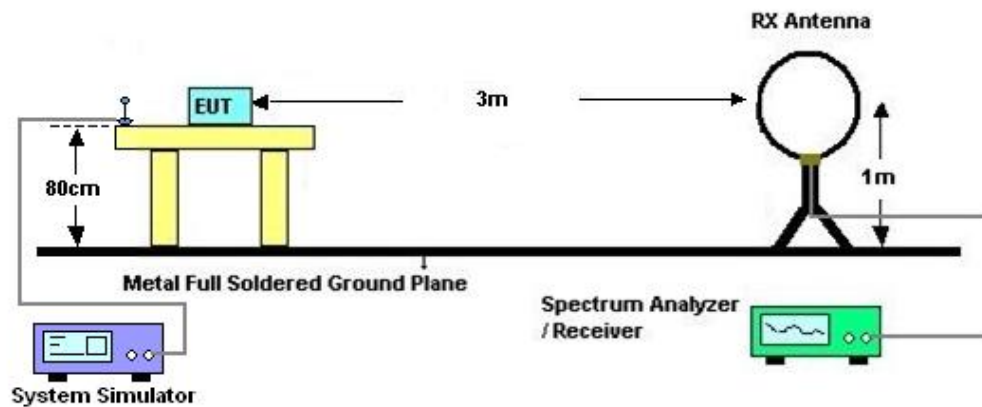

4.2.2 For radiated test from 30MHz to 1GHz

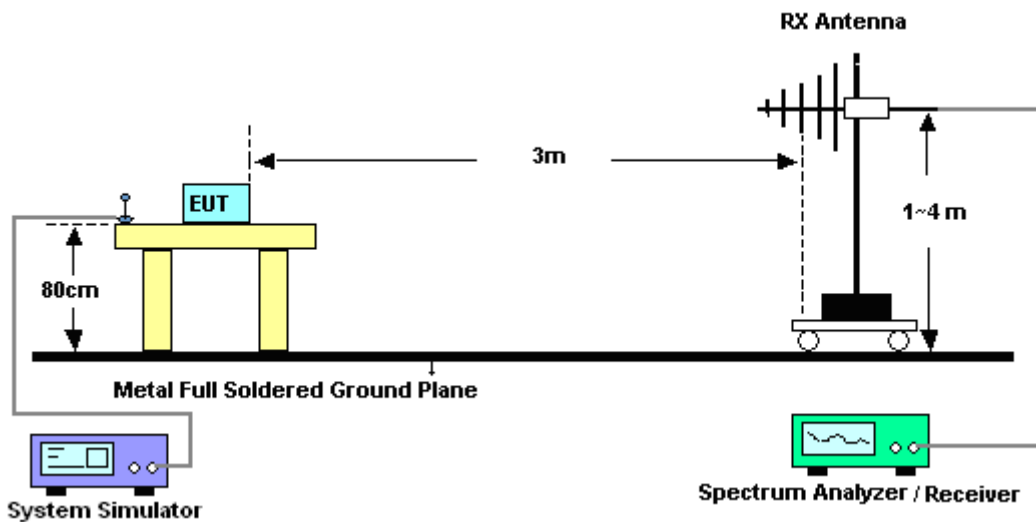

4.2.3 For radiated test above 1GHz

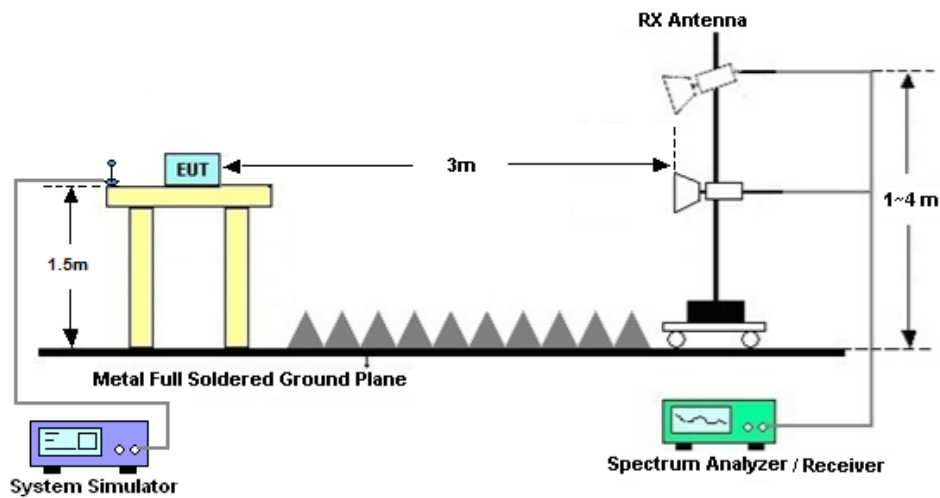

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Aug. 17, 2024~ Sep. 05, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V, 3A	Oct. 16, 2023	Aug. 17, 2024~ Sep. 05, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Aug. 17, 2024~ Sep. 05, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Aug. 17, 2024~ Sep. 05, 2024	Jul. 02, 2025	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 17, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Apr. 17, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Apr. 17, 2025	Jul. 04, 2025	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 03, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 03, 2025	Apr. 17, 2025	Apr. 02, 2027	Radiation (03CH02-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz-3GHz	Dec. 25, 2024	Apr. 17, 2025	Dec. 24, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Apr. 17, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Apr. 17, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Apr. 17, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Apr. 17, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Nina Cheng	Temperature :	24~26℃
		Relative Humidity :	50~53%

Conducted Output Power(Average power) and ERP

LTE Band 5_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				20450	20525	20600			
Frequency (MHz)				829	836.5	844	L	M	H
10	QPSK	1	0	23.36	23.41	23.38	0.4178	0.4227	0.4198
10	QPSK	1	25	23.33	23.38	23.36	0.4150	0.4198	0.4178
10	QPSK	1	49	23.29	23.35	23.32	0.4111	0.4169	0.4140
10	QPSK	25	0	22.35	22.40	22.36	0.3311	0.3350	0.3319
10	QPSK	25	12	22.31	22.38	22.35	0.3281	0.3334	0.3311
10	QPSK	25	25	22.29	22.35	22.31	0.3266	0.3311	0.3281
10	QPSK	50	0	22.31	22.37	22.32	0.3281	0.3327	0.3289
10	16QAM	1	0	22.28	22.37	22.32	0.3258	0.3327	0.3289
10	64QAM	1	0	21.32	21.41	21.36	0.2612	0.2667	0.2636
10	256QAM	1	0	18.37	18.38	18.39	0.1324	0.1327	0.1330
Channel				20425	20525	20625	ERP(W)		
Frequency (MHz)				826.5	836.5	846.5	L	M	H
5	QPSK	1	0	23.29	23.34	23.36	0.4111	0.4159	0.4178
5	16QAM	1	0	22.26	22.35	22.26	0.3243	0.3311	0.3243
Channel				20415	20525	20635	ERP(W)		
Frequency (MHz)				825.5	836.5	847.5	L	M	H
3	QPSK	1	0	23.33	23.37	23.34	0.4150	0.4188	0.4159
3	16QAM	1	0	22.25	22.32	22.27	0.3236	0.3289	0.3251
Channel				20407	20525	20643	ERP(W)		
Frequency (MHz)				824.7	836.5	848.3	L	M	H
1.4	QPSK	1	0	23.33	23.36	23.36	0.4150	0.4178	0.4178
1.4	16QAM	1	0	22.27	22.31	22.28	0.3251	0.3281	0.3258



LTE Band 12_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23060	23095	23130			
Frequency (MHz)				704	707.5	711	L	M	H
10	QPSK	1	0	23.46	23.47	23.46	0.3027	0.3034	0.3027
10	QPSK	1	25	23.40	23.41	23.41	0.2985	0.2992	0.2992
10	QPSK	1	49	23.41	23.46	23.39	0.2992	0.3027	0.2979
10	QPSK	25	0	22.42	22.45	22.43	0.2382	0.2399	0.2388
10	QPSK	25	12	22.38	22.41	22.37	0.2360	0.2377	0.2355
10	QPSK	25	25	22.40	22.41	22.41	0.2371	0.2377	0.2377
10	QPSK	50	0	22.40	22.43	22.37	0.2371	0.2388	0.2355
10	16QAM	1	0	22.35	22.40	22.40	0.2344	0.2371	0.2371
10	64QAM	1	0	21.39	21.41	21.40	0.1879	0.1888	0.1884
10	256QAM	1	0	18.36	18.44	18.43	0.0935	0.0953	0.0951
Channel				23035	23095	23155	ERP(W)		
Frequency (MHz)				701.5	707.5	713.5	L	M	H
5	QPSK	1	0	23.45	23.44	23.45	0.3020	0.3013	0.3020
5	16QAM	1	0	22.30	22.37	22.39	0.2317	0.2355	0.2366
Channel				23025	23095	23165	ERP(W)		
Frequency (MHz)				700.5	707.5	714.5	L	M	H
3	QPSK	1	0	23.42	23.44	23.40	0.2999	0.3013	0.2985
3	16QAM	1	0	22.32	22.35	22.35	0.2328	0.2344	0.2344
Channel				23017	23095	23173	ERP(W)		
Frequency (MHz)				699.7	707.5	715.3	L	M	H
1.4	QPSK	1	0	22.32	22.35	22.35	0.2328	0.2344	0.2344
1.4	16QAM	1	0	22.34	22.34	22.33	0.2339	0.2339	0.2333

LTE Band 13_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23230					
Frequency (MHz)				782				M	
10	QPSK	1	0		23.46			0.4276	
10	QPSK	1	25		23.43			0.4246	
10	QPSK	1	49		23.42			0.4236	
10	QPSK	25	0		22.45			0.3388	
10	QPSK	25	12		22.38			0.3334	
10	QPSK	25	25		22.41			0.3357	
10	QPSK	50	0		22.43			0.3373	
10	16QAM	1	0		21.40			0.2661	
10	64QAM	1	0		21.38			0.2649	
10	256QAM	1	0		18.42			0.1340	



Channel				23205	23230	23255	ERP(W)		
Frequency (MHz)				779.5	782	784.5	L	M	H
5	QPSK	1	0	23.44	23.39	23.43	0.4256	0.4207	0.4246
5	16QAM	1	0	21.38	21.35	21.38	0.2649	0.2630	0.2649

LTE Band 26_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)			
Channel				26790	26865	26915	26965				
Frequency (MHz)				824	831.5	836.5	841.5	Straddle Ch	L	M	H
15	QPSK	1	0	23.52	23.51	23.53	23.46	0.4335	0.4325	0.4345	0.4276
15	QPSK	1	37	23.71	23.47	23.52	23.41	0.4529	0.4285	0.4335	0.4227
15	QPSK	1	74	23.79	23.44	23.46	23.42	0.4613	0.4256	0.4276	0.4236
15	QPSK	36	0	22.58	22.48	22.49	22.44	0.3491	0.3412	0.3420	0.3381
15	QPSK	36	20	22.60	22.46	22.45	22.42	0.3508	0.3396	0.3388	0.3365
15	QPSK	36	39	22.56	22.45	22.45	22.37	0.3475	0.3388	0.3388	0.3327
15	QPSK	75	0	22.51	22.41	22.45	22.39	0.3436	0.3357	0.3388	0.3342
15	16QAM	1	0	23.05	22.42	22.45	22.40	0.3890	0.3365	0.3388	0.3350
15	64QAM	1	0	22.30	21.42	21.46	21.41	0.3273	0.2673	0.2698	0.2667
15	256QAM	1	0	18.81	18.43	18.49	18.39	0.1466	0.1343	0.1361	0.1330
Channel				-	26840	26915	26990	ERP(W)			
Frequency (MHz)				-	829	836.5	844	-	L	M	H
10	QPSK	1	0	-	23.49	23.51	23.43	-	0.4305	0.4325	0.4246
10	16QAM	1	0	-	22.35	22.44	22.38	-	0.3311	0.3381	0.3334
Channel				-	26815	26915	27015	ERP(W)			
Frequency (MHz)				-	826.5	836.5	846.5	-	L	M	H
5	QPSK	1	0	-	23.48	23.51	23.42	-	0.4295	0.4325	0.4236
5	16QAM	1	0	-	22.41	22.39	22.33	-	0.3357	0.3342	0.3296
Channel				-	26815	26915	27025	ERP(W)			
Frequency (MHz)				-	825.5	836.5	847.5	-	L	M	H
3	QPSK	1	0	-	23.49	23.49	23.41	-	0.4305	0.4305	0.4227
3	16QAM	1	0	-	22.37	22.40	22.33	-	0.3327	0.3350	0.3296
Channel				-	26797	26915	27033	ERP(W)			
Frequency (MHz)				-	824.7	836.5	848.3	-	L	M	H
1.4	QPSK	1	0	-	23.44	23.52	23.45	-	0.4256	0.4335	0.4266
1.4	16QAM	1	0	-	22.43	22.44	22.39	-	0.3373	0.3381	0.3342



LTE Band 71_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				133222	133322	133372			
Frequency (MHz)				673	683	688	L	M	H
20	QPSK	1	0	23.55	23.58	23.53	0.3090	0.3112	0.3076
20	QPSK	1	49	23.48	23.53	23.47	0.3041	0.3076	0.3034
20	QPSK	1	99	23.51	23.51	23.51	0.3062	0.3062	0.3062
20	QPSK	50	0	22.58	22.60	22.52	0.2472	0.2483	0.2438
20	QPSK	50	24	22.53	22.58	22.49	0.2443	0.2472	0.2421
20	QPSK	50	50	22.53	22.56	22.47	0.2443	0.2460	0.2410
20	QPSK	100	0	22.52	22.54	22.48	0.2438	0.2449	0.2415
20	16QAM	1	0	22.55	22.58	22.47	0.2455	0.2472	0.2410
20	64QAM	1	0	21.54	21.58	21.49	0.1945	0.1963	0.1923
20	256QAM	1	0	18.58	18.55	18.52	0.0984	0.0977	0.0971
Channel				133197	133297	133397	EIRP(W)		
Frequency (MHz)				670.5	680.5	690.5	L	M	H
15	QPSK	1	0	23.48	23.54	23.50	0.3041	0.3083	0.3055
15	16QAM	1	0	22.48	22.51	22.41	0.2415	0.2432	0.2377
Channel				133172	133272	133422	EIRP(W)		
Frequency (MHz)				668	678	693	L	M	H
10	QPSK	1	0	23.48	23.55	23.46	0.3041	0.3090	0.3027
10	16QAM	1	0	22.51	22.53	22.43	0.2432	0.2443	0.2388
Channel				133147	133247	133447	EIRP(W)		
Frequency (MHz)				665.5	675.5	695.5	L	M	H
5	QPSK	1	0	23.52	23.53	23.47	0.3069	0.3076	0.3034
5	16QAM	1	0	22.50	22.53	22.46	0.2427	0.2443	0.2404



LTE Band 5 other PA


Peak-to-Average Ratio

Mode	LTE Band 5 / 10MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	4.38	5.54	6.17	PASS



LTE Band 5 / 10MHz / QPSK


Middle Channel / Full RB

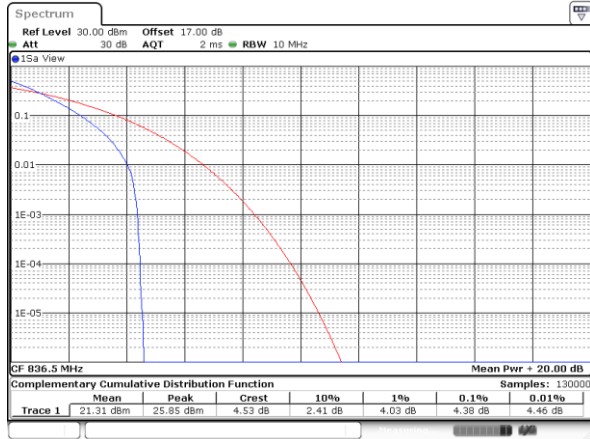

Date: 5.SEP.2024 12:02:36

LTE Band 5 / 10MHz / 16QAM


Middle Channel / Full RB

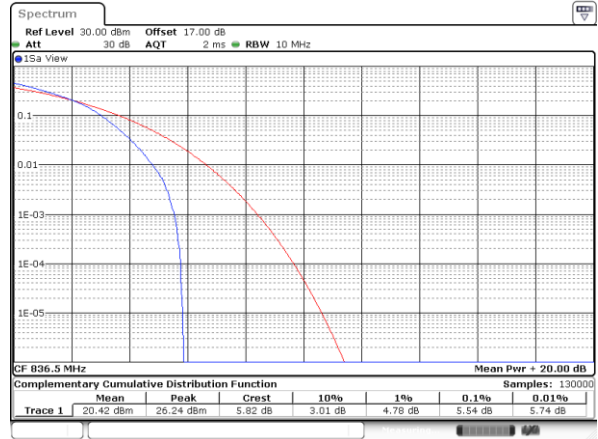

Date: 5.SEP.2024 12:03:36

LTE Band 5 / 10MHz / 64QAM

Middle Channel / Full RB

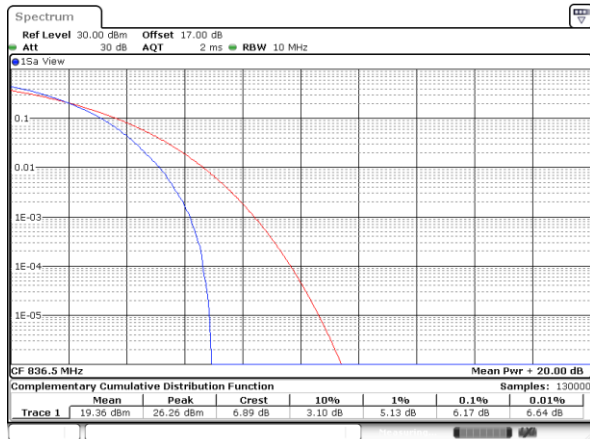

Date: 5.SEP.2024 12:04:15




26dB Bandwidth

Mode	LTE Band 5 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	5.00	5.07	9.91	9.97	-	-	-	-




Middle Channel / 5MHz / QPSK

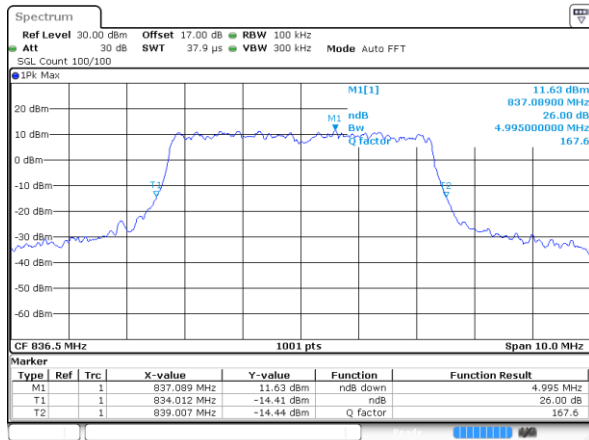

Date: 27 AUG 2024 08:10:58


Middle Channel / 5MHz / 16QAM

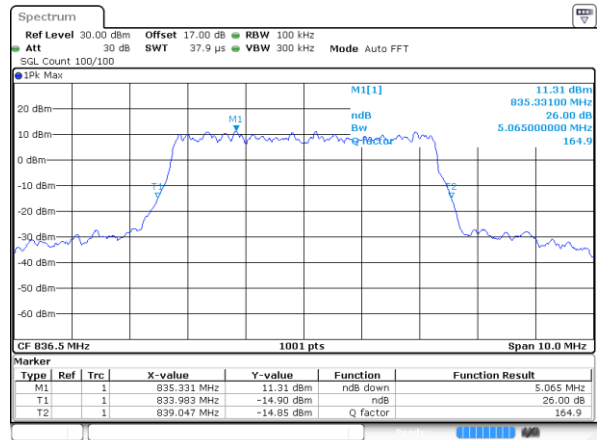

Date: 27 AUG 2024 08:11:40


LTE Band 5

Middle Channel / 10MHz / QPSK

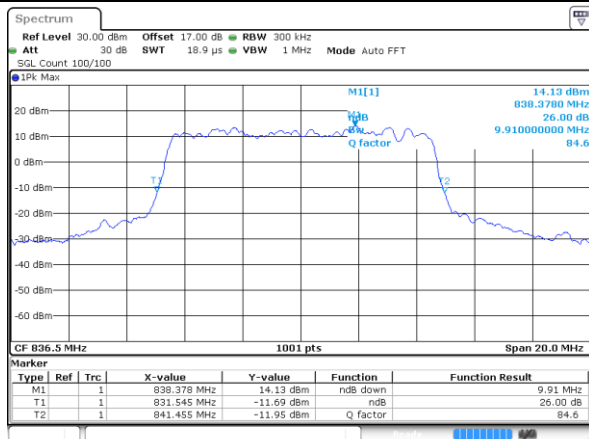

Date: 27 AUG 2024 08:37:53

Middle Channel / 10MHz / 16QAM

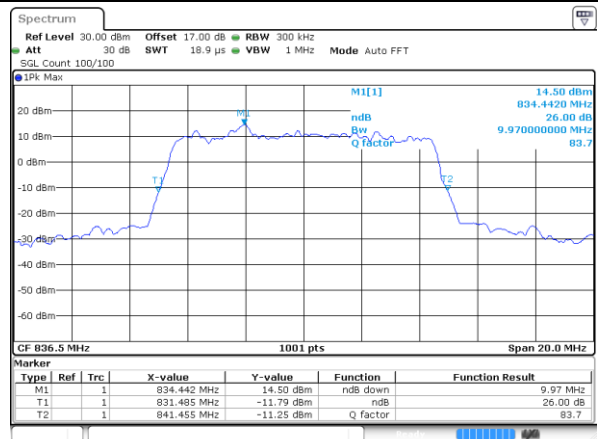

Date: 27 AUG 2024 08:38:35




Occupied Bandwidth

Mode	LTE Band 5 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	4.49	4.48	9.05	9.05	-	-	-	-




Middle Channel / 5MHz / QPSK

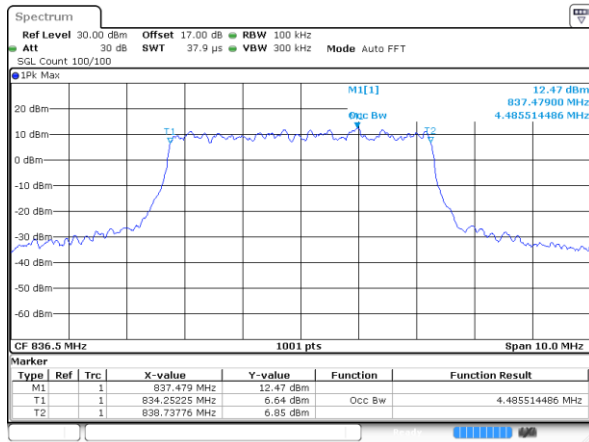

Date: 27 AUG 2024 08:10:38


Middle Channel / 5MHz / 16QAM

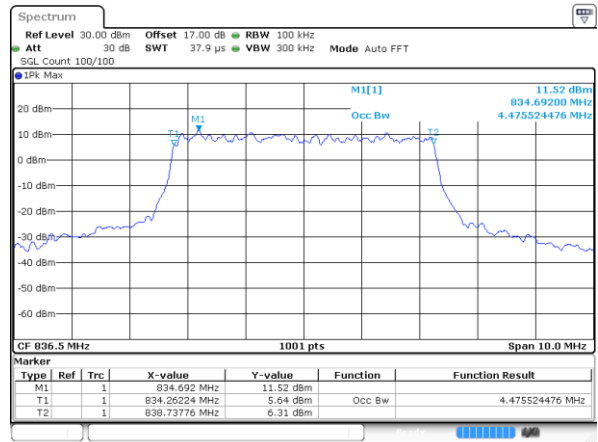

Date: 27 AUG 2024 08:11:19


LTE Band 5

Middle Channel / 10MHz / QPSK

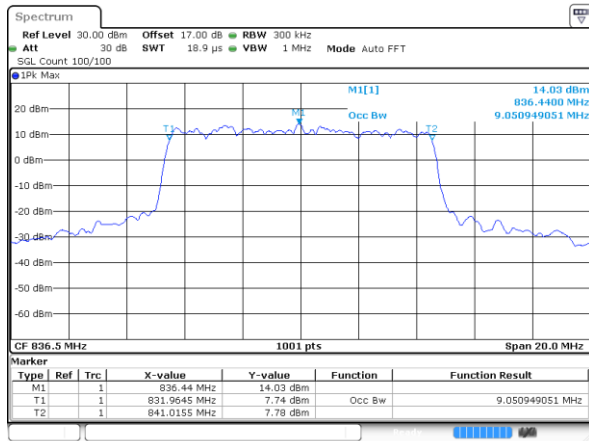

Date: 27 AUG 2024 08:37:32

Middle Channel / 10MHz / 16QAM

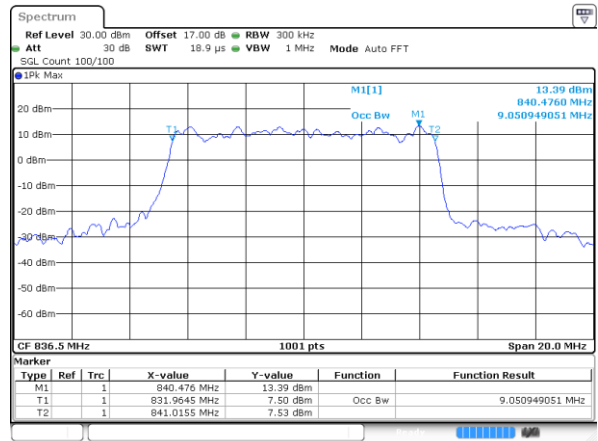


Date: 27 AUG 2024 08:38:14



Conducted Band Edge


LTE Band 5 / 5MHz / QPSK

Lowest Band Edge / 1RB

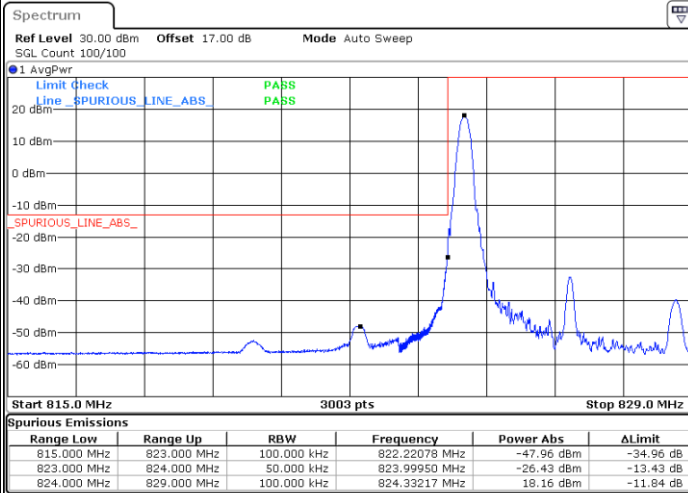


Date: 27 AUG 2024 07:58:47

Highest Band Edge / 1RB

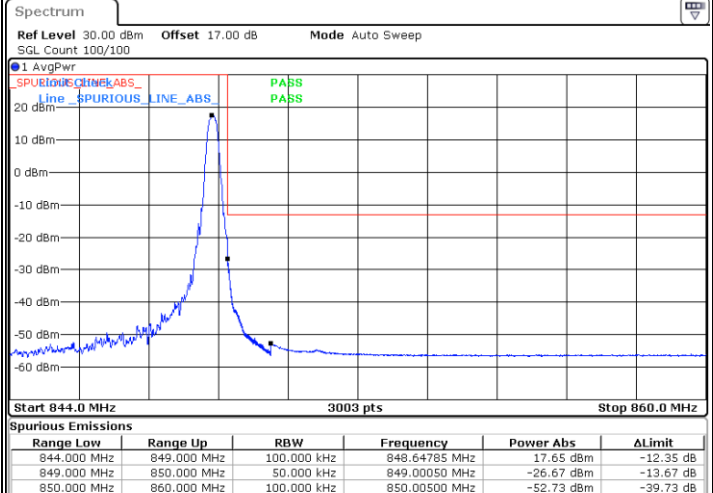


Date: 27 AUG 2024 08:13:30

Lowest Band Edge / Full RB

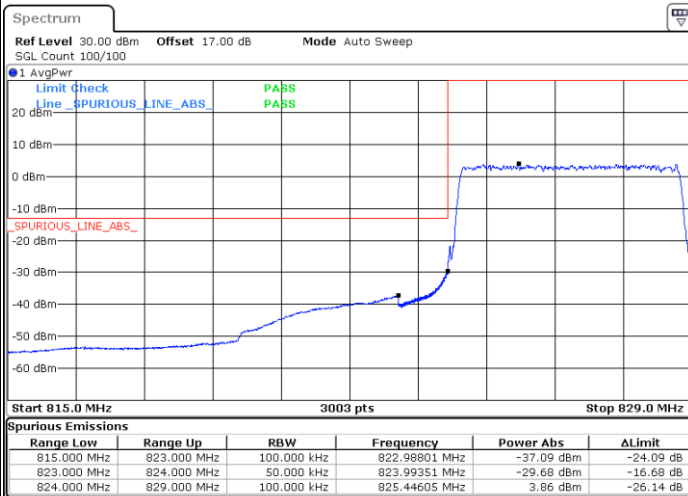

Date: 27 AUG 2024 08:04:17

Highest Band Edge / Full RB

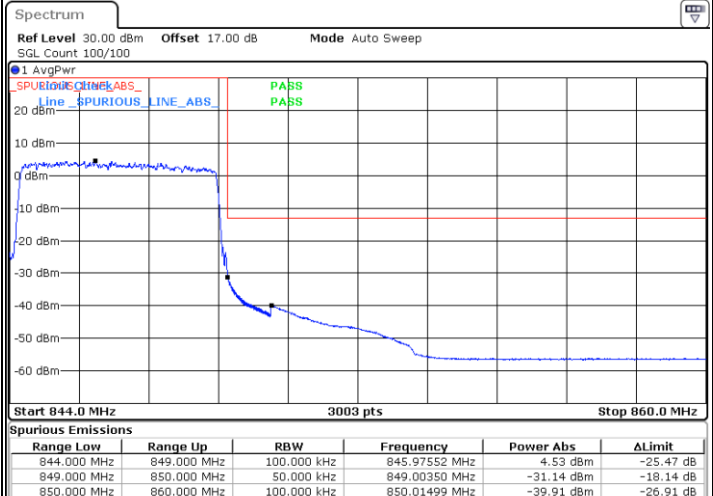


Date: 27 AUG 2024 08:19:00




LTE Band 5 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

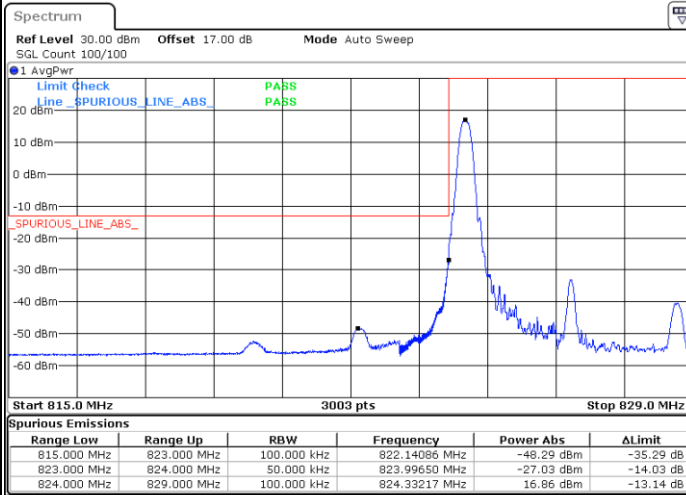


Date: 27 AUG 2024 08:00:37

Highest Band Edge / 1 RB

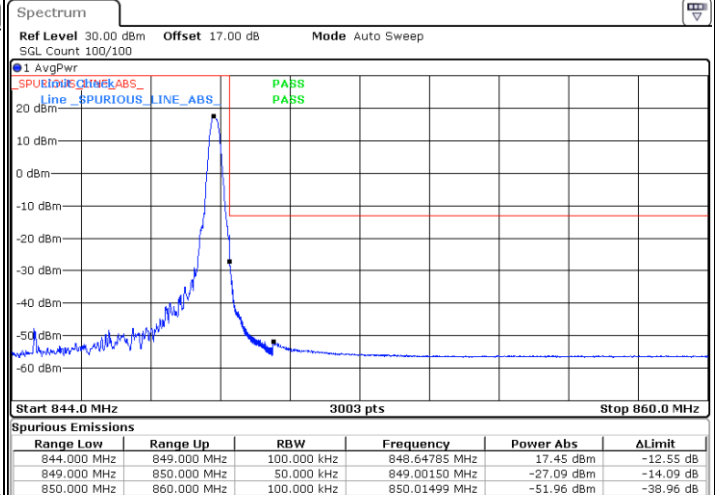


Date: 27 AUG 2024 08:15:20

Lowest Band Edge / Full RB

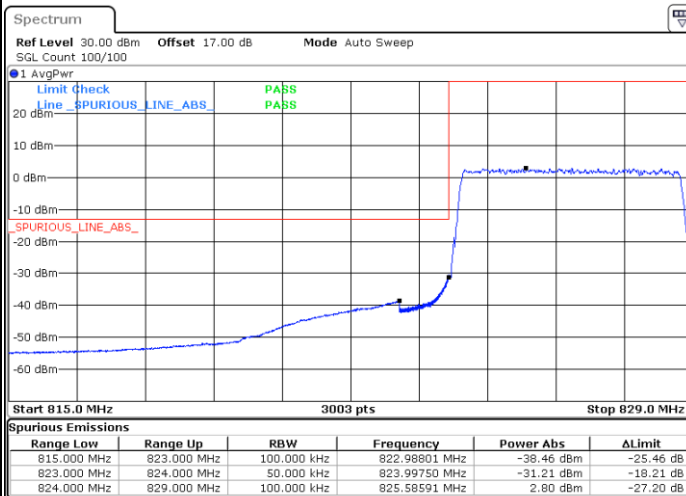

Date: 27 AUG 2024 08:06:07

Highest Band Edge / Full RB

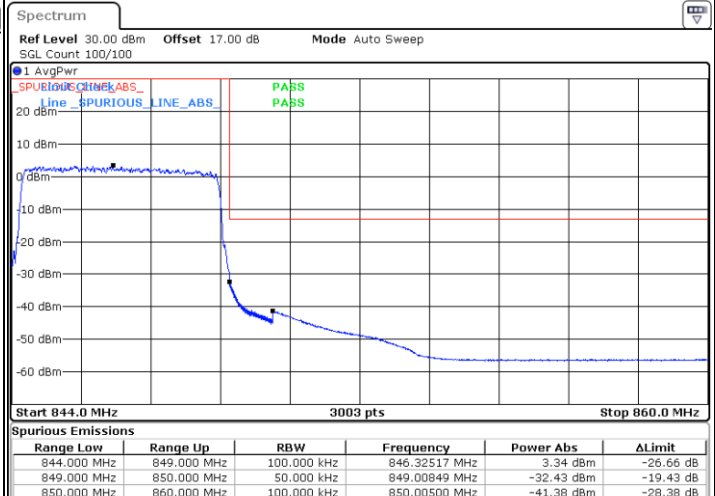


Date: 27 AUG 2024 08:20:50




LTE Band 5 / 5MHz / 64QAM


Lowest Band Edge / 1 RB

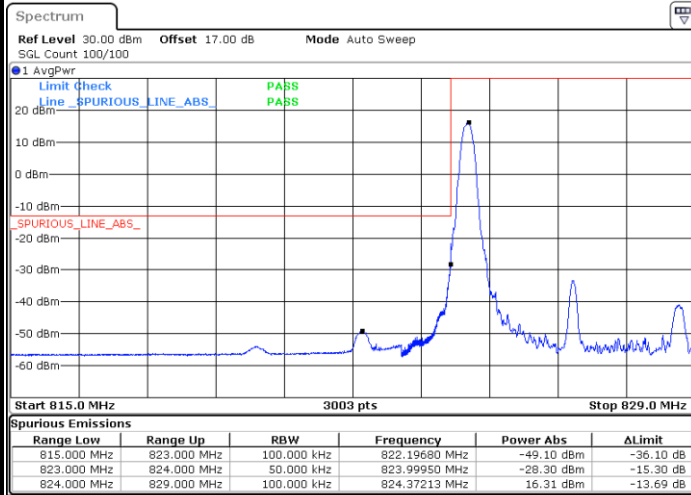


Highest Band Edge / 1 RB

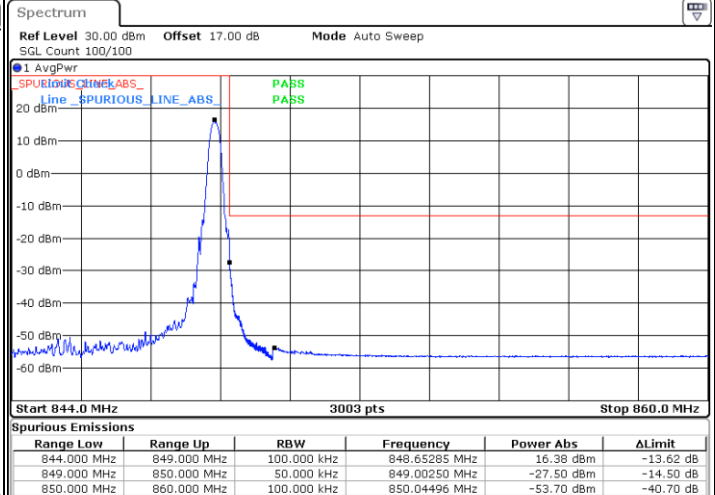

Lowest Band Edge / Full RB

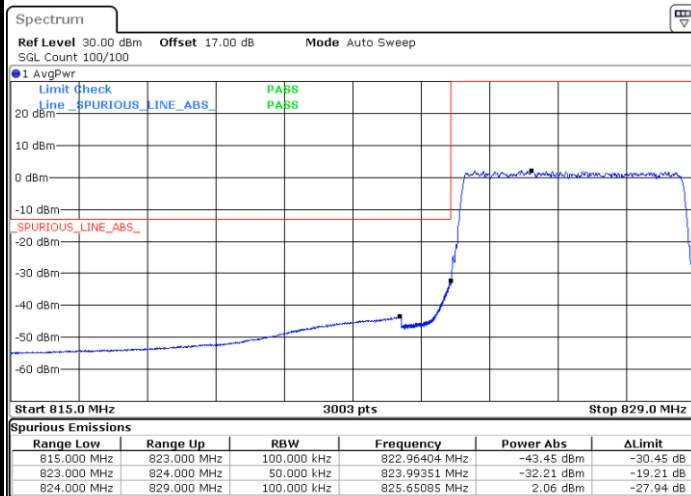


Highest Band Edge / Full RB

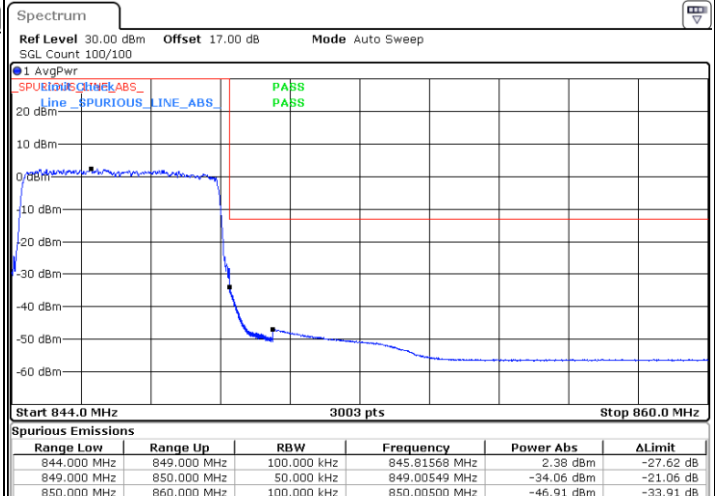




LTE Band 5 / 10MHz / QPSK


Lowest Band Edge / 1RB

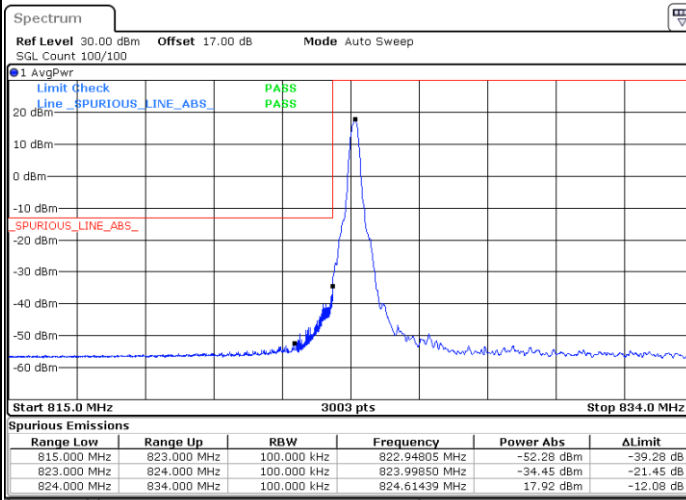


Highest Band Edge / 1RB

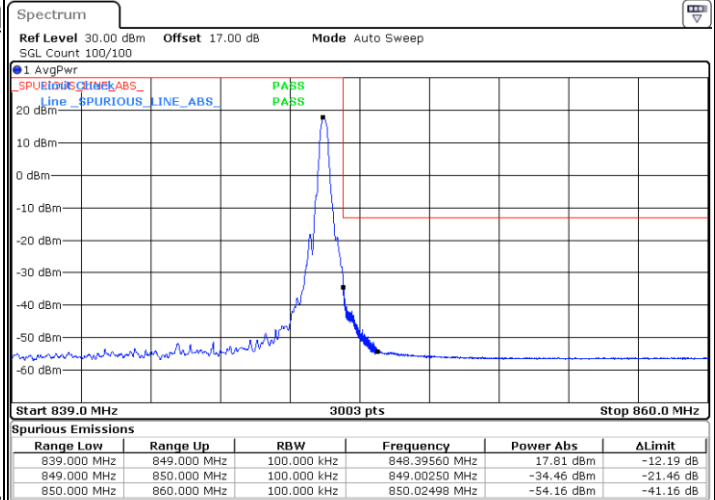

Lowest Band Edge / Full RB

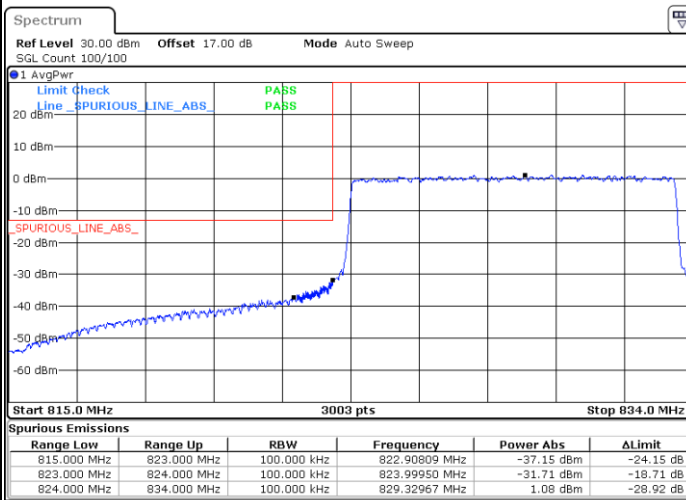


Highest Band Edge / Full RB

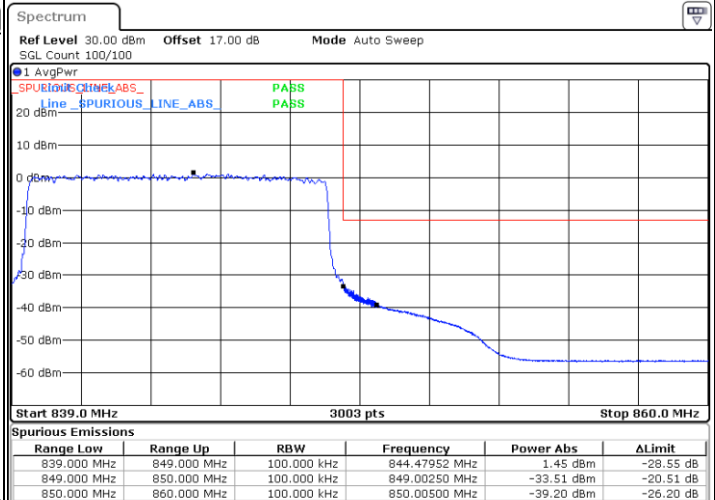




LTE Band 5 / 10MHz / 16QAM


Lowest Band Edge / 1 RB

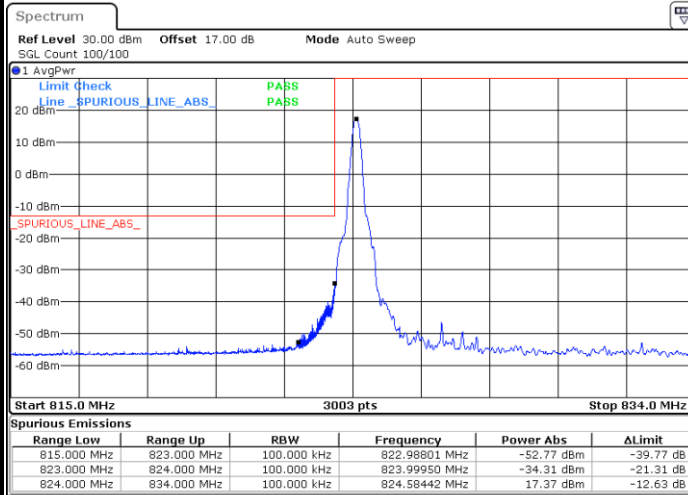


Highest Band Edge / 1 RB

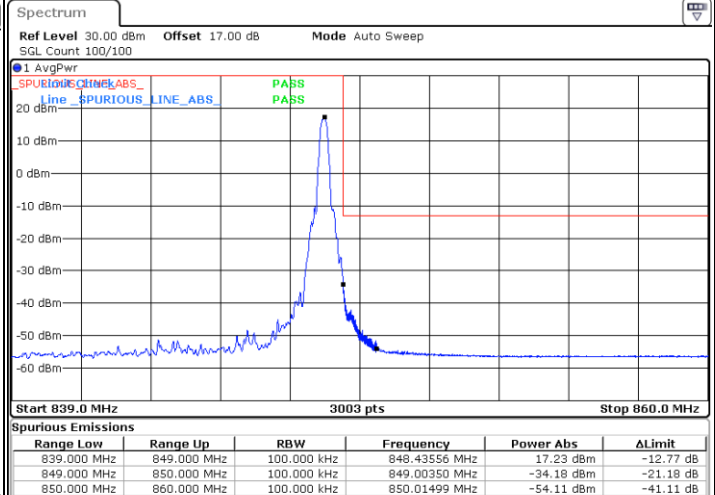

Lowest Band Edge / Full RB

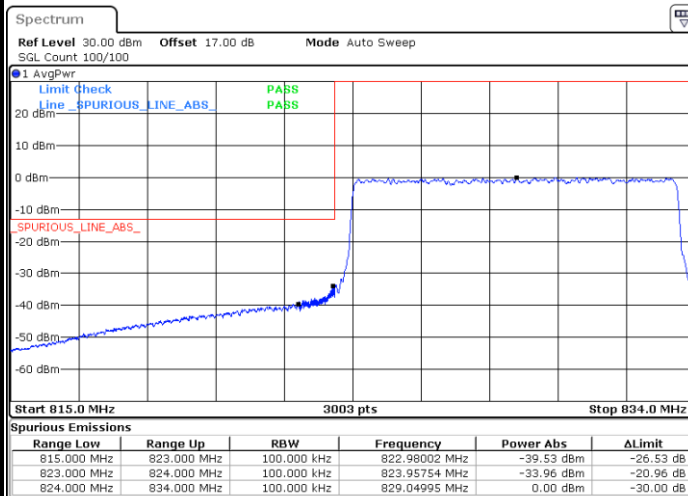


Highest Band Edge / Full RB

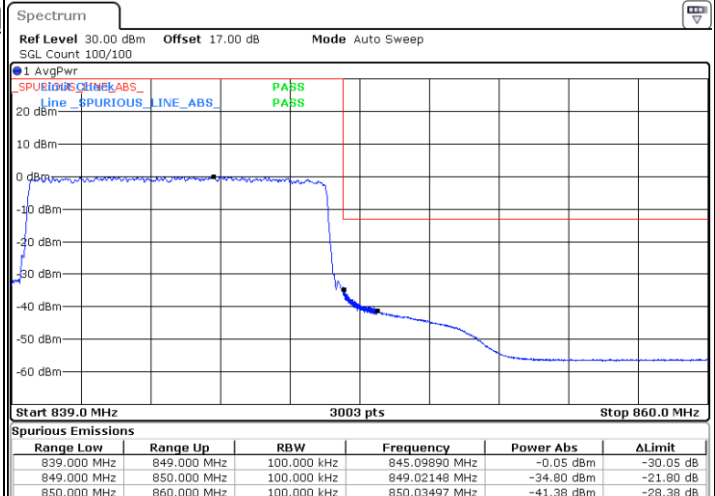




LTE Band 5 / 10MHz / 64QAM


Lowest Band Edge / 1 RB

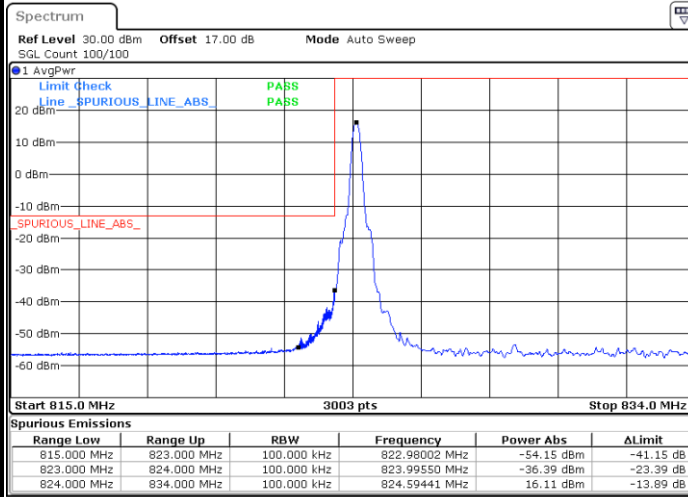


Highest Band Edge / 1 RB

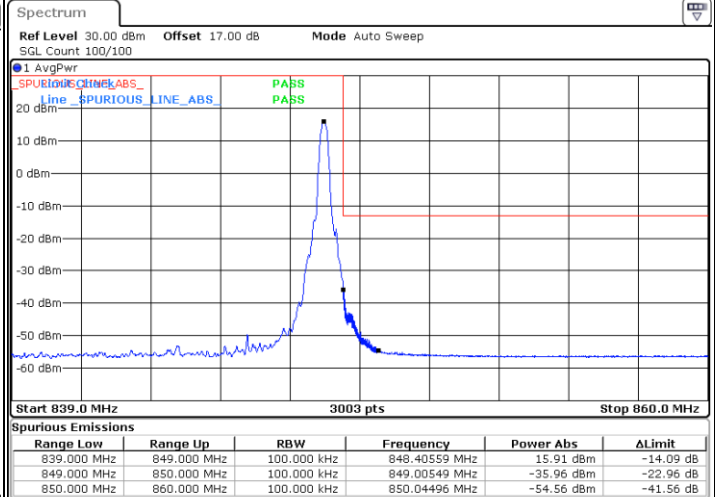

Lowest Band Edge / Full RB

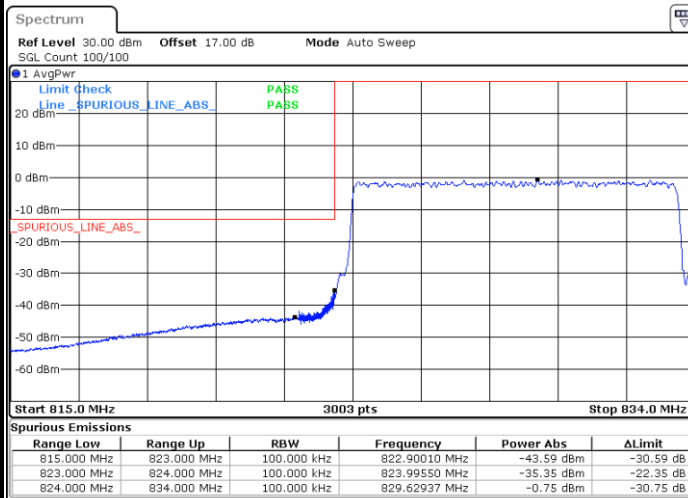

Highest Band Edge / Full RB

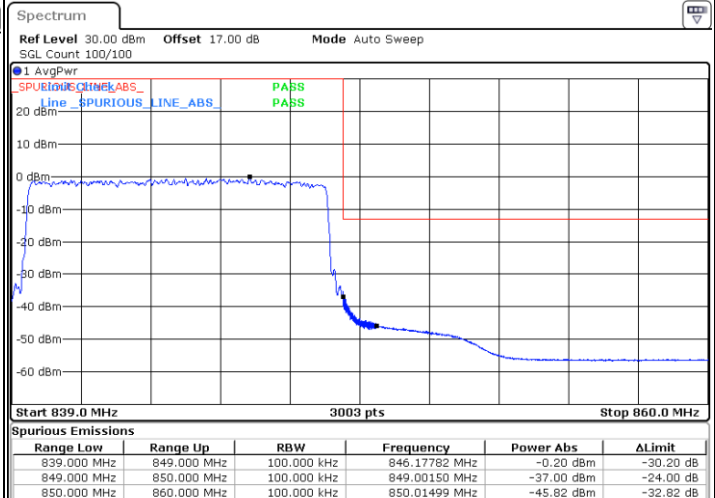




Conducted Spurious Emission


LTE Band 5 / 5MHz

Lowest Channel / QPSK

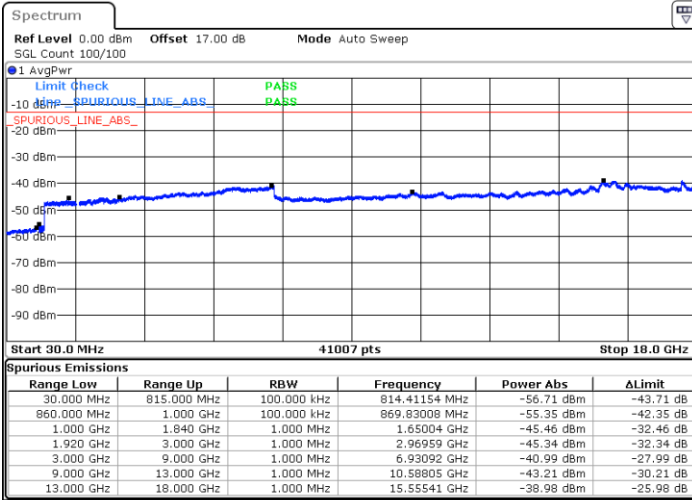


Date: 28.AUG.2024 04:04:36

Middle Channel / QPSK

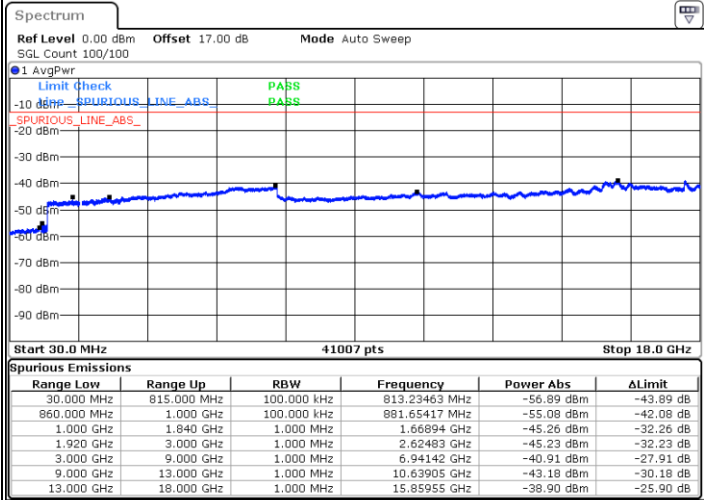

Date: 28.AUG.2024 04:05:55

Highest Channel / QPSK

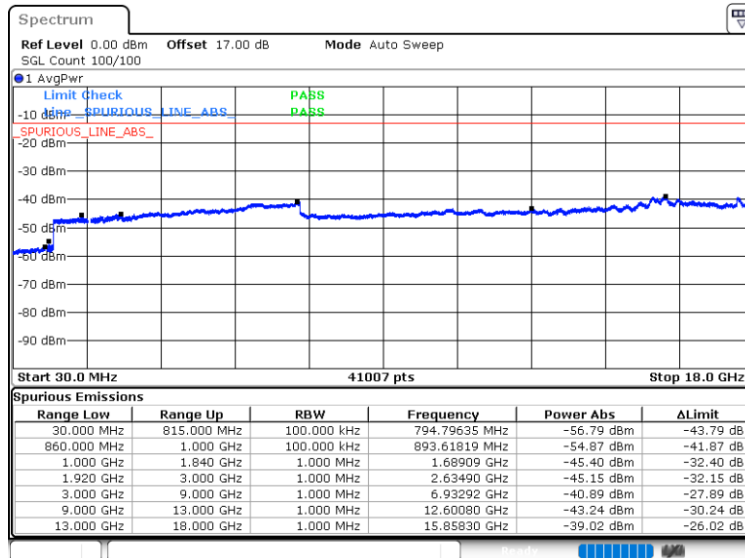


Date: 28.AUG.2024 04:07:14




LTE Band 5 / 10MHz

Lowest Channel / QPSK

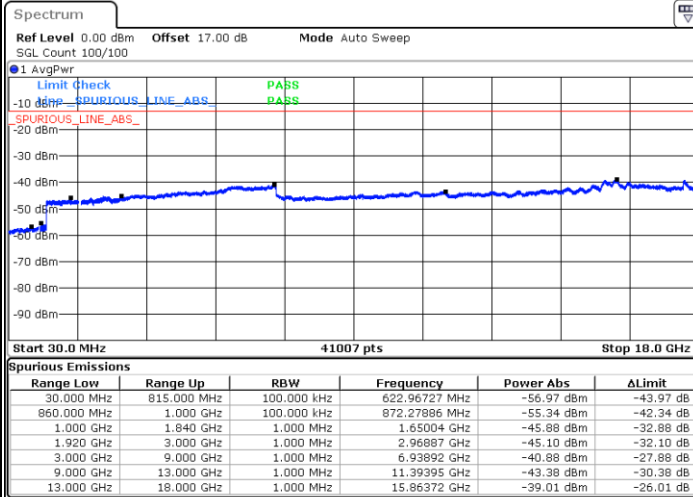


Date: 28.AUG.2024 04:09:36

Middle Channel / QPSK

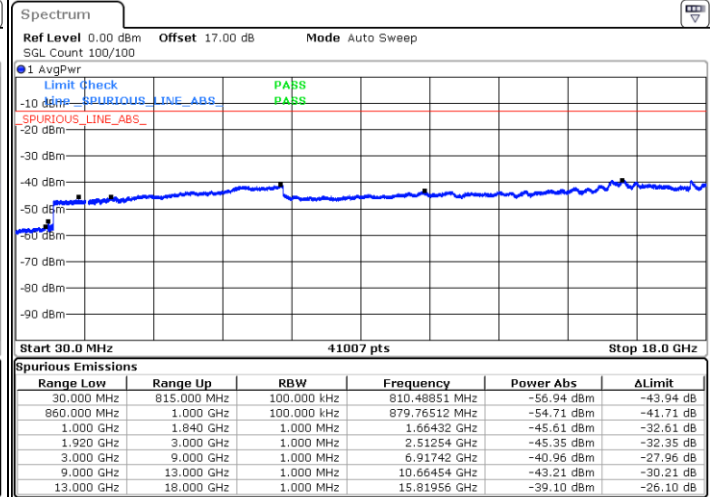

Date: 28.AUG.2024 04:10:56

Highest Channel / QPSK

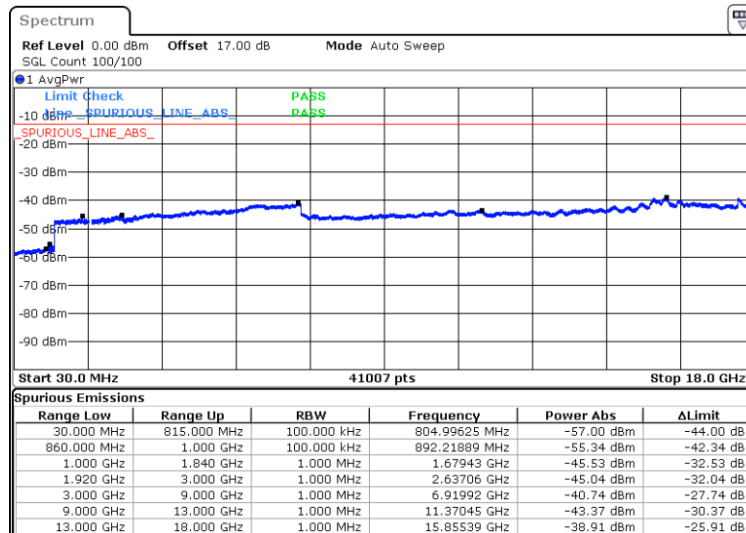

Date: 28.AUG.2024 04:12:15

**Frequency Stability**

Test Conditions		LTE Band 5 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	2.5ppm
		Deviation (ppm)	Result
50	Normal Voltage	0.0002	PASS
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0008	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0023	
0	Normal Voltage	0.0010	
-10	Normal Voltage	0.0008	
-20	Normal Voltage	0.0001	
-30	Normal Voltage	0.0001	
20	Maximum Voltage	0.0004	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0005	

Note: Normal Voltage = 3.8 V.; Battery End Point = 3.5 V.; Maximum Voltage = 4.3 V.



LTE Band 12


Peak-to-Average Ratio

Mode	LTE Band 12 / 10MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	4.35	5.54	5.51	PASS



LTE Band 12 / 10MHz / QPSK


Middle Channel / Full RB

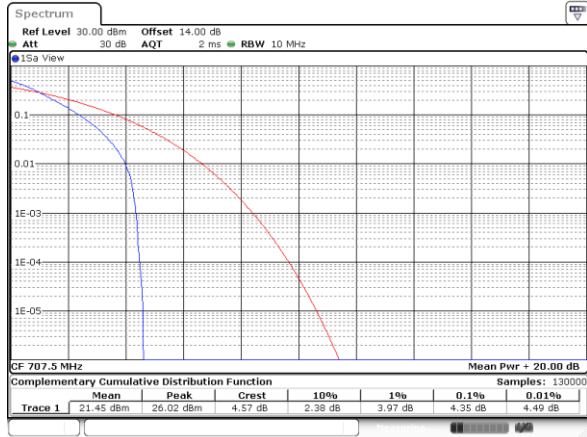

Date: 4.SEP.2024 14:15:12

LTE Band 12 / 10MHz / 16QAM


Middle Channel / Full RB

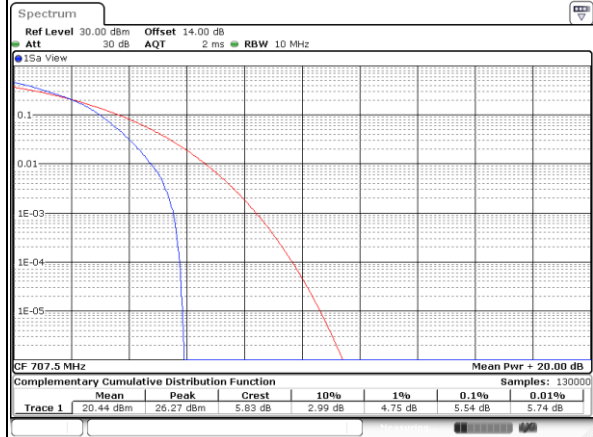

Date: 4.SEP.2024 14:18:00

LTE Band 12 / 10MHz / 64QAM

Middle Channel / Full RB

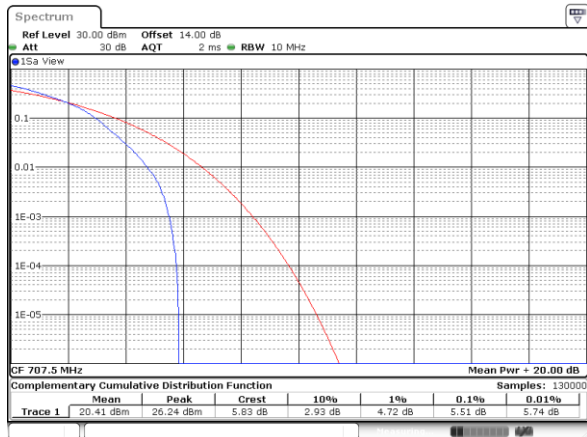

Date: 4.SEP.2024 14:18:34




26dB Bandwidth

Mode	LTE Band 12 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.37	1.36	3.03	3.04	4.87	5.03	9.91	9.83	-	-	-	-




LTE Band 12

Middle Channel / 1.4MHz / QPSK

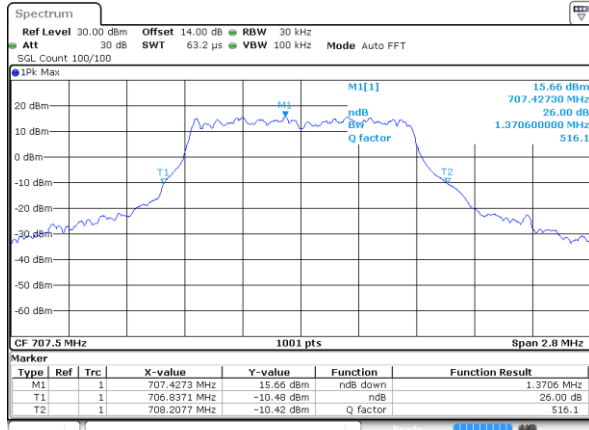


Date: 17 AUG 2024 21:25:09

Middle Channel / 1.4MHz / 16QAM

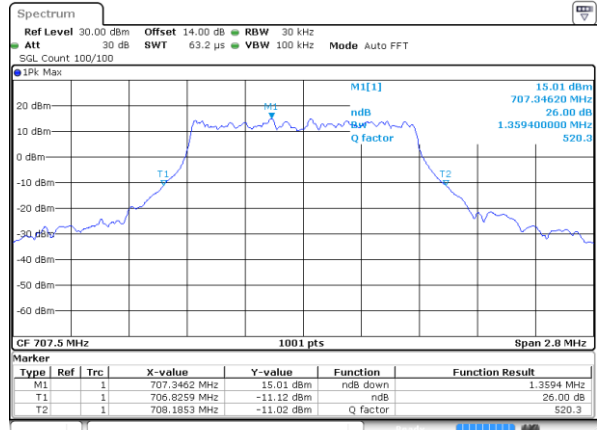


Date: 17 AUG 2024 21:25:48

Middle Channel / 3MHz / QPSK

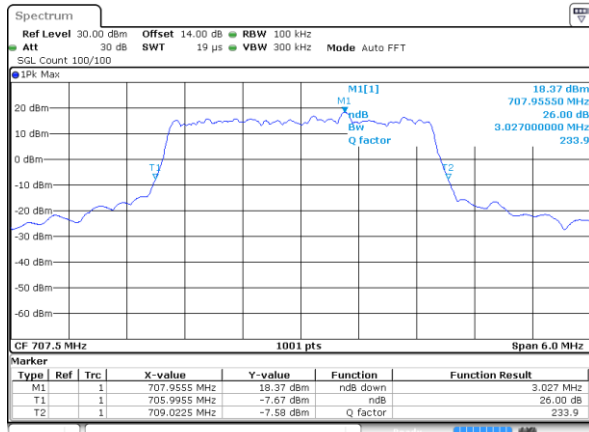


Date: 17 AUG 2024 21:46:12

Middle Channel / 3MHz / 16QAM

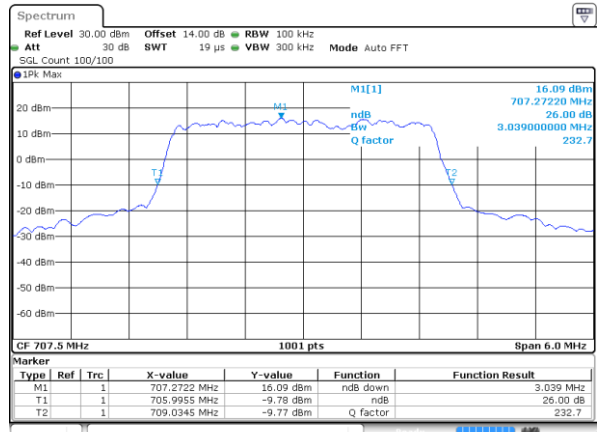


Date: 17 AUG 2024 21:46:52

Middle Channel / 5MHz / QPSK

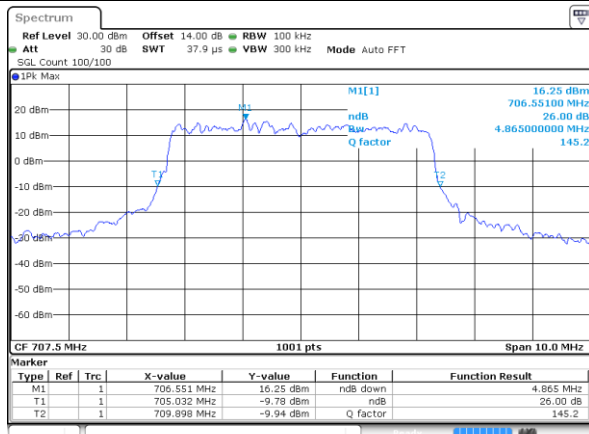

Date: 17 AUG 2024 22:07:58

Middle Channel / 5MHz / 16QAM

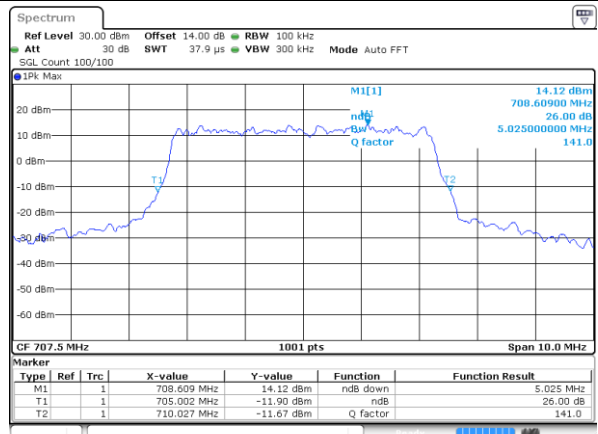


Date: 17 AUG 2024 22:08:38




LTE Band 12

Middle Channel / 10MHz / QPSK

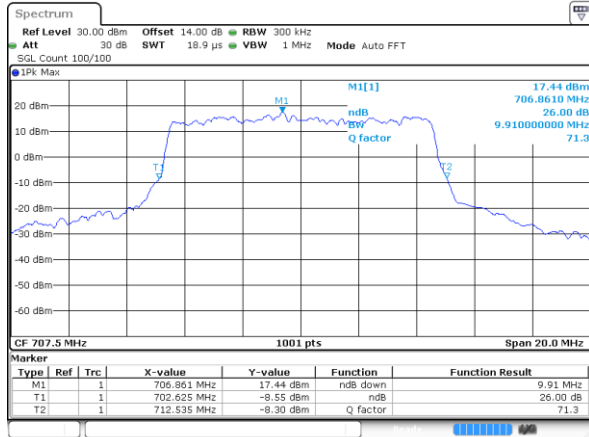

Middle Channel / 10MHz / 16QAM

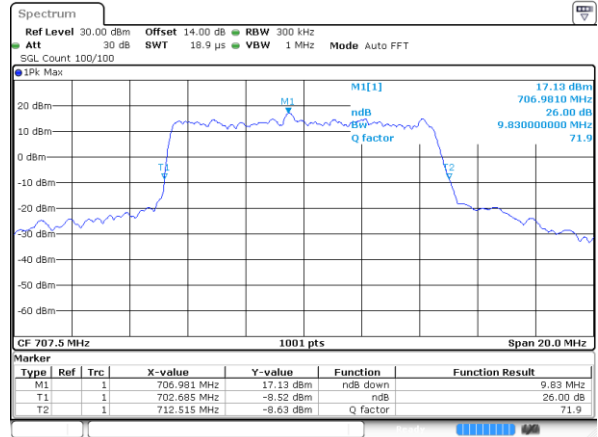




Occupied Bandwidth

Mode	LTE Band 12 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.09	1.10	2.73	2.74	4.51	4.50	9.07	9.07	-	-	-	-




LTE Band 12


Middle Channel / 1.4MHz / QPSK

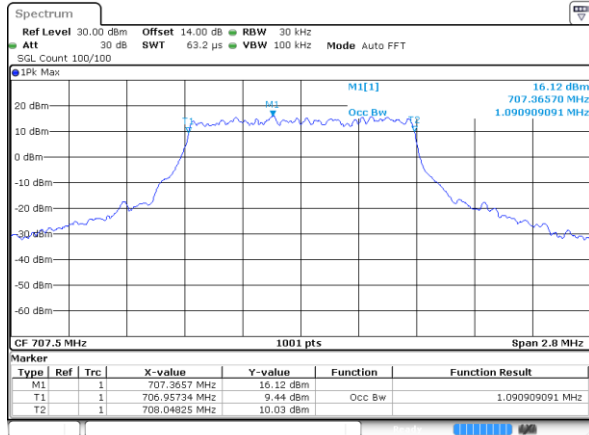


Middle Channel / 1.4MHz / 16QAM

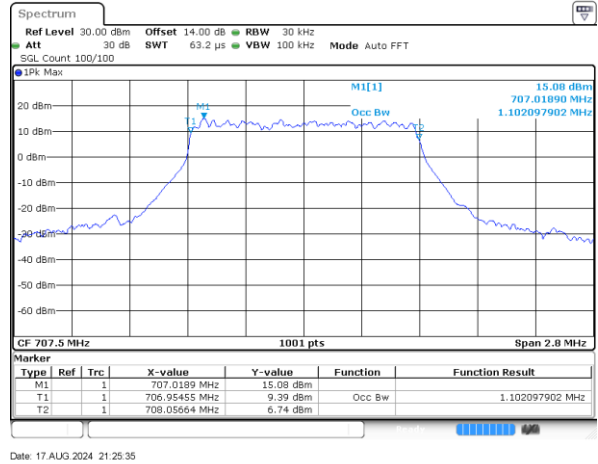


Middle Channel / 3MHz / QPSK

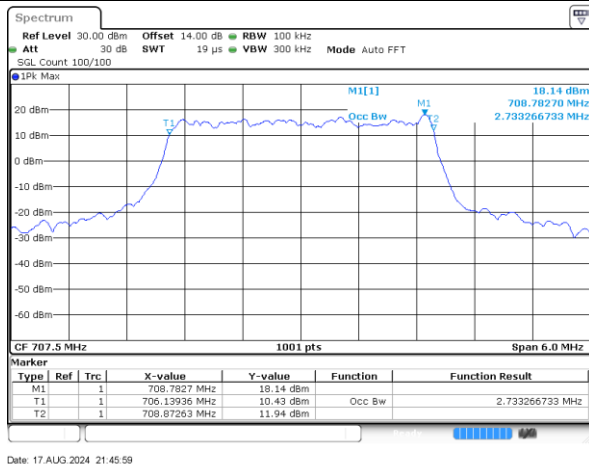


Middle Channel / 3MHz / 16QAM

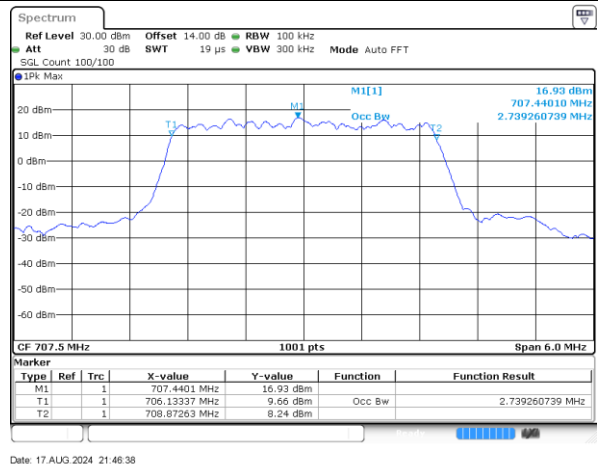

Middle Channel / 5MHz / QPSK

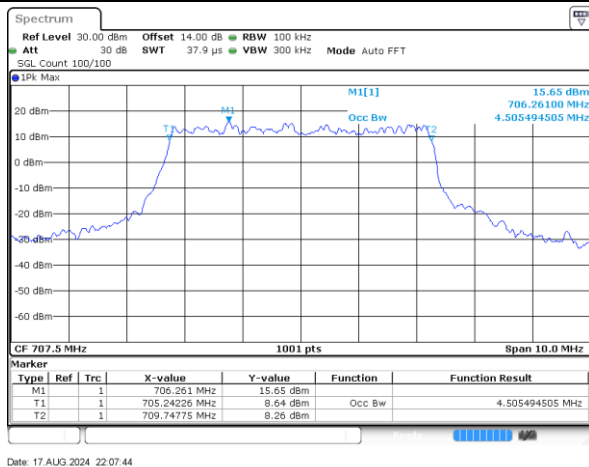


Middle Channel / 5MHz / 16QAM

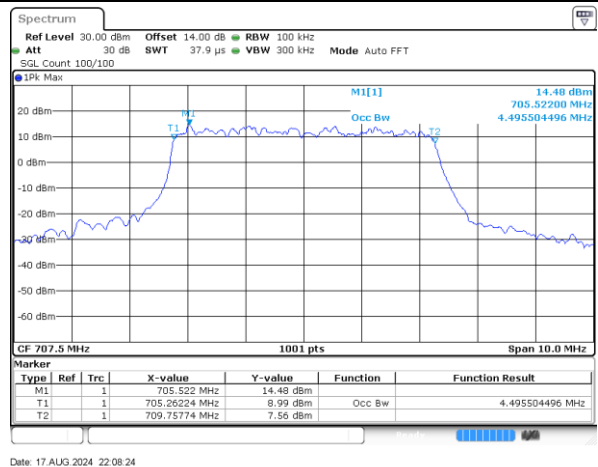




LTE Band 12

Middle Channel / 10MHz / QPSK

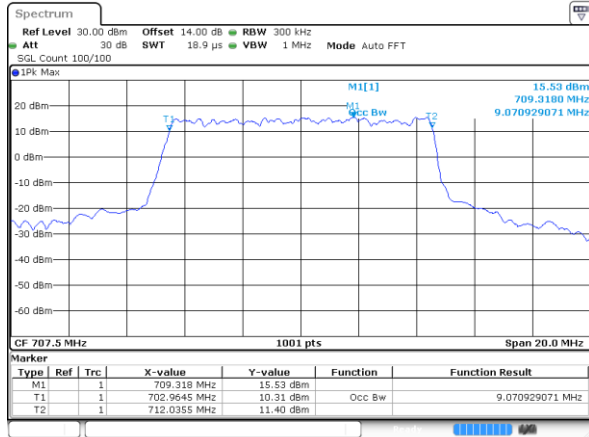

Middle Channel / 10MHz / 16QAM

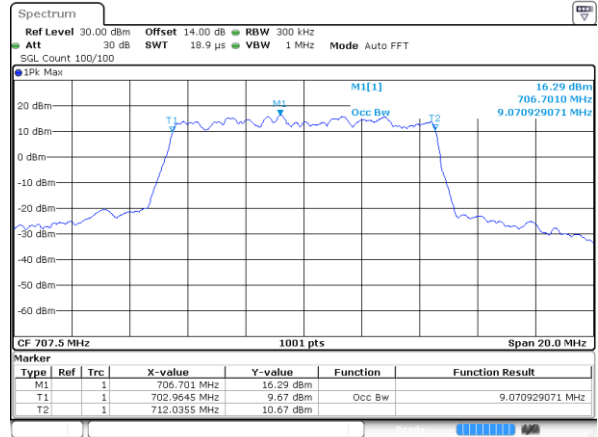





Conducted Band Edge

LTE Band 12 / 1.4MHz / QPSK


Lowest Band Edge / 1RB

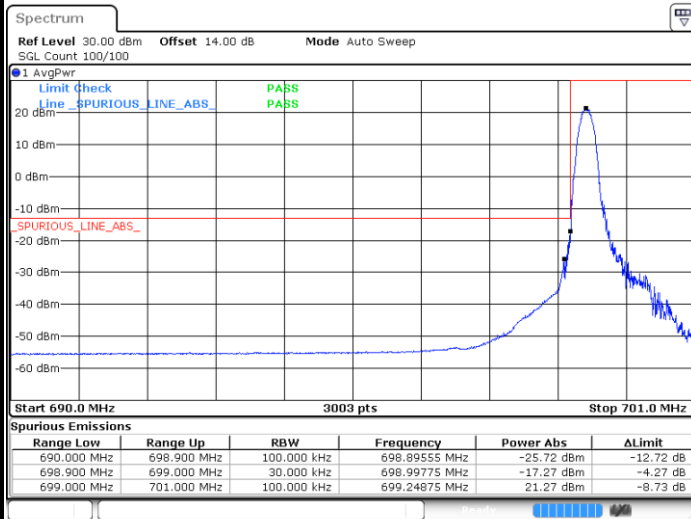


Highest Band Edge / 1RB

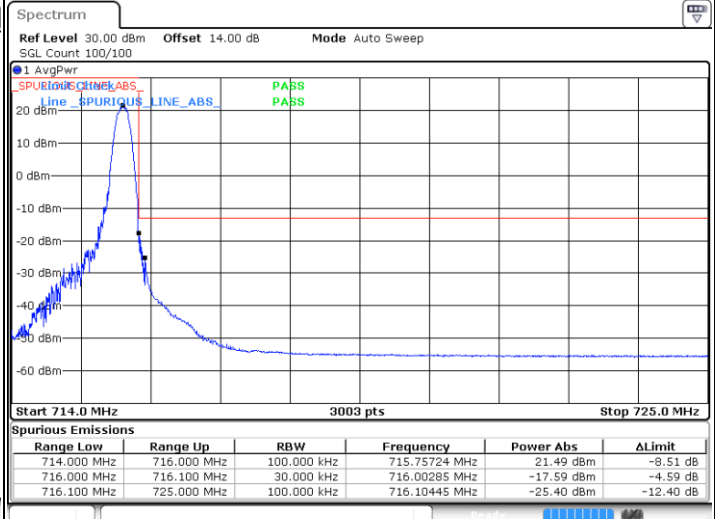

Lowest Band Edge / Full RB

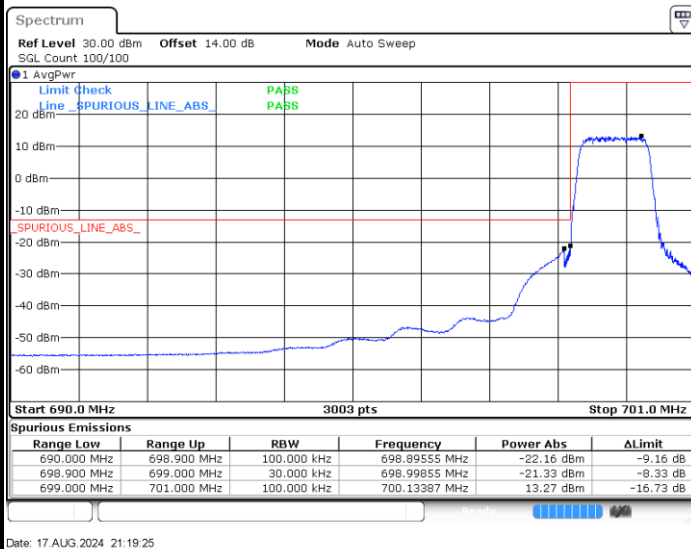


Highest Band Edge / Full RB

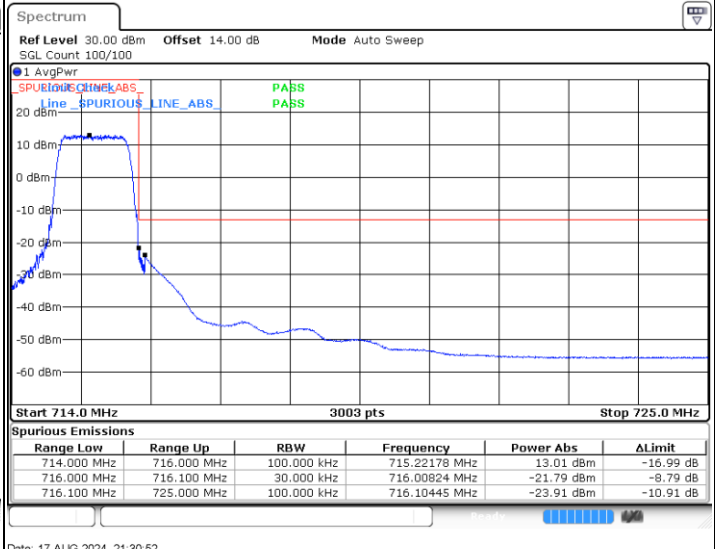




LTE Band 12 / 1.4MHz / 16QAM

Lowest Band Edge / 1 RB

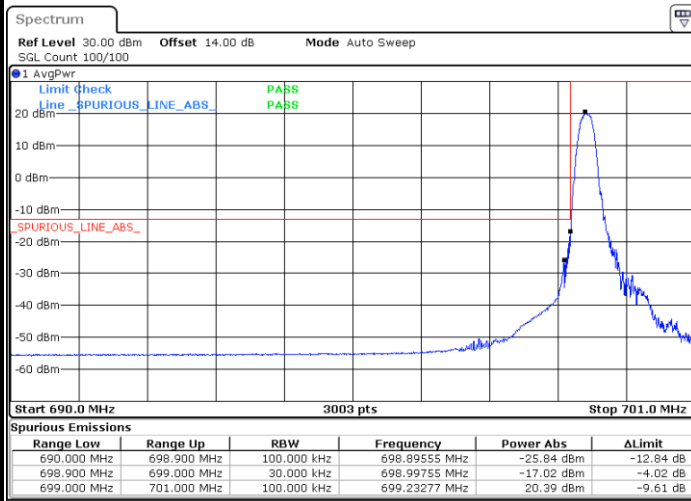


Date: 17 AUG 2024 21:16:53

Highest Band Edge / 1 RB

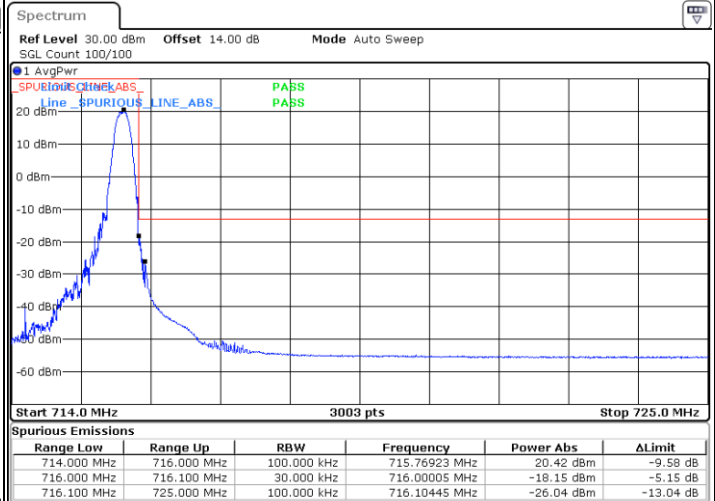


Date: 17 AUG 2024 21:28:19

Lowest Band Edge / Full RB

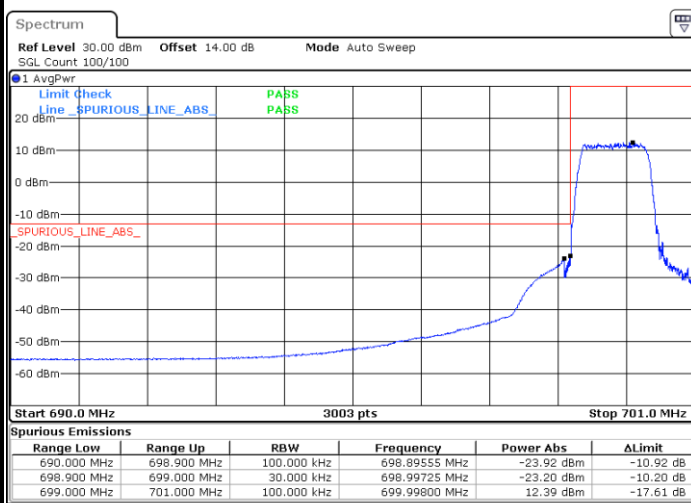

Date: 17 AUG 2024 21:20:41

Highest Band Edge / Full RB

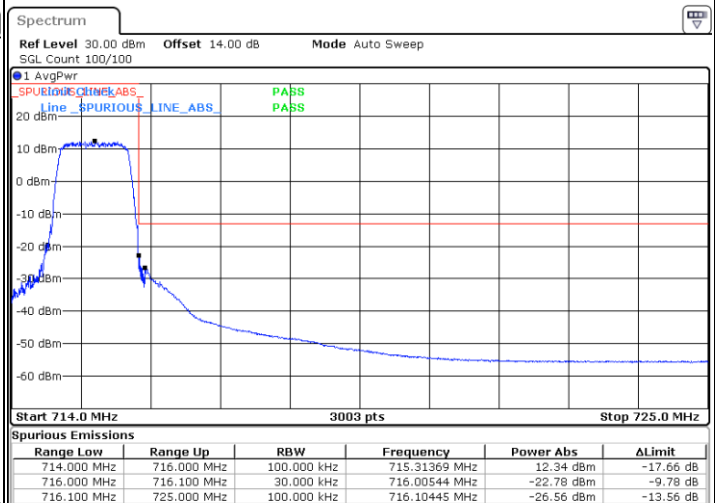


Date: 17 AUG 2024 21:32:08




LTE Band 12 / 1.4MHz / 64QAM

Lowest Band Edge / 1 RB

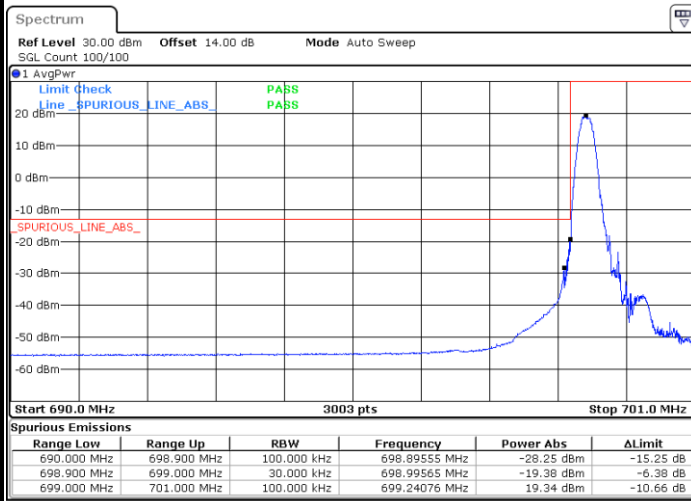


Date: 17 AUG 2024 21:18:09

Highest Band Edge / 1 RB

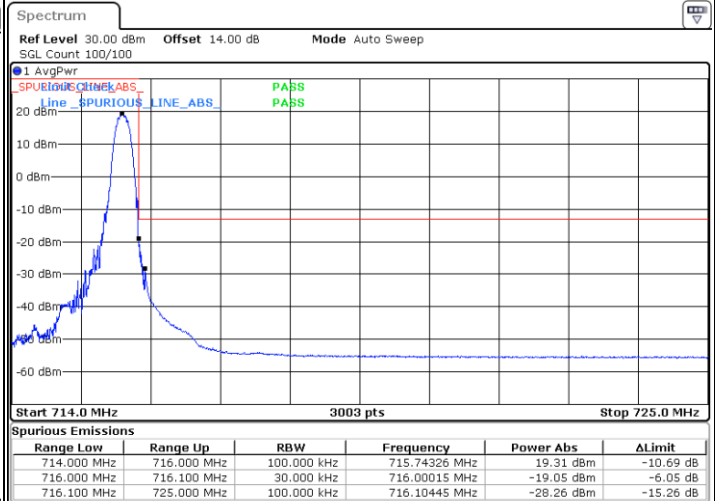


Date: 17 AUG 2024 21:29:35

Lowest Band Edge / Full RB

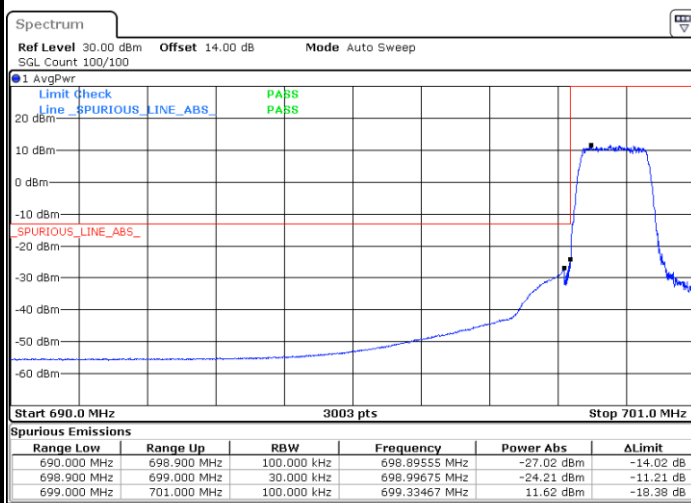

Date: 17 AUG 2024 21:21:57

Highest Band Edge / Full RB

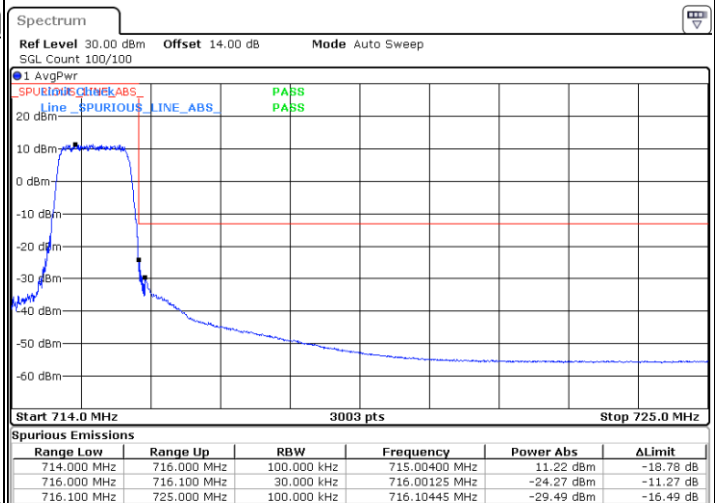


Date: 17 AUG 2024 21:33:24




LTE Band 12 / 3MHz / QPSK

Lowest Band Edge / 1RB

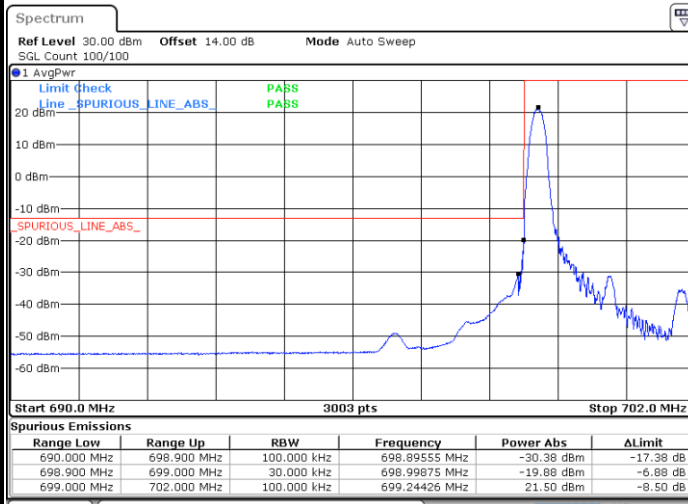


Date: 17 AUG 2024 21:36:39

Highest Band Edge / 1RB

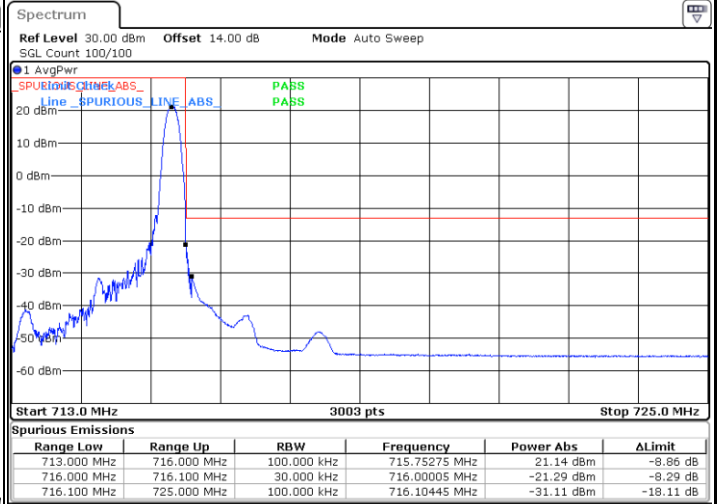


Date: 17 AUG 2024 21:48:07

Lowest Band Edge / Full RB

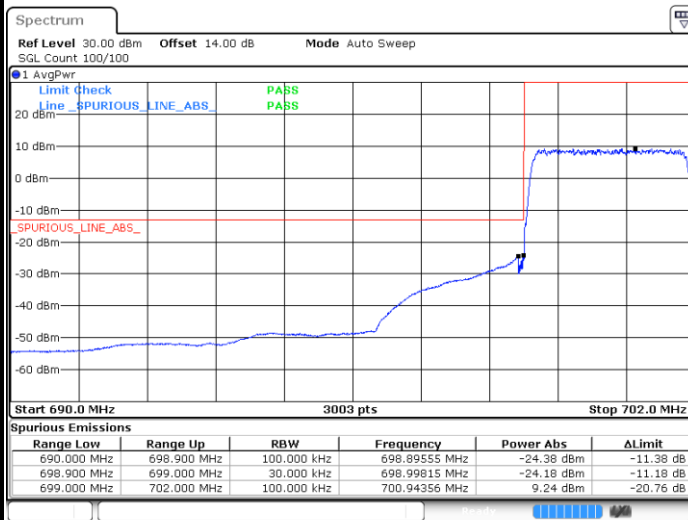

Date: 17 AUG 2024 21:40:28

Highest Band Edge / Full RB

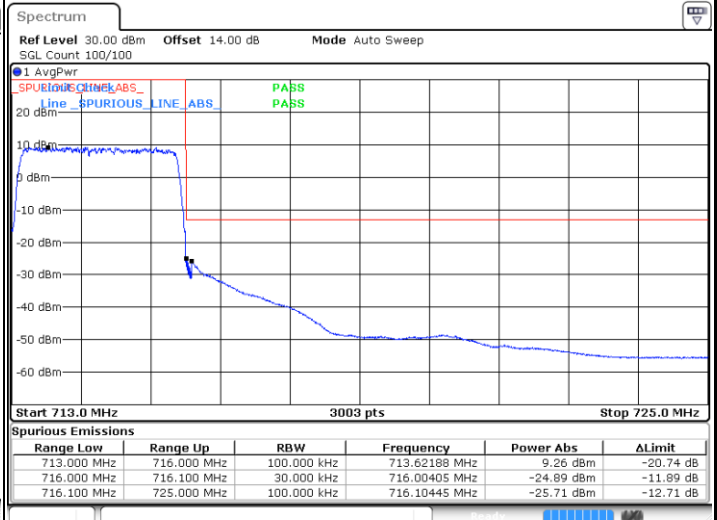


Date: 17 AUG 2024 21:51:55




LTE Band 12 / 3MHz / 16QAM

Lowest Band Edge / 1 RB

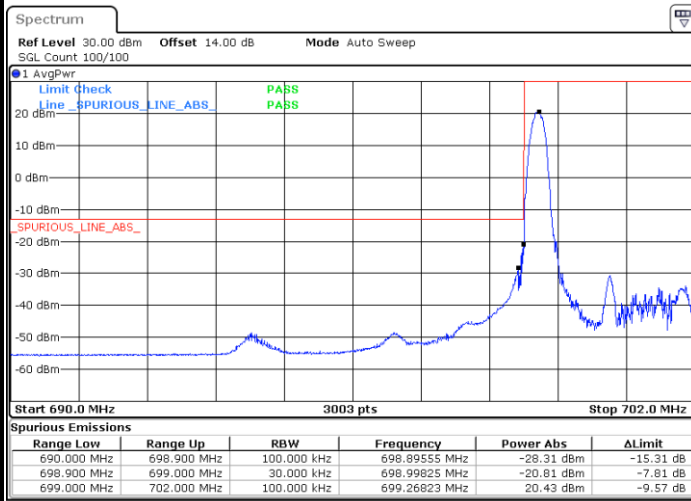


Date: 17 AUG 2024 21:37:55

Highest Band Edge / 1 RB

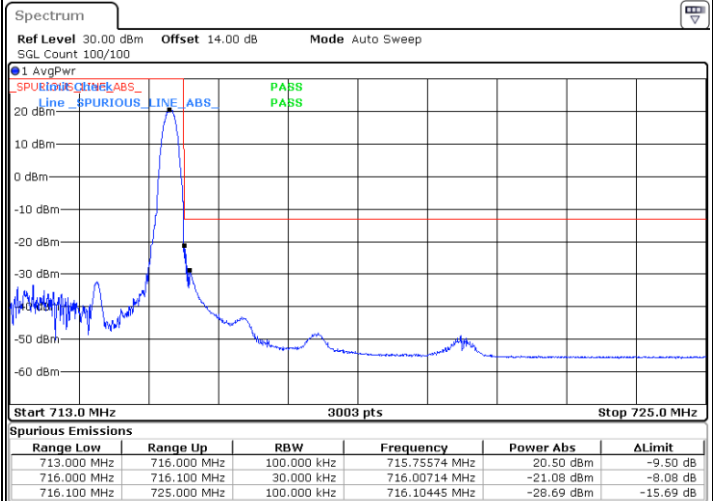


Date: 17 AUG 2024 21:49:23

Lowest Band Edge / Full RB

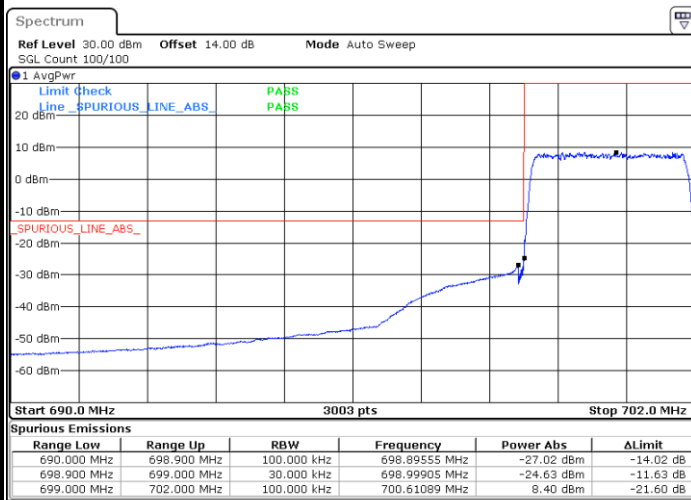

Date: 17 AUG 2024 21:41:44

Highest Band Edge / Full RB

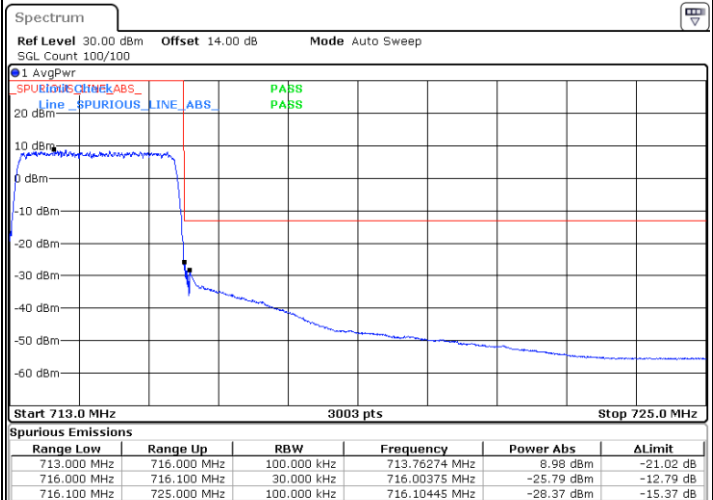


Date: 17 AUG 2024 21:53:11




LTE Band 12 / 3MHz / 64QAM

Lowest Band Edge / 1 RB

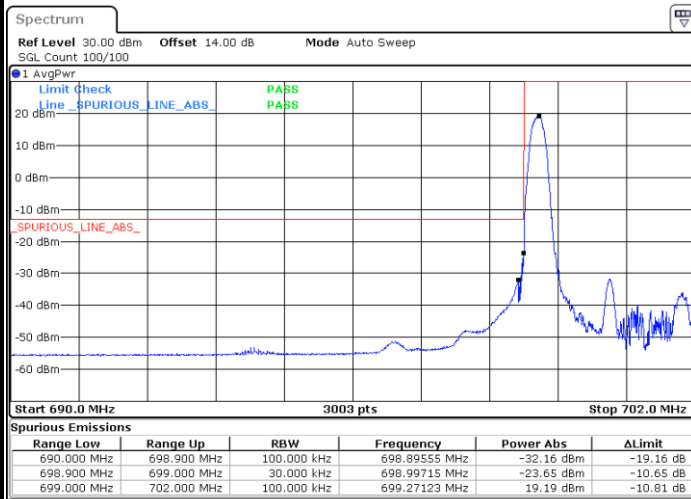


Date: 17 AUG 2024 21:39:11

Highest Band Edge / 1 RB

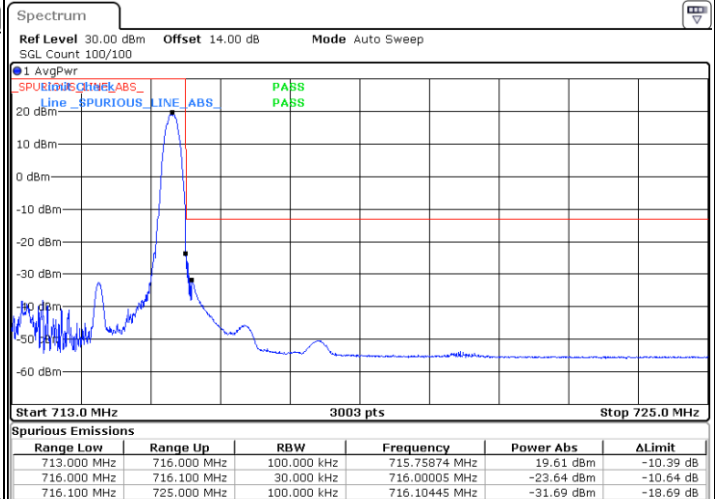


Date: 17 AUG 2024 21:50:39

Lowest Band Edge / Full RB

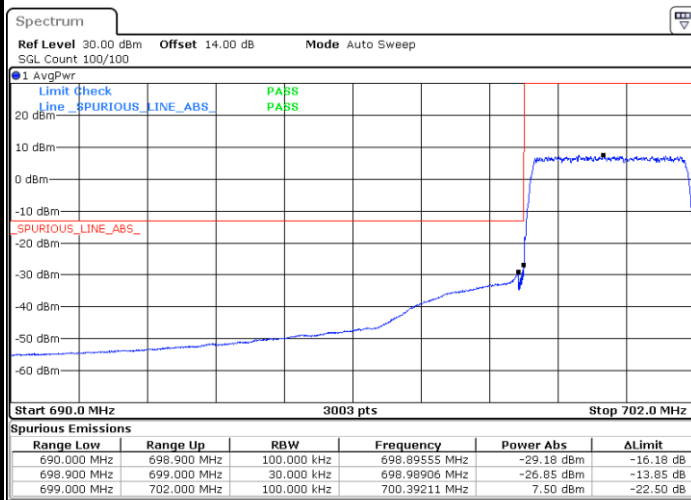

Date: 17 AUG 2024 21:43:00

Highest Band Edge / Full RB

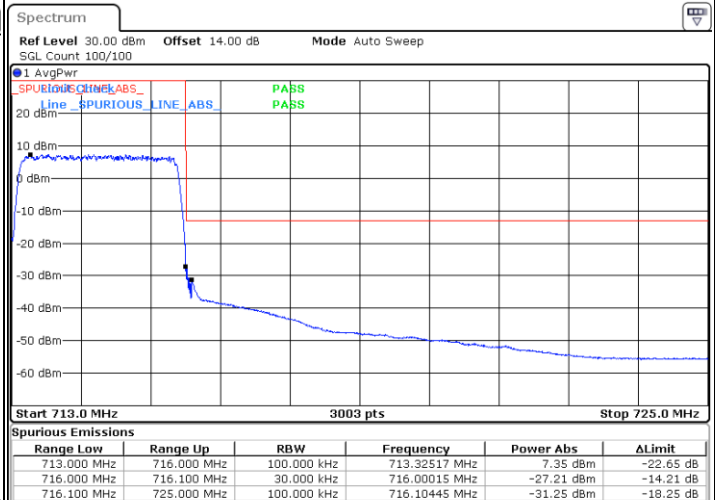


Date: 17 AUG 2024 21:54:27




LTE Band 12 / 5MHz / QPSK


Lowest Band Edge / 1RB

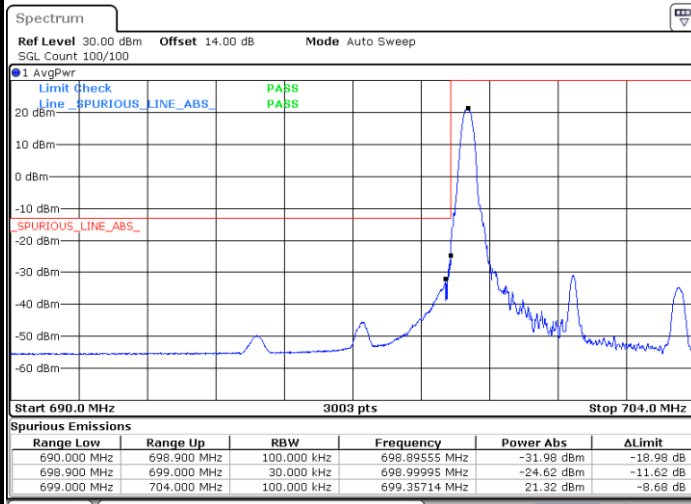


Highest Band Edge / 1RB

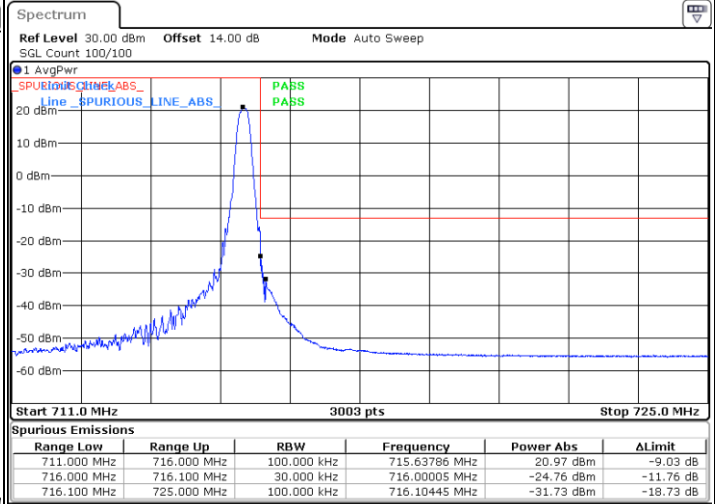

Lowest Band Edge / Full RB

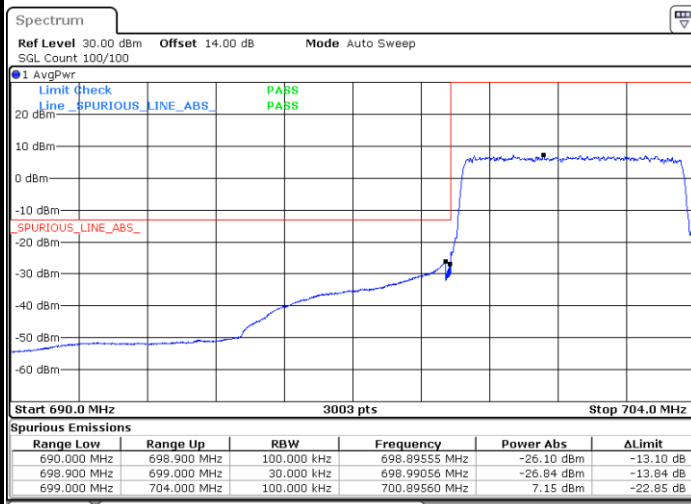


Highest Band Edge / Full RB

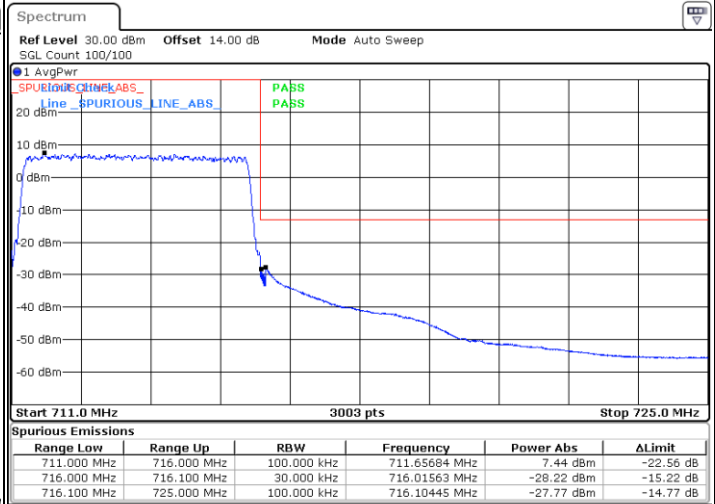




LTE Band 12 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

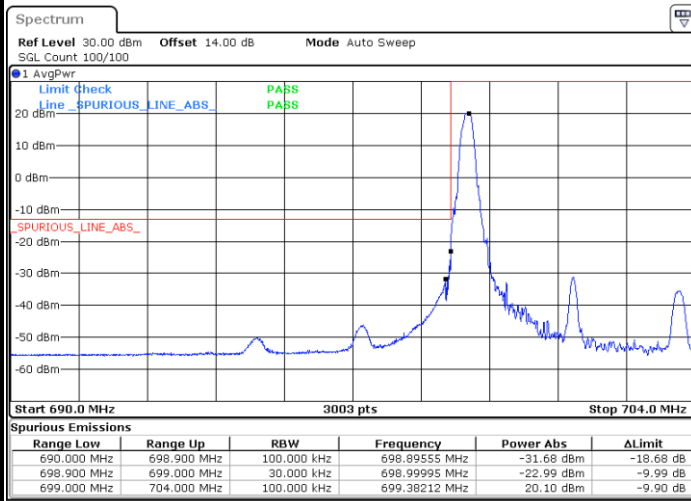


Date: 17 AUG 2024 21:59:42

Highest Band Edge / 1 RB

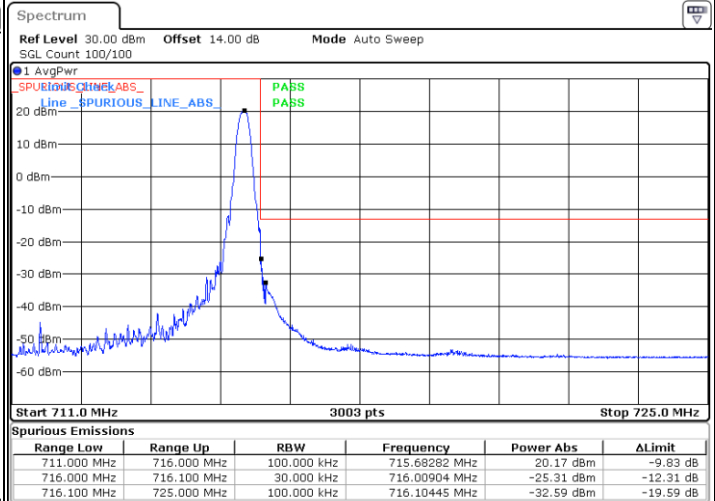


Date: 17 AUG 2024 22:11:09

Lowest Band Edge / Full RB

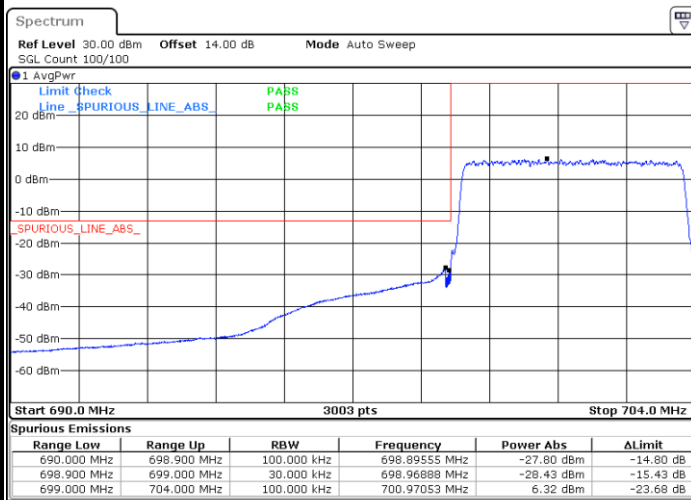

Date: 17 AUG 2024 22:03:30

Highest Band Edge / Full RB

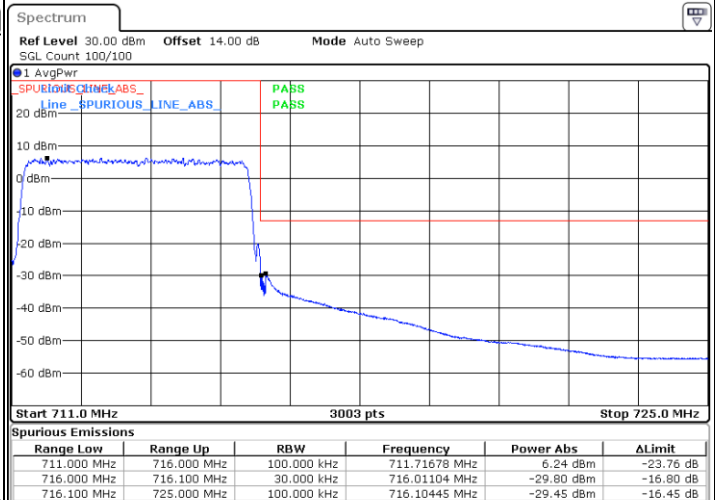


Date: 17 AUG 2024 22:14:57




LTE Band 12 / 5MHz / 64QAM

Lowest Band Edge / 1 RB

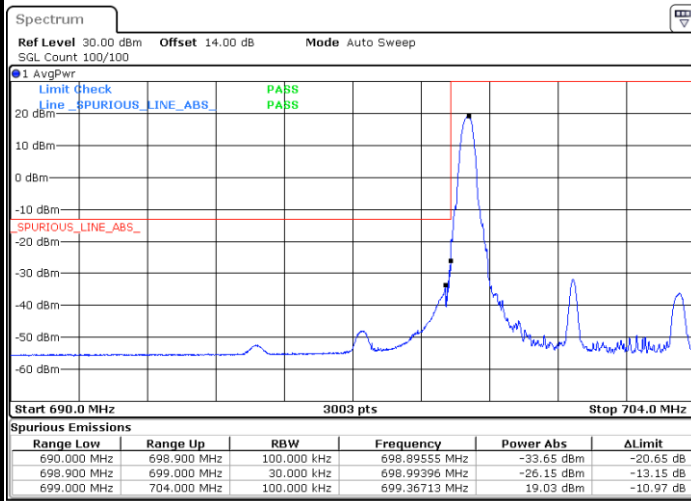


Date: 17 AUG 2024 22:00:58

Highest Band Edge / 1 RB

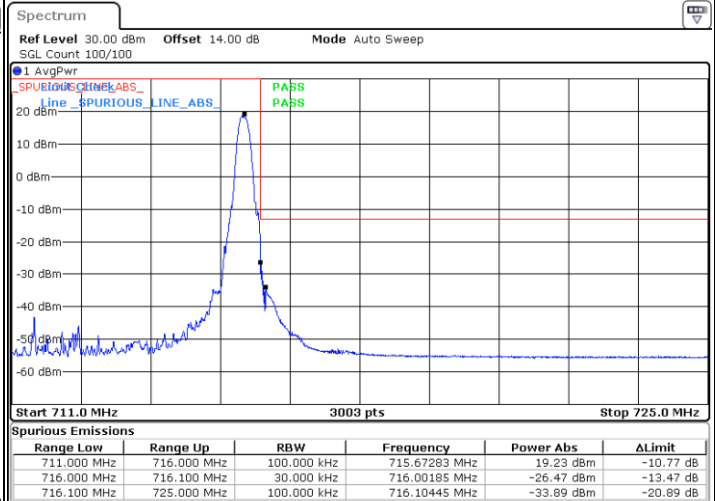


Date: 17 AUG 2024 22:12:25

Lowest Band Edge / Full RB

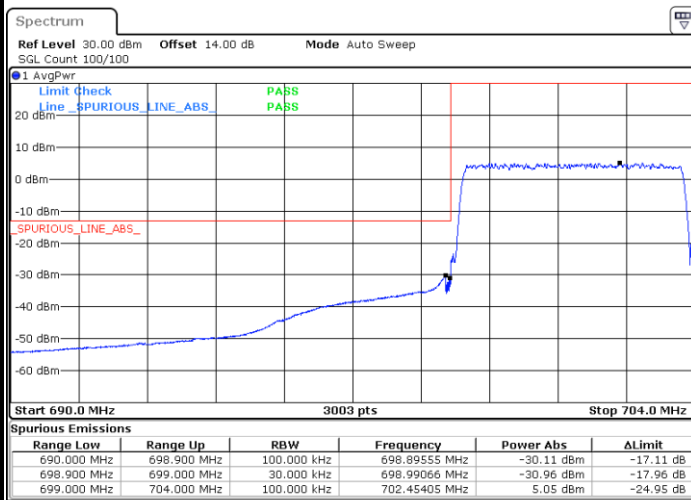

Date: 17 AUG 2024 22:04:46

Highest Band Edge / Full RB

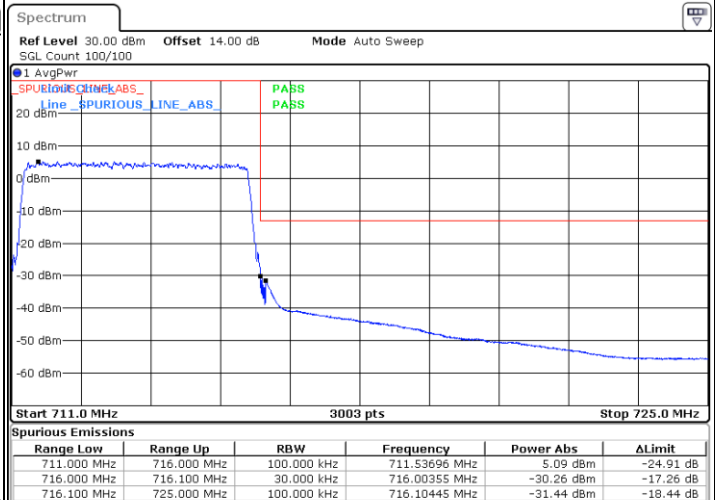

Date: 17 AUG 2024 22:16:13