



FCC PART 15 TEST REPORT No. I22Z60589-IOT06

for

Sonim Technologies, Inc.

Smart phone

**XP9900(P14001), XP9900(P14002), XP9900(P14003), XP9900(P14004),
XP9900(P14005), XP9900(P14006), XP9900(P14010)**

With

FCC ID: WYPP14010

Hardware Version: V1.0

Software Version: 10.0.0-01-12.0.0-10.60.10

Issued Date: 2022-07-21

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22Z60589-IOT06	Rev.0	1st edition	2022-07-21

CONTENTS

CONTENTS	3
1. TEST LATORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION.....	6
2.1 APPLICANT INFORMATION	6
2.2 MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARYEQUIPMENT(AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. GENERAL DESCRIPTION.....	8
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	8
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
6.1. SUMMARY OF TEST RESULTS.....	9
6.2. STATEMENTS.....	9
6.3. TEST CONDITIONS	9
7. TEST EQUIPMENTS UTILIZED	10
8. MEASUREMENT UNCERTAINTY	11
8.1 TRANSMITTER OUTPUT POWER	11
8.2 PEAK POWER SPECTRAL DENSITY	11
8.3 OCCUPIED CHANNEL BANDWIDTH.....	11
8.4 BAND EDGES COMPLIANCE	11
8.5 SPURIOUS EMISSIONS	11
ANNEX A: MEASUREMENT RESULTS.....	12
A.1. MEASUREMENT METHOD	12
A.2. MAXIMUM OUTPUT POWER	13
A.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED).....	18

A.4. OCCUPIED 26DB BANDWIDTH(CONDUCTED).....	20
A.5. BAND EDGES COMPLIANCE	38
A5.1 BAND EDGES - RADIATED	38
A.6. TRANSMITTER SPURIOUS EMISSION	52
A.7. AC POWERLINE CONDUCTED EMISSION (150kHz- 30MHz).....	78
A.8. 99% OCCUPIED BANDWIDTH	84
A.9. POWER CONTROL	89
ANNEX B: EUT PARAMETERS.....	89
ANNEX C: ACCREDITATION CERTIFICATE	90

1. TEST LATORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1: CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 2: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.3. Testing Environment

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

1.4. Project date


Testing Start Date: 2022-05-05

Testing End Date: 2022-07-20


1.5. Signature



Xie Xiuzhen
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Hu Xiaoyu
(Approved this test report)

2. CLIENT INFORMATION

2.1 Applicant Information

Company Name: Sonim Technologies, Inc.
Address: 6500 River Place Blvd., Building 7, Suite 250
City: Austin
Postal Code: TX 78730
Country: USA
Telephone: 1-650-378-8100
Fax: /

2.2 Manufacturer Information

Company Name: Sonim Technologies, Inc.
Address: 6500 River Place Blvd., Building 7, Suite 250
City: Austin
Postal Code: TX 78730
Country: USA
Telephone: 1-650-378-8100
Fax: /

3. EQUIPMENT UNDER TEST (EUT) AND

ANCILLARY EQUIPMENT (AE)

3.1. About EUT

Description	Smart phone
Model name	XP9900(P14001),XP9900(P14002),XP9900(P14003), XP9900(P14004),XP9900(P14005),XP9900(P14006), XP9900(P14010)
FCC ID	WYPP14010
WLAN Frequency Band	ISM Bands: -5150MHz~5250MHz -5250MHz~5350MHz -5470MHz~5725MHz
Type of modulation	OFDM
Antenna	Integral Antenna
Antenna gain	-1.01dBi(Ant8); -0.35dBi(Ant9)
Voltage	3.9V

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT76a	016188000003678	V1.0	10.0.0-01-12.0.0-10.60.10
UT07a	016188000001615	V1.0	10.0.0-01-12.0.0-10.60.10

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger
AE3	USB Cable
AE1	
Model	BAT-05000-01S
Manufacturer	Dongguan Veken Battery Co., Ltd.
AE2	
Model	1-CHUSQ302-097
Manufacturer	HUIZHOU PUAN ELECTRONICS CO.,LTD
AE3	
Model	336278
Manufacturer	SUNTOPS ELECTRONICS CO.,LTD

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Smart phone with integrated antenna and inbuilt battery.

It has Bluetooth (EDR)function.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	P
Peak Power Spectral Density	15.407	/	P
Occupied 26dB Bandwidth	15.403	/	P
Band edge compliance (Radiated)	15.209	/	P
Transmitter spurious emissions (Radiated)	15.407	/	P
AC Powerline Conducted Emission (150kHz- 30MHz)	15.407	/	P
Frequency Stability	15.407	/	P
99% Occupied bandwidth	/	/	P
Transmit Power Control	15.407	/	NA

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

The model XP9900(P14002), XP9900(P14003), XP9900(P14004), XP9900(P14005), XP9900(P14006), XP9900(P14010) is a variant product of XP9900(P14001).For detail differences between two models please refer the Declaration of Changes document.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.9V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2023-05-15
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2023-05-30
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2023-02-21
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2022-09-25
2	Test Receiver	FSV40	101047	Rohde & Schwarz	1 year	2023-06-09
3	BiLog Antenna	VULB9163	01176	Schwarzbeck	1 year	2022-11-25
4	EMI Antenna	3117	00139065	ETS-Lindgren	1 year	2022-09-13
5	EMI Antenna	LB-7180-N F	J203001300 005	A-INFO	1 year	2023-02-23
6	EMI Antenna	LB-180400 -25-C-KF	J211060826	A-INFO	1 year	2023-02-27

8. Measurement Uncertainty

8.1 Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2 Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3 Occupied Channel Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4 Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5 Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)


Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.40
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.32
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

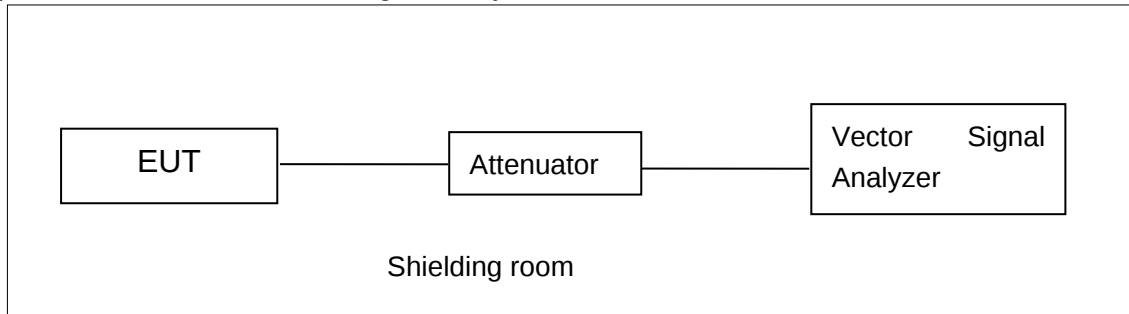


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

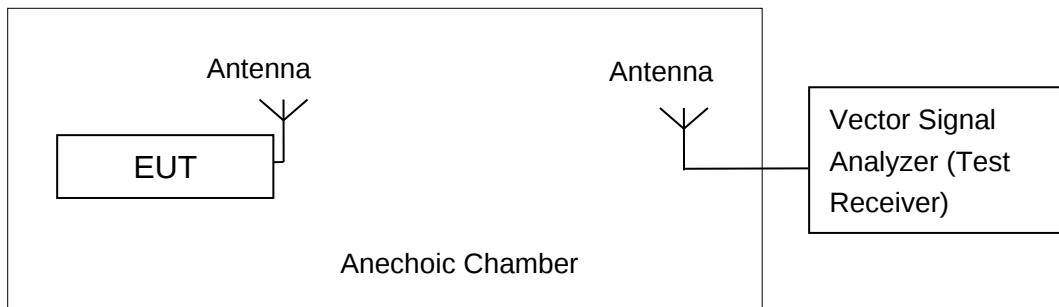

The measurement is made according to KDB 789033

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum output Power

Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurement method SA-2 is made according to KDB 789033

Measurement Results:

SISO

802.11a mode

Channel	Test Result (dBm)	
	MCS0	
	Ant8	Ant9
5180MHz (Ch36)	16.30	16.22
5200MHz (Ch40)	16.00	15.91
5240MHz (Ch48)	15.94	15.70
5260MHz (Ch52)	16.23	15.80
5280MHz (Ch56)	16.66	15.77
5320MHz (Ch64)	16.94	15.51
5500MHz (Ch100)	15.50	15.97
5580MHz (Ch116)	15.73	15.72
5700MHz (Ch140)	16.28	15.29
5720MHz (Ch144)	16.24	15.50

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Channel	Test Result (dBm)	
	MCS0	
	Ant8	Ant9

5180MHz (Ch36)	16.17	16.03
5200MHz (Ch40)	15.89	15.70
5240MHz (Ch48)	15.81	15.50
5260MHz (Ch52)	16.16	15.64
5280MHz (Ch56)	16.54	15.59
5320MHz (Ch64)	16.79	15.38
5500MHz (Ch100)	15.34	15.79
5580MHz (Ch116)	15.59	15.61
5700MHz (Ch140)	16.15	15.10
5720MHz (Ch144)	16.09	15.35

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Channel	Test Result (dBm)	
	MCS0	
	Ant8	Ant9
5180MHz (Ch36)	14.68	14.50
5200MHz (Ch40)	14.40	14.17
5240MHz (Ch48)	14.35	14.06
5260MHz (Ch52)	14.65	14.08
5280MHz (Ch56)	14.94	14.03
5320MHz (Ch64)	15.37	13.87
5500MHz (Ch100)	13.84	14.37
5580MHz (Ch116)	14.14	14.28
5700MHz (Ch140)	14.67	13.64

5720MHz (Ch144)	14.67	13.85
-----------------	-------	-------

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Channel	Test Result (dBm)	
	MCS0	
	Ant8	Ant9
5190MHz (Ch38)	15.38	15.25
5230MHz (Ch46)	15.30	14.92
5270MHz (Ch54)	15.62	15.06
5310MHz (Ch62)	16.09	14.71
5510MHz (Ch102)	14.80	15.07
5550MHz (Ch110)	14.87	15.08
5670MHz (Ch134)	15.70	14.58
5710MHz (Ch142)	15.51	14.62

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Channel	Test Result (dBm)	
	MCS0	
	Ant8	Ant9
5190MHz (Ch38)	13.62	13.73
5230MHz (Ch46)	13.03	13.26
5270MHz (Ch54)	12.83	13.39
5310MHz (Ch62)	13.13	13.36
5510MHz (Ch102)	13.27	13.44

5550MHz (Ch110)	13.03	13.18
5670MHz (Ch134)	13.39	13.16
5710MHz (Ch142)	13.08	13.01

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Channel	Test Result (dBm)	
	MCS0	
	Ant8	Ant9
5210MHz (Ch42)	12.29	12.74
5290MHz (Ch58)	12.10	12.46
5530MHz (Ch106)	12.14	12.54
5610MHz (Ch122)	12.37	12.38
5690MHz (Ch138)	12.27	12.31

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

MIMO

Channel	Test Result (dBm)	
	MCS0	
	802.11n-HT20	802.11ac-HT20
5180MHz (Ch36)	19.13	17.60
5200MHz (Ch40)	18.85	17.27
5240MHz (Ch48)	18.72	17.22
5260MHz (Ch52)	18.91	17.38
5280MHz (Ch56)	19.10	17.52
5320MHz (Ch64)	19.19	17.23
5500MHz (Ch100)	18.61	17.89

5580MHz (Ch116)	18.66	17.24
5700MHz (Ch140)	18.66	17.17
5720MHz (Ch144)	18.76	17.29

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Channel	Test Result (dBm)	
	MCS0	
	802.11n-HT40	802.11ac-HT40
5190MHz (Ch38)	18.33	16.63
5230MHz (Ch46)	18.06	16.13
5270MHz (Ch54)	18.34	16.09
5310MHz (Ch62)	18.51	16.20
5510MHz (Ch102)	17.94	16.39
5550MHz (Ch110)	17.98	16.12
5670MHz (Ch134)	18.20	16.22
5710MHz (Ch142)	18.11	16.20

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Channel	Test Result (dBm)
	MCS0
	802.11ac-HT80
5210MHz (Ch42)	15.53
5290MHz (Ch58)	15.24
5530MHz (Ch106)	15.34
5610MHz (Ch122)	15.25
5690MHz (Ch138)	15.24

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Duty cycles of all mode are meet the 98% requirement.

Note: The following cases are performed with this condition:

- a) 802.11a/n20/n40 mode(Ant8), 802.11ac80 mode(Ant9) are selected as the worst condition (SISO);
- b) 802.11a/n20/n40 mode(Ant8), 802.11ac80 mode(Ant9) are selected as the worst condition (MIMO);

Conclusion: PASS

A.3. Peak Power Spectral Density (conducted)

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11

The output power measurement method Section F is made according to KDB 789033

Measurement Results:

SISO-Ant8

Mode	Frequency	Power Spectral Density (dBm/MHz)	Conclusion
802.11a	5180 MHz	5.74	P
	5200 MHz	5.52	P
	5240 MHz	5.38	P
	5260 MHz	5.68	P
	5280 MHz	6.19	P
	5320 MHz	6.22	P
	5500 MHz	4.92	P
	5580 MHz	5.16	P
	5700 MHz	5.65	P
	5720 MHz	5.82	P
802.11n HT20	5180 MHz	5.33	P
	5200 MHz	4.97	P
	5240 MHz	5.02	P
	5260 MHz	5.29	P
	5280 MHz	5.73	P
	5320 MHz	5.73	P
	5500 MHz	4.50	P
	5580 MHz	4.73	P
	5700 MHz	5.17	P
	5720 MHz	5.37	P

802.11n HT40	5190 MHz	1.47	P
	5230 MHz	1.35	P
	5270 MHz	1.71	P
	5310 MHz	2.11	P
	5510 MHz	0.85	P
	5550 MHz	1.05	P
	5670 MHz	1.79	P
	5710 MHz	1.65	P

SISO-Ant9

Mode	Frequency	Power Spectral Density (dBm/MHz)	Conclusion
802.11ac HT80	5210MHz	-4.99	P
	5290MHz	-5.15	P
	5530MHz	-4.52	P
	5610MHz	-4.58	P
	5690MHz	-4.89	P

MIMO

Mode	Frequency	Power Spectral Density (dBm/MHz)	Conclusion
802.11n HT20	5180 MHz	8.09	P
	5200 MHz	7.91	P
	5240 MHz	7.69	P
	5260 MHz	8.02	P
	5280 MHz	8.37	P
	5320 MHz	8.45	P
	5500 MHz	7.47	P
	5580 MHz	7.63	P
	5700 MHz	7.84	P
	5720 MHz	7.88	P
802.11n HT40	5190 MHz	4.35	P
	5230 MHz	4.08	P
	5270 MHz	4.47	P
	5310 MHz	4.83	P
	5510 MHz	3.86	P
	5550 MHz	4.11	P
	5670 MHz	4.43	P
	5710 MHz	4.20	P
802.11ac HT80	5210MHz	-0.99	P
	5290MHz	-1.23	P
	5530MHz	-1.62	P

	5610MHz	-1.25	P
	5690MHz	-1.92	P

Conclusion: PASS

A.4. Occupied 26dB Bandwidth(conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Frequency	Occupied 26dB Bandwidth (MHz)		conclusion
802.11a	5180 MHz	Fig.1	23.40	P
	5200 MHz	Fig.2	23.40	P
	5240 MHz	Fig.3	23.35	P
	5260 MHz	Fig.4	24.30	P
	5280 MHz	Fig.5	23.45	P
	5320 MHz	Fig.6	23.45	P
	5500 MHz	Fig.7	24.00	P
	5580 MHz	Fig.8	24.45	P
	5700 MHz	Fig.9	24.75	P
	5720 MHz	Fig.10	23.90	P
802.11n HT20	5180 MHz	Fig.11	24.55	P
	5200 MHz	Fig.12	24.30	P
	5240 MHz	Fig.13	24.55	P
	5260 MHz	Fig.14	24.60	P
	5280 MHz	Fig.15	25.60	P
	5320 MHz	Fig.16	24.65	P
	5500 MHz	Fig.17	24.70	P
	5580 MHz	Fig.18	24.65	P
	5700 MHz	Fig.19	24.80	P
	5720 MHz	Fig.20	24.55	P
802.11n HT40	5190 MHz	Fig.21	42.00	P
	5230 MHz	Fig.22	41.76	P
	5270 MHz	Fig.23	41.60	P
	5310 MHz	Fig.24	41.92	P
	5510 MHz	Fig.25	41.60	P

	5550 MHz	Fig.26	42.40	P
	5670 MHz	Fig.27	41.76	P
	5710 MHz	Fig.28	42.00	P

SISO-Ant9

802.11ac HT80	5210MHz	Fig.29	84.00	P
	5290MHz	Fig.30	84.16	P
	5530MHz	Fig.31	83.84	P
	5610MHz	Fig.32	83.84	P
	5690MHz	Fig.33	84.00	P

Conclusion: PASS

Test graphs as below:

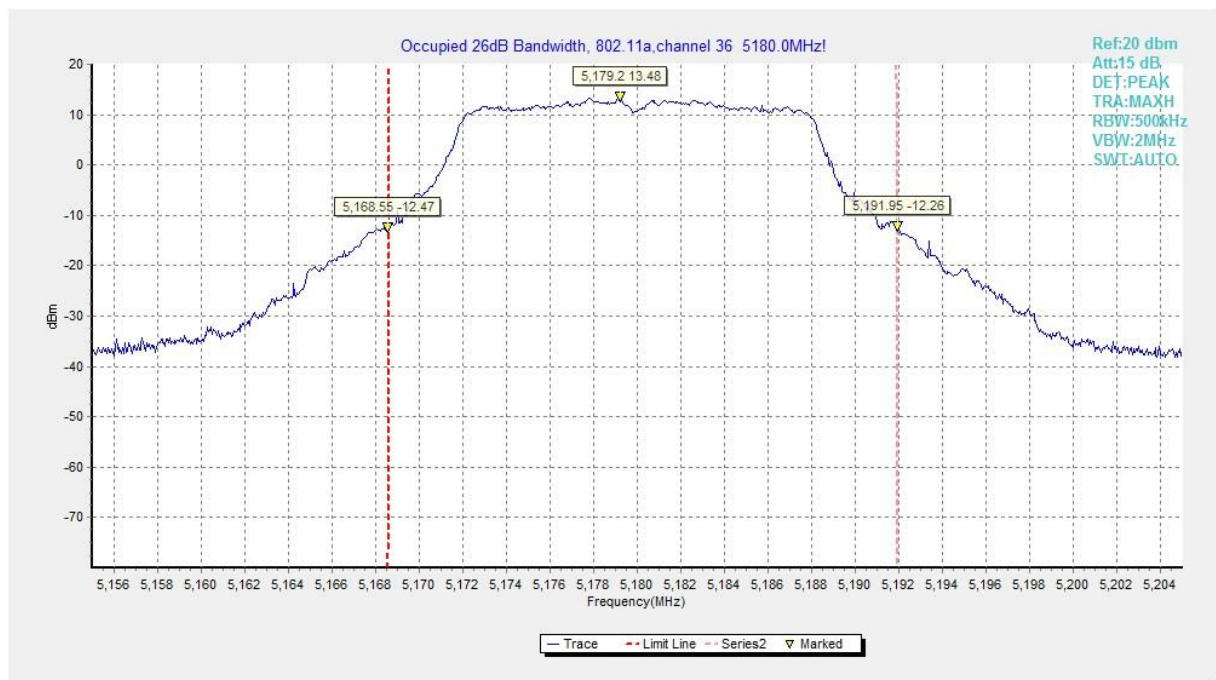


Fig.1 Occupied 26dB Bandwidth (802.11a, 5180MHz)

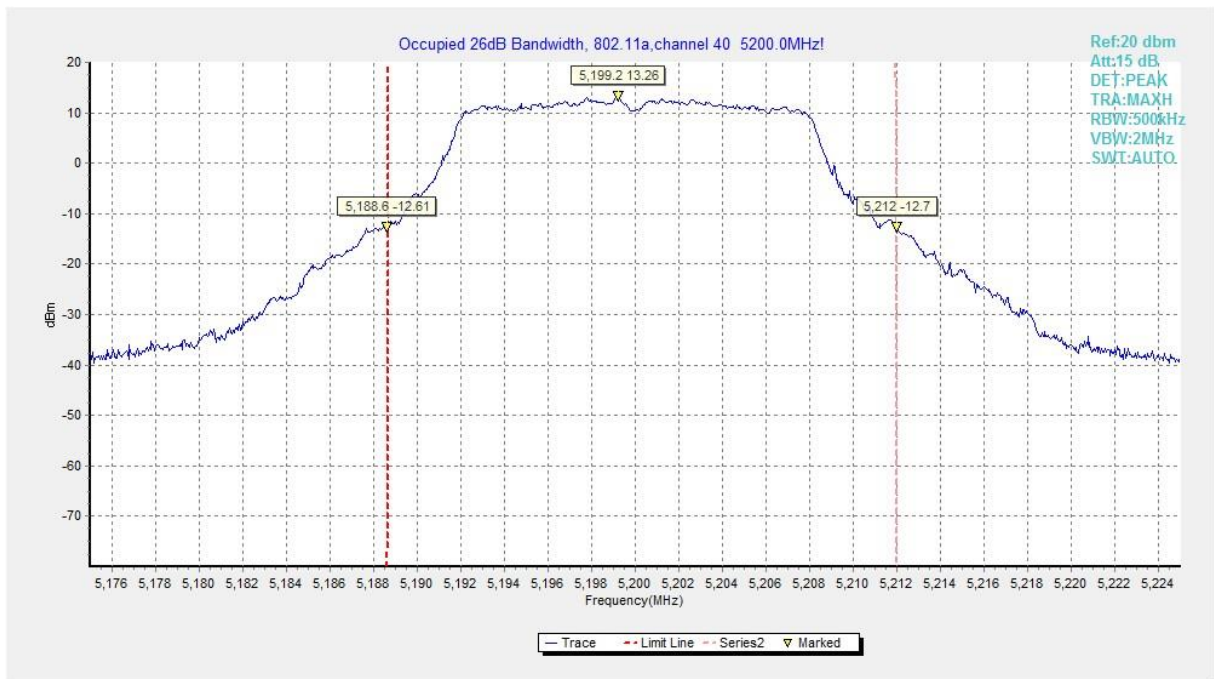


Fig.2 Occupied 26dB Bandwidth (802.11a, 5200MHz)

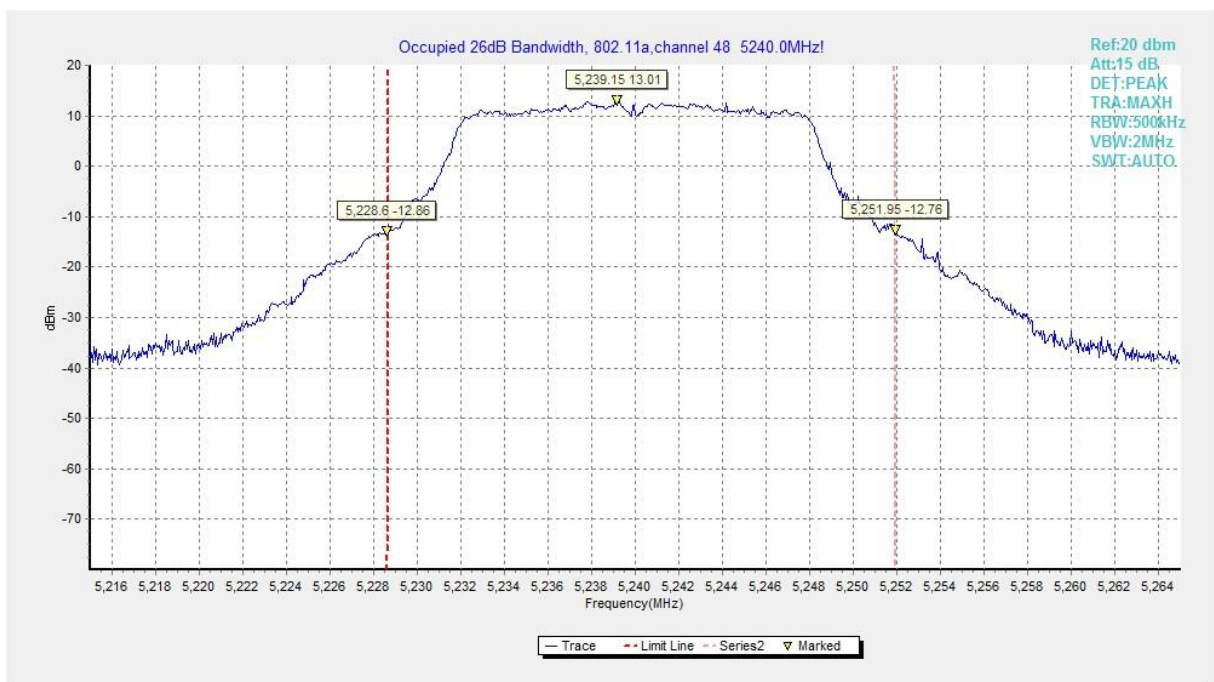


Fig.3 Occupied 26dB Bandwidth (802.11a, 5240MHz)

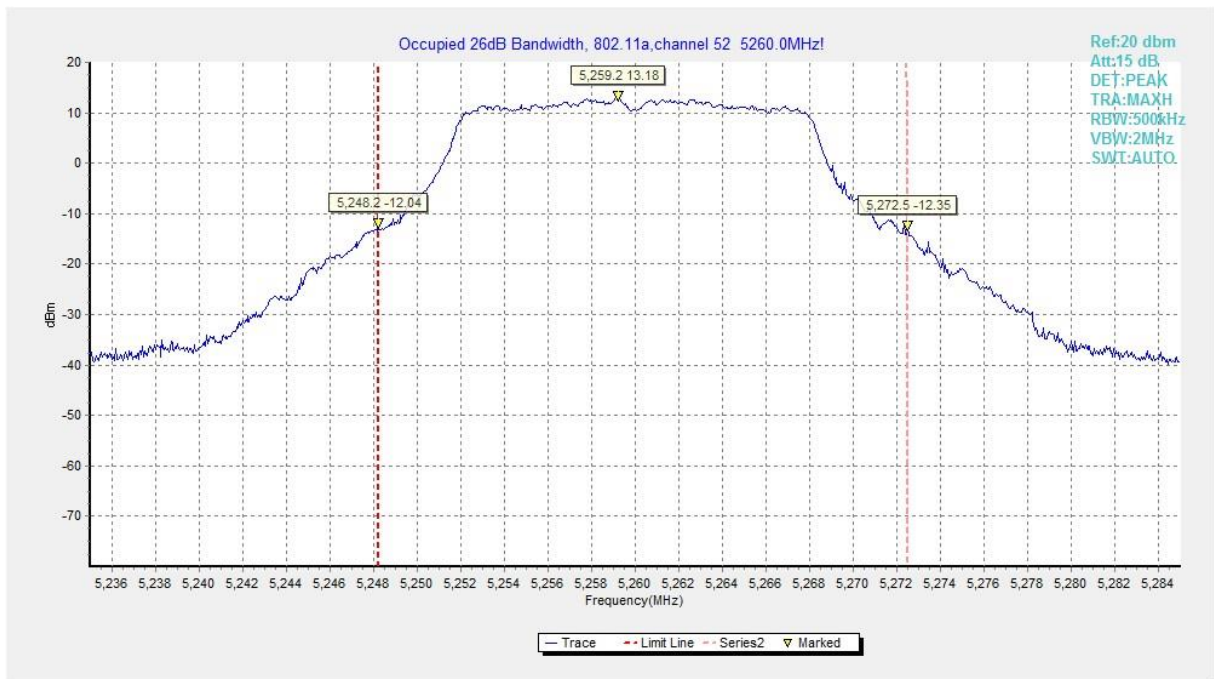


Fig.4 Occupied 26dB Bandwidth (802.11a, 5260MHz)

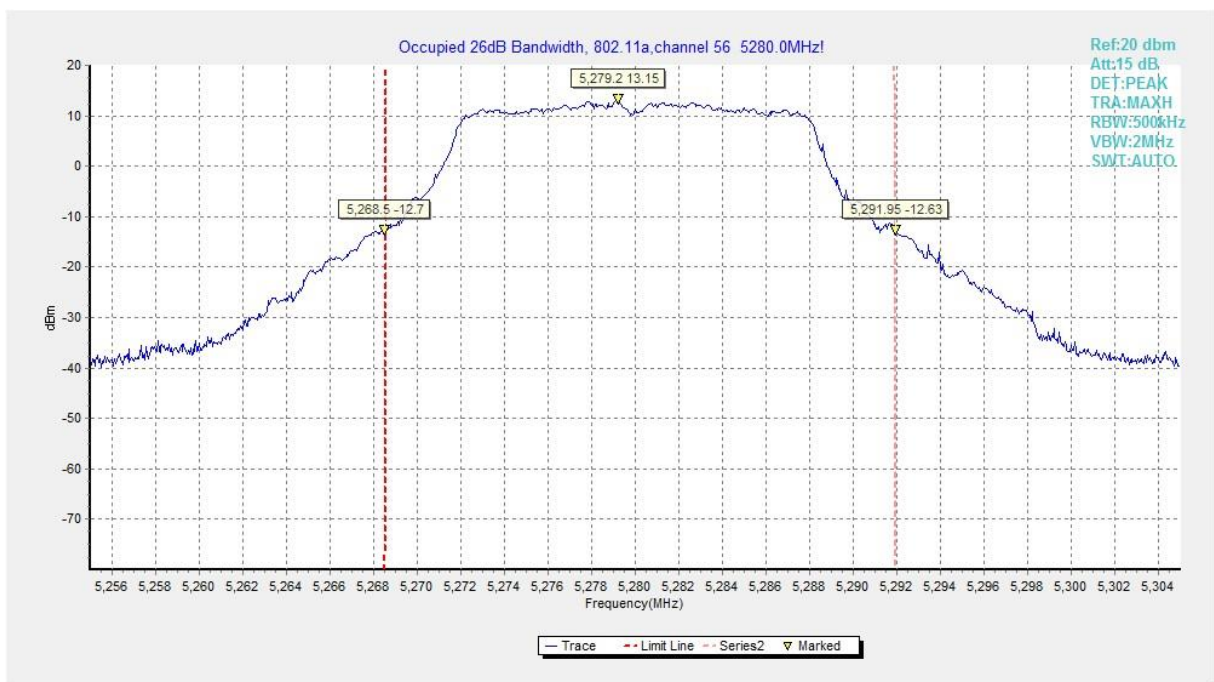


Fig.5 Occupied 26dB Bandwidth (802.11a, 5280MHz)

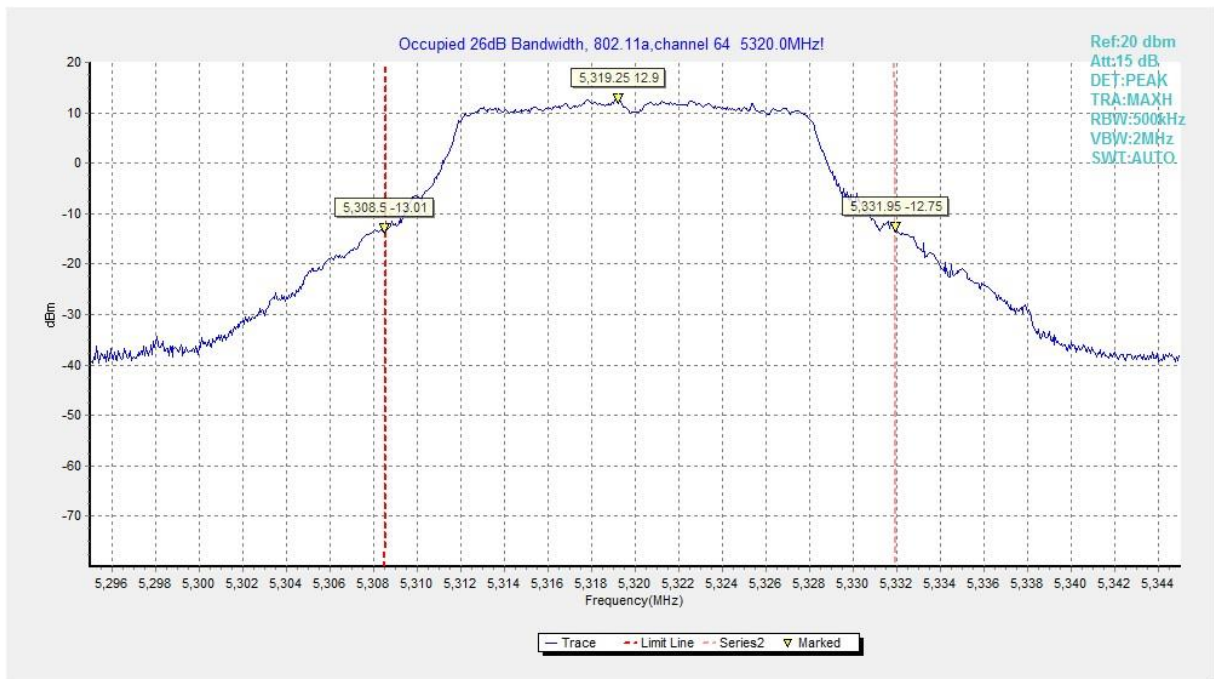


Fig.6 Occupied 26dB Bandwidth (802.11a, 5320MHz)

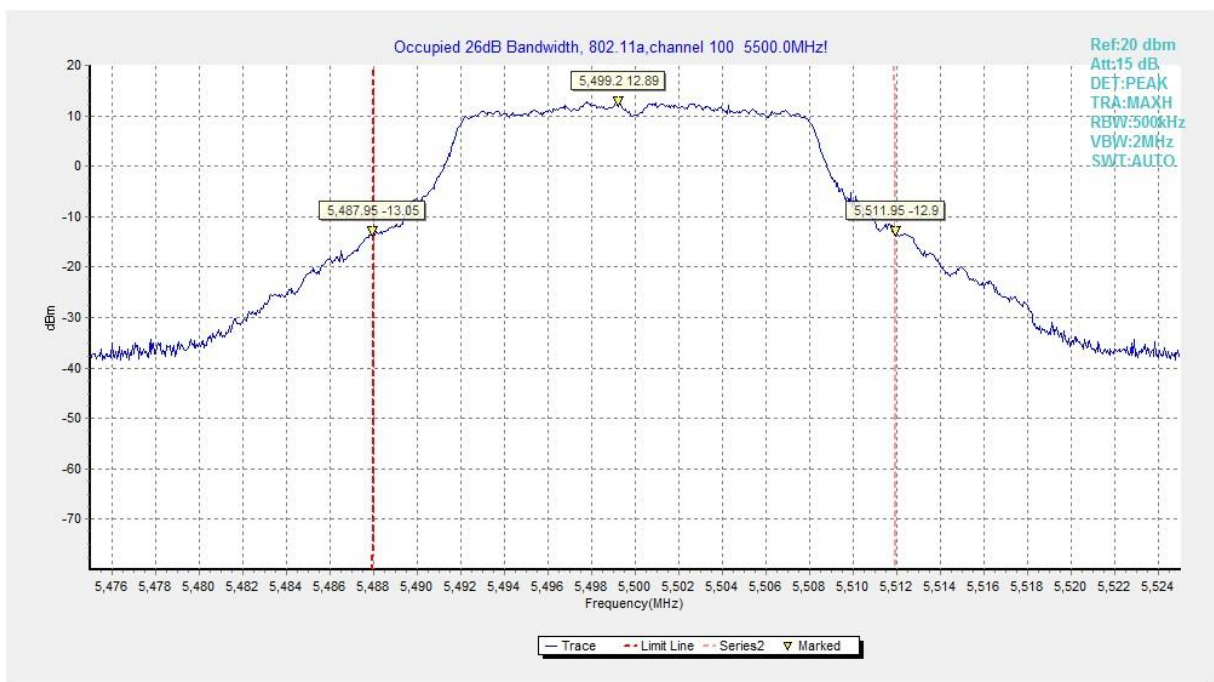


Fig.7 Occupied 26dB Bandwidth (802.11a, 5500MHz)

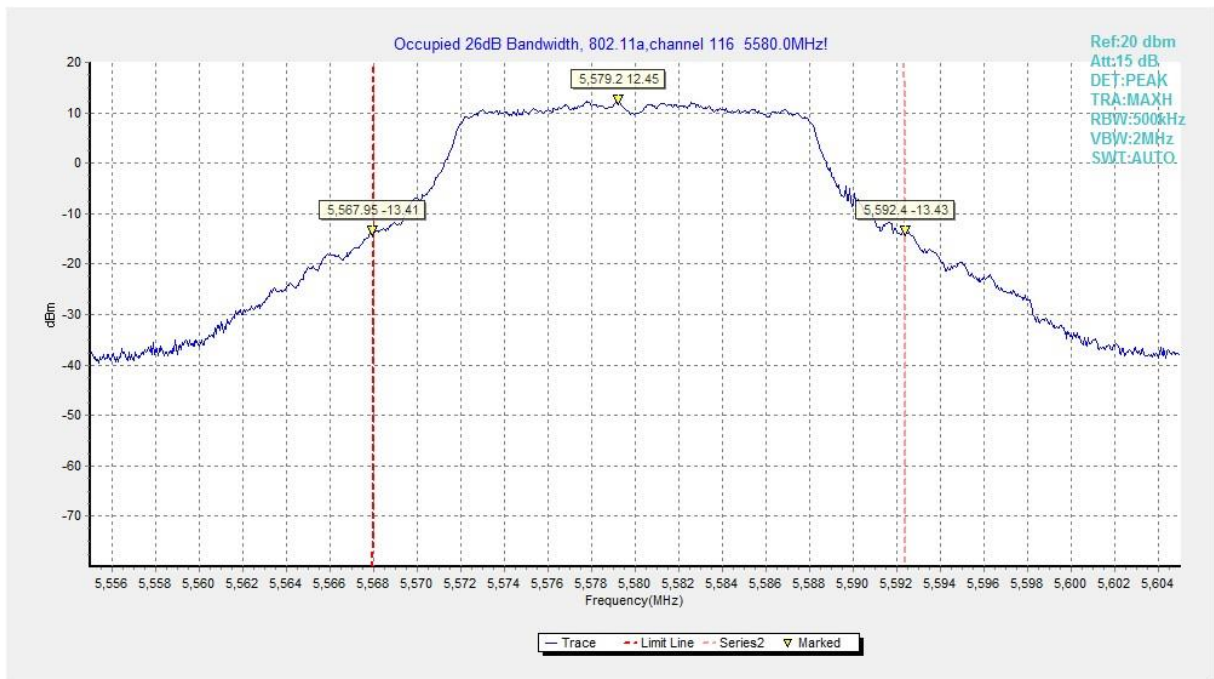


Fig.8 Occupied 26dB Bandwidth (802.11a, 5580MHz)

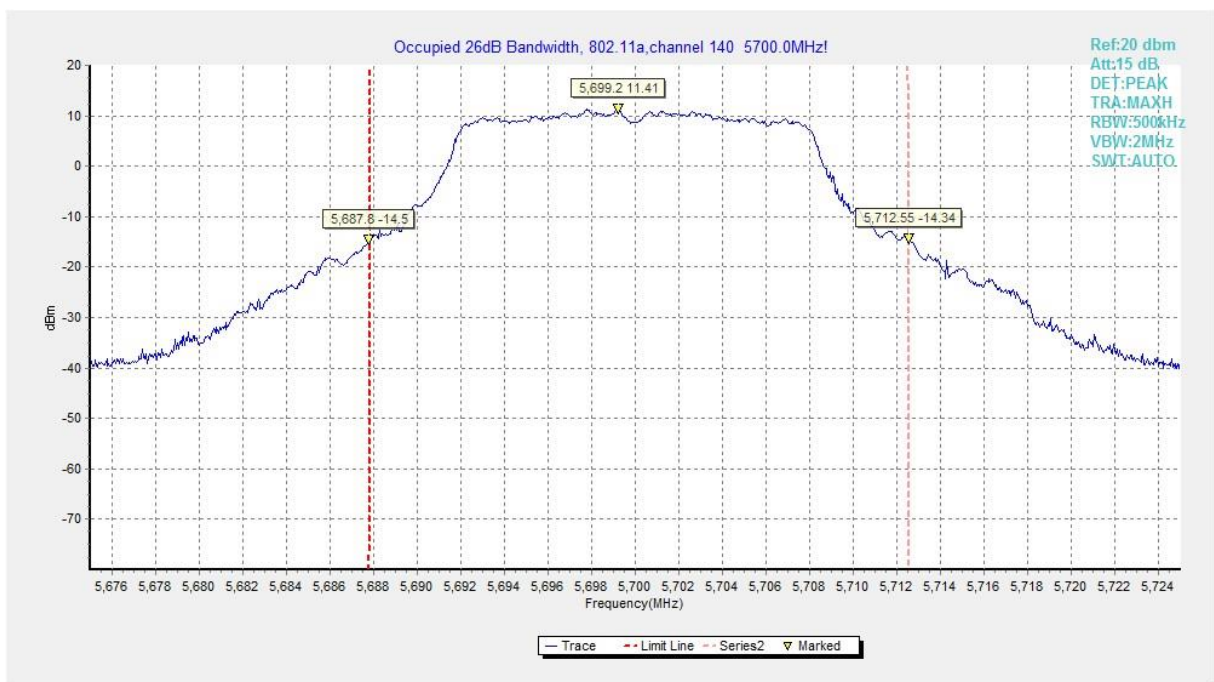


Fig.9 Occupied 26dB Bandwidth (802.11a, 5700MHz)

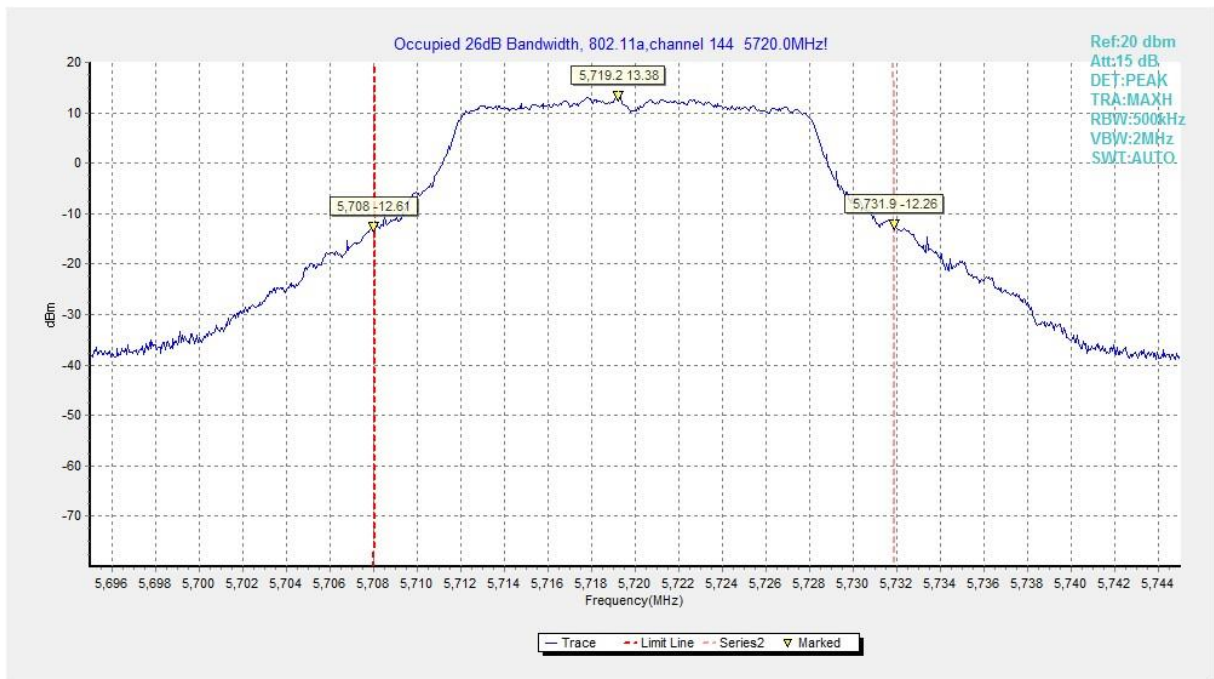


Fig.10 Occupied 26dB Bandwidth (802.11a, 5720MHz)

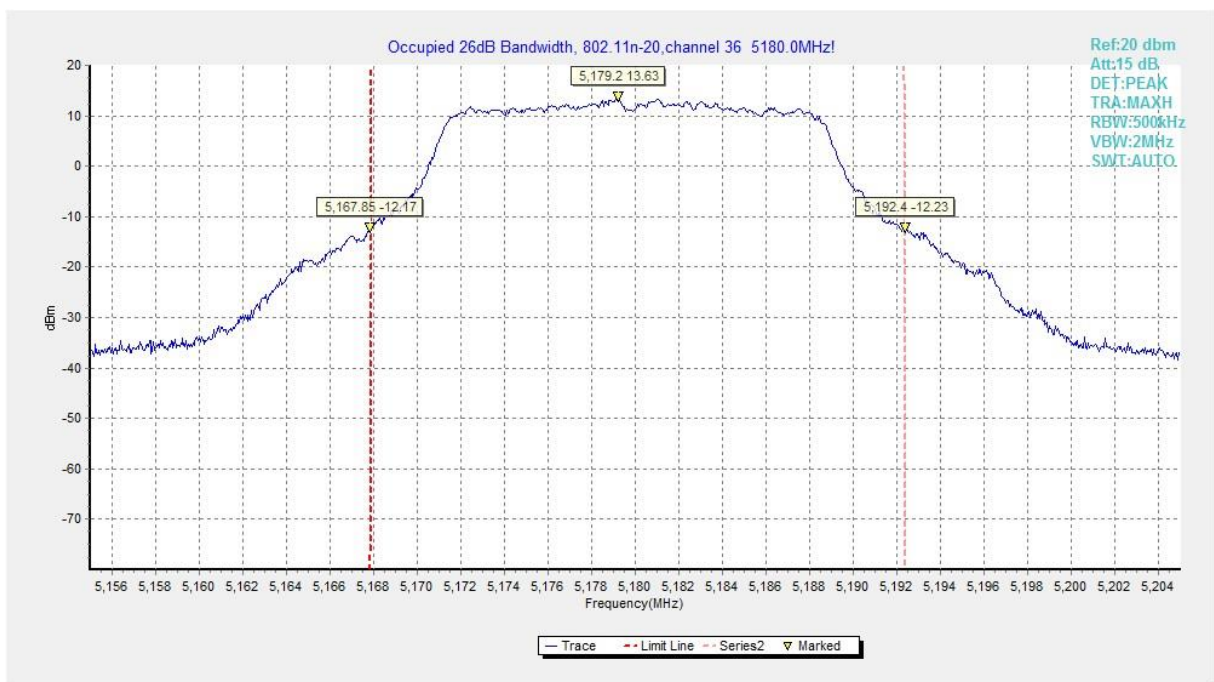


Fig.11 Occupied 26dB Bandwidth (802.11n-HT20, 5180MHz)

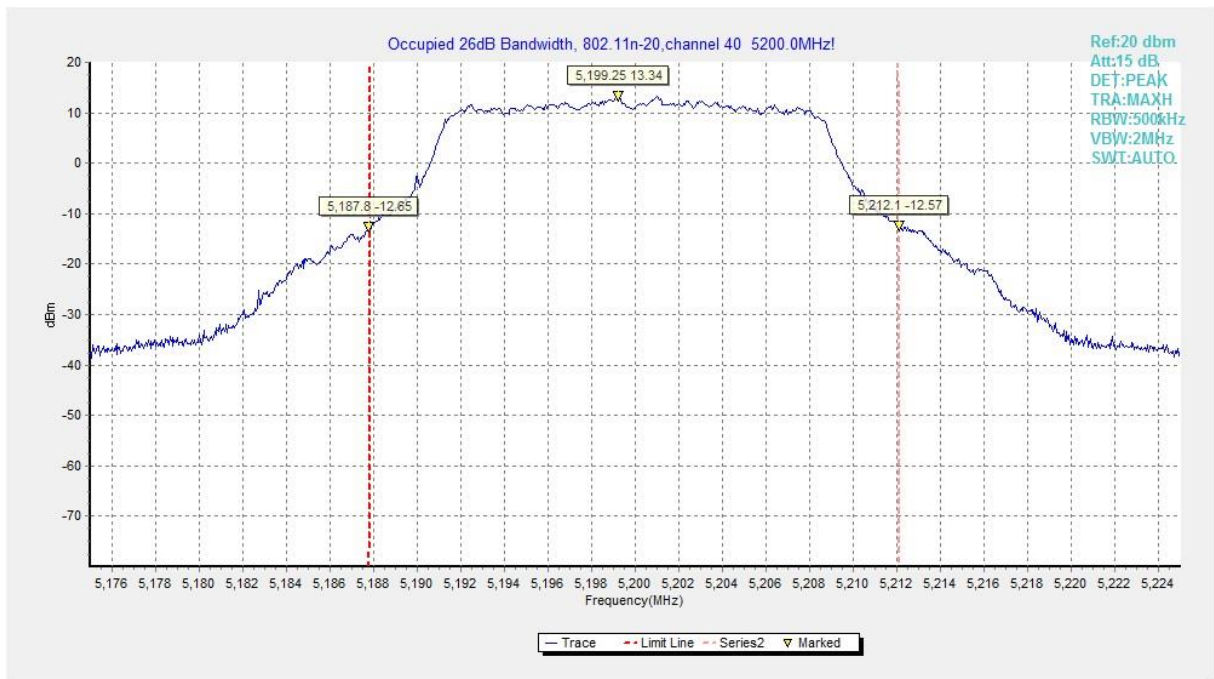


Fig.12 Occupied 26dB Bandwidth (802.11n-HT20, 5200MHz)

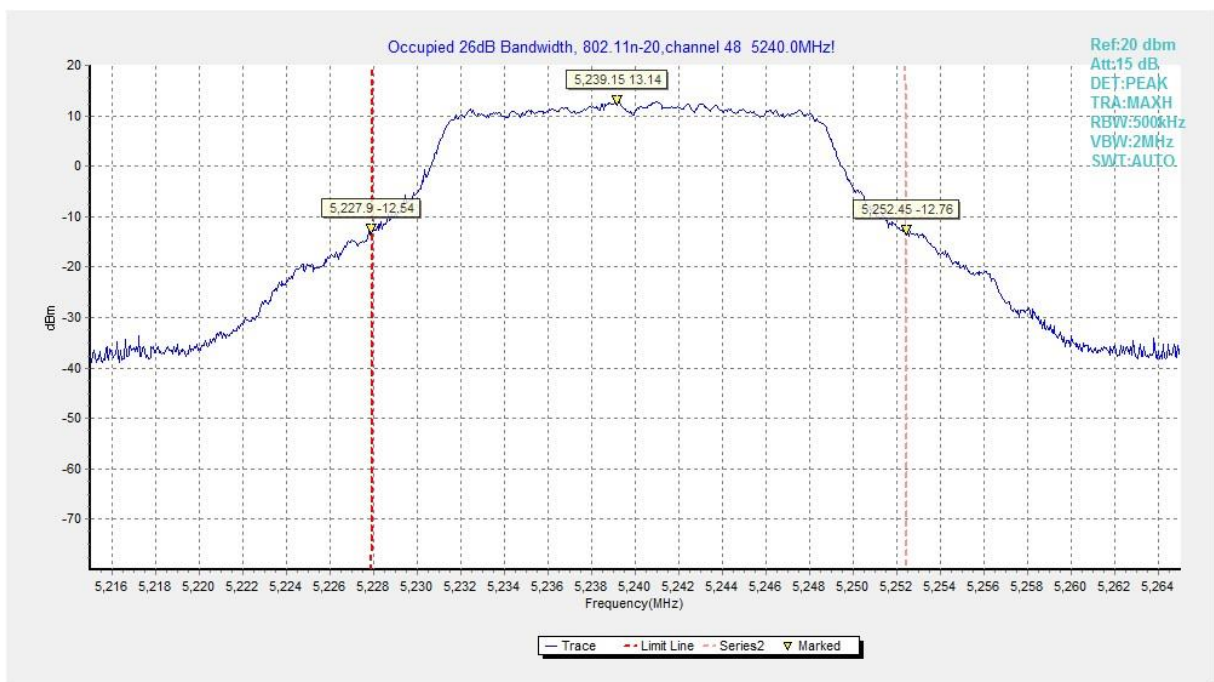


Fig.13 Occupied 26dB Bandwidth (802.11n-HT20, 5240MHz)

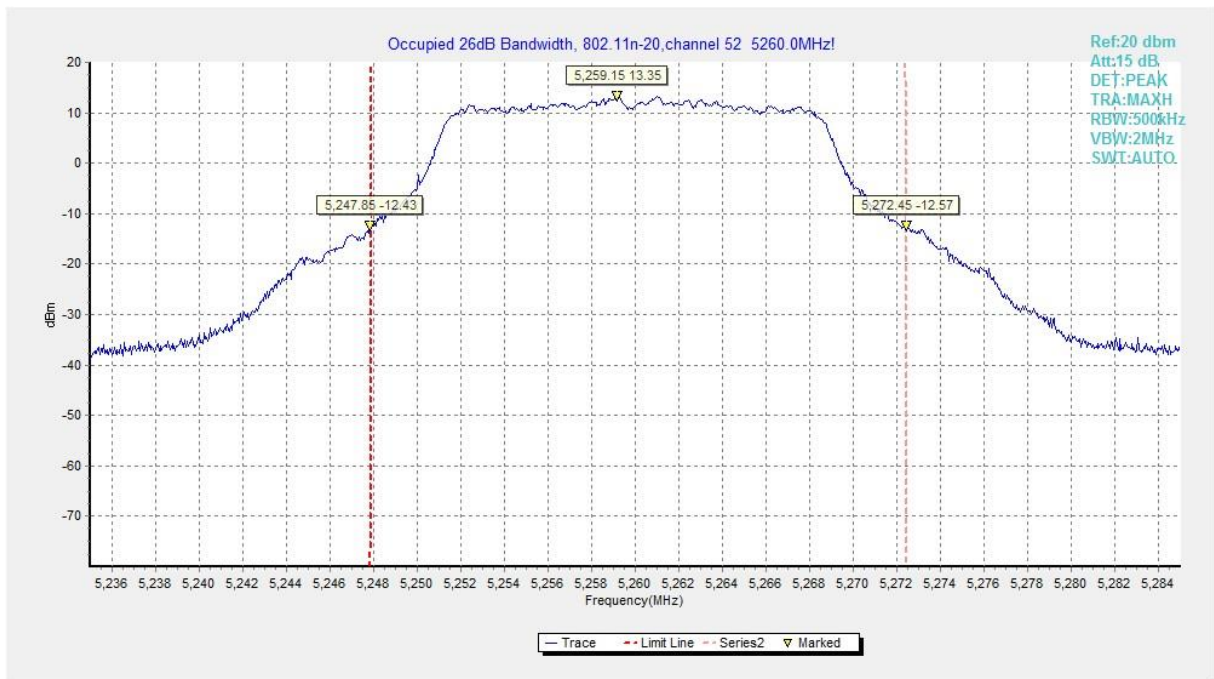


Fig.14 Occupied 26dB Bandwidth (802.11n-HT20, 5260MHz)

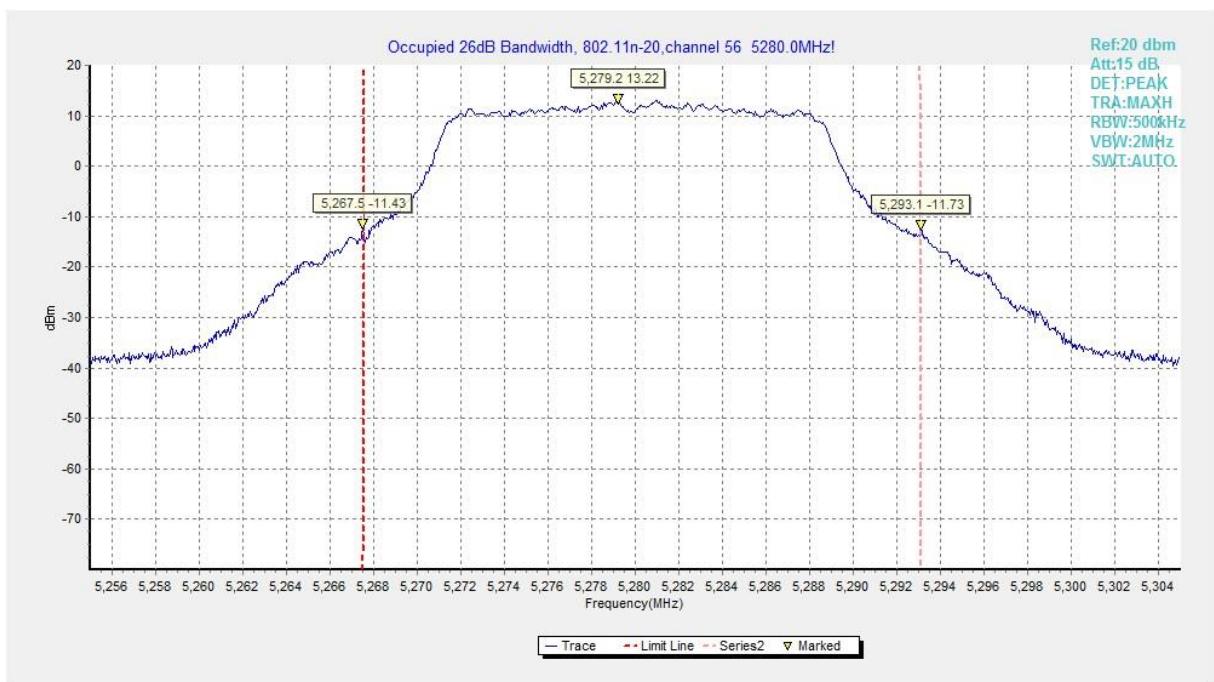


Fig.15 Occupied 26dB Bandwidth (802.11n-HT20, 5280MHz)

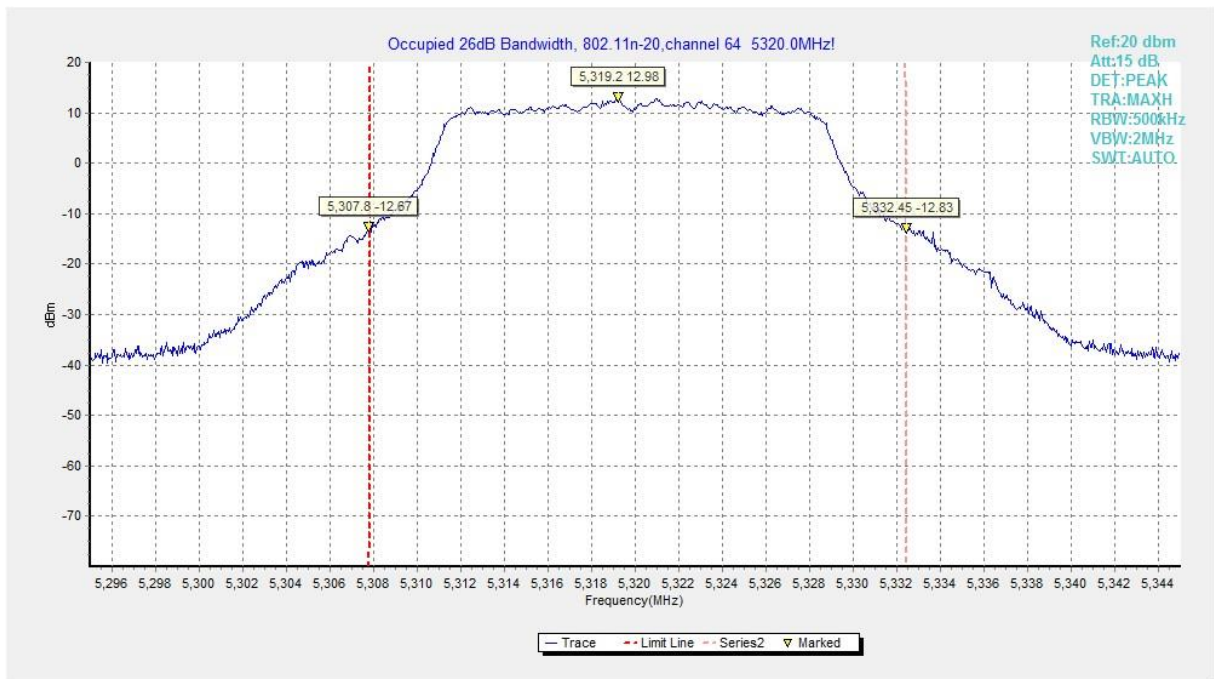


Fig.16 Occupied 26dB Bandwidth (802.11n-HT20, 5320MHz)

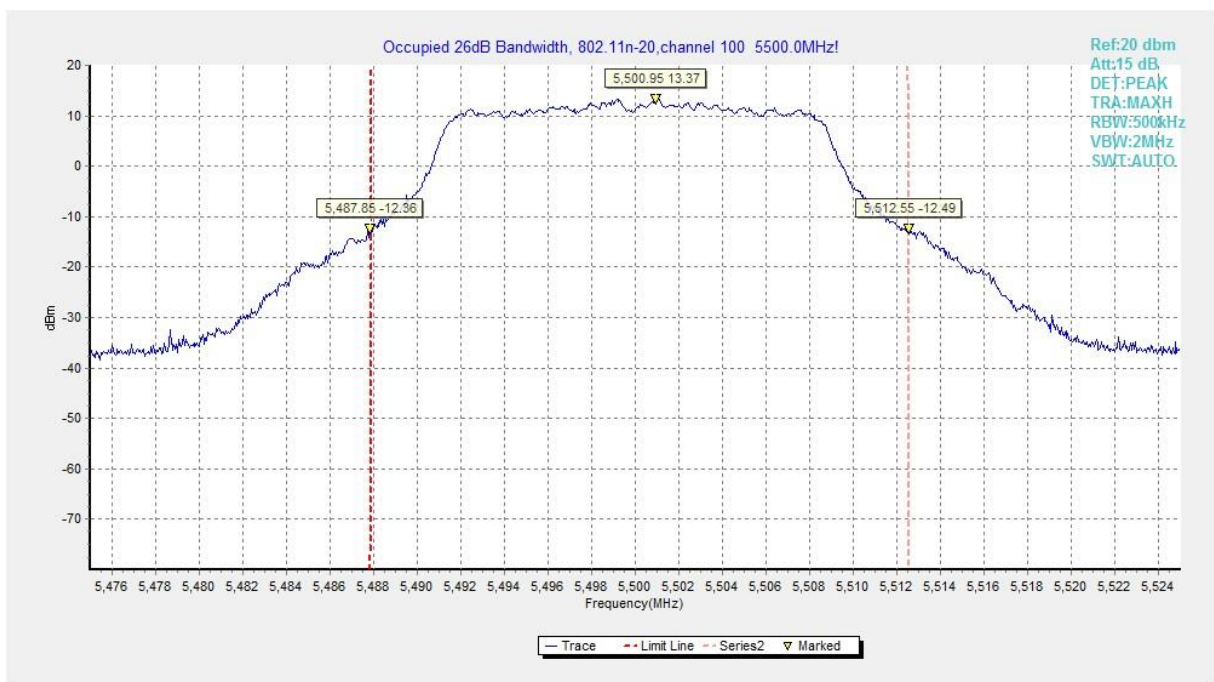


Fig.17 Occupied 26dB Bandwidth (802. 11n-HT20, 5500MHz)

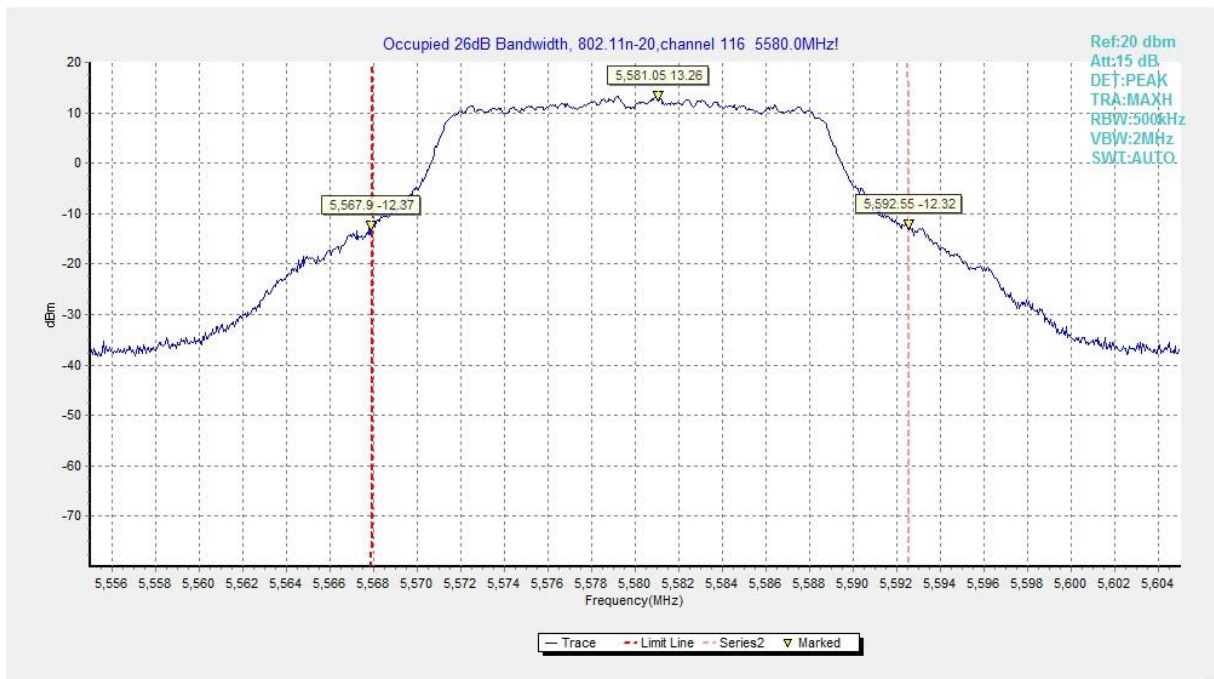


Fig.18 Occupied 26dB Bandwidth (802. 11n-HT20, 5580MHz)

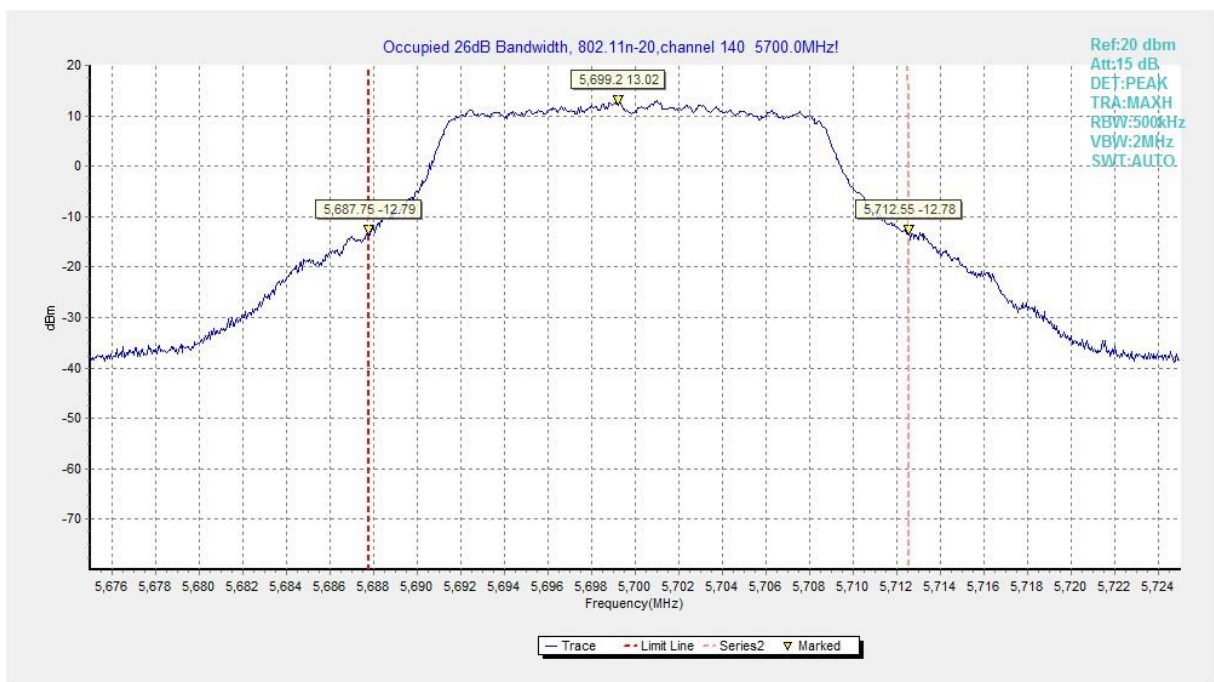


Fig.19 Occupied 26dB Bandwidth (802. 11n-HT20, 5700MHz)

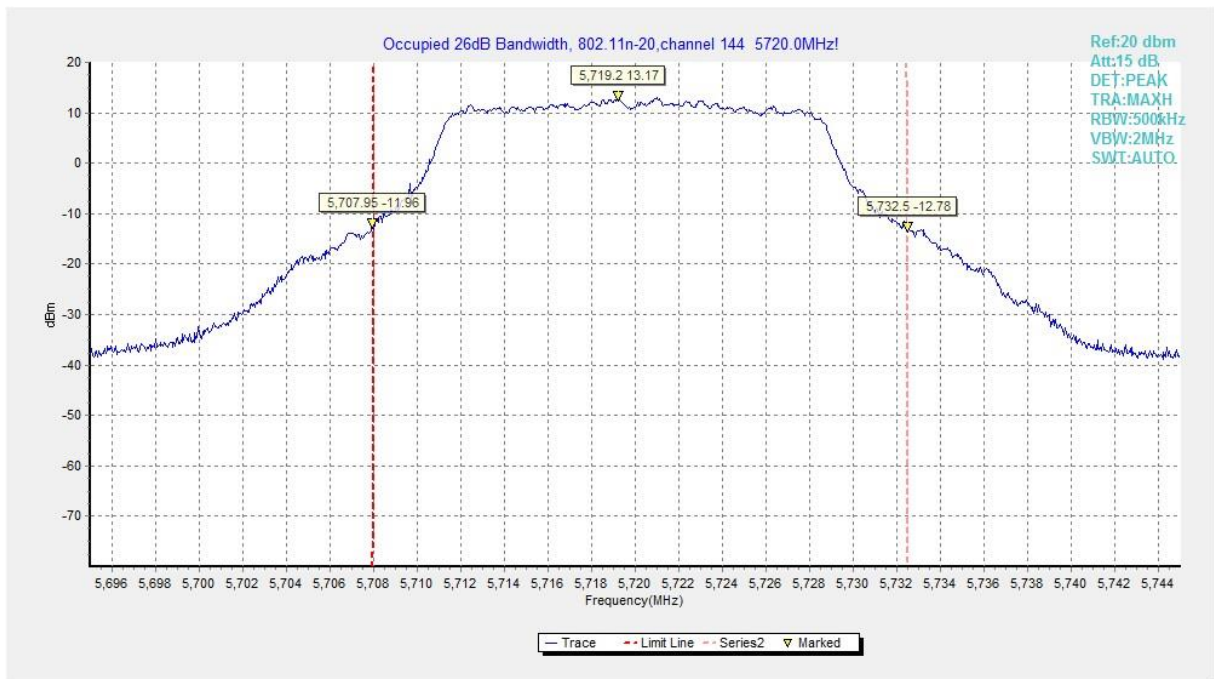


Fig.20 Occupied 26dB Bandwidth (802. 11n-HT20, 5720MHz)

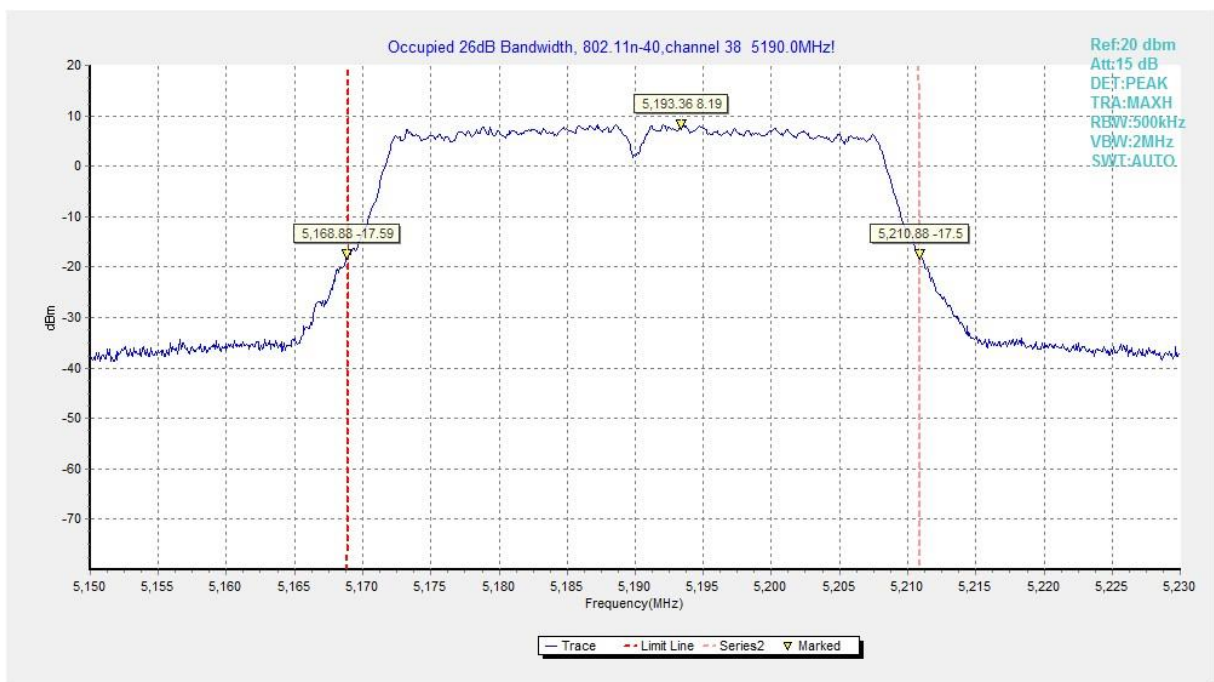


Fig.21 Occupied 26dB Bandwidth (802.11n-HT40, 5190MHz)

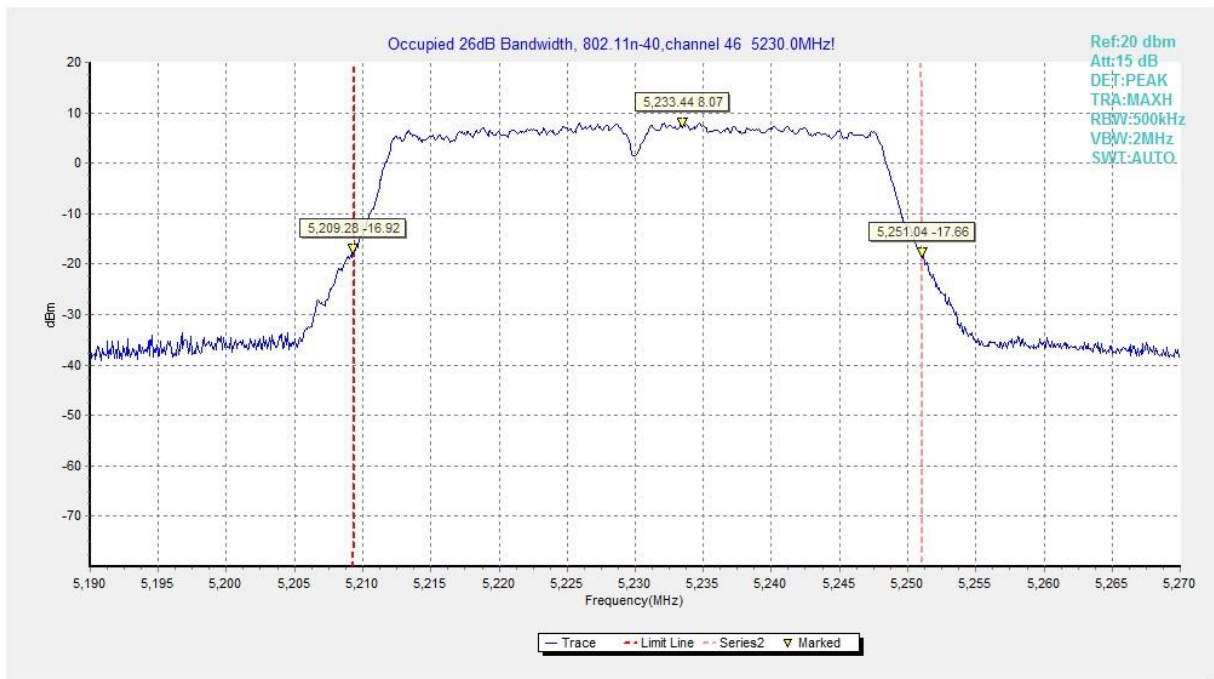


Fig.22 Occupied 26dB Bandwidth (802.11n-HT40, 5230MHz)

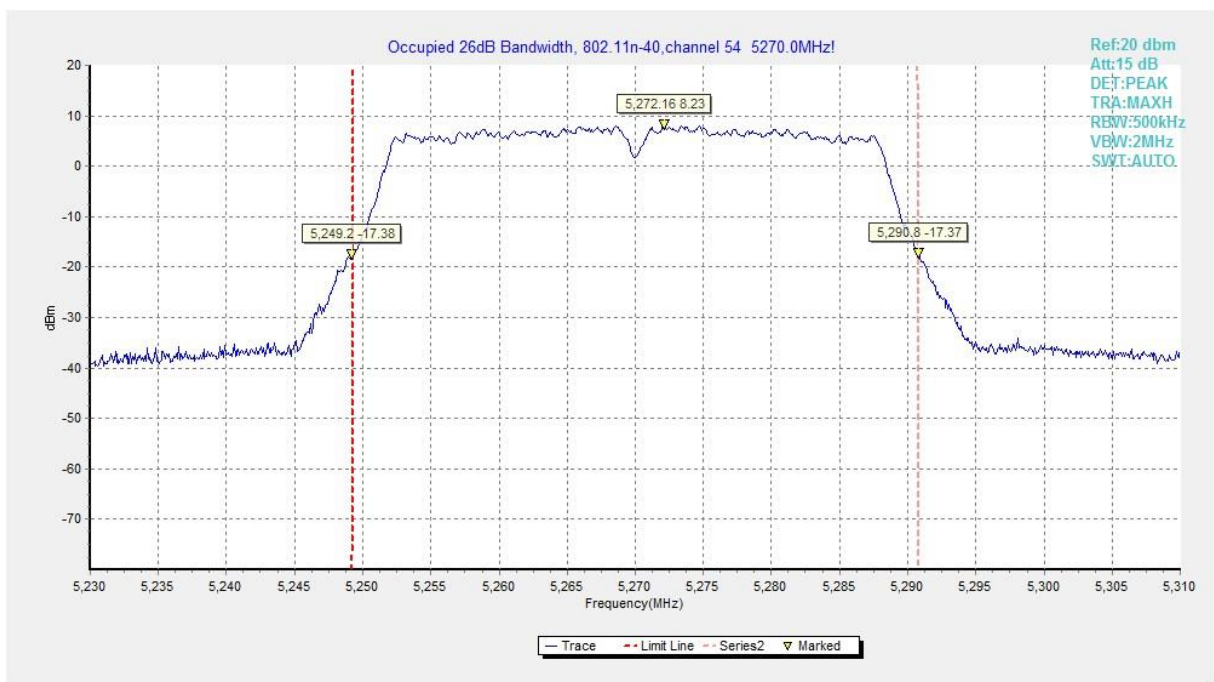


Fig.23 Occupied 26dB Bandwidth (802.11n-HT40, 5270MHz)

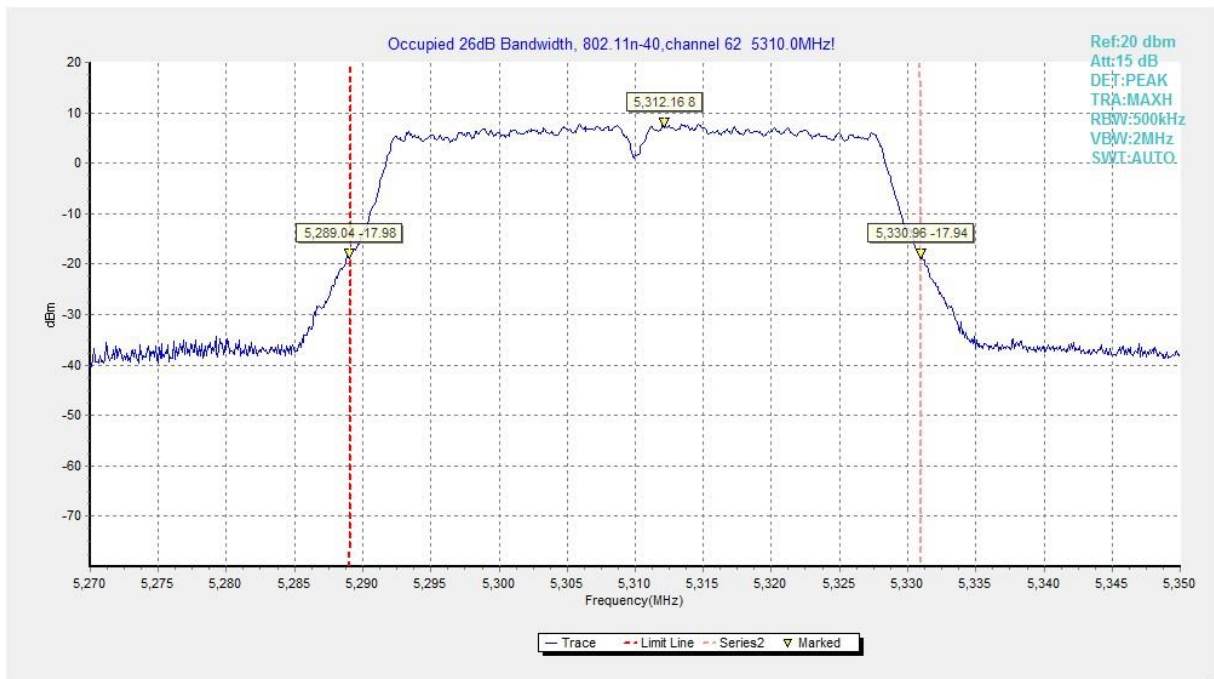


Fig.24 Occupied 26dB Bandwidth (802.11n-HT40, 5310MHz)

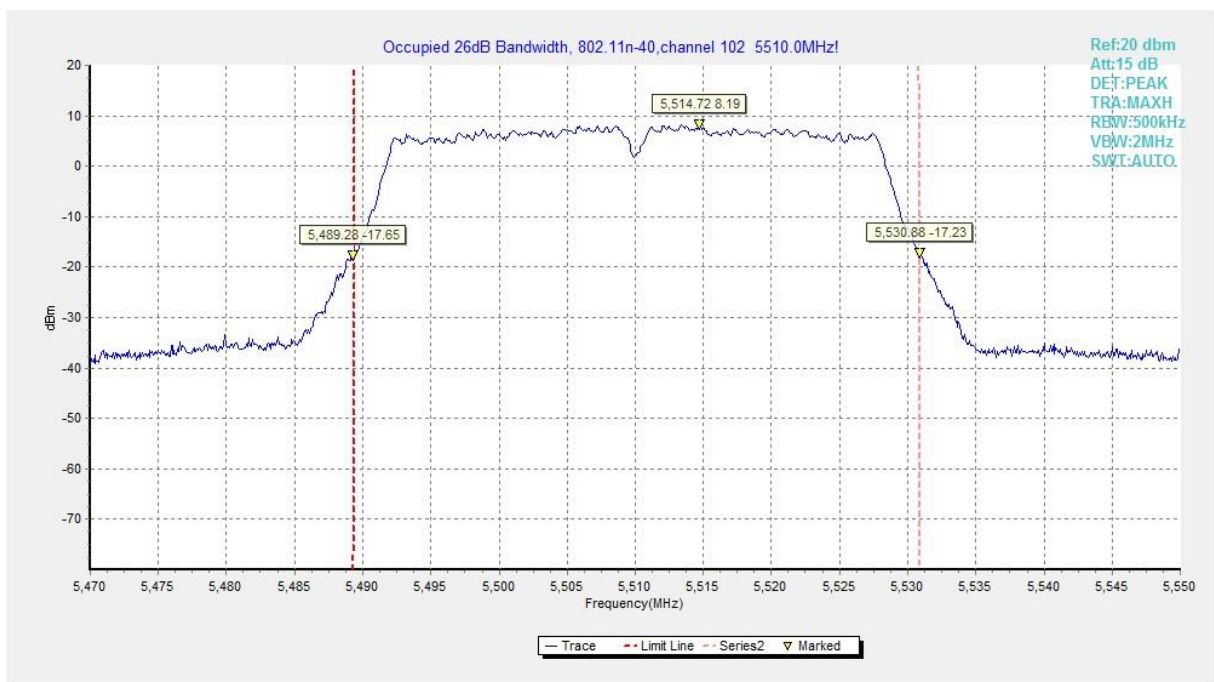


Fig.25 Occupied 26dB Bandwidth (802. 11n-HT40, 5510MHz)

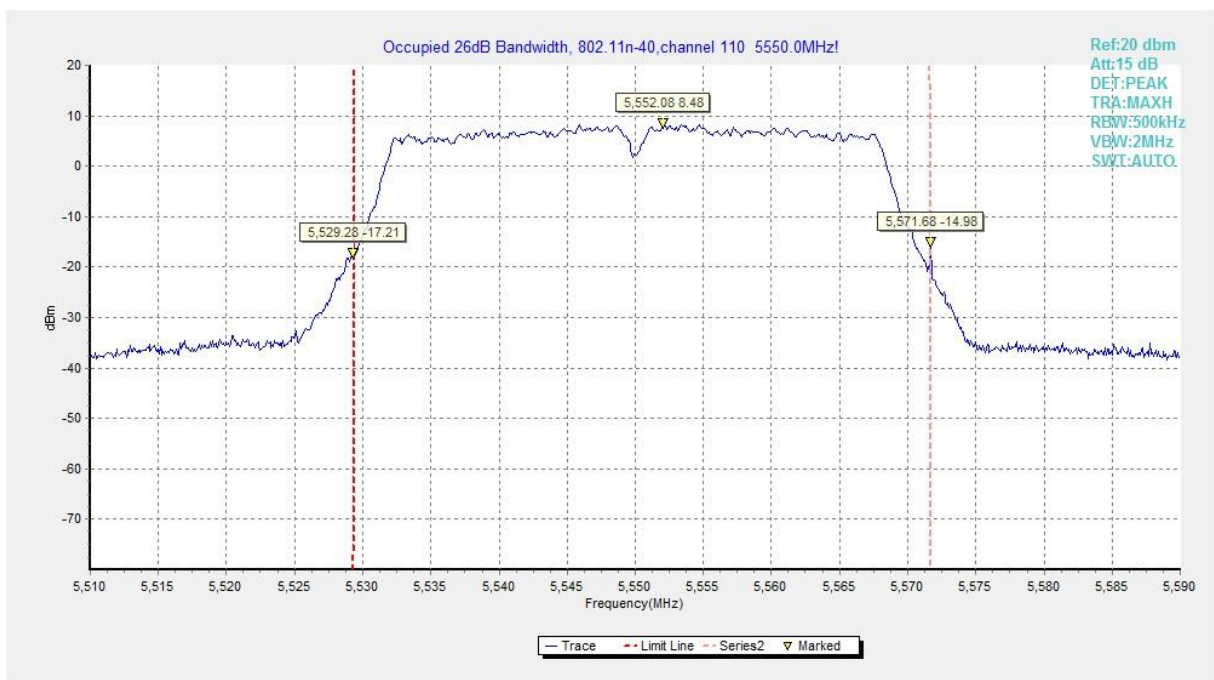


Fig.26 Occupied 26dB Bandwidth (802. 11n-HT40, 5590MHz)

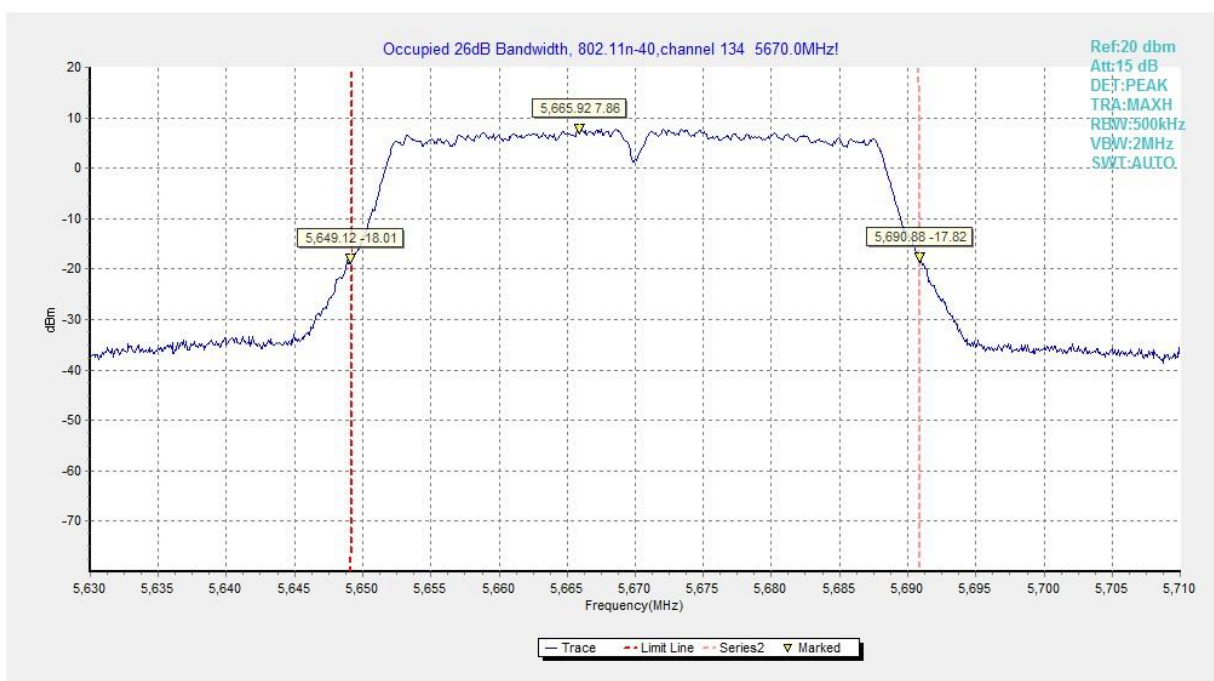


Fig.27 Occupied 26dB Bandwidth (802. 11n-HT40, 5670MHz)

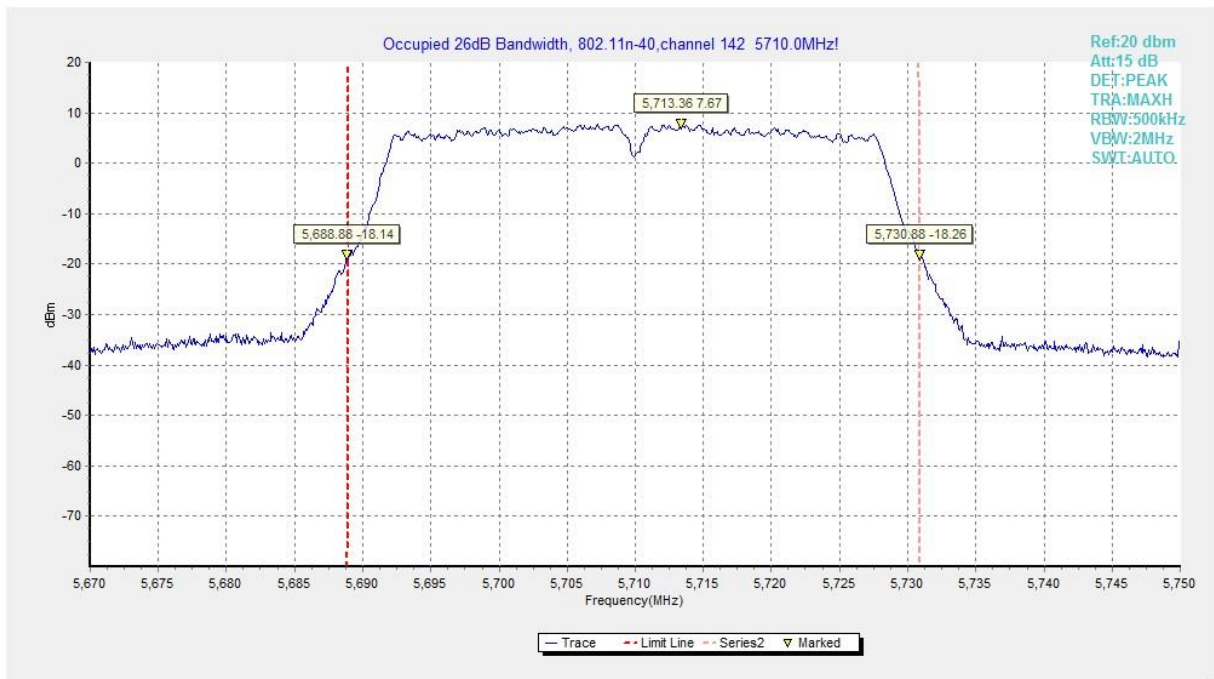


Fig.28 Occupied 26dB Bandwidth (802. 11n-HT40, 5710MHz)



Fig.29 Occupied 26dB Bandwidth (802. 11ac-HT80, 5210MHz)

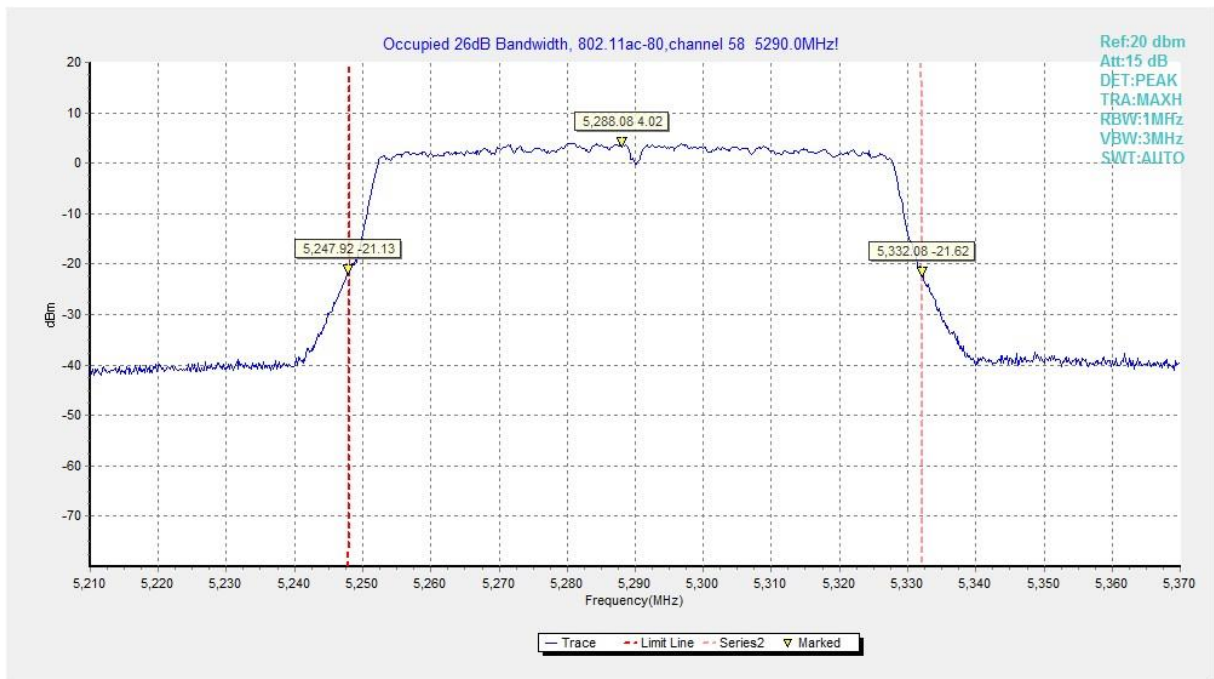


Fig.30 Occupied 26dB Bandwidth (802. 11ac-HT80, 5290MHz)

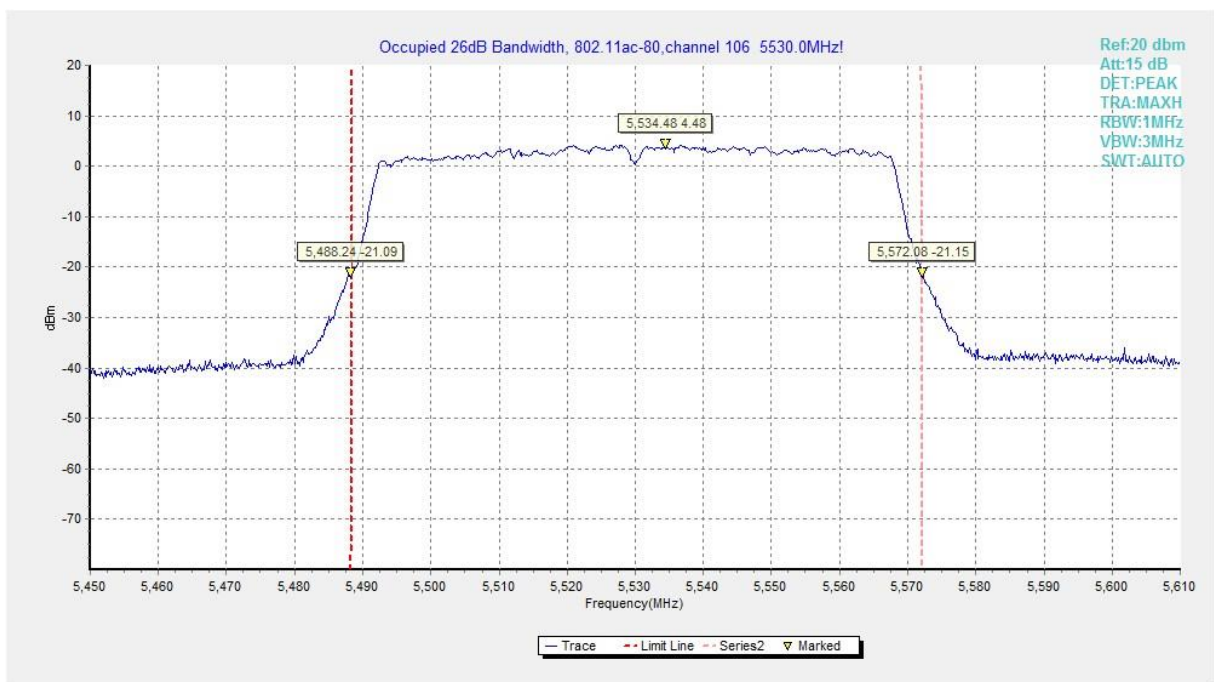


Fig.31 Occupied 26dB Bandwidth (802. 11ac-HT80, 5530MHz)

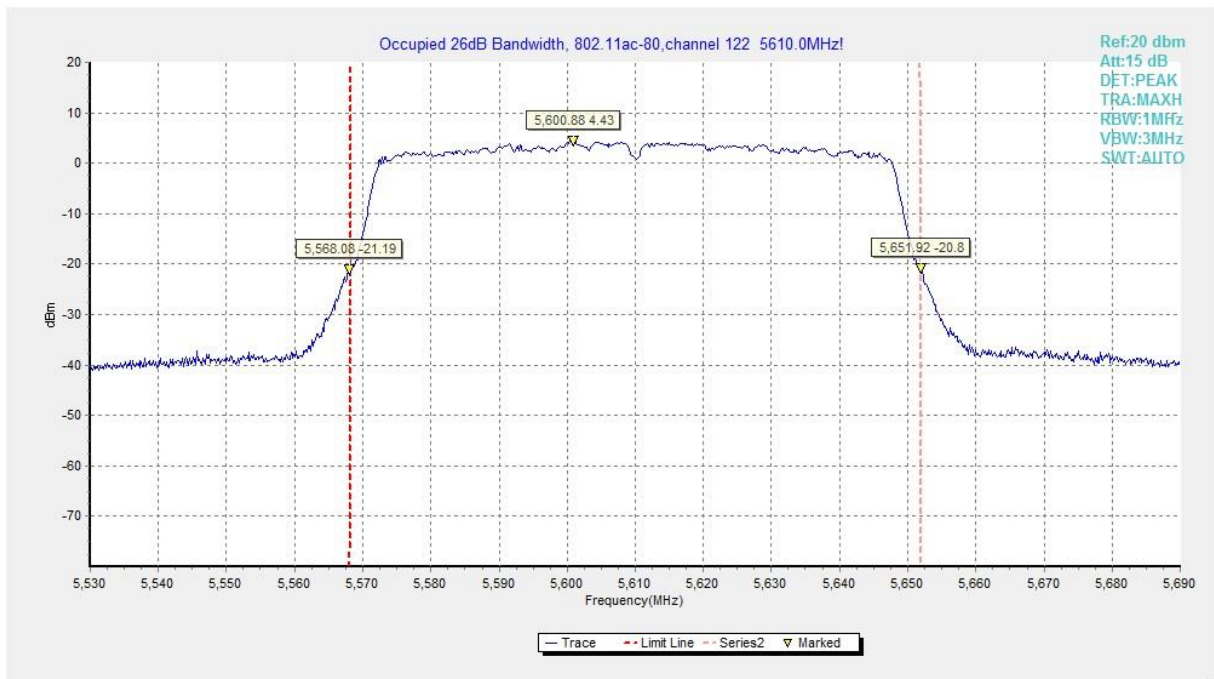


Fig.32 Occupied 26dB Bandwidth (802. 11ac-HT80, 5610MHz)

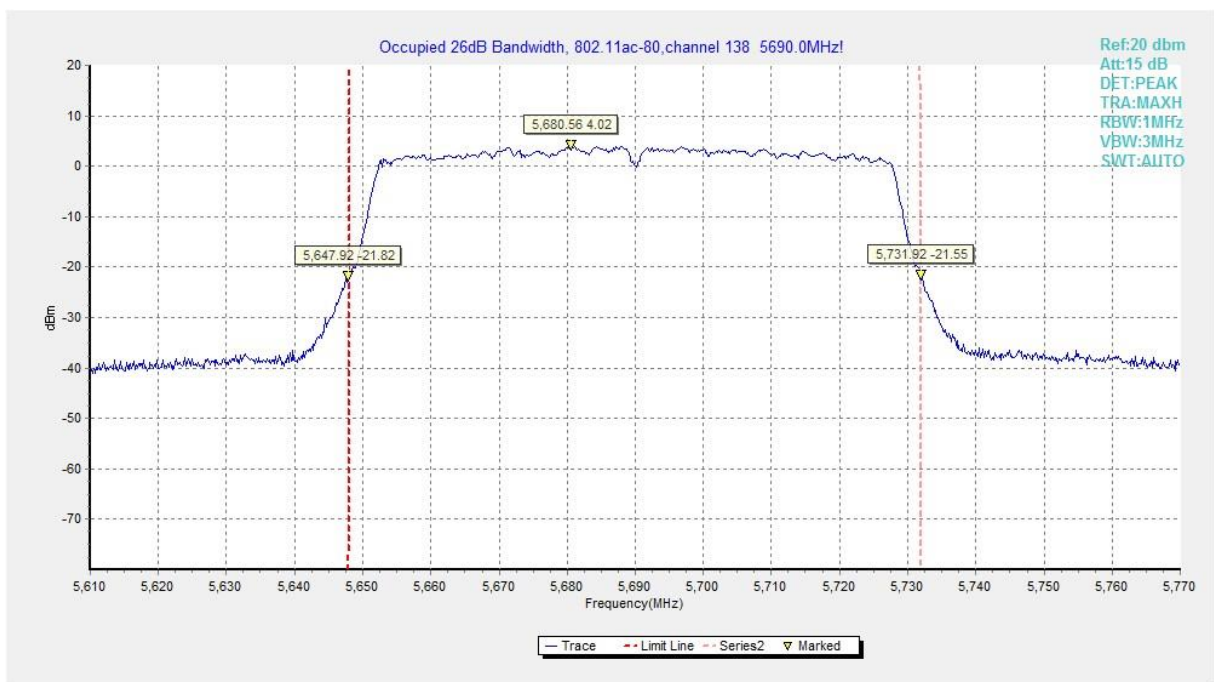


Fig.33 Occupied 26dB Bandwidth (802. 11ac-HT80, 5610MHz)

A.5. Band Edges Compliance

A5.1 Band Edges - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

15.407(b) Undesirable emission limits.

Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: All emissions outside of the 5.47–5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m and the table height shall be 1.5 m.

The EUT and transmitting antenna shall be centered on the turntable.

Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as

appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. Final measurements for the EUT require a measurement antenna height scan of 1 m to 4 m and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Measurement Result:

Mode	Frequency	Test Results	Conclusion
802.11a	5180 MHz	Fig.34	P
	5320 MHz	Fig.35	P
	5500 MHz	Fig.36	P
	5700 MHz	Fig.37	P
802.11n HT20	5180 MHz	Fig.38	P
	5320 MHz	Fig.39	P
	5500 MHz	Fig.40	P
	5700 MHz	Fig.41	P
802.11ac HT20	5180 MHz	Fig.42	P
	5320 MHz	Fig.43	P
	5500 MHz	Fig.44	P
	5700 MHz	Fig.45	P

802.11n HT40	5190 MHz	Fig.46	P
	5310 MHz	Fig.47	P
	5510 MHz	Fig.48	P
	5670 MHz	Fig.49	P
802.11ac HT40	5190 MHz	Fig.50	P
	5310 MHz	Fig.51	P
	5510 MHz	Fig.52	P
	5670 MHz	Fig.53	P

802.11ac HT80	5210MHz	Fig.54	P
	5290MHz	Fig.55	P
	5530MHz	Fig.56	P

EUT ID: UT76a
Conclusion: PASS
Test graphs as below:
Note: The plot above is the combination results of both vertical and horizontal polarizations

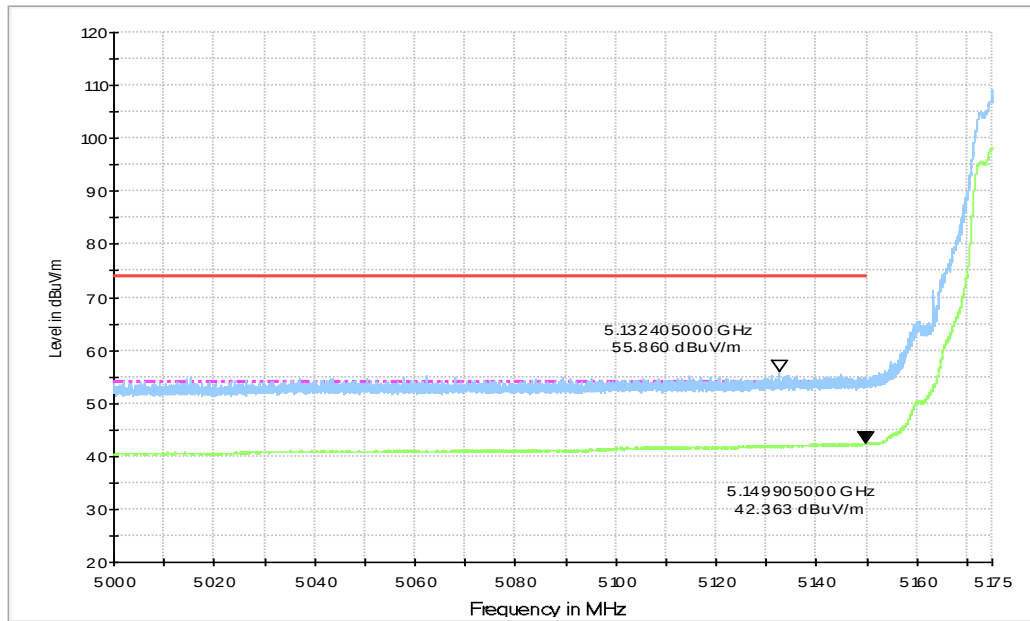


Fig.34 Band Edges (802.11a, 5180MHz)

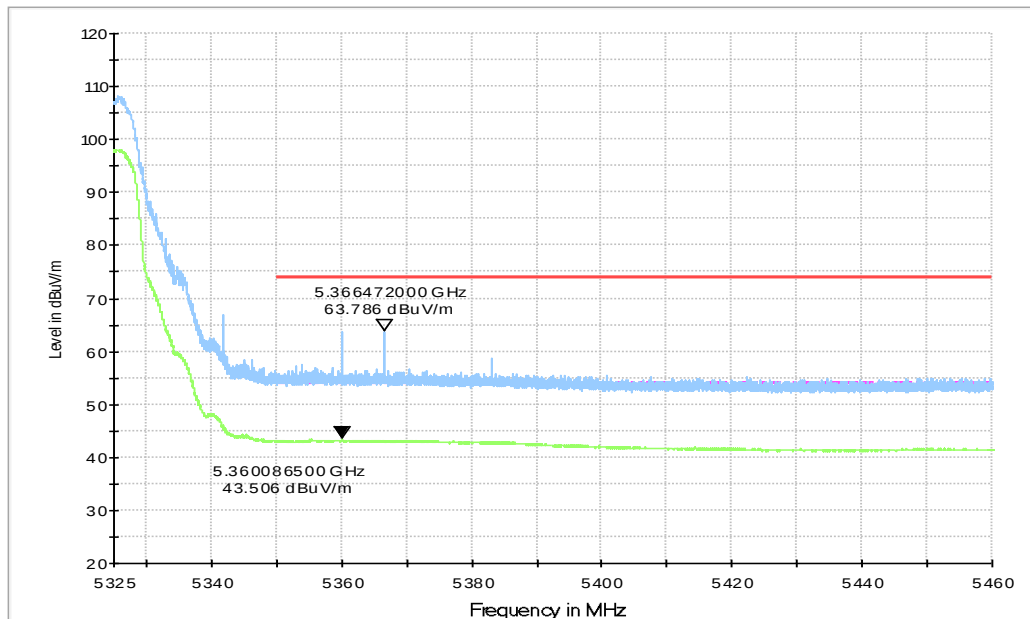


Fig.35 Band Edges (802.11a, 5320MHz)

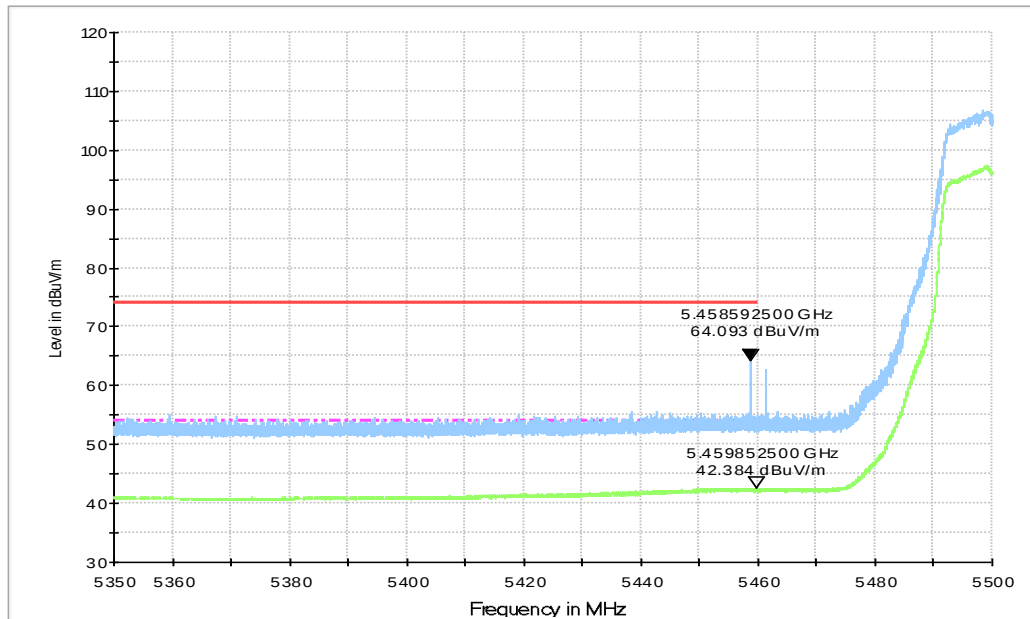


Fig.36 Band Edges (802.11a, 5500MHz)

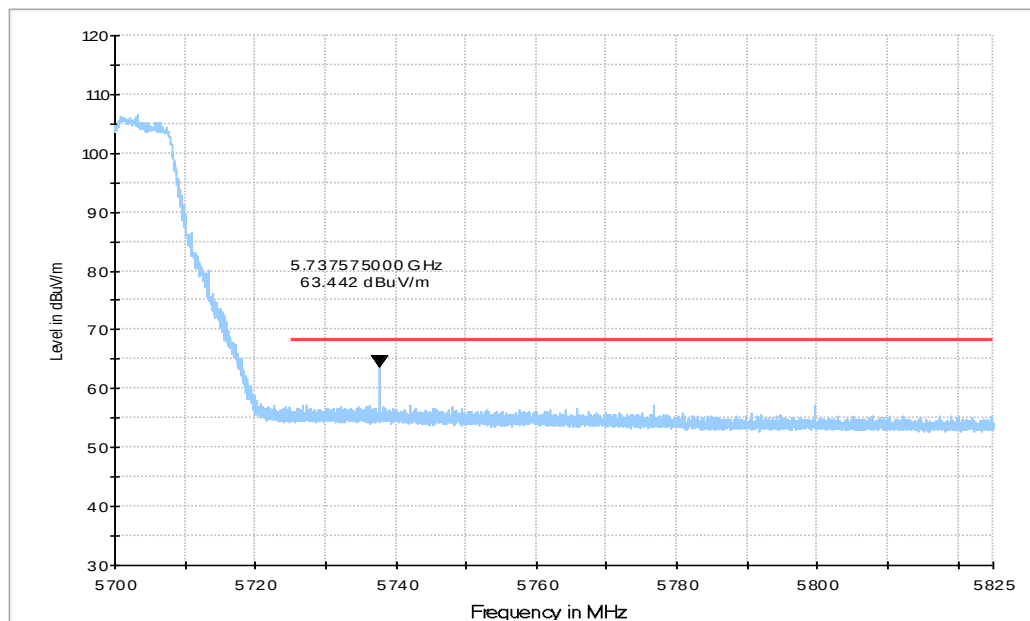


Fig.37 Band Edges (802.11a, 5700MHz)

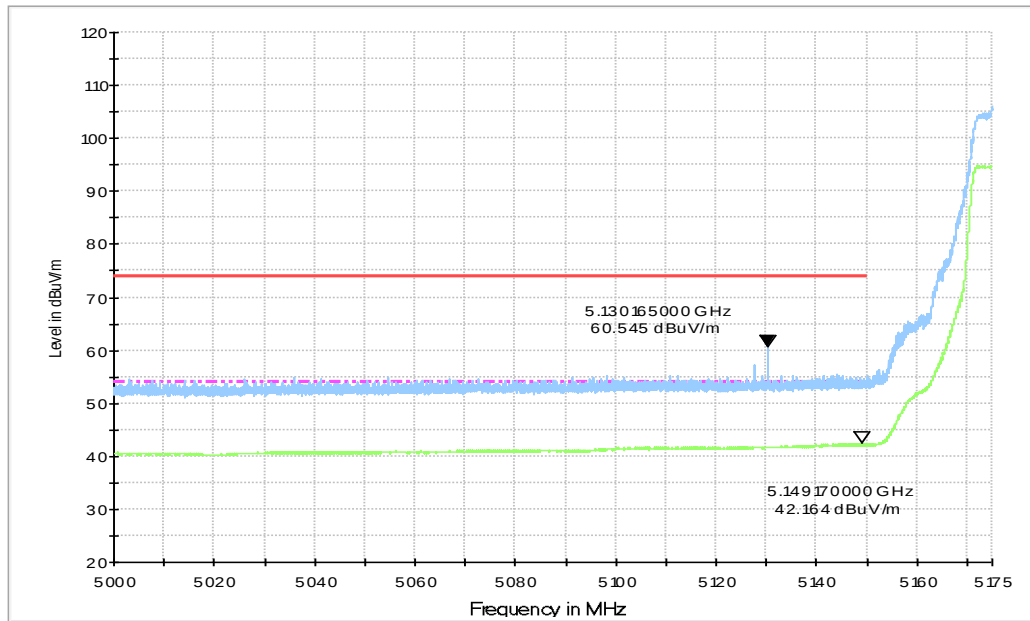


Fig.38 Band Edges (802.11n-HT20, 5180MHz)

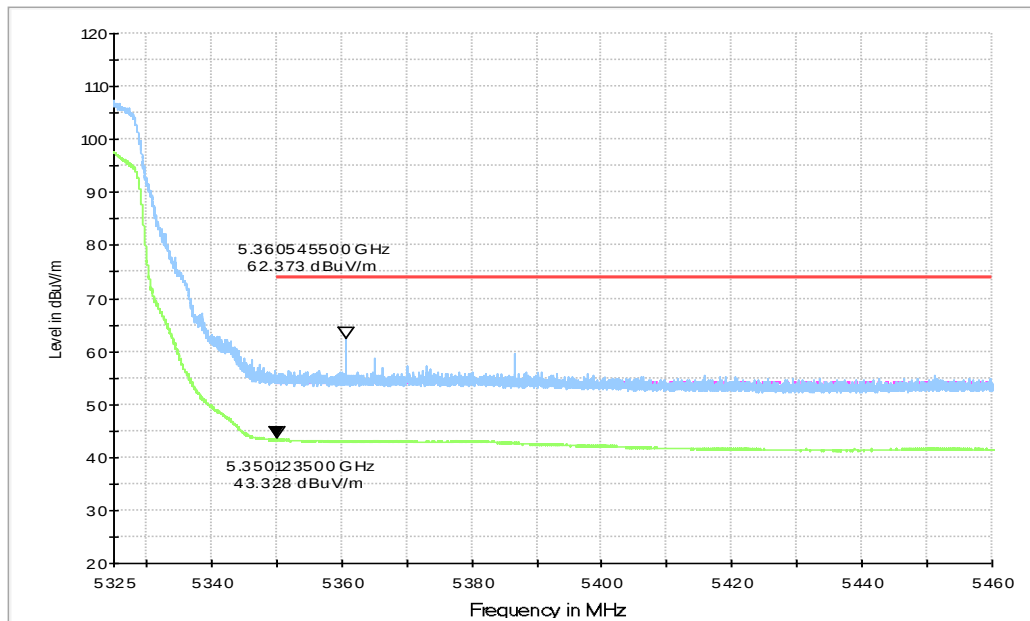


Fig.39 Band Edges (802.11n-HT20, 5320MHz)

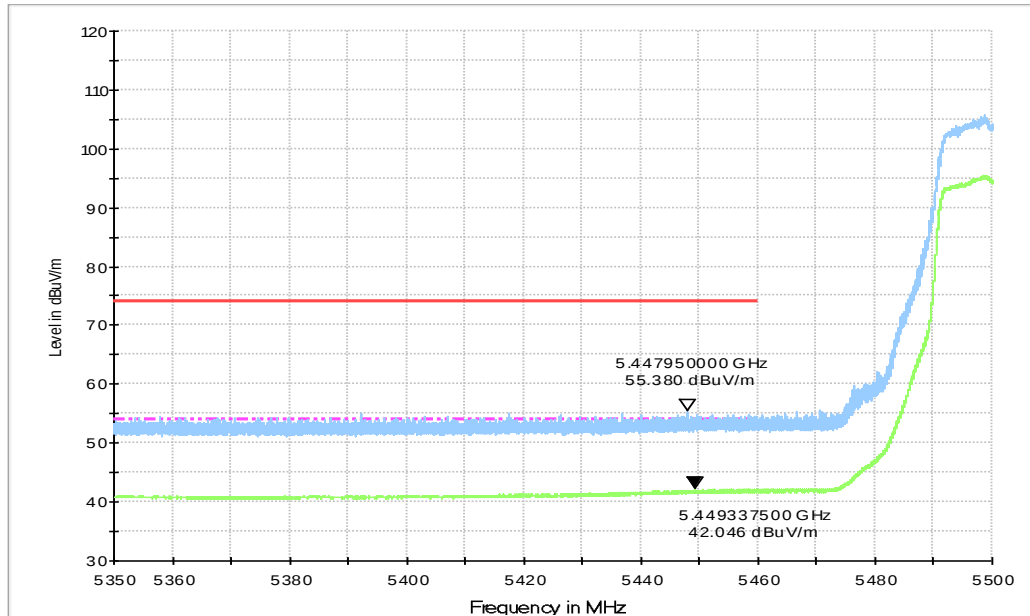


Fig.40 Band Edges (802.11n-HT20, 5500MHz)

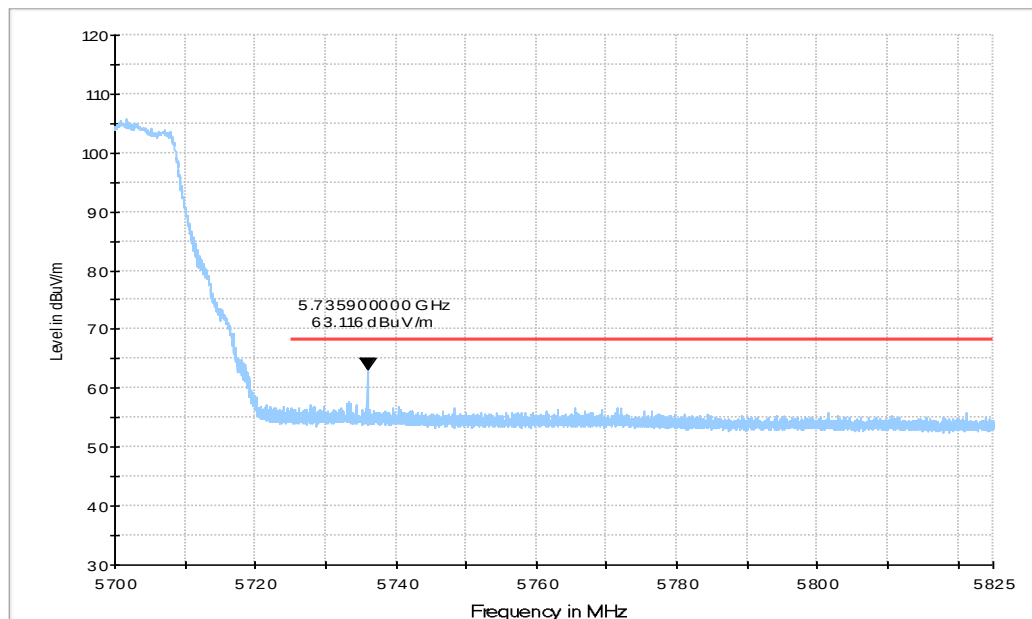


Fig.41 Band Edges (802.11n-HT20, 5700MHz)

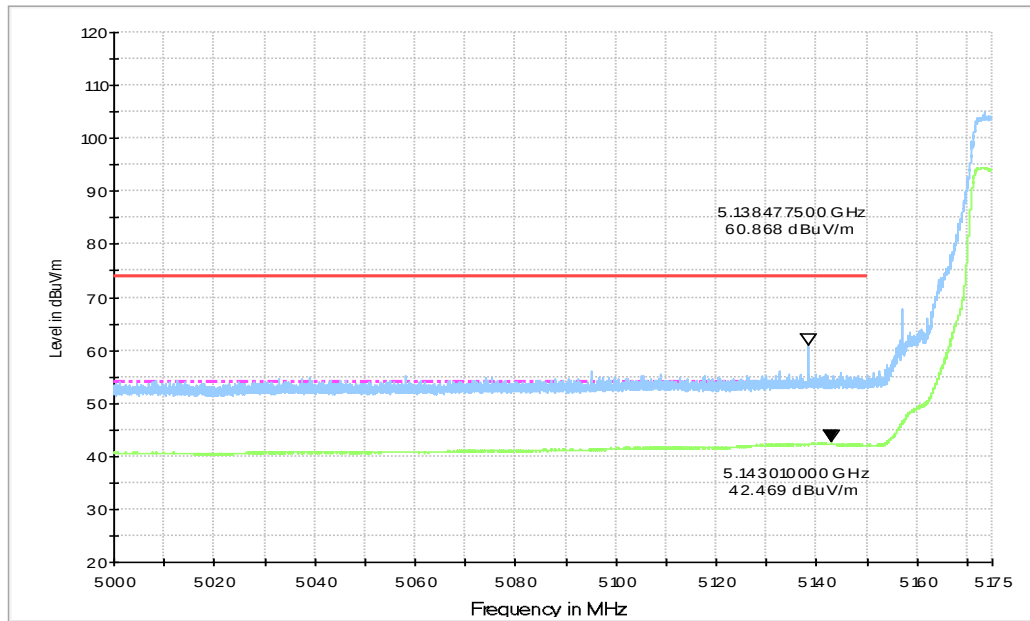


Fig.42 Band Edges (802.11ac-HT20, 5180MHz)

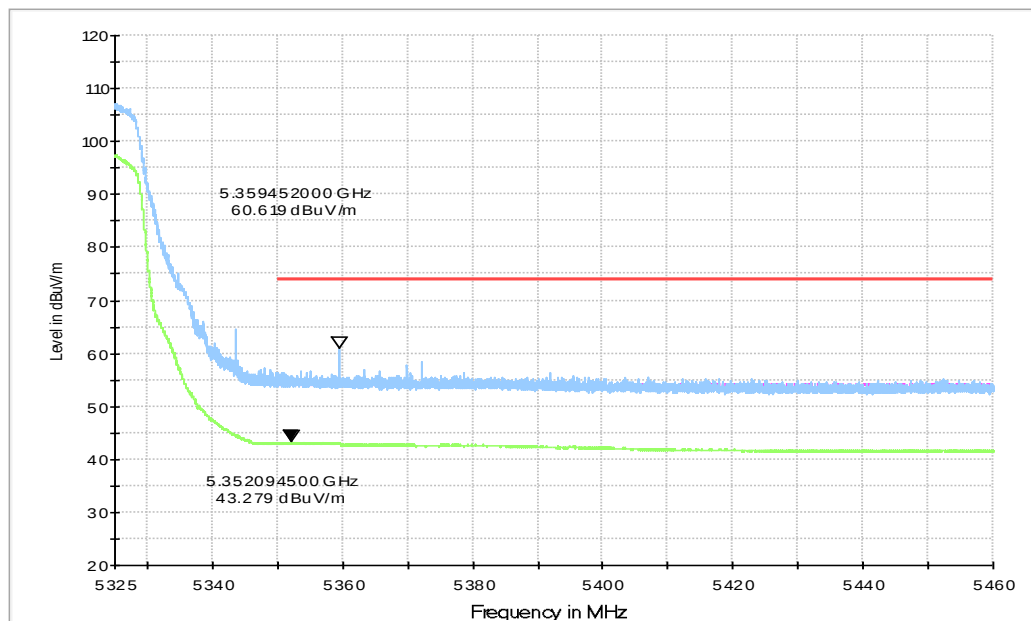


Fig.43 Band Edges (802.11ac-HT20, 5320MHz)

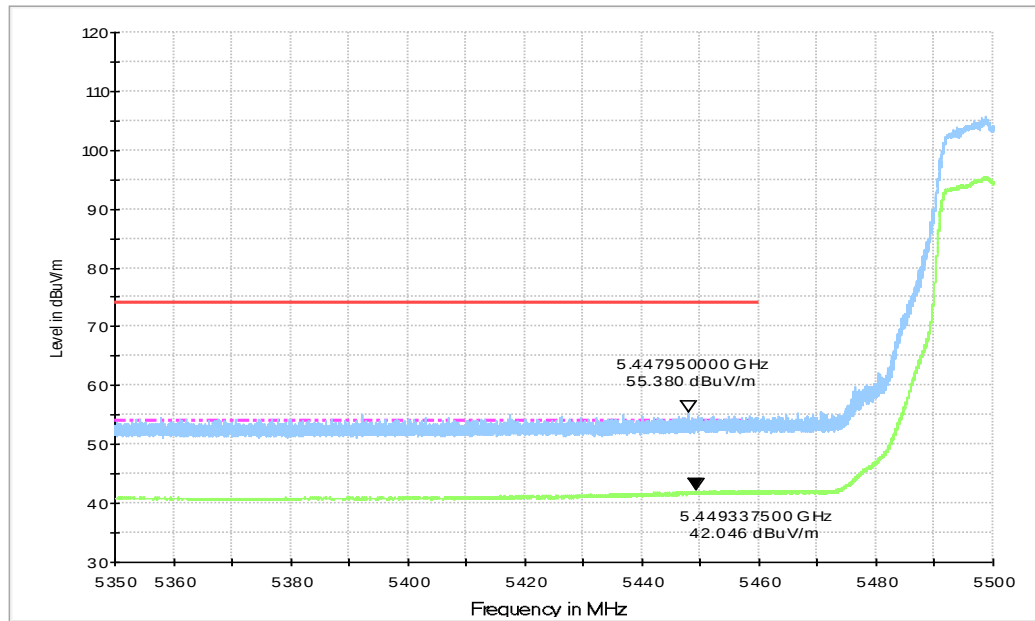


Fig.44 Band Edges (802.11ac-HT20, 5500MHz)

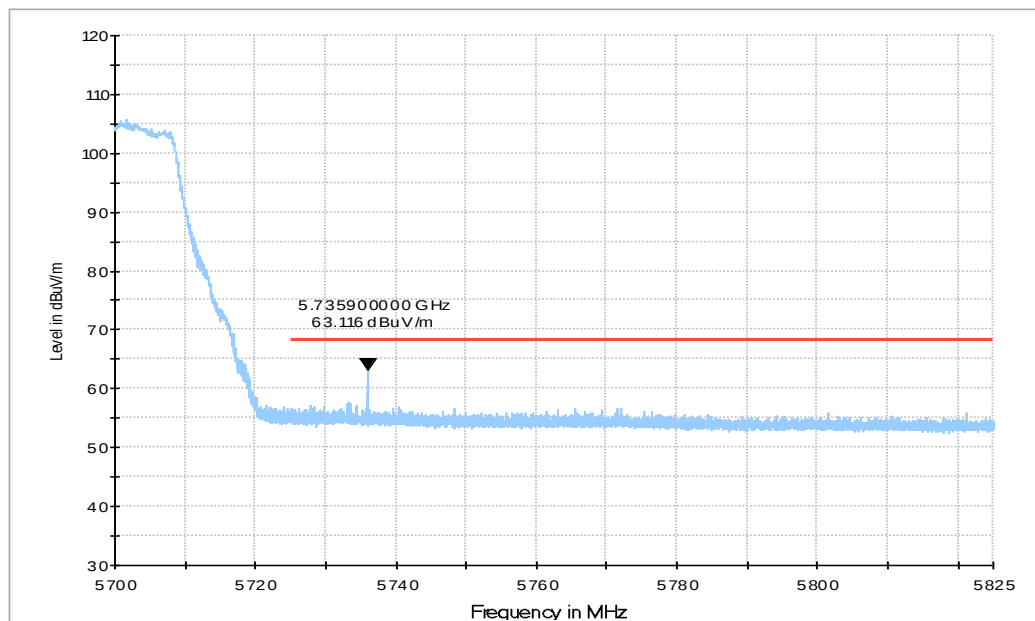


Fig.45 Band Edges (802.11ac-HT20, 5700MHz)

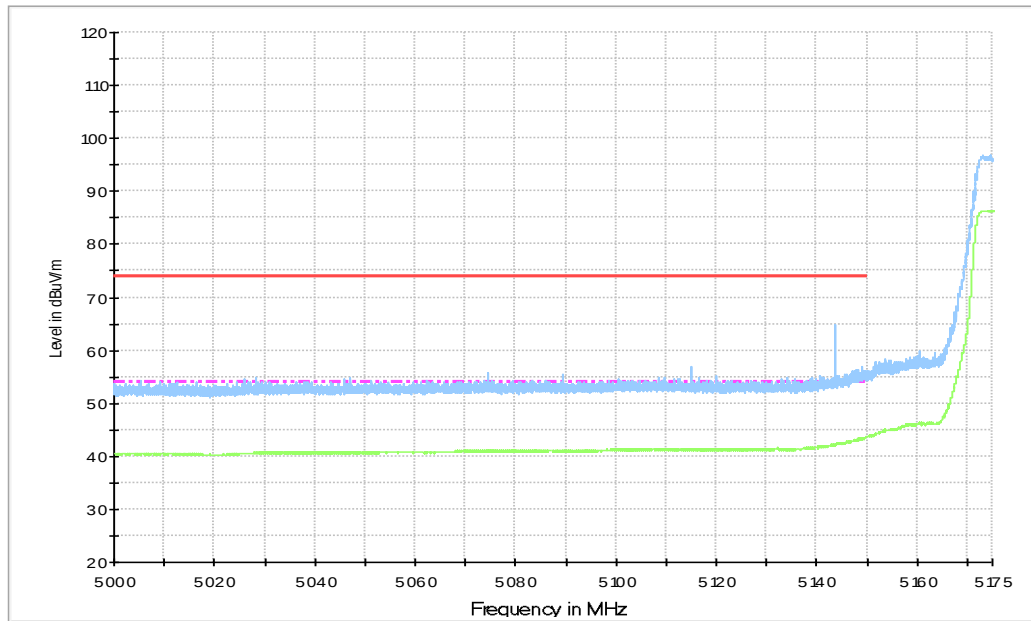


Fig.46 Band Edges (802.11n-HT40, 5190MHz)

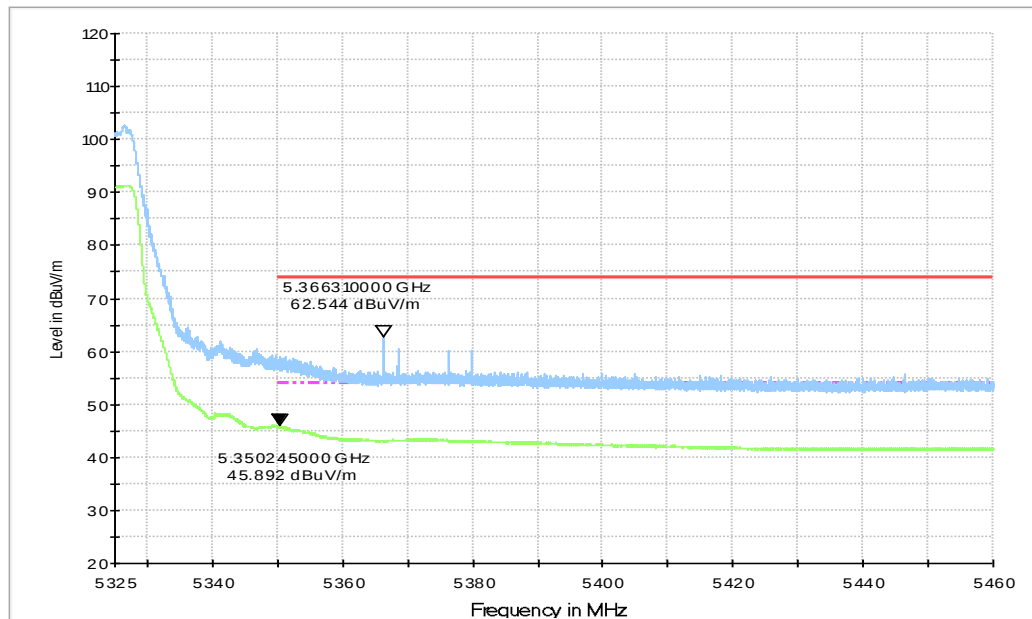


Fig.47 Band Edges (802.11n-HT40, 5310MHz)

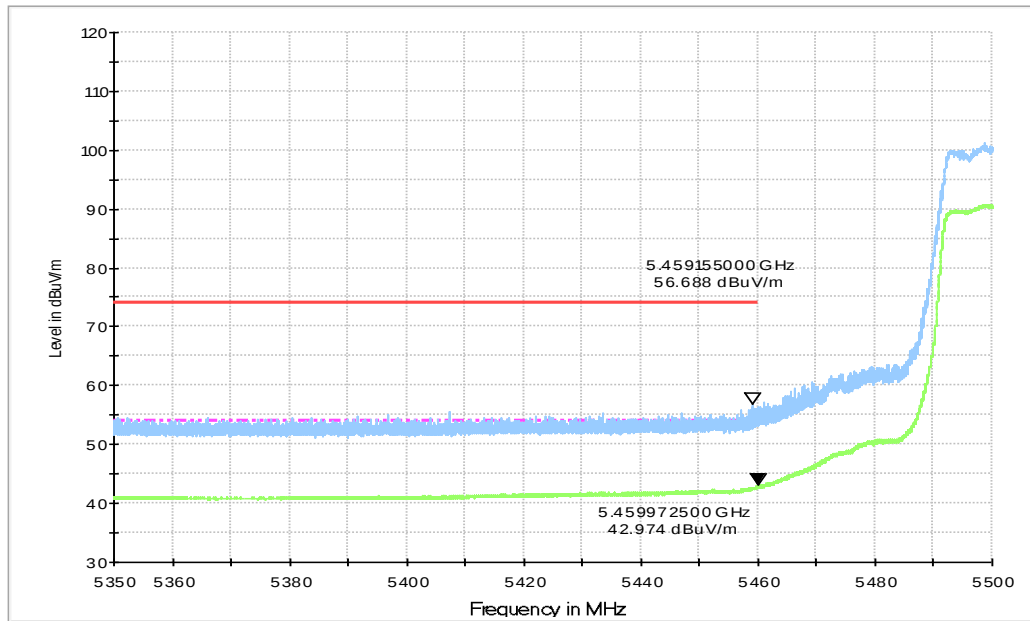


Fig.48 Band Edges (802.11n-HT40, 5510MHz)

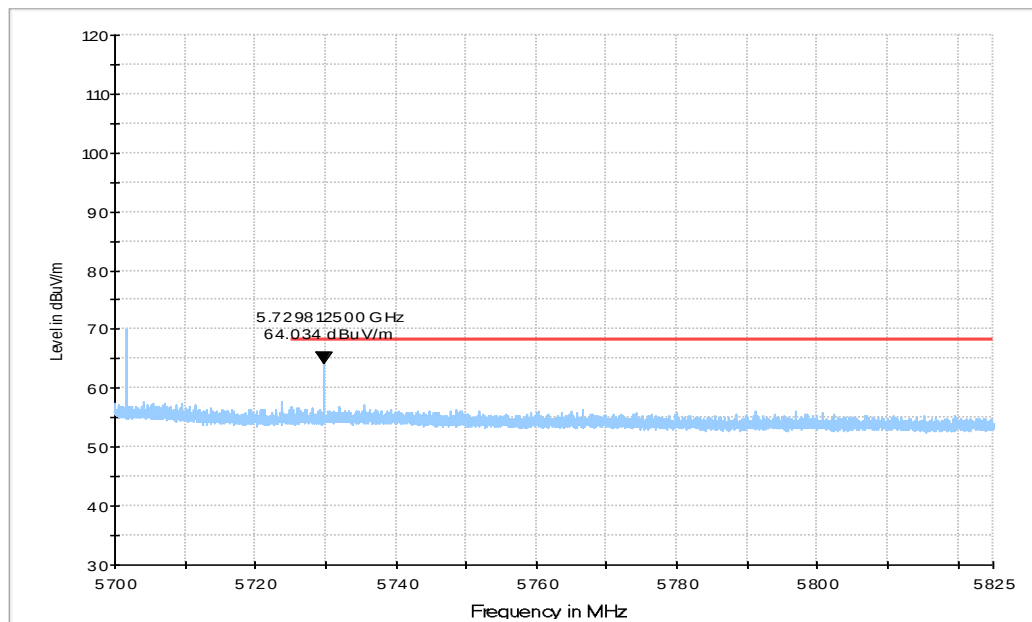


Fig.49 Band Edges (802.11n-HT40, 5670MHz)

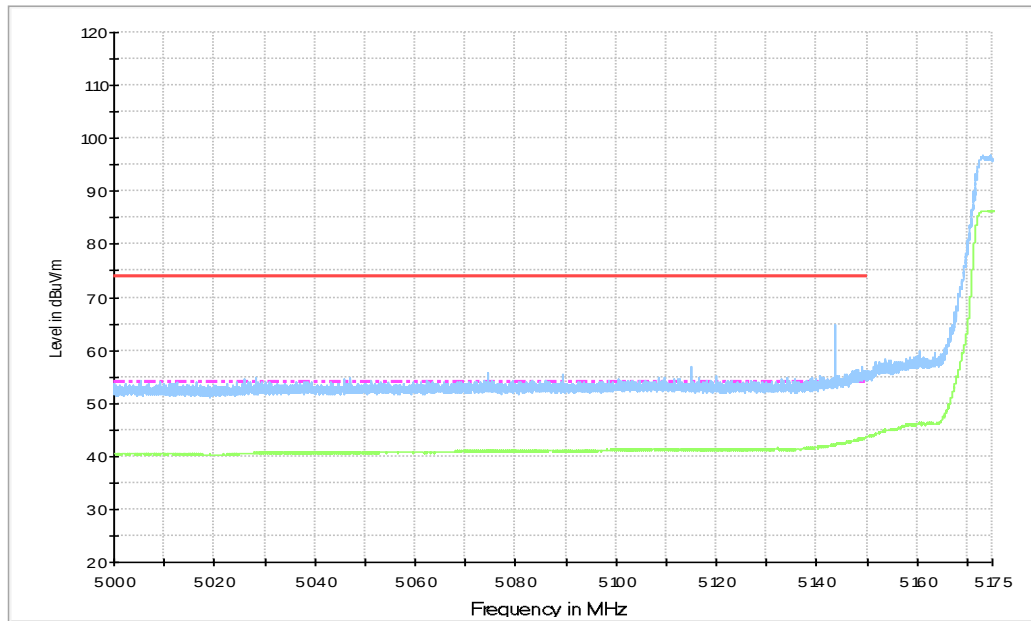


Fig.50 Band Edges (802.11ac-HT40, 5190MHz)

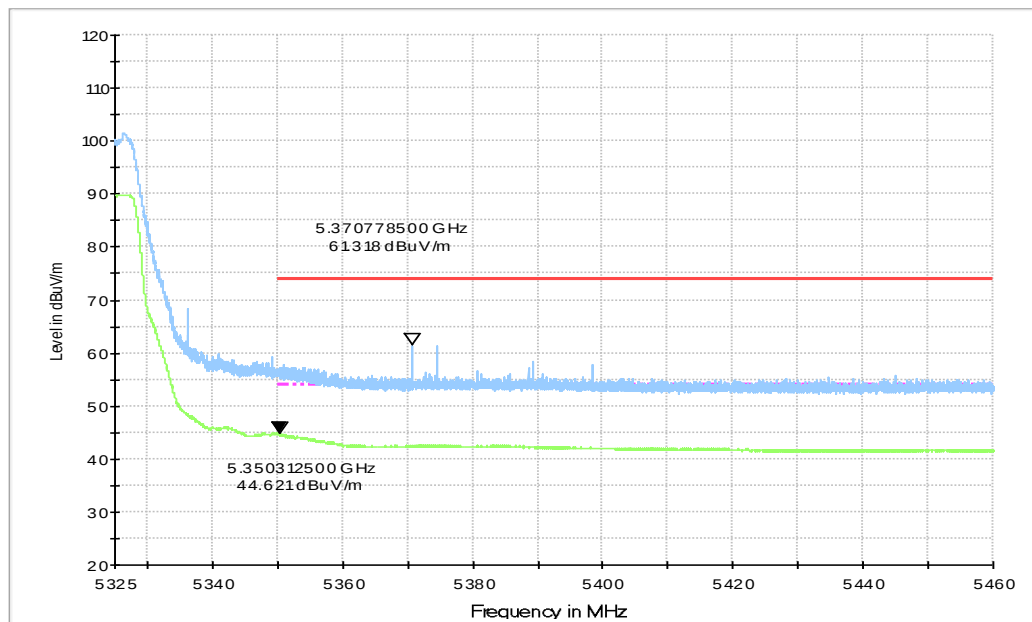


Fig.51 Band Edges (802.11ac-HT40, 5310MHz)

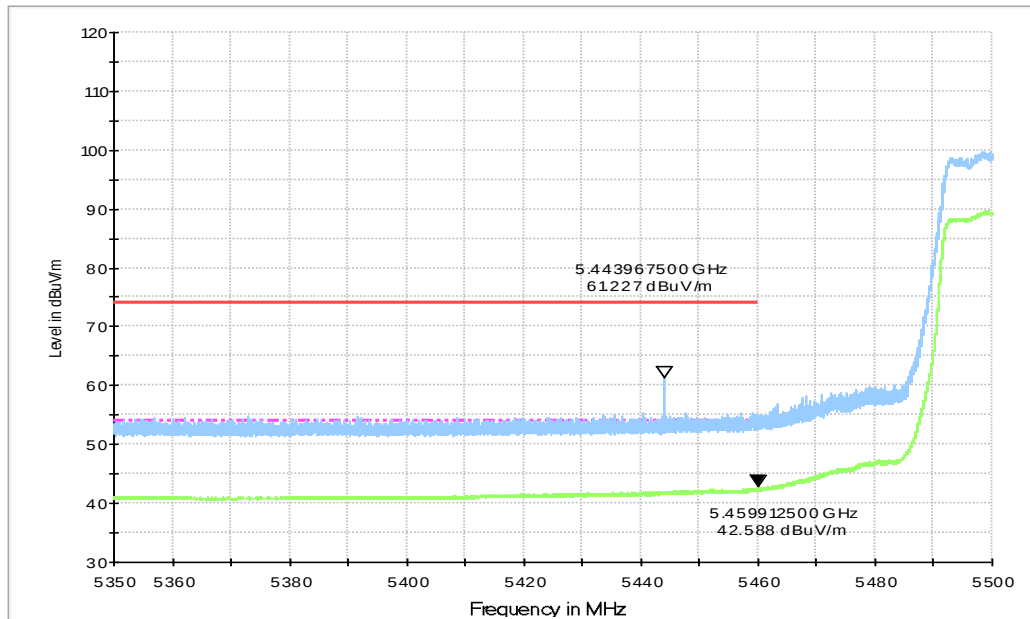


Fig.52 Band Edges (802.11ac-HT40, 5510MHz)

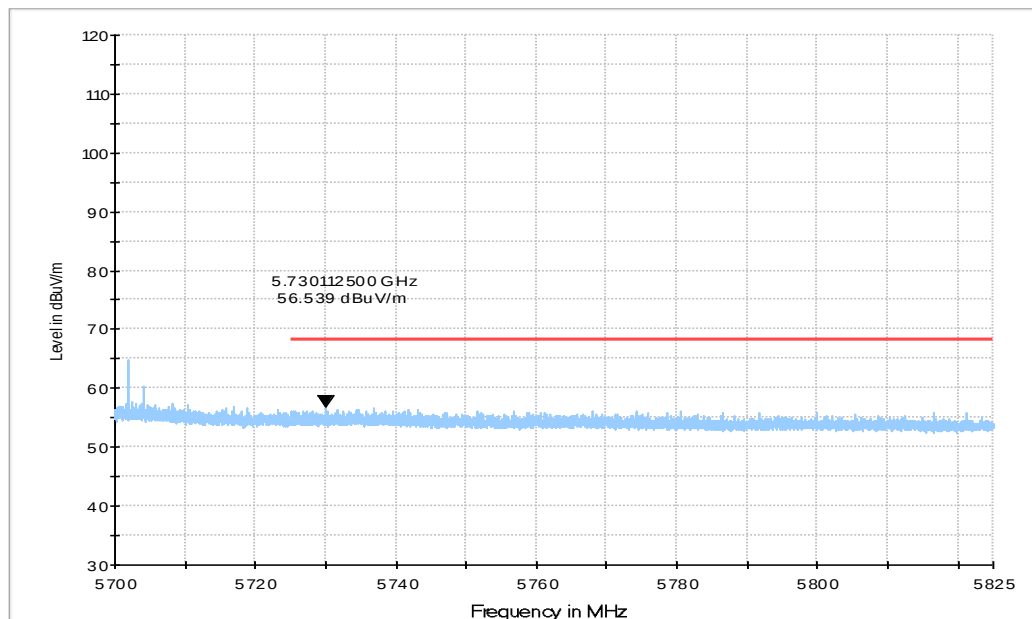


Fig.53 Band Edges (802.11ac-HT40, 5670MHz)

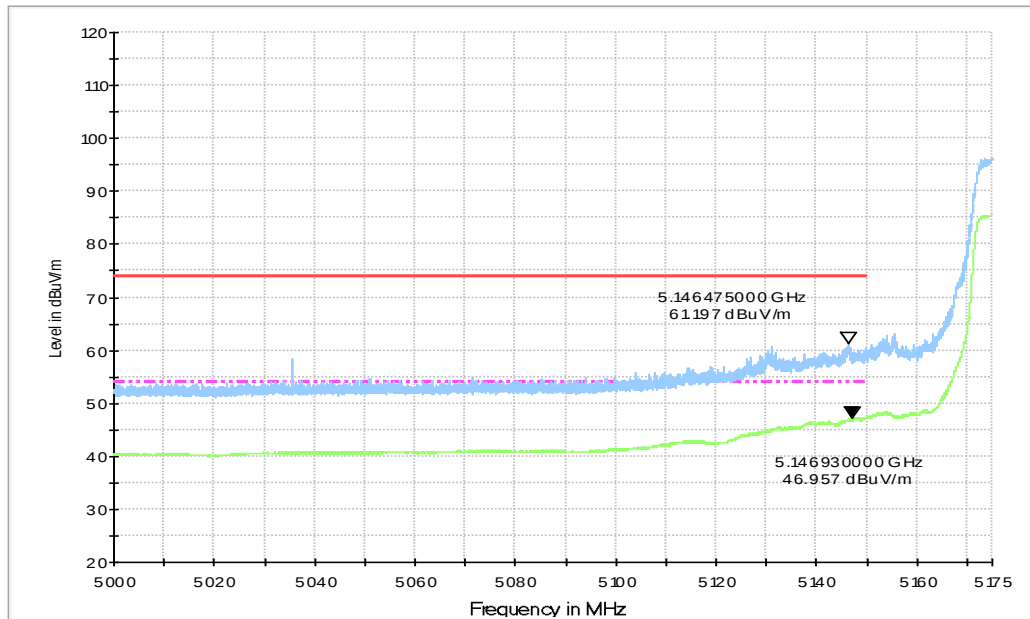


Fig.54 Band Edges (802.11ac-HT80, 5210MHz)

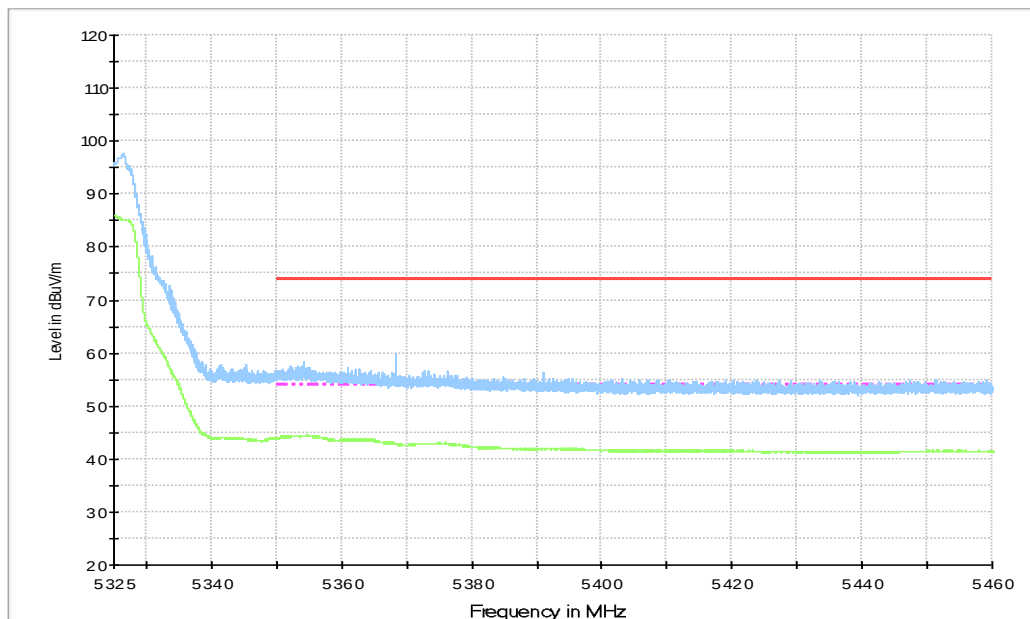


Fig.55 Band Edges (802.11ac-HT80, 5290MHz)

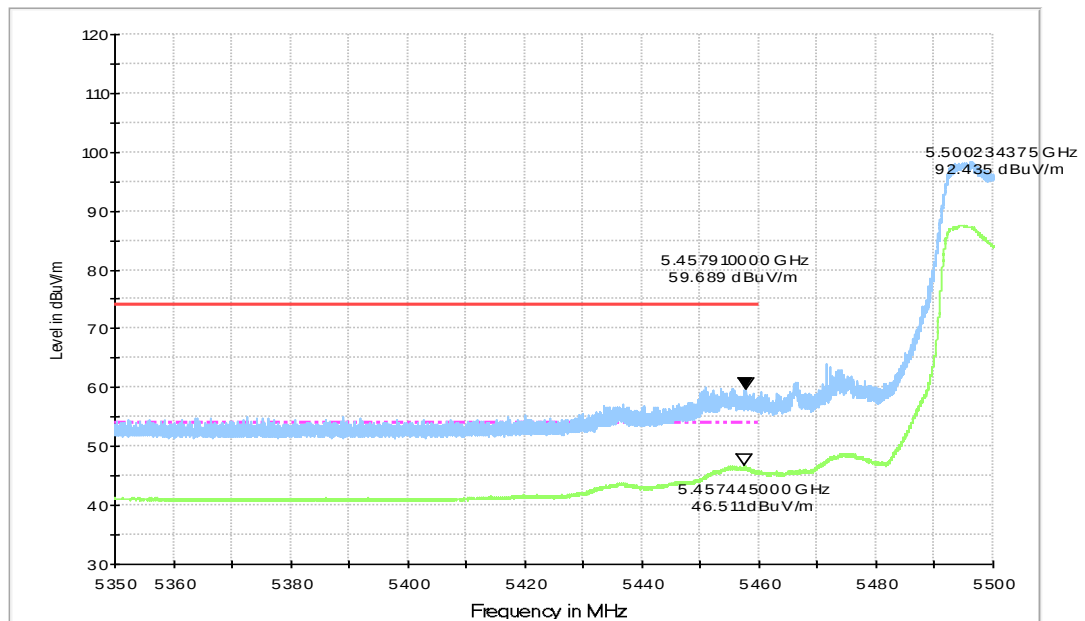


Fig.56 Band Edges (802.11ac-HT80, 5530MHz)

A.6. Transmitter Spurious Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:


Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m

The EUT and transmitting antenna shall be centered on the turntable.

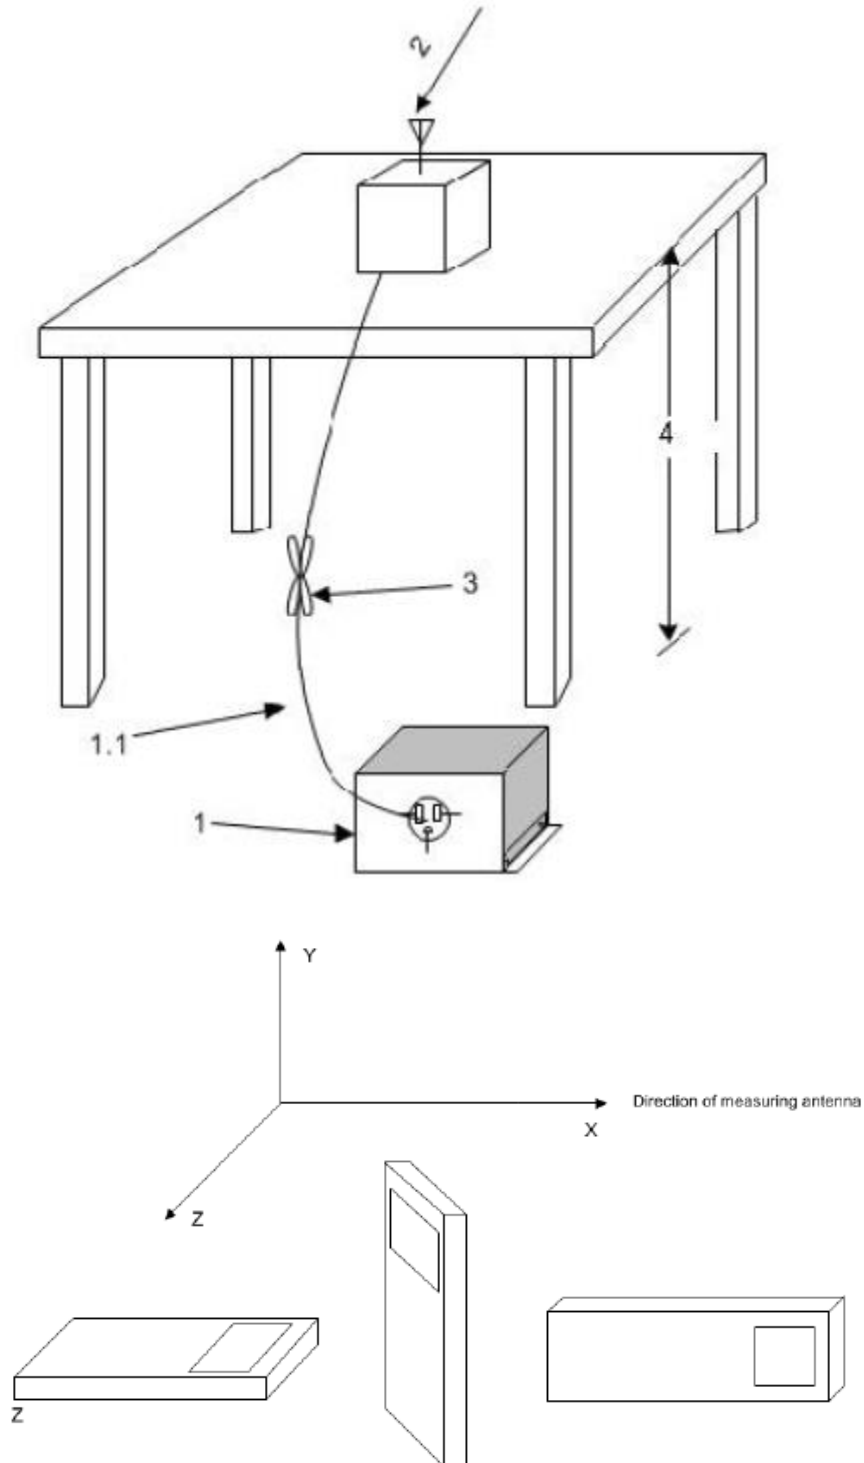

Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= P_{Mea} + Cable Loss + Antenna Factor

Where:

P_{Mea} field strength recorded from the instrument

Test EUI ID: UT76a

Average

802.11a

Channel 36

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5146.850	41.4	-25.7	34.3	32.82	54.0	12.6	V
5149.500	41.5	-25.7	34.3	32.94	54.0	12.5	V
12440.800	34.4	-31.1	38.9	26.67	54.0	19.6	V
15540.000	35.5	-28.8	40.1	24.29	54.0	18.5	V
17853.600	38.0	-26.3	41.2	23.11	54.0	16.0	H
17874.400	37.9	-26.3	41.2	22.99	54.0	16.1	V

Channel 40

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5143.800	40.9	-25.7	34.2	32.29	54.0	13.1	V
5148.450	40.9	-25.7	34.3	32.31	54.0	13.1	V
12444.000	34.4	-31.1	38.9	26.64	54.0	19.6	V
15600.000	35.2	-28.7	40.1	23.81	54.0	18.8	H
17856.000	38.1	-26.3	41.2	23.20	54.0	15.9	H
17959.200	38.2	-26.1	41.3	23.04	54.0	15.8	H

Channel 48

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5351.550	40.5	-25.8	34.5	31.77	54.0	13.5	V

5389.900	40.4	-25.7	34.5	31.63	54.0	13.6	V
12413.600	34.4	-31.2	38.9	26.77	54.0	19.6	H
15720.000	35.6	-28.5	40.3	23.76	54.0	18.4	H
17953.600	38.1	-26.1	41.3	22.97	54.0	15.9	H
17956.800	38.2	-26.1	41.3	23.01	54.0	15.8	H

Channel 52

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5146.250	39.3	-25.7	34.3	30.69	54.0	14.7	V
5351.850	39.7	-25.8	34.5	30.96	54.0	14.3	V
12440.600	34.5	-31.1	38.9	26.70	54.0	19.6	V
15780.200	35.7	-28.4	40.4	23.66	54.0	18.3	H
17748.100	37.7	-26.5	41.1	23.10	54.0	16.3	H
17854.800	38.0	-26.3	41.2	23.12	54.0	16.0	H

Channel 56

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.650	40.1	-25.8	34.5	31.43	54.0	13.9	V
5351.400	40.3	-25.8	34.5	31.57	54.0	13.7	V
12445.000	34.5	-31.1	38.9	26.75	54.0	19.5	H
15839.600	36.4	-28.2	40.5	24.09	54.0	17.6	H
17857.000	38.0	-26.3	41.2	23.16	54.0	16.0	H
17953.800	38.0	-26.1	41.3	22.85	54.0	16.0	H

Channel 64

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5352.000	40.7	-25.8	34.5	32.01	54.0	13.3	V
5353.650	40.8	-25.8	34.5	32.11	54.0	13.2	V
10642.100	33.6	-33.3	37.6	29.34	54.0	20.4	H
15959.500	36.6	-27.7	40.6	23.61	54.0	17.4	V
17839.400	37.8	-26.4	41.2	23.00	54.0	16.2	H
17956.000	38.0	-26.1	41.3	22.86	54.0	16.0	V

Channel 100

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5456.150	41.0	-25.3	34.6	-50.22	54.0	13.0	V
5456.450	41.0	-25.3	34.6	-50.18	54.0	13.0	V

10994.100	33.8	-32.7	37.8	-38.91	54.0	20.2	V
15941.900	36.8	-27.7	40.6	-49.70	54.0	17.2	H
17742.600	37.7	-26.5	41.1	-52.26	54.0	16.3	V
17964.800	38.1	-26.1	41.3	-53.34	54.0	15.9	H

Channel 120

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5449.850	39.6	-25.4	34.6	-48.74	54.0	14.4	V
5457.450	39.8	-25.3	34.6	-48.97	54.0	14.2	V
11119.500	32.8	-32.3	37.9	-38.39	54.0	21.2	H
15940.800	36.9	-27.7	40.6	-49.78	54.0	17.1	V
17846.000	37.9	-26.4	41.2	-52.77	54.0	16.1	V
17959.300	38.1	-26.1	41.3	-53.25	54.0	15.9	H

Channel 140

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5398.900	39.2	-25.7	34.5	-48.02	54.0	14.8	V
5455.900	39.7	-25.4	34.6	-48.89	54.0	14.3	V
11400.000	33.5	-32.3	38.1	-39.31	54.0	20.5	H
15946.300	36.8	-27.7	40.6	-49.76	54.0	17.2	V
17847.100	37.8	-26.4	41.2	-52.66	54.0	16.2	H
17968.100	38.1	-26.1	41.3	-53.27	54.0	15.9	V

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5144.800	41.4	-25.7	34.2	32.79	54.0	12.6	V
5148.100	41.4	-25.7	34.3	32.81	54.0	12.6	V
12440.000	34.4	-31.1	38.9	26.64	54.0	19.6	H
15540.000	35.5	-28.8	40.1	24.28	54.0	18.5	V
17856.800	38.1	-26.3	41.2	23.19	54.0	16.0	H
17952.000	38.1	-26.1	41.3	22.91	54.0	15.9	V

Channel 40

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5147.000	41.0	-25.7	34.3	32.45	54.0	13.0	V

5353.200	40.4	-25.8	34.5	31.71	54.0	13.6	V
12444.000	34.5	-31.1	38.9	26.74	54.0	19.5	V
15600.000	35.2	-28.7	40.1	23.79	54.0	18.8	H
17857.600	38.0	-26.3	41.2	23.17	54.0	16.0	V
17873.600	38.0	-26.3	41.2	23.07	54.0	16.0	V

Channel 48

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5354.500	40.6	-25.8	34.5	31.90	54.0	13.4	V
5358.600	40.5	-25.8	34.5	31.83	54.0	13.5	V
12439.200	34.4	-31.1	38.9	26.70	54.0	19.6	H
15720.000	35.6	-28.5	40.3	23.80	54.0	18.4	H
17855.200	38.0	-26.3	41.2	23.17	54.0	16.0	H
17859.200	38.0	-26.3	41.2	23.11	54.0	16.0	V

Channel 52

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5144.550	39.2	-25.7	34.2	30.67	54.0	14.8	V
5353.650	39.7	-25.8	34.5	31.01	54.0	14.3	V
12450.500	34.5	-31.1	38.9	26.70	54.0	19.5	V
15780.200	35.5	-28.4	40.4	23.50	54.0	18.5	H
17850.400	37.9	-26.3	41.2	23.06	54.0	16.1	H
17984.600	38.0	-26.0	41.3	22.73	54.0	16.0	V

Channel 56

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5351.700	40.2	-25.8	34.5	31.48	54.0	13.8	V
5352.300	40.1	-25.8	34.5	31.38	54.0	13.9	V
12448.200	34.4	-31.1	38.9	26.63	54.0	19.6	H
15839.600	36.3	-28.2	40.5	24.02	54.0	17.7	H
17740.400	37.7	-26.5	41.1	23.09	54.0	16.3	H
17852.600	38.0	-26.3	41.2	23.13	54.0	16.0	H

Channel 64

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.550	40.8	-25.8	34.5	32.14	54.0	13.2	V
5350.600	40.9	-25.8	34.5	32.16	54.0	13.1	V
10647.600	32.8	-33.3	37.6	28.49	54.0	21.2	H

15959.500	36.6	-27.7	40.6	23.61	54.0	17.4	V
17742.600	37.6	-26.5	41.1	23.01	54.0	16.4	H
17851.500	38.0	-26.3	41.2	23.13	54.0	16.0	H

Channel 100

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5408.900	39.3	-25.6	34.5	-48.16	54.0	14.7	V
5421.100	39.4	-25.6	34.5	-48.34	54.0	14.6	V
10999.600	33.5	-32.7	37.8	-38.58	54.0	20.5	V
16027.700	36.8	-27.9	40.7	-49.70	54.0	17.2	H
17771.200	37.6	-26.5	41.1	-52.19	54.0	16.4	V
17958.200	38.1	-26.1	41.3	-53.28	54.0	15.9	H

Channel 120

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5453.400	39.5	-25.4	34.6	-48.72	54.0	14.5	V
5458.900	39.6	-25.3	34.6	-48.85	54.0	14.4	V
11199.800	33.3	-32.1	38.0	-39.17	54.0	20.7	V
15940.800	36.8	-27.7	40.6	-49.71	54.0	17.2	H
17736.000	37.4	-26.5	41.1	-52.00	54.0	16.6	H
17957.100	38.1	-26.1	41.3	-53.25	54.0	15.9	V

Channel 140

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5459.150	39.8	-25.3	34.6	-49.05	54.0	14.2	V
5458.650	39.6	-25.3	34.6	-48.86	54.0	14.4	V
11400.000	33.4	-32.3	38.1	-39.20	54.0	20.6	H
15947.400	36.8	-27.7	40.6	-49.74	54.0	17.2	H
17740.400	37.5	-26.5	41.1	-52.11	54.0	16.5	H
17956.000	38.1	-26.1	41.3	-53.23	54.0	15.9	V

802.11ac-HT20
Channel 36

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5139.400	41.6	-25.7	34.2	33.01	54.0	12.4	V
5139.450	41.6	-25.7	34.2	33.02	54.0	12.4	V
11942.400	34.3	-31.7	38.7	27.21	54.0	19.7	V
15540.000	35.5	-28.8	40.1	24.30	54.0	18.5	H
17857.600	38.0	-26.3	41.2	23.18	54.0	16.0	H
17880.800	38.0	-26.3	41.2	23.06	54.0	16.0	H

Channel 40

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5415.550	40.3	-25.6	34.5	31.43	54.0	13.7	V
5434.550	40.3	-25.5	34.5	31.26	54.0	13.7	V
12443.200	34.4	-31.1	38.9	26.69	54.0	19.6	H
15600.000	35.2	-28.7	40.1	23.76	54.0	18.8	H
17855.200	38.1	-26.3	41.2	23.20	54.0	15.9	H
17952.800	38.2	-26.1	41.3	23.05	54.0	15.8	V

Channel 48

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5421.000	40.5	-25.6	34.5	31.55	54.0	13.5	V
5441.850	40.5	-25.4	34.5	31.41	54.0	13.5	V
12437.600	34.4	-31.1	38.9	26.63	54.0	19.6	H
15720.000	35.6	-28.5	40.3	23.78	54.0	18.4	H
17964.800	38.1	-26.1	41.3	22.95	54.0	15.9	V
17965.600	38.0	-26.1	41.3	22.81	54.0	16.0	H

Channel 52

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.900	39.7	-25.8	34.5	31.02	54.0	14.3	V
5351.300	39.7	-25.8	34.5	31.02	54.0	14.3	V
12440.600	34.5	-31.1	38.9	26.74	54.0	19.5	V
15780.200	35.5	-28.4	40.4	23.51	54.0	18.5	V
17740.400	37.5	-26.5	41.1	22.91	54.0	16.5	V
17956.000	38.0	-26.1	41.3	22.81	54.0	16.0	V