



FCC PART 15C TEST REPORT No. I22Z60589-IOT04

for

Sonim Technologies, Inc.

Smart phone

XP9900(P14001), XP9900(P14002), XP9900(P14003), XP9900(P14004),

XP9900(P14005), XP9900(P14006), XP9900(P14010)

With

FCC ID: WYPP14010

Hardware Version: V1.0

Software Version: 10.0.0-01-12.0.0-10.60.10

Issued Date: 2022-07-20

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I22Z60589-IOT04	Rev.0	1st edition	2022-07-20

CONTENTS

CONTENTS	3
1. TEST LATORATORY.....	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTINGENVIRONMENT	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. GENERAL DESCRIPTION.....	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS	8
6.1. SUMMARY OF TEST RESULTS.....	8
6.2. STATEMENTS.....	9
6.3. TEST CONDITIONS	9
7. TEST EQUIPMENTS UTILIZED	9
8. MEASUREMENT UNCERTAINTY	10
8.1. TRANSMITTER OUTPUT POWER.....	10
8.2. PEAK POWER SPECTRAL DENSITY	10
8.3. OCCUPIED 6dB BANDWIDTH.....	10
8.4. BAND EDGES COMPLIANCE	10
8.5. SPURIOUS EMISSIONS	10
8.6. AC POWER-LINE CONDUCTED EMISSION	10
ANNEX A: MEASUREMENT RESULTS.....	11
A.1. MEASUREMENT METHOD	11
A.2. MAXIMUM PEAK OUTPUT POWER	12
A.2.1 ANTENNA GAIN.....	12
A.2.2. MAXIMUM PEAK OUTPUT POWER-CONDUCTED	12

A.3. PEAK POWER SPECTRAL DENSITY	16
A.4. OCCUPIED 6DB BANDWIDTH	17
A.5. TRANSMITTER SPURIOUS EMISSION	22
A.5.1 TRANSMITTER SPURIOUS EMISSION - RADIATED	22
A.6. BAND EDGES COMPLIANCE	34
A6.1 BAND EDGES - CONDUCTED.....	34
A.7. AC POWERLINE CONDUCTED EMISSION.....	41
ANNEX B: EUT PARAMETERS.....	46
ANNEX C: ACCREDITATION CERTIFICATE	46

1. TEST LATORATORY

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (ISED#: 24849). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

1.3. TestingEnvironment

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2022-05-05


Testing End Date: 2022-07-20

1.5. Signature




Xie Xiuzhen

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Hu Xiaoyu

(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: Sonim Technologies, Inc.
Address: 6500 River Place Blvd., Building 7, Suite 250
City: Austin
Postal Code: TX 78730
Country: USA
Telephone: 1-650-378-8100
Fax: /

2.2. Manufacturer Information

Company Name: Sonim Technologies, Inc.
Address: 6500 River Place Blvd., Building 7, Suite 250
City: Austin
Postal Code: TX 78730
Country: USA
Telephone: 1-650-378-8100
Fax: /

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE)

3.1. About EUT

Description	Smart phone
Model name	XP9900(P14001),XP9900(P14002),XP9900(P14003), XP9900(P14004),XP9900(P14005),XP9900(P14006), XP9900(P14010)
FCC ID	WYPP14010
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.9V

3.2. Internal Identification of EUT used during the test

EUTID*	IMEI	HW Version	SW Version
UT77a	016188000003694	V1.0	10.0.0-01-12.0.0-10.60.10
UT07a	016188000001615	V1.0	10.0.0-01-12.0.0-10.60.10

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger
AE3	USB Cable

AE1

Model	BAT-05000-01S
Manufacturer	Dongguan Veken Battery Co., Ltd.

AE2

Model	1-CHUSQ302-097
Manufacturer	HUIZHOU PUAN ELECTRONICS CO.,LTD

AE3

Model	336278
Manufacturer	SUNTOPS ELECTRONICS CO.,LTD

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a model of Smart phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. REFERENCE DOCUMENTS

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C and E:	
	15.205 Restricted bands of operation;	2018
	15.209 Radiated emission limits, general requirements;	
	15.407 General technical requirements	
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from	2013
	Low-Voltage Electrical and Electronic Equipment in the	
	Range of 9 kHz to 40 GHz	
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance - Conducted& Radiated	15.407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacture as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

The model XP9900(P14002), XP9900(P14003), XP9900(P14004), XP9900(P14005), XP9900(P14006), XP9900(P14010) is a variant product of XP9900(P14001). For detail differences between two models please refer the Declaration of Changes document.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.9V
Humidity	44%

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2023-05-15
2	LISN	ENV216	101200	Rohde & Schwarz	1 year	2023-05-30
3	Test Receiver	ESCI	100344	Rohde & Schwarz	1 year	2023-02-21
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103023	Rohde & Schwarz	1 year	2022-10-28
2	BiLog Antenna	VULB9163	302	Schwarzbeck	1 year	2022-12-28
3	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	1 year	2022-08-11
4	EMI Antenna	3115	6914	ETS-Lindgren	1 year	2023-01-20

8. Measurement Uncertainty

8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5. Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.18
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.54
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.26

8.6. AC Power-line Conducted Emission


Measurement Uncertainty : 3.08dB,k=2

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

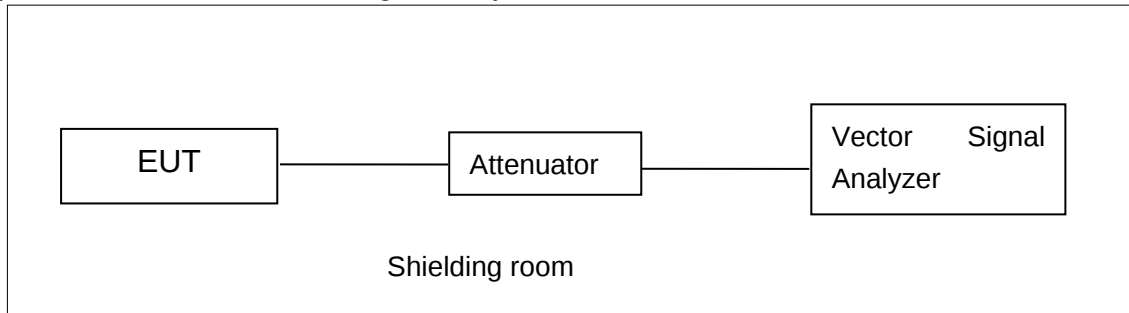


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

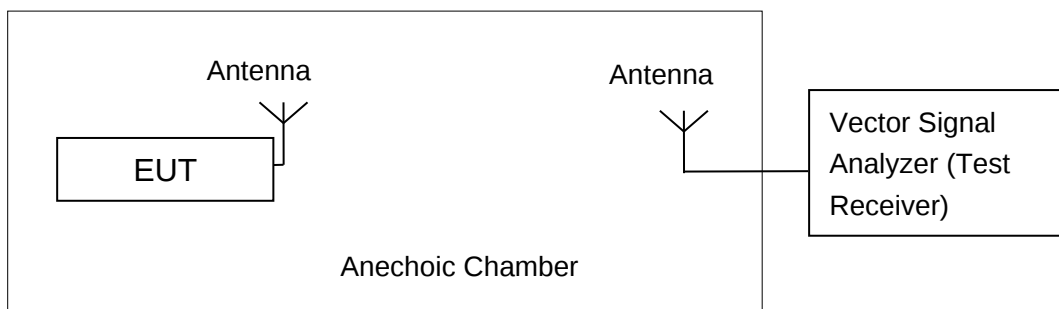

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

A.2.1 Antenna Gain

Antenna gain is -1.01dBi(Ant8); -0.35dBi(Ant9) and the value is supplied by the applicant or manufacturer.

A.2.2. Maximum Peak Output Power-conducted

Measurement Results:

SISO-ANT8:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	16.12	15.64	15.21

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n(20MHz)	MCS0	15.96	15.50	15.06

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac(20MHz)	MCS0	14.55	14.09	13.48

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n(40MHz)	MCS0	15.24	14.70

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac(40MHz)	MCS0	13.47	13.31

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac(80MHz)	MCS0	12.43

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

SISO-ANT9:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	15.64	15.76	15.94

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n(20MHz)	MCS0	15.50	15.63	15.76

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac(20MHz)	MCS0	14.09	14.04	14.17

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n(40MHz)	MCS0	14.85	14.91

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac(40MHz)	MCS0	14.10	14.21

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac(80MHz)	MCS0	12.70

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

MIMO-SUM:

802.11a mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	6	18.94	18.75	18.59

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11n(20MHz)	MCS0	18.77	18.58	18.42

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11ac(20MHz)	MCS0	17.34	17.10	16.85

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11n(40MHz)	MCS0	18.07	17.83

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT40 mode

Mode	Data Rate (Index)	Test Result (dBm)	
		5755MHz (Ch151)	5795MHz (Ch159)
802.11ac(40MHz)	MCS0	15.91	15.91

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11ac-HT80 mode

Mode	Data Rate (Index)	Test Result (dBm)
		5775MHz (Ch155)
802.11ac(80MHz)	MCS0	15.23

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Duty cycles of all mode are meet the 98% requirement.

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

SISO-ANT8(11ac80-Ant9)

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	2.71	P
	157	2.31	P
	165	1.94	P
802.11n HT20	149	2.15	P
	157	1.80	P
	165	1.40	P
802.11n HT40	151	-1.66	P
	159	-2.09	P
802.11ac HT80	155	-7.60	P

Measurement Results:

MIMO

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	5.42	P
	157	5.10	P
	165	4.95	P
802.11n HT20	149	4.88	P
	157	4.64	P
	165	4.46	P
802.11n HT40	151	1.10	P
	159	0.74	P
802.11ac HT80	155	-4.08	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
802.11a	149	Fig.1	15.35	P
	157	Fig.2	15.35	P
	165	Fig.3	15.30	P
802.11n HT20	149	Fig.4	16.00	P
	157	Fig.5	15.95	P
	165	Fig.6	15.45	P
802.11n HT40	151	Fig.7	35.76	P
	159	Fig.8	35.28	P
802.11ac HT80	155	Fig.9	75.04	P

Conclusion: PASS

Test graphs as below:

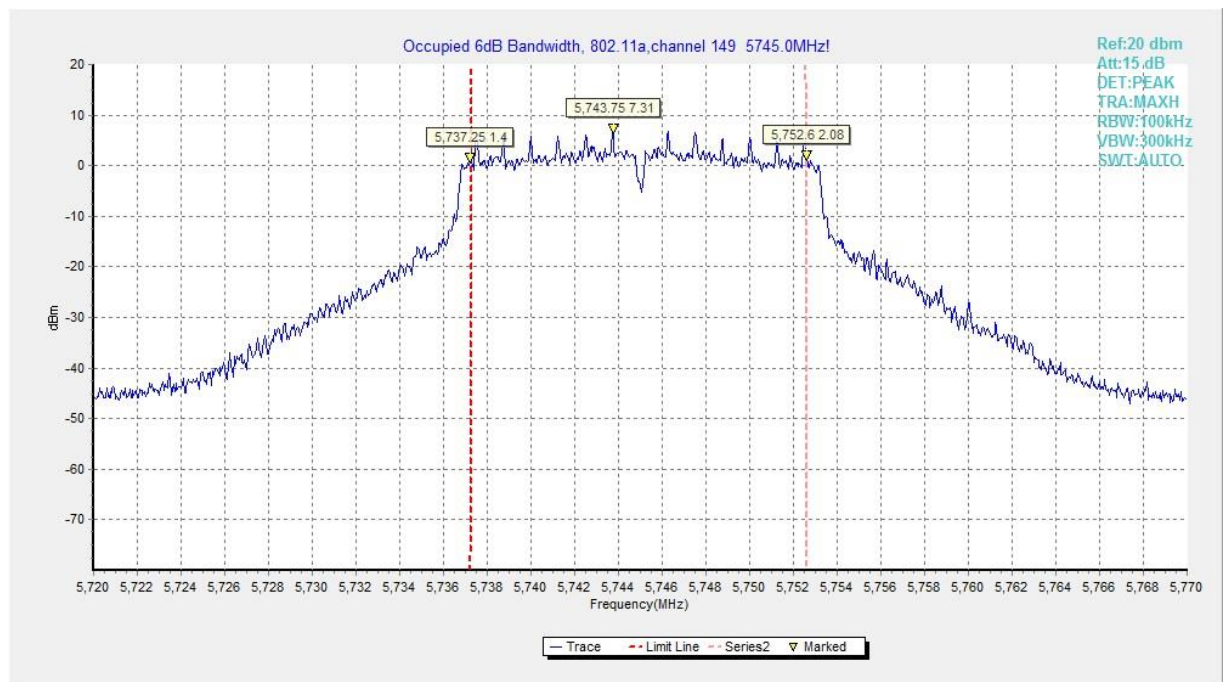


Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)

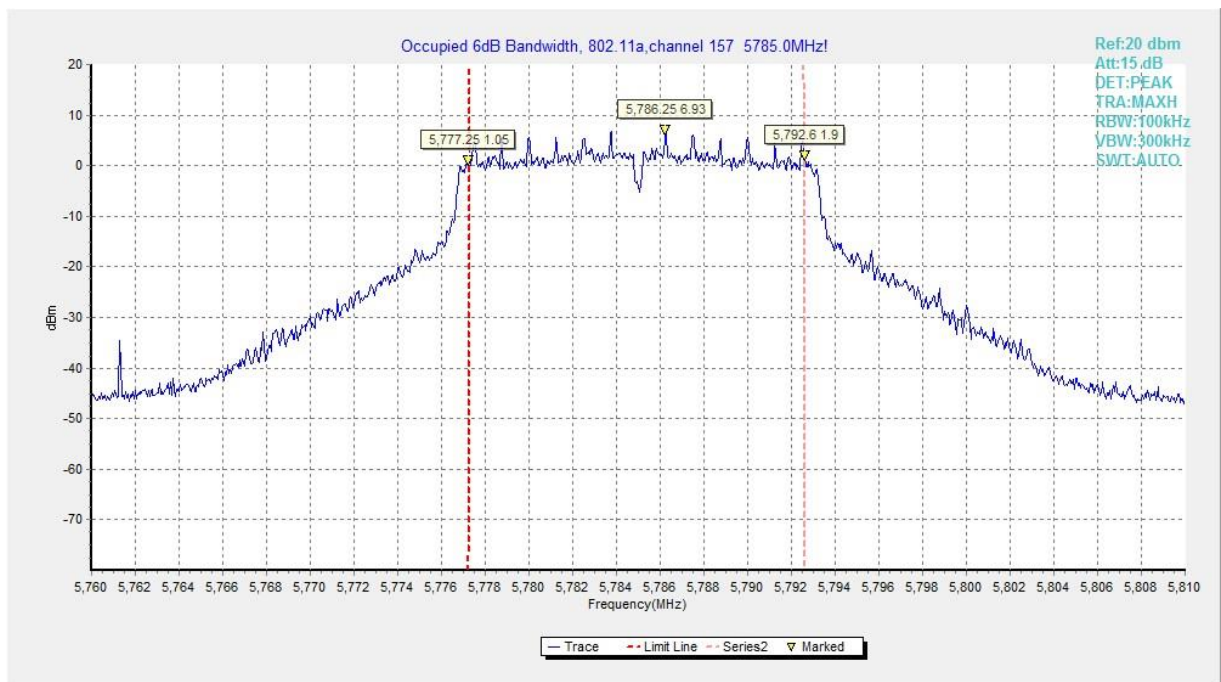


Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)

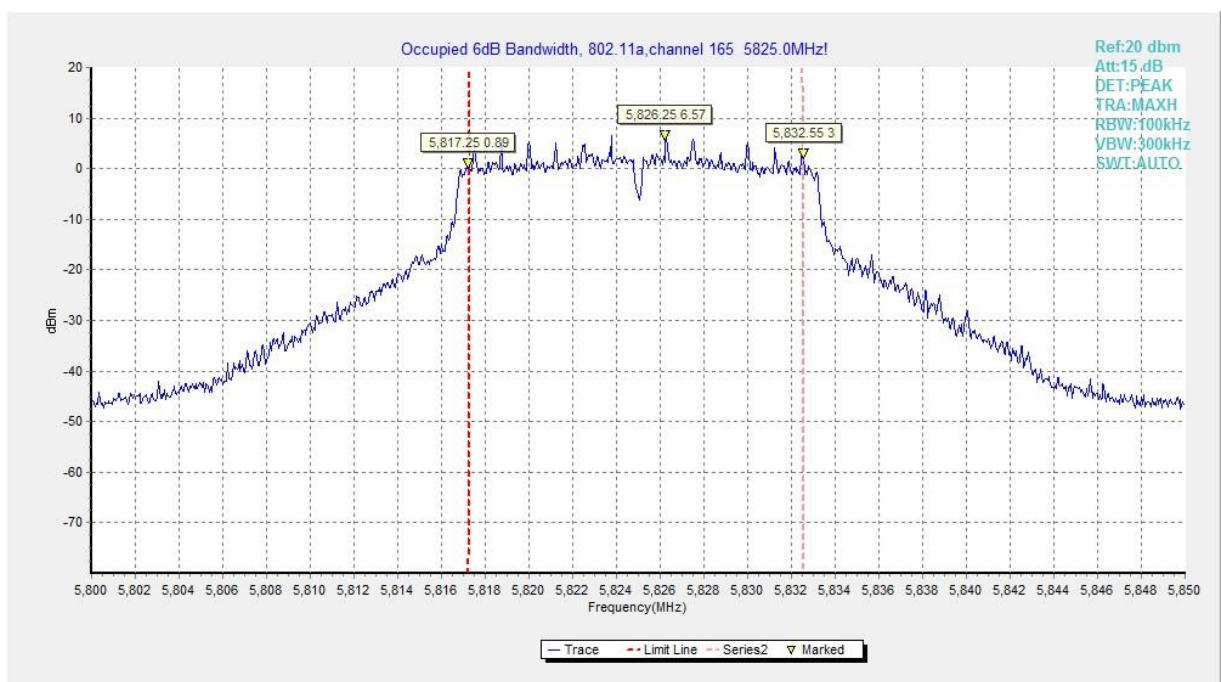


Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)

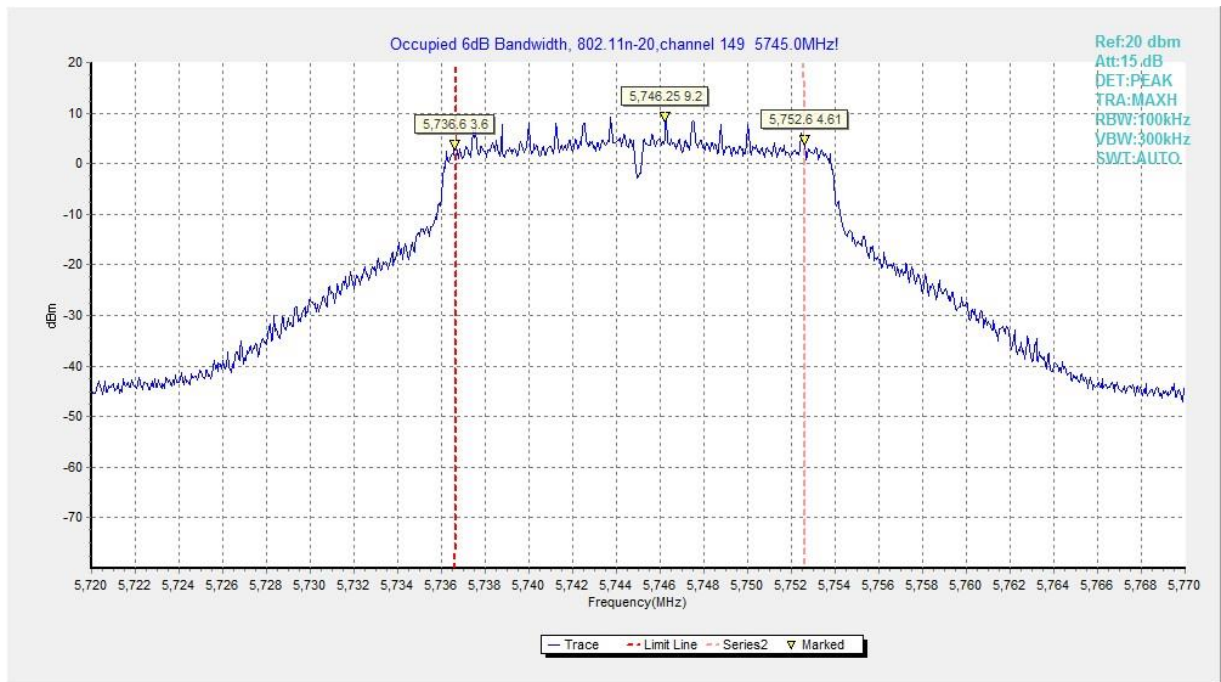


Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

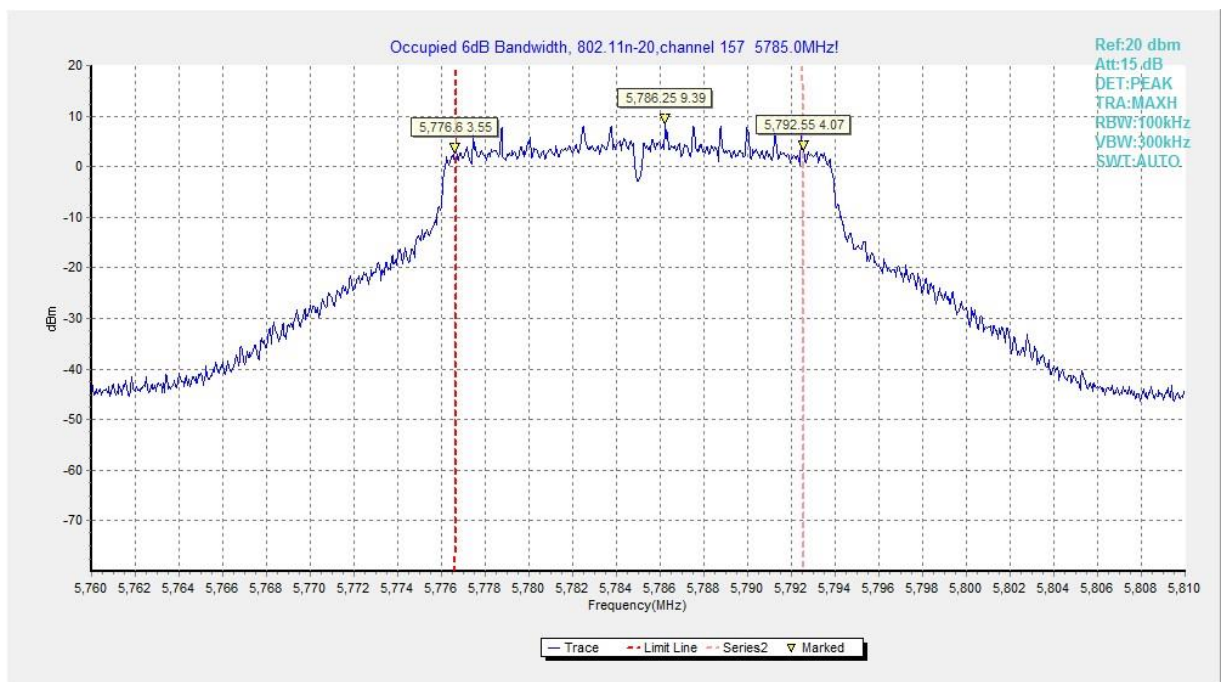


Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

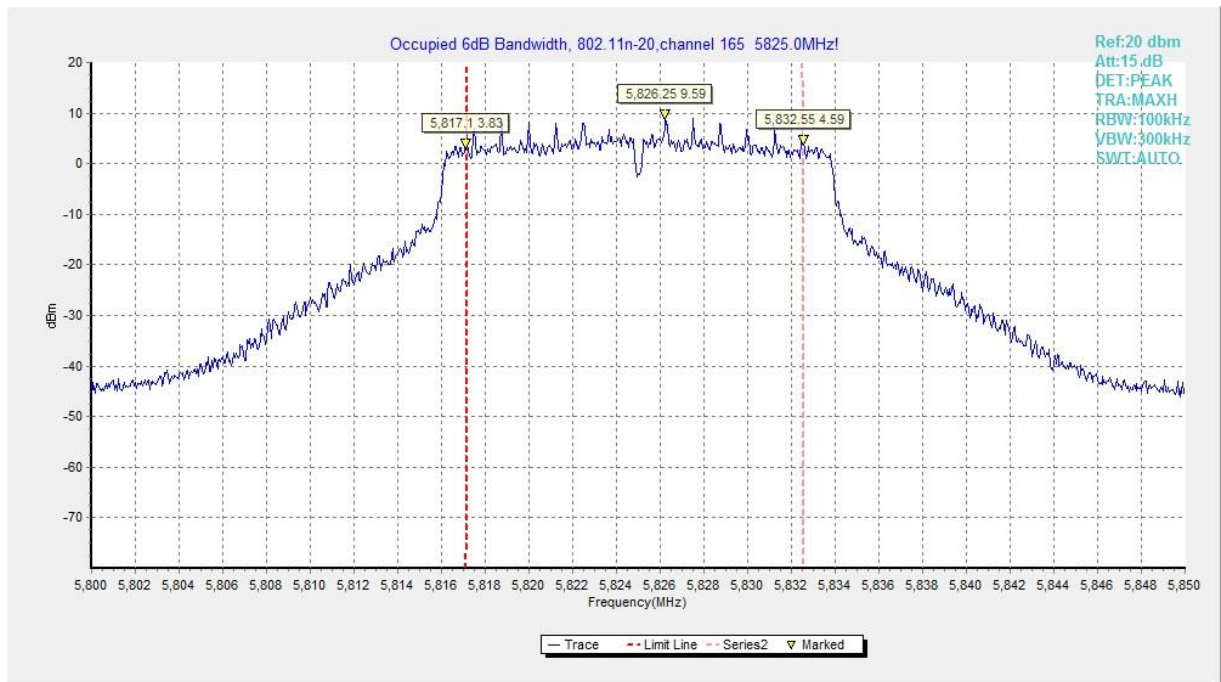


Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

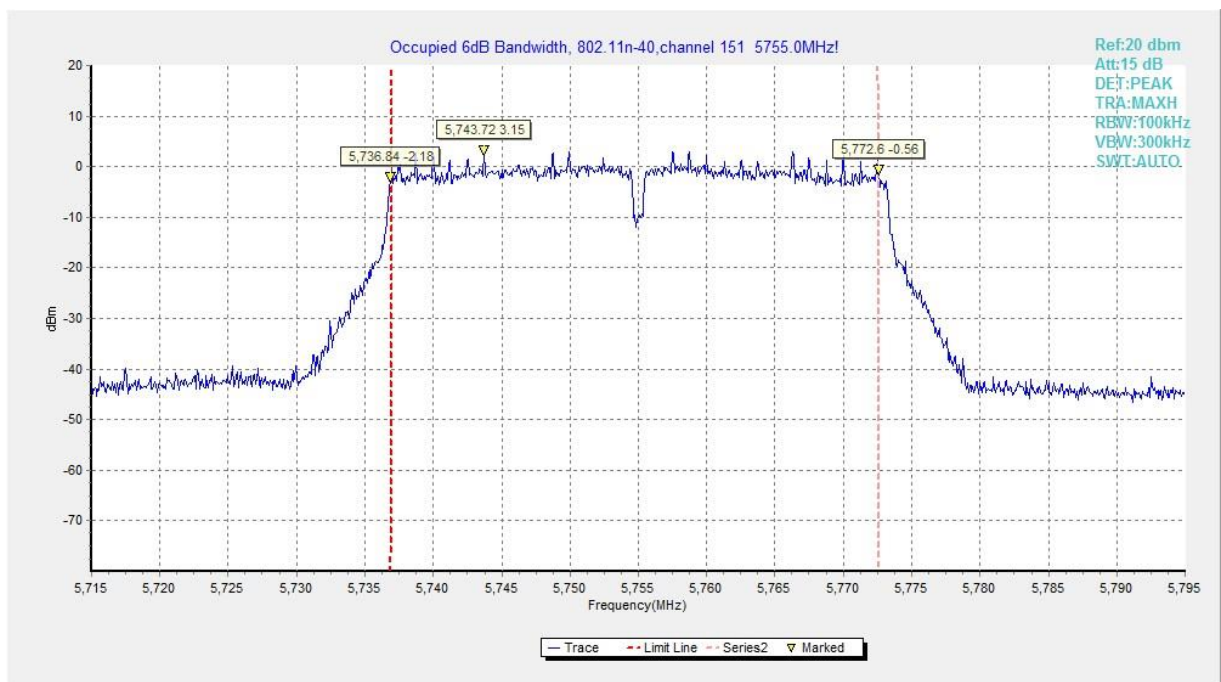


Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)

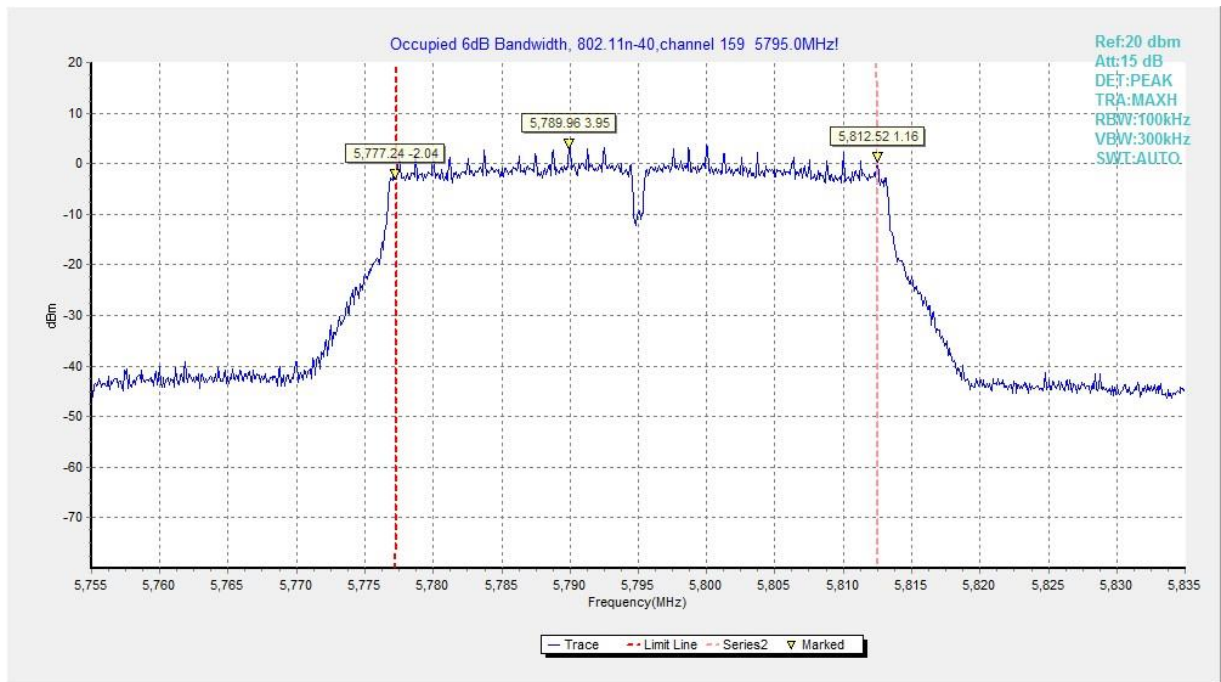


Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)

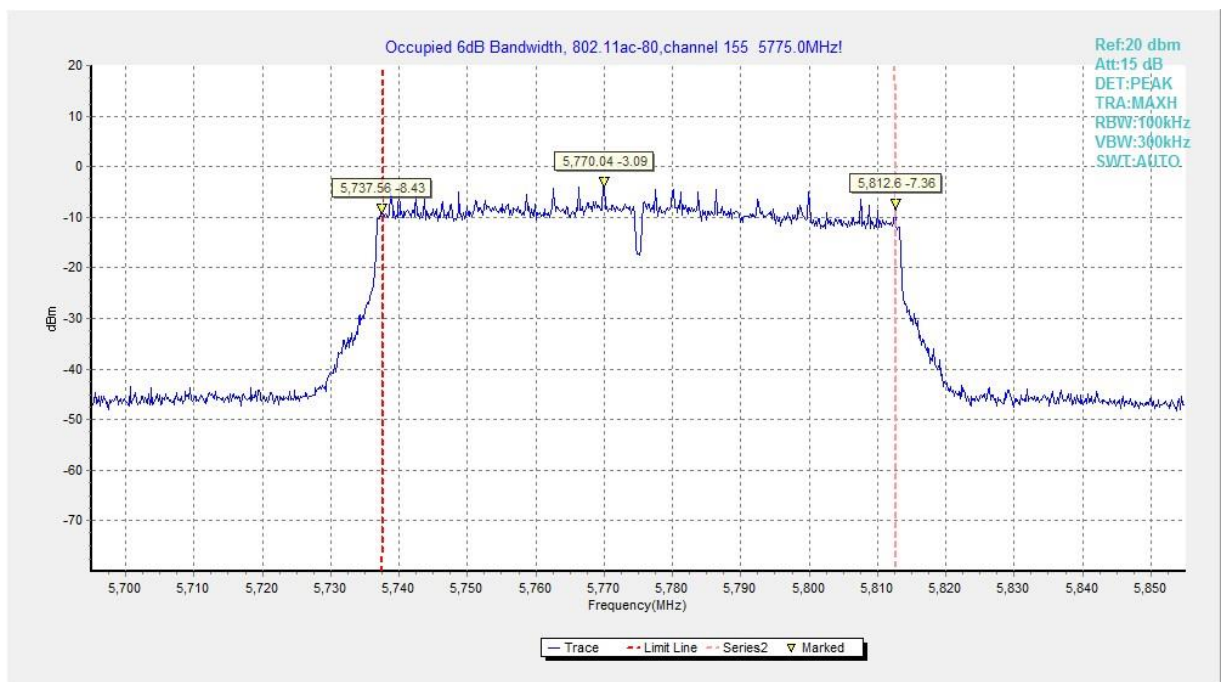


Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)

A.5. Transmitter Spurious Emission

A.5.1 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:


Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m

The EUT and transmitting antenna shall be centered on the turntable.

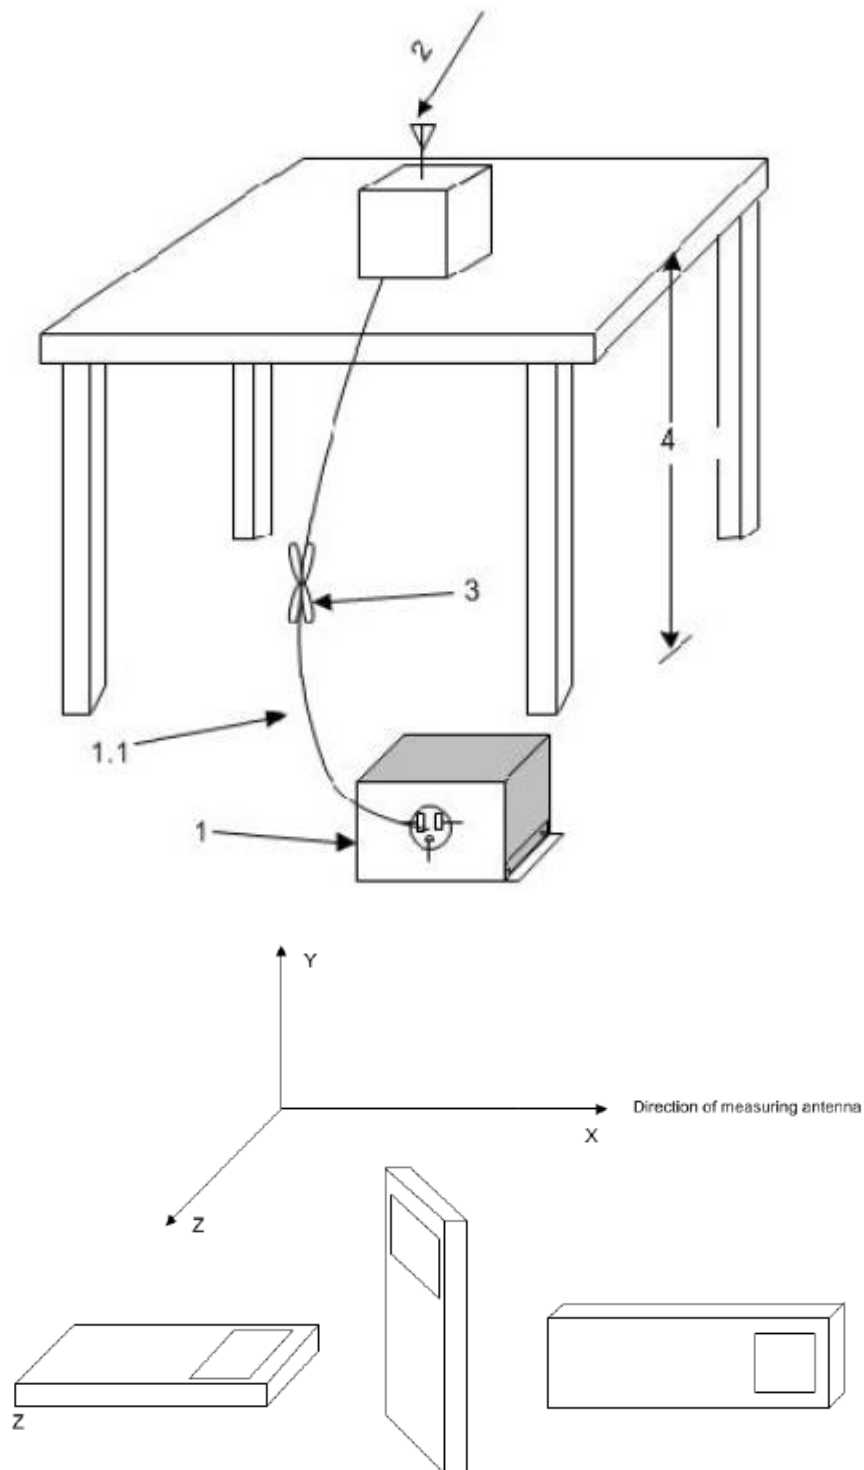

Test Condition

The EUT shall be tested 1 near top, 1 near middle, and 1 near bottom. Set the unlicensed wireless device to operate in continuous transmit mode. For unlicensed wireless devices unable to be configured for 100% duty cycle even in test mode, configure the system for the maximum duty cycle supported.

When required for unlicensed wireless devices, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the

nominal rated supply voltage.

Exploratory radiated emissions measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. The frequencies of maximum emission may be determined by manually positioning the antenna close to the EUT, and then moving the antenna over all sides of the EUT while observing a spectral display. It is advantageous to have prior knowledge of the frequencies of emissions, although this may be determined from such a near-field scan. The near-field scan shall only be used to determine the frequency but not the amplitude of the emissions. Where exploratory measurements are not adequate to determine the worst-case operating modes and are used only to identify the frequencies of the highest emissions, additional preliminary tests can be required.

For emissions from the EUT, the maximum level shall be determined by rotating the EUT and its antenna through 0° to 360°. For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of test. If either antenna height or EUT azimuth are not fully measured during exploratory testing, then complete testing can be required at the OATS or semi-anechoic chamber when the final full spectrum testing is performed.

Final radiated emissions measurements

The final measurements are using the orientation and equipment arrangement of the EUT based on the measurement results found during the preliminary (exploratory) measurements, the EUT arrangement, appropriate modulation, and modes of operation that produce the emissions that have the highest amplitude relative to the limit shall be selected for the final measurement.

For each mode of operation required to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

For each mode selected, record the frequency and amplitude of the highest fundamental emission (if applicable), as well as the frequency and amplitude of the six highest spurious emissions relative to the limit. Emissions more than 20 dB below the limit do not need to be reported.

This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The receiver references:

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-40000	1MHz/3MHz	20

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= P_{Mea} + Cable Loss + Antenna Factor

Where:

P_{Mea} field strength recorded from the instrument

Conclusion: PASS

EUT ID: UT77a

Average Results:

802.11a

Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.700	45.87	-25.50	46.66	24.71	54.00	8.13	V
17975.250	45.77	-25.50	46.66	24.61	54.00	8.23	V
14487.700	40.41	-28.59	42.46	26.54	54.00	13.59	H
14495.950	40.31	-28.59	42.46	26.44	54.00	13.69	V
11929.100	37.62	-31.48	39.09	30.01	54.00	16.38	H
11912.600	37.60	-31.85	39.05	30.40	54.00	16.40	V

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17792.650	46.04	-25.50	46.66	24.88	54.00	7.96	H
17966.450	46.00	-25.50	46.66	24.84	54.00	8.00	H
14477.800	41.13	-28.59	42.46	27.26	54.00	12.87	H
14479.450	40.97	-28.59	42.46	27.10	54.00	13.03	H
11919.200	38.23	-31.48	39.09	30.62	54.00	15.77	H
11992.350	38.23	-31.48	39.09	30.62	54.00	15.77	V

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17892.200	46.38	-25.50	46.66	25.22	54.00	7.62	H
17991.750	46.22	-25.50	46.66	25.06	54.00	7.78	V
14476.150	41.02	-28.59	42.46	27.15	54.00	12.98	V
14495.400	40.88	-28.59	42.46	27.01	54.00	13.12	V
11939.000	38.53	-31.48	39.09	30.92	54.00	15.47	V
11891.700	38.14	-31.85	39.05	30.94	54.00	15.86	V

802.11n-HT20
Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.200	46.34	-25.50	46.66	25.18	54.00	7.66	V
17872.400	46.29	-25.50	46.66	25.13	54.00	7.71	V
14486.050	41.22	-28.59	42.46	27.35	54.00	12.78	V
14497.600	41.18	-28.59	42.46	27.31	54.00	12.82	V
11918.100	38.18	-31.48	39.09	30.57	54.00	15.82	V
11932.400	38.09	-31.48	39.09	30.48	54.00	15.91	V

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17984.050	46.03	-25.50	46.66	24.87	54.00	7.97	H
17975.800	45.91	-25.50	46.66	24.75	54.00	8.09	V
14498.150	41.17	-28.59	42.46	27.30	54.00	12.83	H
14495.400	40.97	-28.59	42.46	27.10	54.00	13.03	V
11916.450	38.17	-31.48	39.09	30.56	54.00	15.83	H
11912.050	38.08	-31.85	39.05	30.88	54.00	15.92	V

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.700	46.11	-25.50	46.66	24.95	54.00	7.89	V
17859.750	46.09	-25.50	46.66	24.93	54.00	7.91	H
14488.250	40.73	-28.59	42.46	26.86	54.00	13.27	H
14481.100	40.66	-28.59	42.46	26.79	54.00	13.34	V
11909.850	38.51	-31.85	39.05	31.31	54.00	15.49	H
11983.000	38.40	-31.48	39.09	30.79	54.00	15.60	H

802.11n-HT40
Ch151

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.350	46.00	-25.50	46.66	24.84	54.00	8.00	H
17874.600	45.86	-25.50	46.66	24.70	54.00	8.14	V
14479.450	40.77	-28.59	42.46	26.90	54.00	13.23	H
14480.000	40.75	-28.59	42.46	26.88	54.00	13.25	H
11962.100	38.10	-31.48	39.09	30.49	54.00	15.90	V
11951.650	38.08	-31.48	39.09	30.47	54.00	15.92	V

Ch159

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.250	46.20	-25.50	46.66	25.04	54.00	7.80	H
17881.750	45.98	-25.50	46.66	24.82	54.00	8.02	V
14482.750	41.04	-28.59	42.46	27.17	54.00	12.96	V
14484.400	40.94	-28.59	42.46	27.07	54.00	13.06	H
11968.700	37.94	-31.48	39.09	30.33	54.00	16.06	V
11899.400	37.93	-31.85	39.05	30.73	54.00	16.07	H

802.11ac-HT20
Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17987.350	46.35	-25.50	46.66	25.19	54.00	7.65	H
17980.750	46.27	-25.50	46.66	25.11	54.00	7.73	V
14481.650	40.86	-28.59	42.46	26.99	54.00	13.14	V
14487.700	40.86	-28.59	42.46	26.99	54.00	13.14	V
11904.900	38.80	-31.85	39.05	31.60	54.00	15.20	V
11875.750	38.00	-31.85	39.05	30.80	54.00	16.00	H

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17891.100	46.30	-25.50	46.66	25.14	54.00	7.70	H
17984.600	46.12	-25.50	46.66	24.96	54.00	7.88	V
14489.350	41.17	-28.59	42.46	27.30	54.00	12.83	H
14483.850	40.77	-28.59	42.46	26.90	54.00	13.23	H
11875.750	38.56	-31.85	39.05	31.36	54.00	15.44	H
11930.750	38.18	-31.48	39.09	30.57	54.00	15.82	H

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17989.550	46.11	-25.50	46.66	24.95	54.00	7.89	H
17888.350	46.06	-25.50	46.66	24.90	54.00	7.94	H
14492.100	41.33	-28.59	42.46	27.46	54.00	12.67	V
14487.150	40.98	-28.59	42.46	27.11	54.00	13.02	H
11885.100	38.30	-31.85	39.05	31.10	54.00	15.70	V
11917.550	38.28	-31.48	39.09	30.67	54.00	15.72	V

802.11ac-HT40

Ch151

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17984.050	46.07	-25.50	46.66	24.91	54.00	7.93	V
17885.050	45.92	-25.50	46.66	24.76	54.00	8.08	V
14470.650	41.18	-28.59	42.46	27.31	54.00	12.82	V
14486.600	41.05	-28.59	42.46	27.18	54.00	12.95	H
11924.150	38.47	-31.48	39.09	30.86	54.00	15.53	V
11934.050	38.28	-31.48	39.09	30.67	54.00	15.72	H

Ch159

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17797.600	45.98	-25.50	46.66	24.82	54.00	8.02	V
17886.150	45.86	-25.50	46.66	24.70	54.00	8.14	V
14485.500	40.96	-28.59	42.46	27.09	54.00	13.04	H
14487.700	40.95	-28.59	42.46	27.08	54.00	13.05	V
11941.200	38.13	-31.48	39.09	30.52	54.00	15.87	H
11930.200	38.09	-31.48	39.09	30.48	54.00	15.91	H

802.11ac-HT80
Ch155

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17968.100	46.10	-25.50	46.66	24.94	54.00	7.90	V
17880.100	46.07	-25.50	46.66	24.91	54.00	7.93	V
14487.150	41.24	-28.59	42.46	27.37	54.00	12.76	V
14496.500	41.12	-28.59	42.46	27.25	54.00	12.88	H
11946.700	38.25	-31.48	39.09	30.64	54.00	15.75	H
11913.700	38.09	-31.48	39.09	30.48	54.00	15.91	H

Peak Results:
802.11a
Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17975.250	56.01	-25.50	46.66	34.85	74.00	17.99	H
17996.700	56.00	-25.50	46.66	34.84	74.00	18.00	H
14585.050	52.04	-27.29	41.90	37.43	68.20	16.16	V
14701.650	51.56	-28.32	41.35	38.54	68.20	16.64	V
11859.800	48.54	-31.85	39.05	41.34	74.00	25.46	V
11916.450	47.83	-31.48	39.09	40.22	74.00	26.17	V

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17959.300	55.28	-25.50	46.66	34.12	74.00	18.72	V
17662.300	55.10	-25.74	45.95	34.89	68.20	13.10	H
14652.700	51.47	-27.29	41.90	36.86	68.20	16.73	V
14686.250	51.26	-28.32	41.35	38.24	68.20	16.94	V
11986.300	48.08	-31.48	39.09	40.47	74.00	25.92	H
11975.300	47.38	-31.48	39.09	39.77	74.00	26.62	V

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.950	55.36	-25.50	46.66	34.20	74.00	18.64	H
17788.250	55.27	-25.50	46.66	34.11	74.00	18.73	V
14568.550	51.10	-27.29	41.90	36.49	68.20	17.10	H
14690.100	50.96	-28.32	41.35	37.94	68.20	17.24	V
11593.600	47.68	-32.31	38.91	41.09	74.00	26.32	H
11864.200	47.54	-31.85	39.05	40.34	74.00	26.46	H

802.11n-HT20

Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17884.500	55.35	-25.50	46.66	34.19	74.00	18.65	H
17774.500	55.25	-25.50	46.66	34.09	74.00	18.75	H
14553.700	50.90	-27.29	41.90	36.29	68.20	17.30	H
14599.900	50.56	-27.29	41.90	35.95	68.20	17.64	H
11874.100	47.76	-31.85	39.05	40.56	74.00	26.24	H
11876.850	46.95	-31.85	39.05	39.75	74.00	27.05	V

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17960.400	56.00	-25.50	46.66	34.84	74.00	18.00	H
17963.700	55.53	-25.50	46.66	34.37	74.00	18.47	V
14360.100	51.66	-28.42	42.34	37.74	68.20	16.54	V
14213.250	51.09	-28.99	42.00	38.07	68.20	17.11	H
11882.350	47.59	-31.85	39.05	40.39	74.00	26.41	V
11911.500	46.90	-31.85	39.05	39.70	74.00	27.10	V

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17678.800	55.38	-25.74	45.95	35.17	68.20	12.82	H
17888.900	55.26	-25.50	46.66	34.10	74.00	18.74	V
13548.850	51.22	-29.56	39.99	40.79	68.20	16.98	V
14357.900	50.94	-28.42	42.34	37.02	68.20	17.26	H
11786.100	47.41	-31.99	38.98	40.42	74.00	26.59	H
11882.900	47.18	-31.85	39.05	39.98	74.00	26.82	H

802.11n-HT40

Ch151

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17784.400	56.12	-25.50	46.66	34.96	74.00	17.88	V
17890.000	55.69	-25.50	46.66	34.53	74.00	18.31	V
14296.300	51.82	-28.42	42.34	37.90	68.20	16.38	V
14687.900	51.03	-28.32	41.35	38.01	68.20	17.17	H
10883.000	47.36	-32.33	38.59	41.10	74.00	26.64	H
11929.100	47.18	-31.48	39.09	39.57	74.00	26.82	V

Ch159

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17797.600	55.48	-25.50	46.66	34.32	74.00	18.52	V
17783.300	55.44	-25.50	46.66	34.28	74.00	18.56	H
14714.300	51.45	-28.32	41.35	38.43	68.20	16.75	H
14596.050	51.22	-27.29	41.90	36.61	68.20	16.98	V
11928.550	47.55	-31.48	39.09	39.94	74.00	26.45	V
11947.250	47.33	-31.48	39.09	39.72	74.00	26.67	V

802.11ac-HT20

Ch149

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17913.100	55.36	-25.50	46.66	34.20	74.00	18.64	H
17777.800	55.24	-25.50	46.66	34.08	74.00	18.76	V
14286.950	51.46	-28.42	42.34	37.54	68.20	16.74	H
14561.950	51.26	-27.29	41.90	36.65	68.20	16.94	V
11940.650	48.47	-31.48	39.09	40.86	74.00	25.53	V
11956.600	48.04	-31.48	39.09	40.43	74.00	25.96	H

Ch157

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17875.700	55.91	-25.50	46.66	34.75	74.00	18.09	H
17980.750	55.27	-25.50	46.66	34.11	74.00	18.73	V
14687.350	51.69	-28.32	41.35	38.67	68.20	16.51	H
14665.350	50.98	-27.29	41.90	36.37	68.20	17.22	V
11930.750	47.80	-31.48	39.09	40.19	74.00	26.20	H
11545.200	47.21	-32.26	38.84	40.64	74.00	26.79	V

Ch165

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17930.150	55.66	-25.50	46.66	34.50	74.00	18.34	H
17854.250	55.47	-25.50	46.66	34.31	74.00	18.53	V
14433.250	51.37	-28.59	42.46	37.50	68.20	16.83	V
14544.900	51.31	-27.29	41.90	36.70	68.20	16.89	V
11915.900	47.81	-31.48	39.09	40.20	74.00	26.19	H
11898.300	47.56	-31.85	39.05	40.36	74.00	26.44	V

802.11ac-HT40
Ch151

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17867.450	55.69	-25.50	46.66	34.53	74.00	18.31	H
17869.650	55.38	-25.50	46.66	34.22	74.00	18.62	H
14623.550	51.11	-27.29	41.90	36.50	68.20	17.09	V
14552.050	51.07	-27.29	41.90	36.46	68.20	17.13	H
11841.650	47.60	-31.85	39.05	40.40	74.00	26.40	V
11995.650	47.58	-31.48	39.09	39.97	74.00	26.42	H

Ch159

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17964.800	55.05	-25.50	46.66	33.89	74.00	18.95	V
17853.150	54.97	-25.50	46.66	33.81	74.00	19.03	V
14575.700	51.16	-27.29	41.90	36.55	68.20	17.04	V
14678.000	51.01	-27.29	41.90	36.40	68.20	17.19	V
10964.950	47.11	-32.82	38.70	41.23	74.00	26.89	V
11918.100	47.09	-31.48	39.09	39.48	74.00	26.91	V

802.11ac-HT80

Ch155

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.200	55.30	-25.50	46.66	34.14	74.00	18.70	V
17991.750	55.25	-25.50	46.66	34.09	74.00	18.75	V
14471.750	52.03	-28.59	42.46	38.16	74.00	21.97	H
14564.150	51.58	-27.29	41.90	36.97	68.20	16.62	H
11888.950	48.07	-31.85	39.05	40.87	74.00	25.93	V
11896.100	47.93	-31.85	39.05	40.73	74.00	26.07	H

Sample calculation: 802.11ac 80MHz CH155–Peak, 17991.200MHz

$$\text{Peak ERP} = P_{\text{Mea}}(34.14\text{dB}\mu\text{V/m}) + \text{Cable Loss}(-25.50\text{dB}) + \text{Antenna Factor}(46.66\text{dB/m}) = 55.30 \text{ dB}\mu\text{V/m}$$

A.6. Band Edges Compliance

A6.1 Band Edges - conducted

Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: increasing linearly from point to point.	

The measurement is made according to KDB 789033 D02

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.10	P
	5825 MHz	Fig.11	P
802.11n HT20	5745 MHz	Fig.12	P
	5825 MHz	Fig.13	P
802.11ac HT20	5745 MHz	Fig.14	P
	5825 MHz	Fig.15	P
802.11n HT40	5755 MHz	Fig.16	P
	5795 MHz	Fig.17	P

802.11ac HT40	5755 MHz	Fig.18	P
	5795 MHz	Fig.19	P
802.11ac HT80	5775 MHz	Fig.20	P
	5775 MHz	Fig.21	P

EUT ID: UT77a

Conclusion: PASS

Test graphs as below:

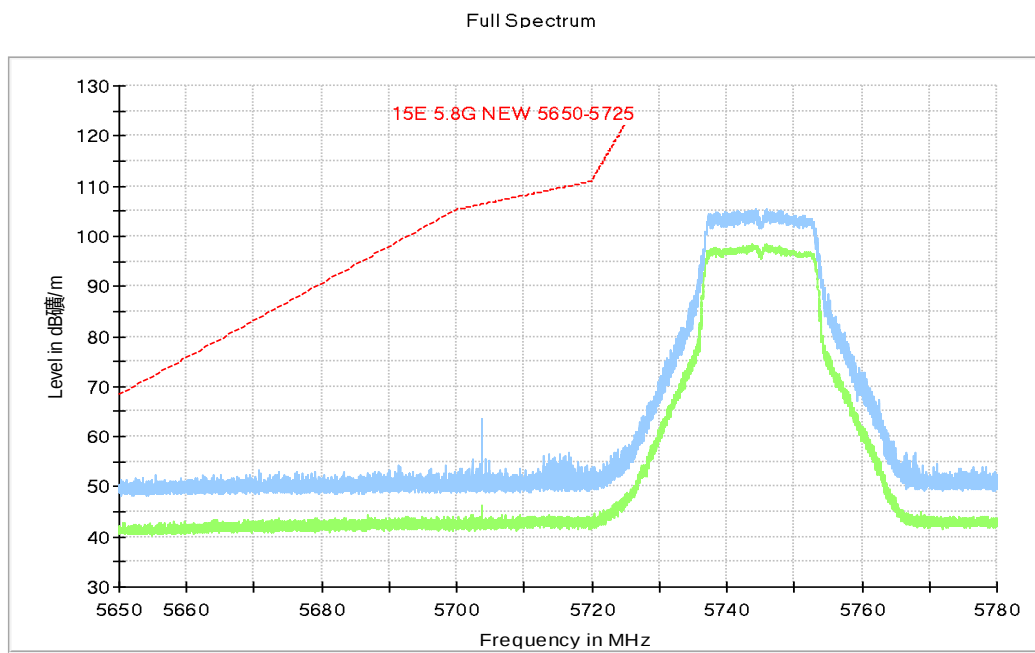


Fig. 10 Band Edges (802.11a, 5745MHz)

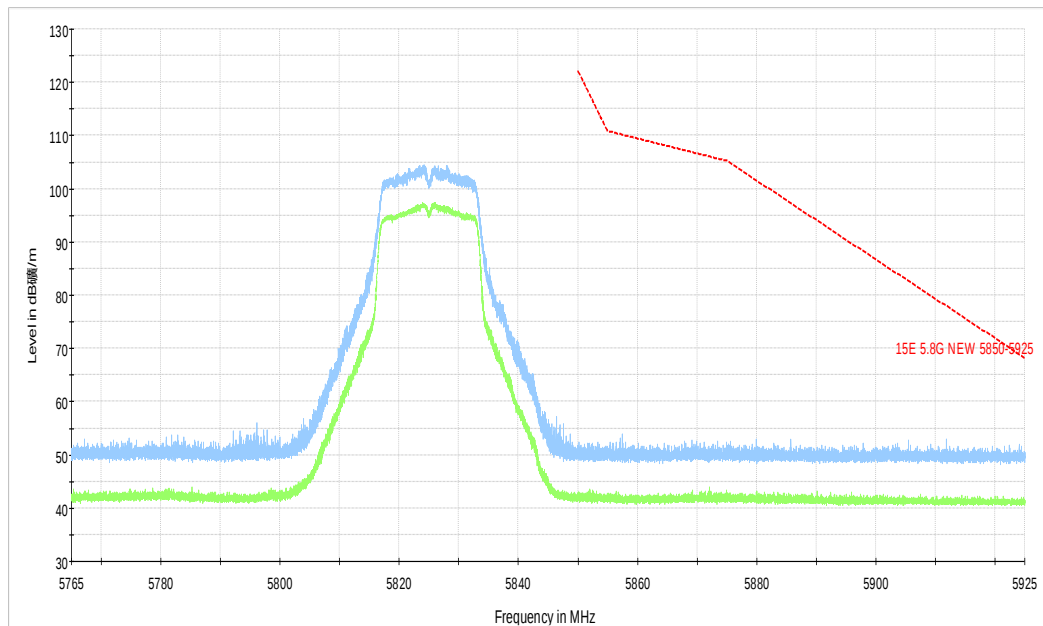


Fig. 11 Band Edges (802.11a, 5825MHz)

Full Spectrum

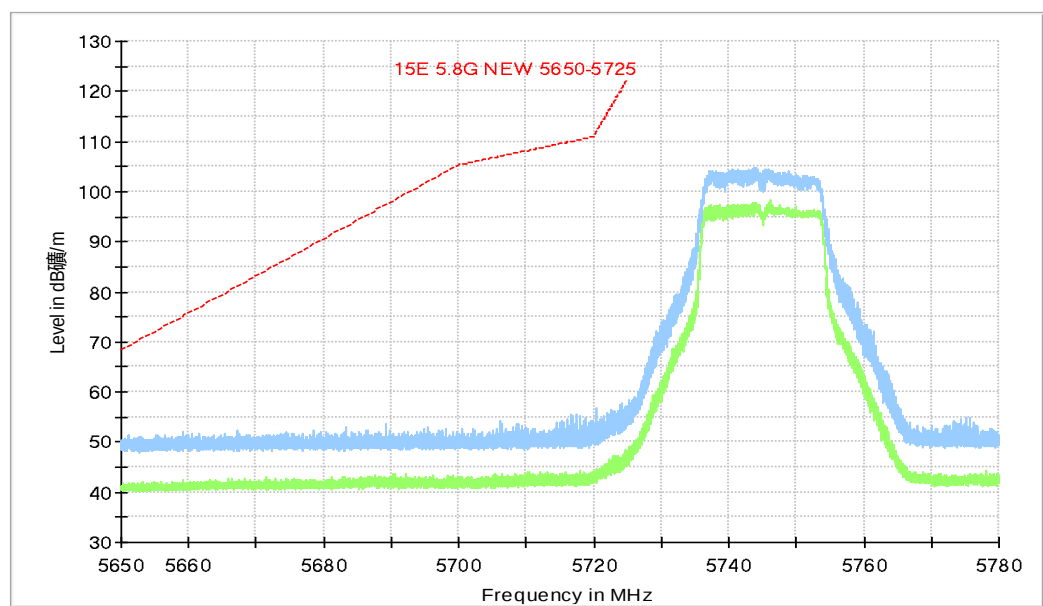


Fig. 12 Band Edges (802.11n-HT20, 5745MHz)

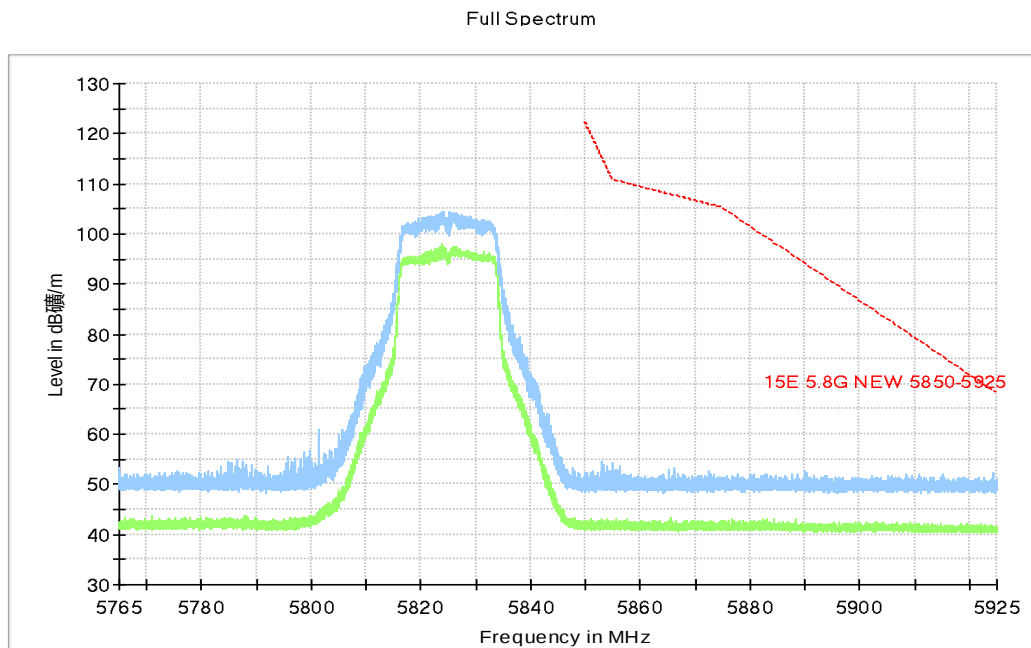


Fig. 13 Band Edges (802.11n-HT20, 5825MHz)

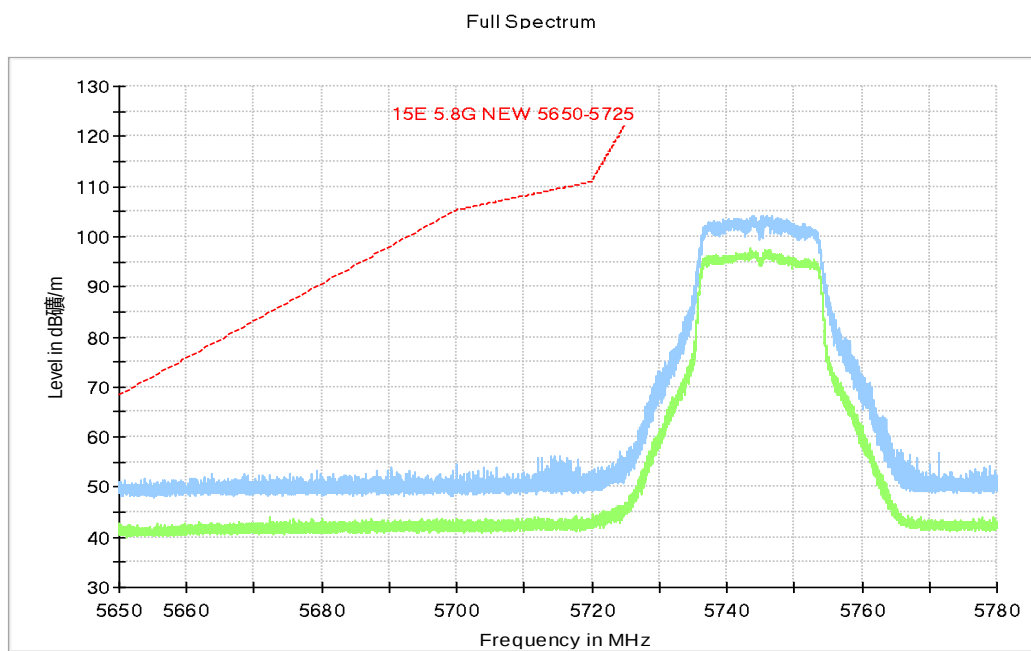


Fig. 14 Band Edges (802.11ac-HT20, 5745MHz)

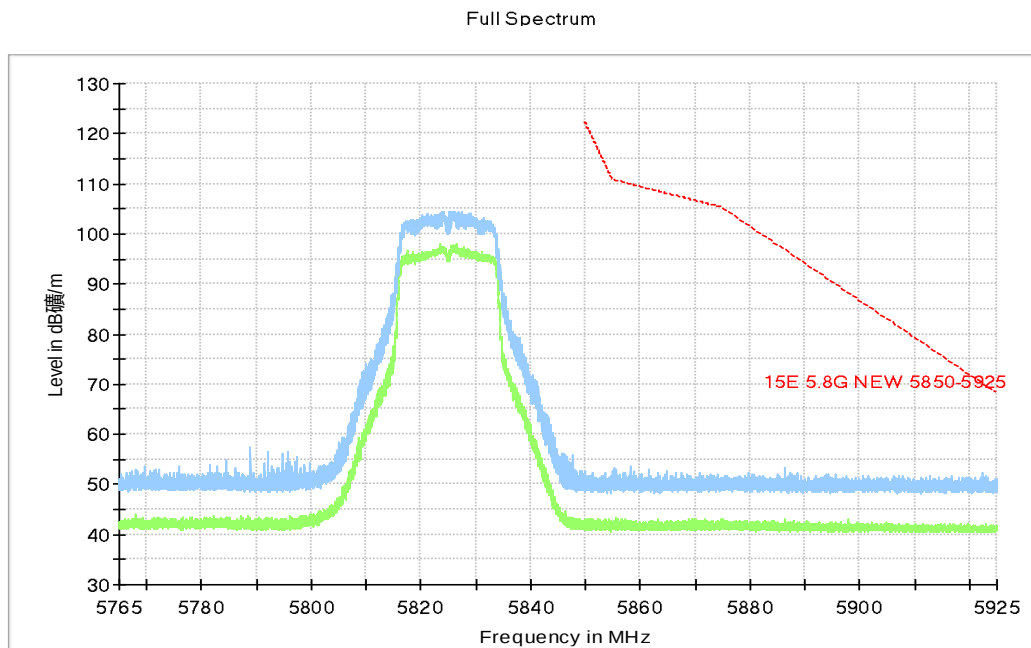


Fig. 15 Band Edges (802.11ac-HT20, 5825MHz)

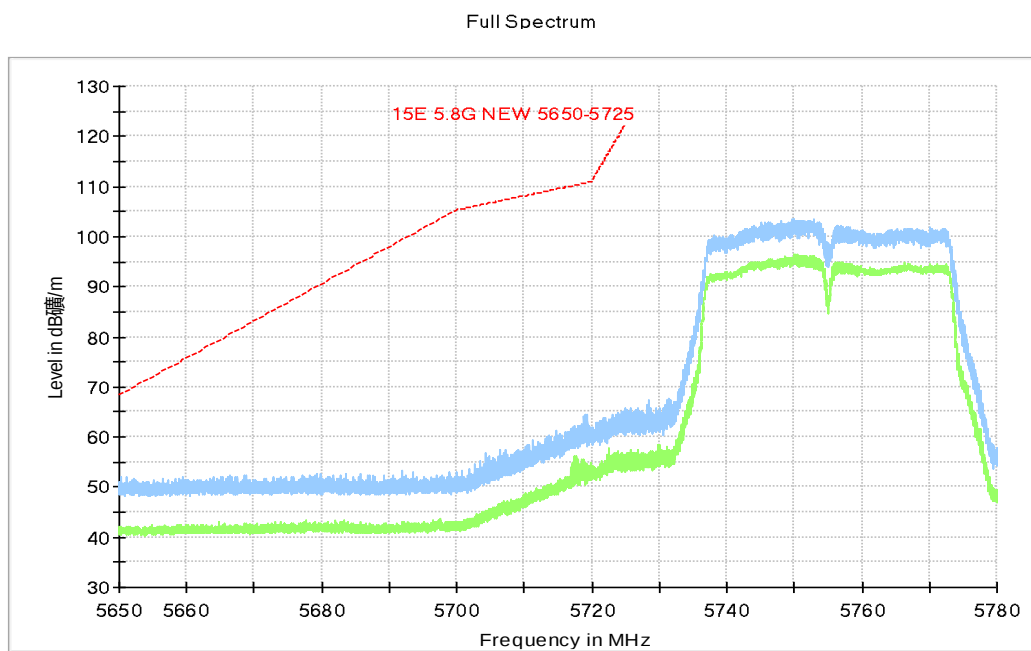


Fig. 16 Band Edges (802.11n-HT40, 5755MHz)

Full Spectrum

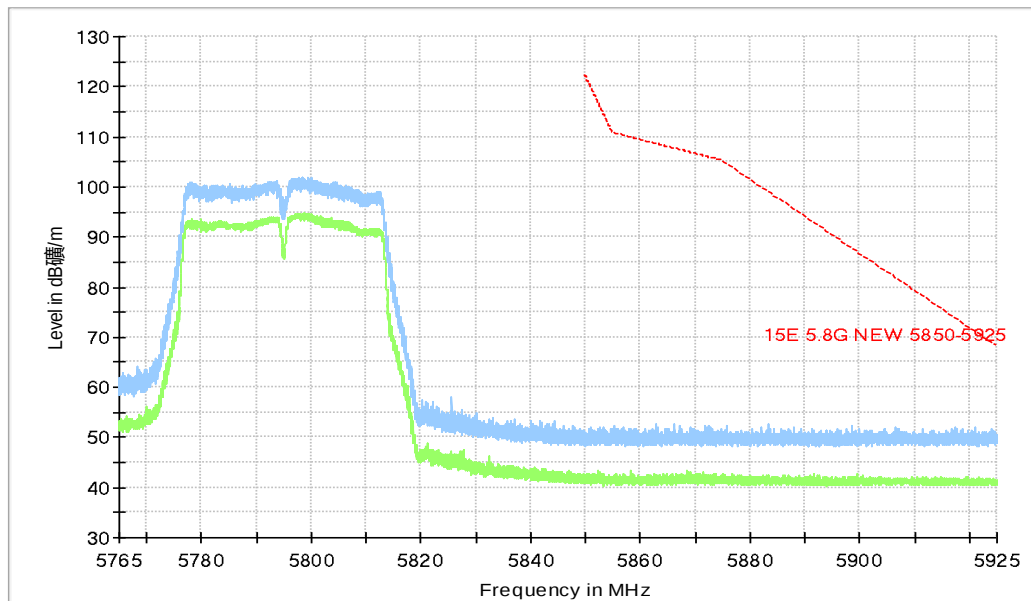


Fig. 17 Band Edges (802.11n-HT40, 5795MHz)

Full Spectrum

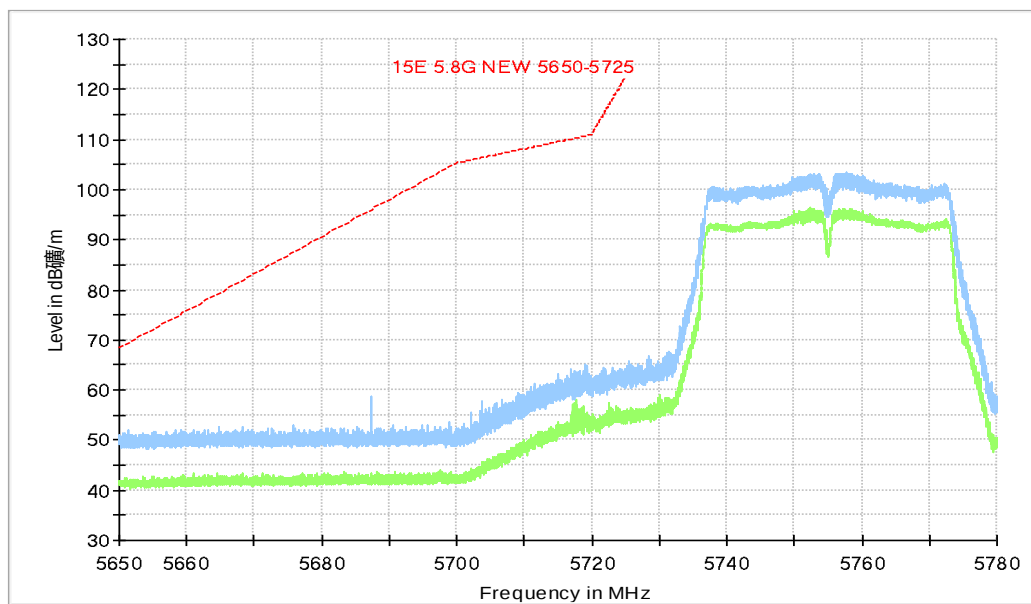


Fig. 18 Band Edges (802.11ac-HT40, 5755MHz)

Full Spectrum

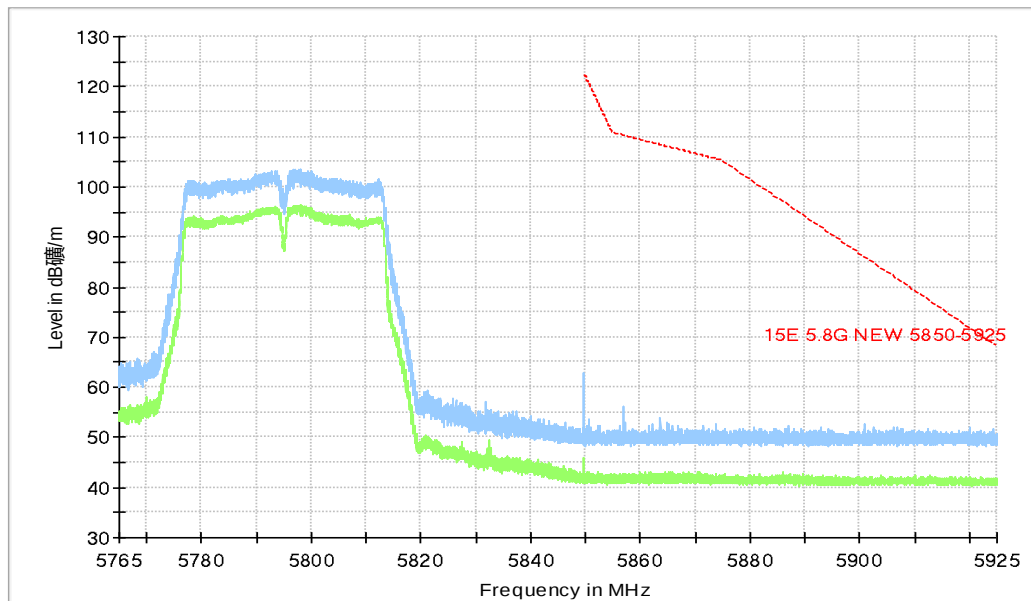


Fig. 19 Band Edges (802.11ac-HT40, 5795MHz)

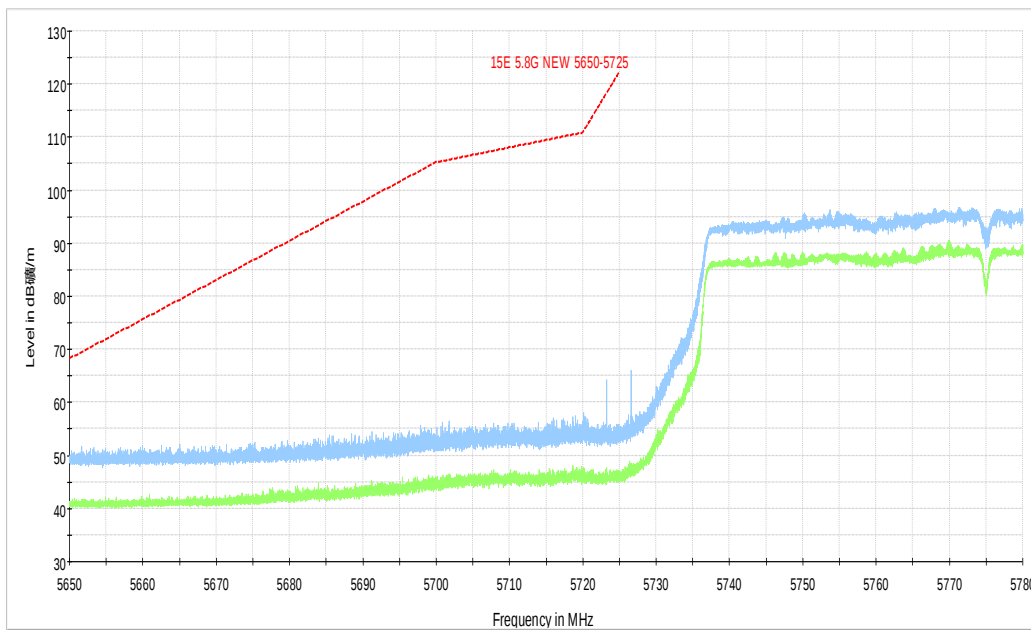


Fig. 20 Band Edges (802.11ac-HT80, 5775MHz)

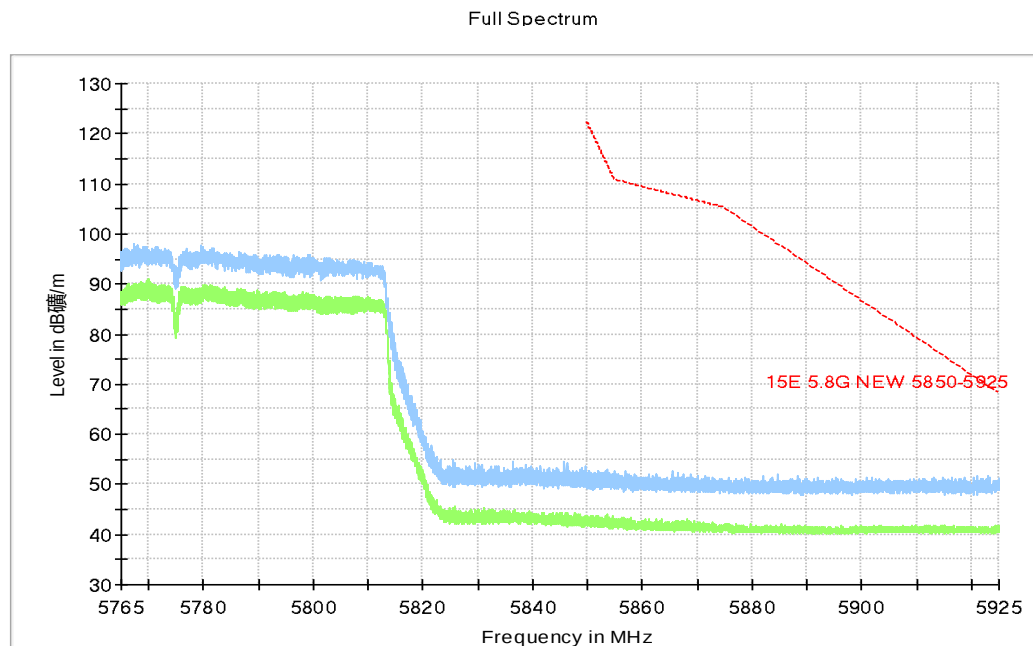


Fig. 21 Band Edges (802.11ac-HT80, 5775MHz)


A.7. AC Powerline Conducted Emission

Method of Measurement: See ANSI C63.10-clause 6.2

Setup:

A stand-alone EUT shall be placed in the center along the back edge of the tabletop. For multiunit tabletop systems, the EUT shall be centered laterally (left to right facing the tabletop) on the tabletop and its rear shall be flush with the rear of the table.

Accessories that are part of an EUT system tested on a tabletop shall be placed in a test arrangement on one or both sides of the host with a 10 cm separation between the nearest points of the cabinets. The rear of the host and accessories shall be flush with the back of the supporting tabletop unless that would not be typical of normal use. If more than two accessories are present, then an equipment test arrangement shall be chosen that maintains 10 cm spacing between cabinets unless the equipment is normally located closer together.

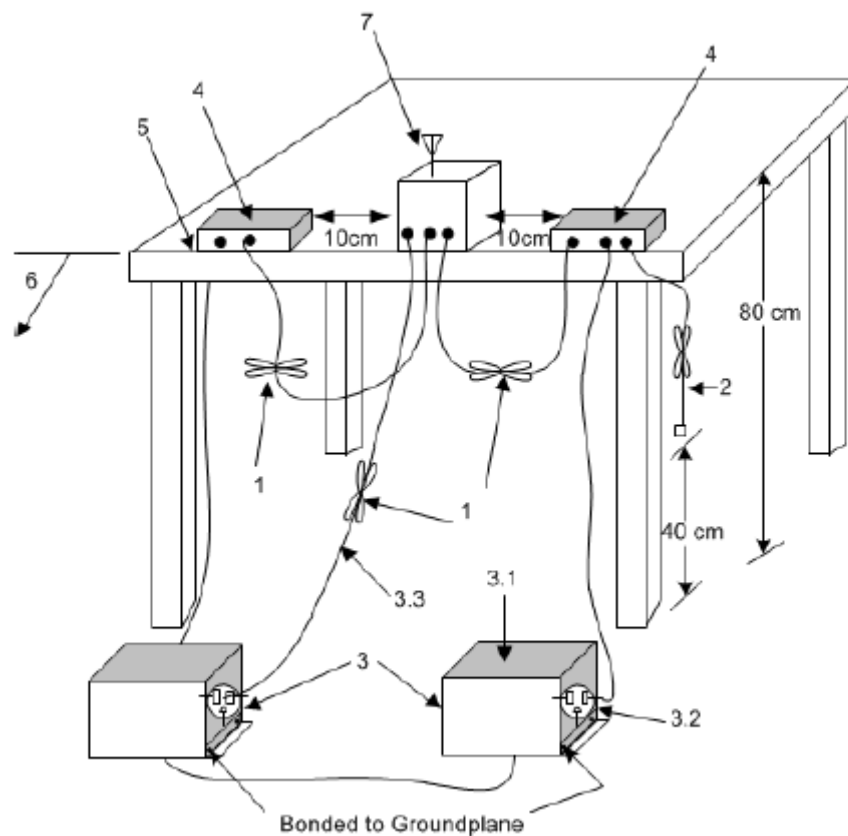

Exploratory ac power-line conducted emission measurements

Exploratory measurements shall be used to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement. For each mode of operation and for each ac power current-carrying conductor, cable manipulation shall be performed within the range of likely configurations. For this measurement or series of measurements, the frequency spectrum of interest shall be monitored looking for the emission that has the highest amplitude relative to the limit. Once that emission is found for each current-carrying conductor of each power cord associated with the EUT (but not the cords associated with non-EUT equipment in the overall system), the one configuration and arrangement and mode of operation that produces the emission closest to the limit over all of the measured conductors shall be recorded.

Final ac power-line conducted emission measurements

Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is composed of equipment units that have their own separate ac

power connections (e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network), then each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be measured separately. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:
EUT ID:UT77a

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.22	Fig.23	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.22	Fig.23	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Conclusion: PASS
Test graphs as below:

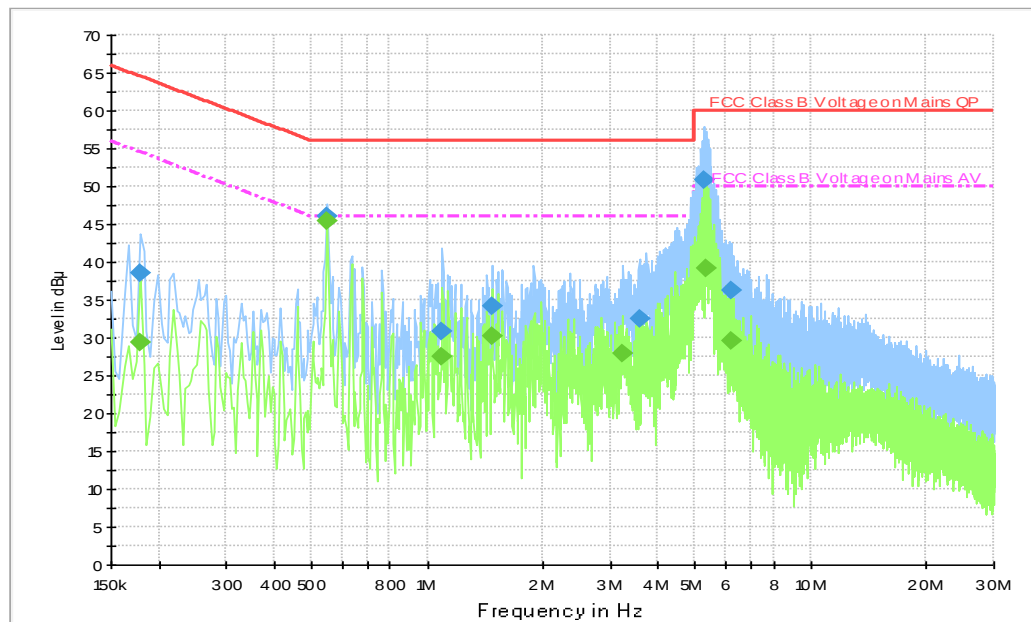


Fig. 22 AC Powerline Conducted Emission-802.11a

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.550000	46.0	L1	19.7	10.0	56.0
1.094000	30.8	N	19.6	25.2	56.0
1.482000	34.2	L1	19.7	21.8	56.0
3.566000	32.6	L1	19.6	23.4	56.0
5.294000	50.8	L1	19.6	9.2	60.0
6.198000	36.3	L1	19.7	23.7	60.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.546000	45.4	L1	19.7	0.6	46.0
1.094000	27.5	L1	19.7	18.5	46.0
1.482000	30.3	L1	19.7	15.7	46.0
3.242000	27.9	L1	19.5	18.1	46.0
5.322000	39.2	L1	19.6	10.8	50.0
6.198000	29.5	L1	19.7	20.5	50.0

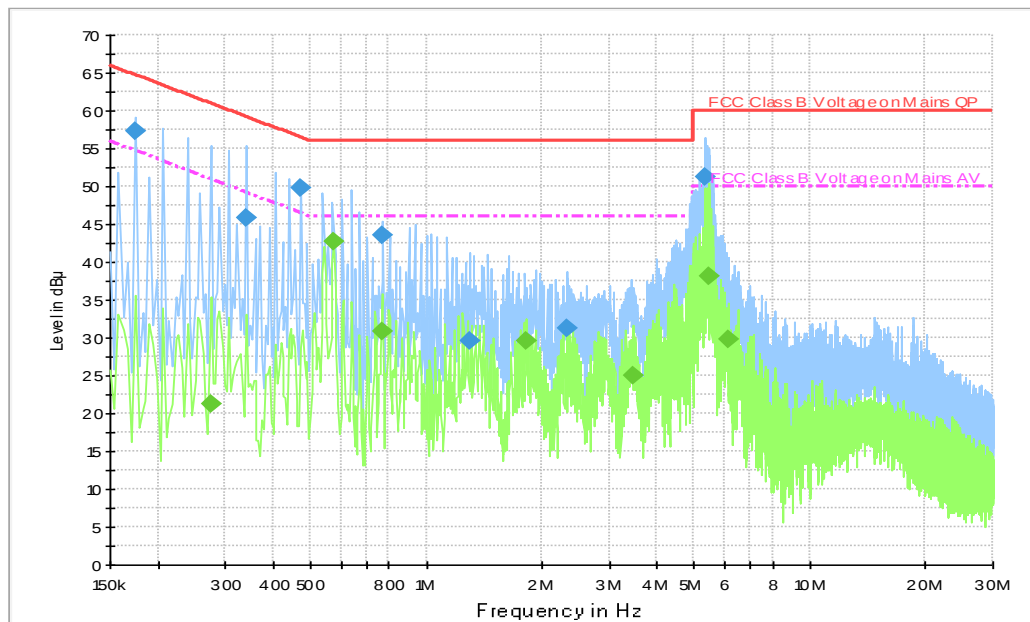


Fig. 23 AC Powerline Conducted Emission-Idle

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.174000	57.4	N	19.6	7.4	64.8
0.338000	45.7	N	19.8	13.5	59.3
0.470000	49.7	N	19.8	6.8	56.5
0.770000	43.5	N	19.6	12.5	56.0
2.338000	31.3	N	19.7	24.7	56.0
5.330000	51.3	L1	19.6	8.7	60.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.574000	42.7	L1	19.7	3.3	46.0
0.766000	30.9	L1	19.6	15.1	46.0
1.826000	29.6	L1	19.6	16.4	46.0
3.454000	25.0	L1	19.6	21.0	46.0
5.474000	38.1	L1	19.6	11.9	50.0
6.146000	29.8	L1	19.7	20.2	50.0

ANNEX B: EUT parameters

Disclaimer: The worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



*** END OF REPORT BODY ***