

Appendix B

Detailed Test Results

GSM850 for Head, Body & Limbs
GSM1900 for Head, Body & Limbs
WCDMA Band II for Head, Body & Limbs
WCDMA Band IV for Head, Body & Limbs
WCDMA Band V for Head, Body & Limbs
LTE Band 7 for Head, Body & Limbs
LTE Band 12 for Head, Body & Limbs
LTE Band 13 for Head, Body & Limbs
LTE Band 14 for Head, Body & Limbs
LTE Band 25 for Head, Body & Limbs
LTE Band 26 for Head, Body & Limbs
LTE Band 30 for Head, Body & Limbs
LTE Band 41 for Head, Body & Limbs
LTE Band 42 for Head, Body & Limbs
LTE Band 43 for Head, Body & Limbs
LTE Band 48 for Head, Body & Limbs
LTE Band 66 for Head, Body & Limbs
LTE Band 71 for Head, Body & Limbs
n7 for Head, Body & Limbs
n14 for Head, Body & Limbs
n25 for Head, Body & Limbs
n26 for Head, Body & Limbs
n30 for Head, Body & Limbs
n41 for Head, Body & Limbs

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZSAR-TRF-01-A04 Rev. A/0 Aug 16,2024

Report No.: SZCR250400159712

Page: 2 of 88

n48 for Head, Body & Limbs
n66 for Head, Body & Limbs
n70 for Head, Body & Limbs
n71 for Head, Body & Limbs
n77 for Head, Body & Limbs
WIFI 2.4G for Head, Body & Limbs
WIFI 5G for Head, Body & Limbs
WIFI 6E for Head, Body & Limbs,Power Density
BT for Head, Body & Limbs



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

X800 GSM850 GPRS 4TS 128CH Right cheek Ant1**X800**

Communication System: GSM 850; Frequency: 824.200

Medium: Head Simulating Liquid. Medium parameters used: $f = 824.200$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 40.7$

DASY6 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.89, 8.49, 8.74); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.436 W/kg; SAR (10g) = 0.268 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.12 dB

SAR (1g) = 0.439 W/kg; SAR (10g) = 0.250 W/kg;

M2/M1 [%]=51.3

Dist 3dB Peak [mm]=8.1

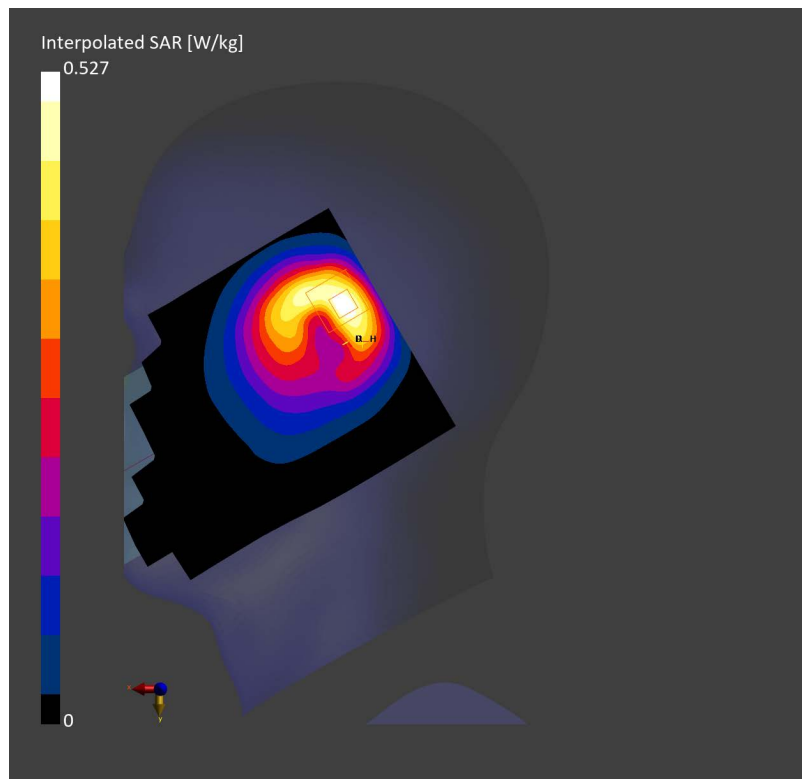

X800 GSM850 GPRS 2TS 251CH Front side 10mm Ant1


X800

Communication System: GSM 850; Frequency: 848.800
Medium: Head Simulating Liquid. Medium parameters used: $f= 848.800\text{ MHz}$; $\sigma= 0.889\text{ S/m}$; $\epsilon_r = 40.5$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.89, 8.49, 8.74); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.393 W/kg; SAR (10g) = 0.261 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.01 dB
SAR (1g) = 0.378 W/kg; SAR (10g) = 0.240 W/kg;
M2/M1 [%]=63.7
Dist 3dB Peak [mm]=14.8

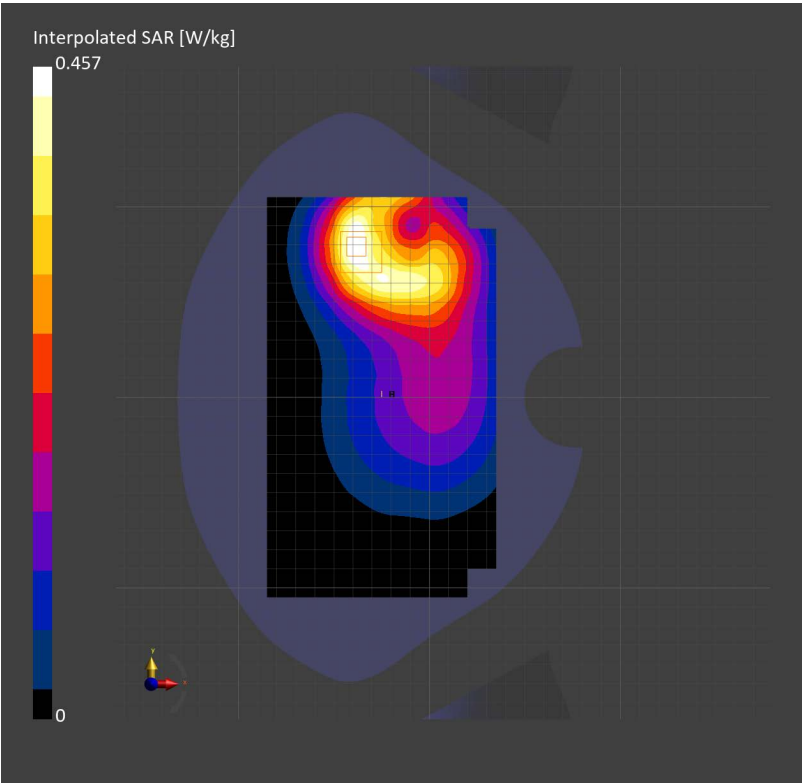

X800 GSM850 GPRS 2TX 251CH Front side 10mm Ant1


X800

Communication System: GSM 850; Frequency: 848.800
Medium: Head Simulating Liquid. Medium parameters used: f= 848.800 MHz; σ = 0.896 S/m; ϵ_r = 43.0

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.89, 8.49, 8.74); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (105.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.375 W/kg; SAR (10g) = 0.252 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.378 W/kg; SAR (10g) = 0.232 W/kg;
M2/M1 [%]=84.5
Dist 3dB Peak [mm]=14.5

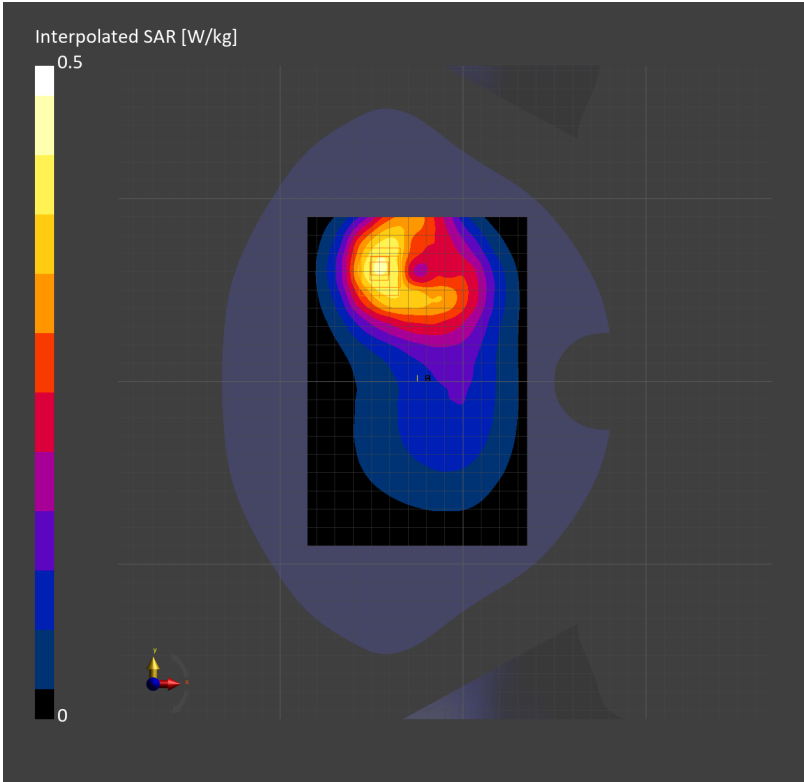

X800 GSM1900 GPRS 4TS 810CH Right cheek Ant2**X800**

Communication System: PCS 1900; Frequency: 1909.800

Medium: Head Simulating Liquid. Medium parameters used: $f = 1909.800$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.7$

DASY6 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.77, 7.41, 7.63); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.525 W/kg; SAR (10g) = 0.294 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.10 dB

SAR (1g) = 0.564 W/kg; SAR (10g) = 0.308 W/kg;

M2/M1 [%]=51.8

Dist 3dB Peak [mm]=10.2

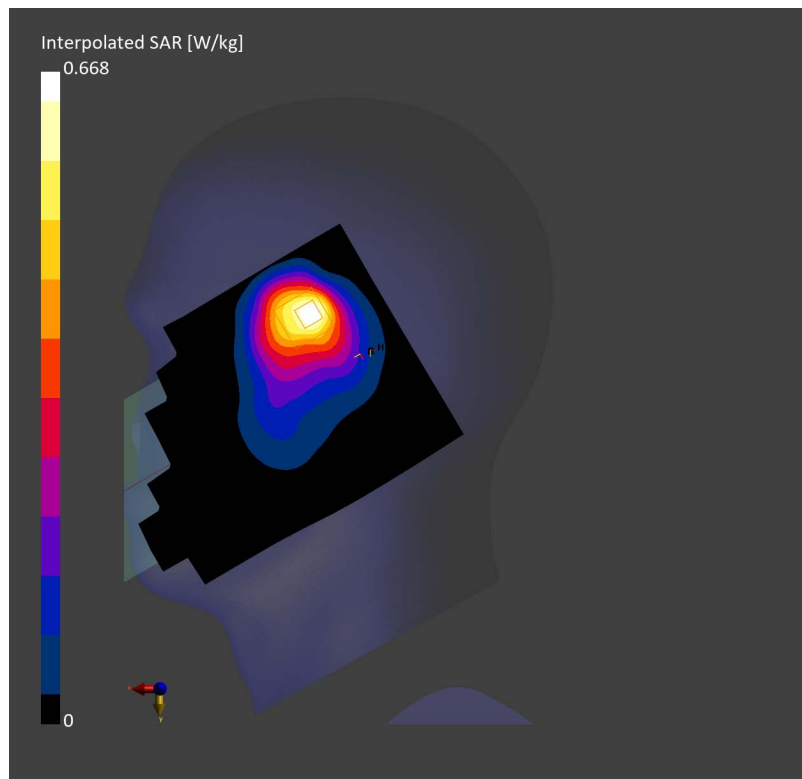

X800 GSM1900 GPRS 4TS 512CH Back side 10mm Ant2


X800

Communication System: PCS 1900; Frequency: 1850.00
Medium: Head Simulating Liquid. Medium parameters used: $f= 1850.200$ MHz; $\sigma= 1.31$ S/m; $\epsilon_r = 39.9$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.77, 7.41, 7.63); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.340 W/kg; SAR (10g) = 0.207 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.02 dB
SAR (1g) = 0.341 W/kg; SAR (10g) = 0.185 W/kg;
M2/M1 [%]=54.9
Dist 3dB Peak [mm]=11.4

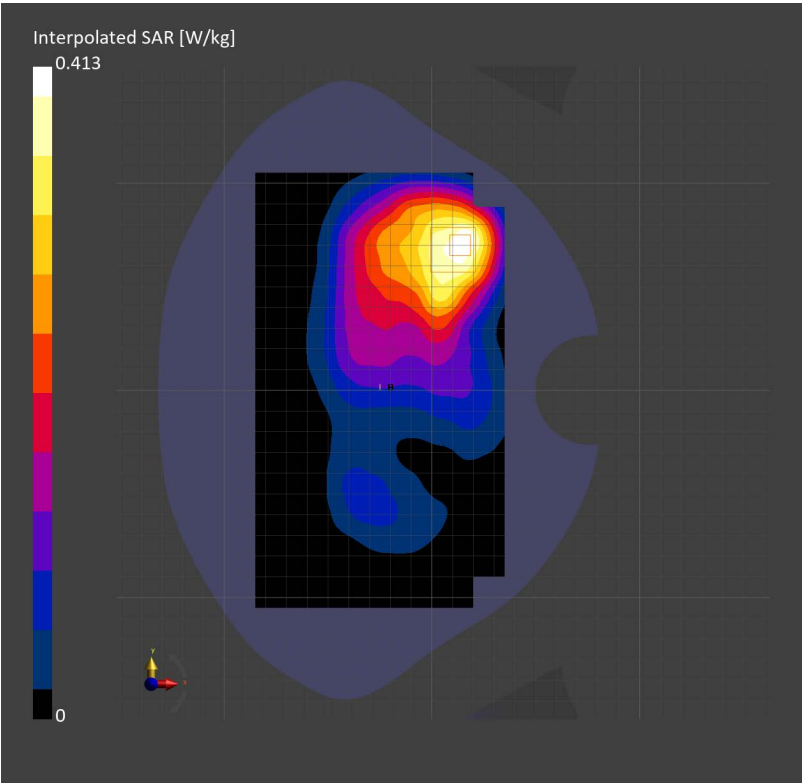

X800 GSM1900 GPRS 4TX 810CH Right cheek Ant2


X800

Communication System: PCS 1900; Frequency: 1909.800
Medium: Head Simulating Liquid. Medium parameters used: $f=1909.800\text{ MHz}$; $\sigma=1.39\text{ S/m}$; $\epsilon_r=40.2$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.77, 7.41, 7.63); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.423 W/kg; SAR (10g) = 0.237 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.07 dB
SAR (1g) = 0.442 W/kg; SAR (10g) = 0.237 W/kg;
M2/M1 [%]=80.7
Dist 3dB Peak [mm]=12.8

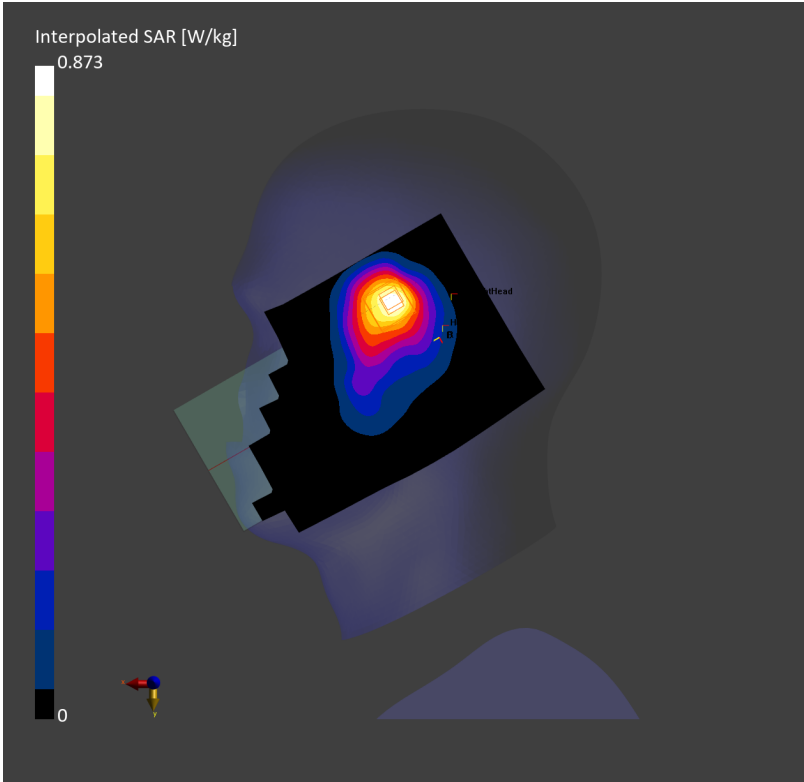

X800 WCDMA Band II RMC 9400CH Right cheek Ant2**X800**

Communication System: Band 2; Frequency: 1880.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.4$

DASY6 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.77, 7.41, 7.63); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.592 W/kg; SAR (10g) = 0.343 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.618 W/kg; SAR (10g) = 0.359 W/kg;

M2/M1 [%]=54.7

Dist 3dB Peak [mm]=10.3

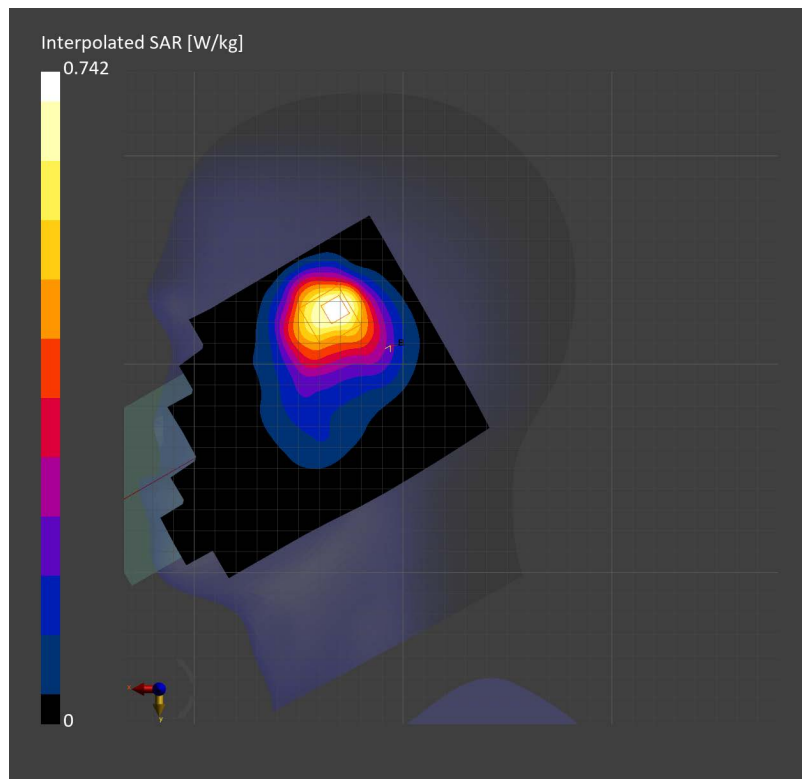

X800 WCDMA Band II RMC 9400CH Front side 10mm Ant2


X800

Communication System: Band 2; Frequency: 1880.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 1880.000$ MHz; $\sigma= 1.41$ S/m; $\epsilon_r = 39.4$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.77, 7.41, 7.63); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.560 W/kg; SAR (10g) = 0.343 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.01 dB
SAR (1g) = 0.543 W/kg; SAR (10g) = 0.358 W/kg;
M2/M1 [%]=64.3
Dist 3dB Peak [mm]=20.5

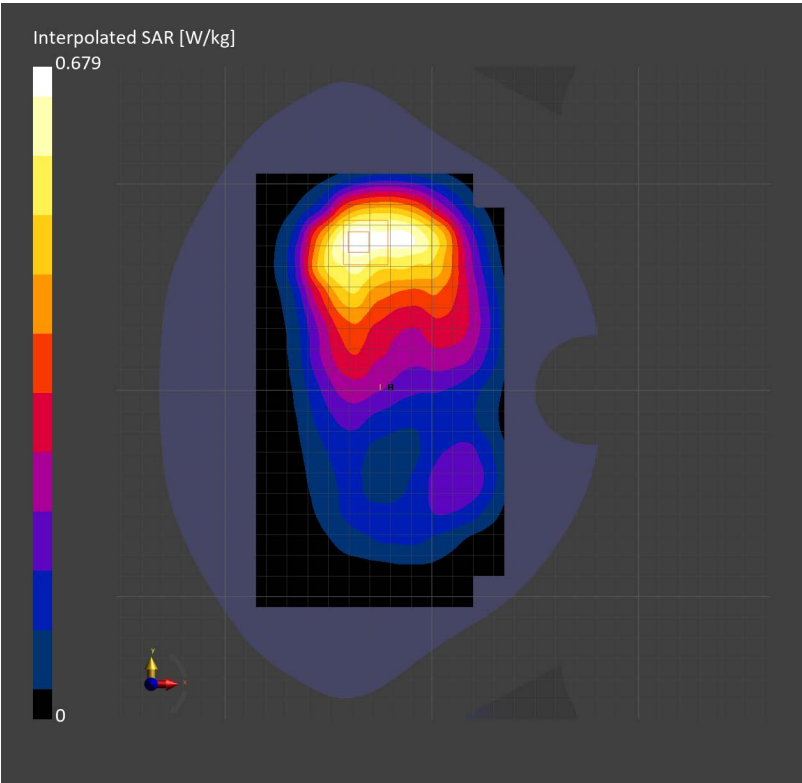

X800 WCDMA Band IV RMC 1412CH Right cheek Ant2**X800**

Communication System: Band 4; Frequency: 1732.400

Medium: Head Simulating Liquid. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 40.3$

DASY8 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.05, 7.68, 7.91); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.709 W/kg; SAR (10g) = 0.411 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.724 W/kg; SAR (10g) = 0.430 W/kg;

M2/M1 [%]=57.7

Dist 3dB Peak [mm]=12.6

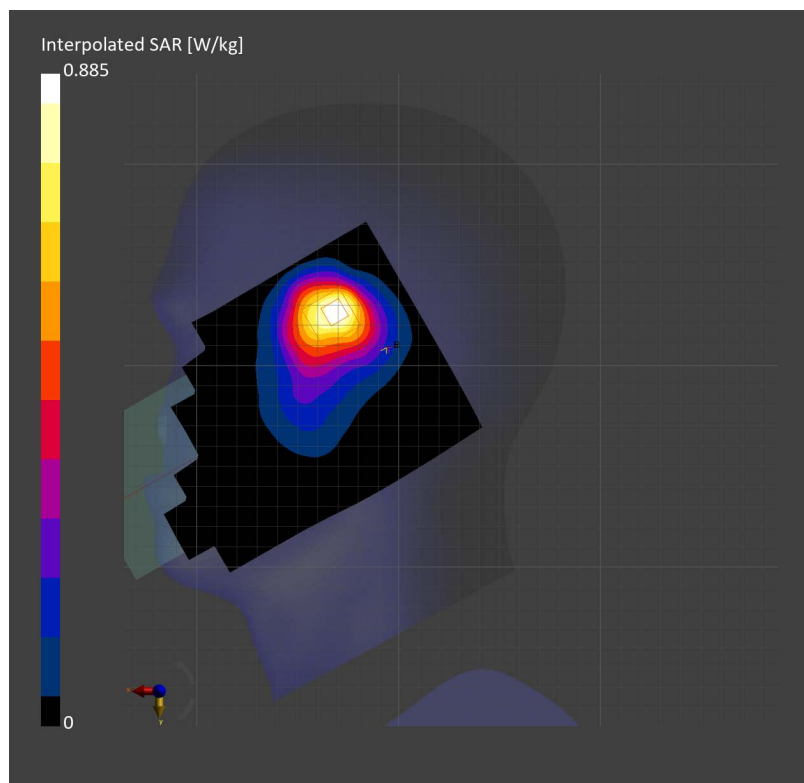

X800 WCDMA Band IV RMC 1412CH Back side 10mm Ant2


X800

Communication System: Band 4; Frequency: 1732.400
Medium: Head Simulating Liquid. Medium parameters used: $f= 1732.400$ MHz; $\sigma= 1.30$ S/m; $\epsilon_r = 40.3$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.05, 7.68, 7.91); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.691 W/kg; SAR (10g) = 0.409 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.08 dB
SAR (1g) = 0.694 W/kg; SAR (10g) = 0.408 W/kg;
M2/M1 [%]=59.5
Dist 3dB Peak [mm]=12.9

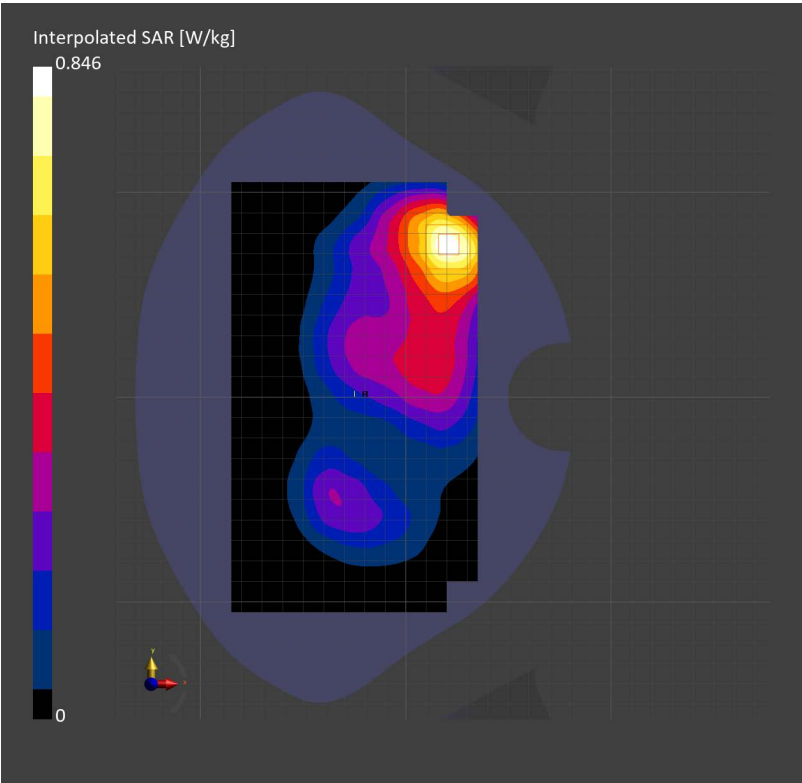

X800 WCDMA BandIV RMC 1412CH Back side 10mm Ant2


X800

Communication System: Band 4; Frequency: 1732.400
Medium: Head Simulating Liquid. Medium parameters used: $f=1732.400\text{ MHz}$; $\sigma=1.31\text{ S/m}$; $\epsilon_r=40.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.05, 7.68, 7.91); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.563 W/kg; SAR (10g) = 0.341 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.01 dB
SAR (1g) = 0.598 W/kg; SAR (10g) = 0.335 W/kg;
M2/M1 [%]=54.4
Dist 3dB Peak [mm]=12.5

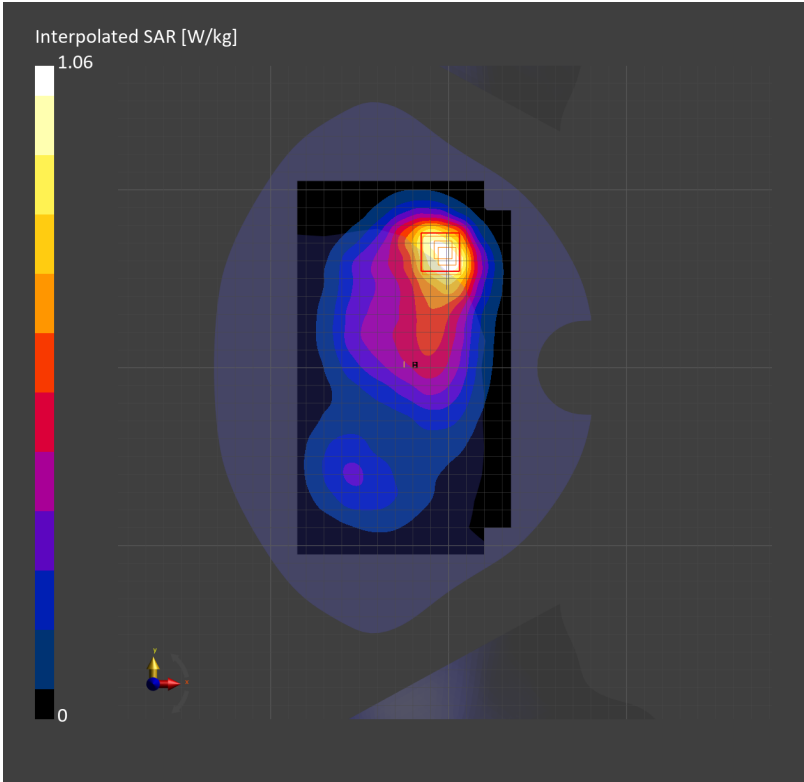

X800 WCDMA Band V RMC 4132CH Right cheek Ant1**X800**

Communication System: Band 5; Frequency: 826.400

Medium: Head Simulating Liquid. Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 41.0$

DASY6 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(8.89, 8.49, 8.74); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.817 W/kg; SAR (10g) = 0.533 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.878 W/kg; SAR (10g) = 0.528 W/kg;

M2/M1 [%]=55.4

Dist 3dB Peak [mm]=9.7

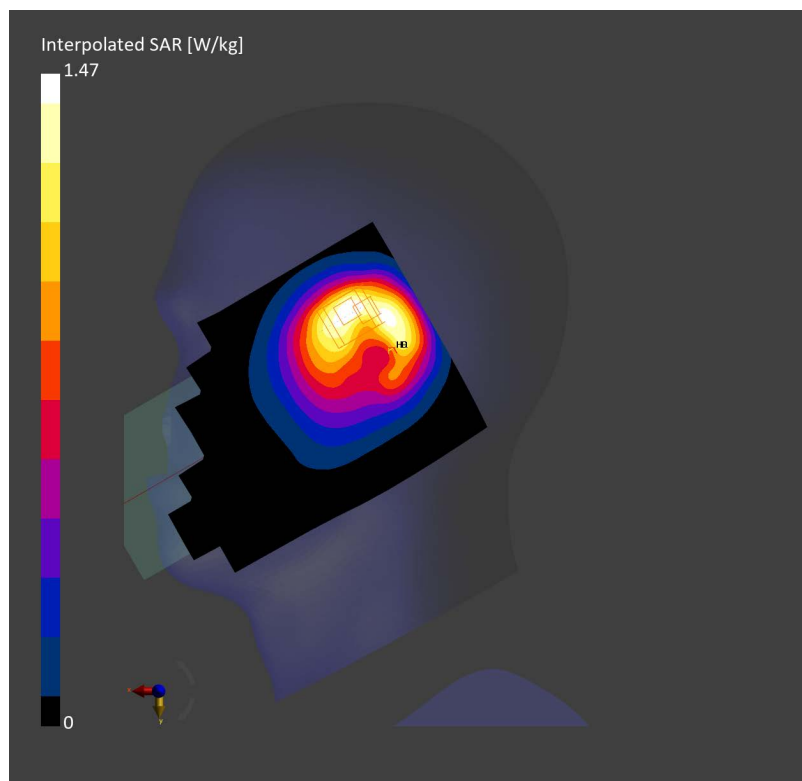

X800 WCDMA Band V RMC 4182CH Front side 10mm Ant1


X800

Communication System: Band 5; Frequency: 836.400
Medium: Head Simulating Liquid. Medium parameters used: $f=836.400\text{ MHz}$; $\sigma=0.891\text{ S/m}$; $\epsilon_r=41.0$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.89, 8.49, 8.74); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.749 W/kg; SAR (10g) = 0.495 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.08 dB
SAR (1g) = 0.739 W/kg; SAR (10g) = 0.467 W/kg;
M2/M1 [%]=65.3
Dist 3dB Peak [mm]=14.8

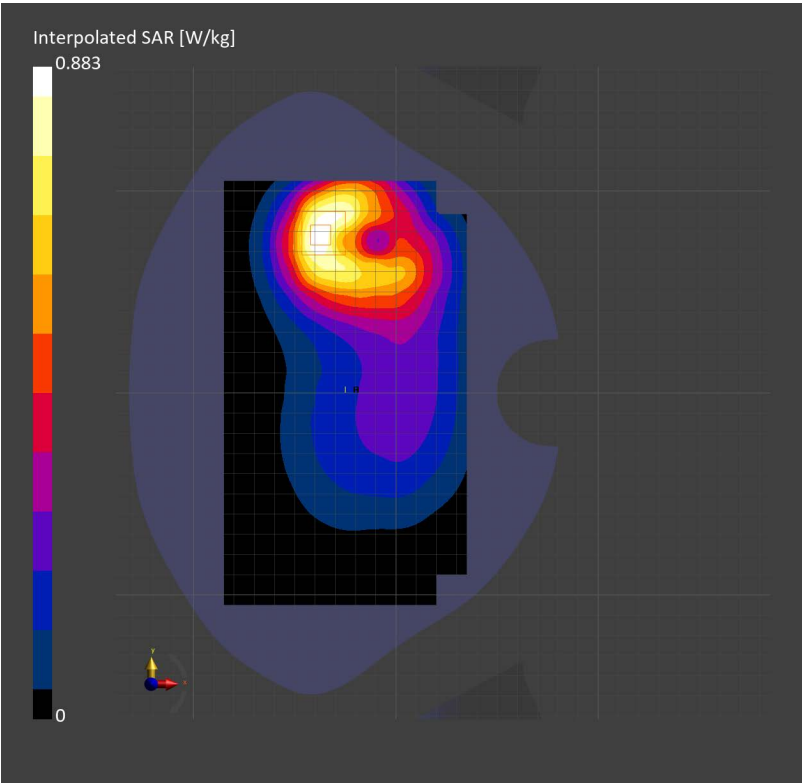

X800 WCDMA BandV RMC 4132CH Right cheek Ant1


X800

Communication System: Band 5; Frequency: 826.400
Medium: Head Simulating Liquid. Medium parameters used: f= 826.400 MHz; σ = 0.881 S/m; ϵ_r = 43.1

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.89, 8.49, 8.74); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.756 W/kg; SAR (10g) = 0.485 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.01 dB
SAR (1g) = 0.722 W/kg; SAR (10g) = 0.410 W/kg;
M2/M1 [%]=80.3
Dist 3dB Peak [mm]=8.4

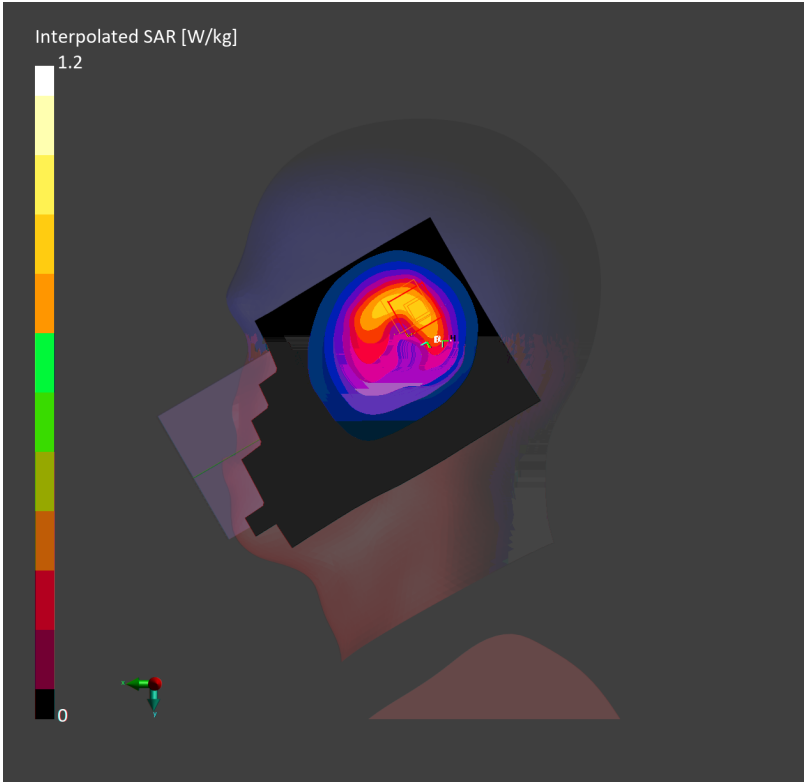

Test Laboratory: SGS-SAR Lab

X800 LTE Band 7 20M QPSK 1RB0 21350CH Right cheek Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.413$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.44 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.977 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.392 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.7%

Maximum value of SAR (measured) = 1.66 W/kg

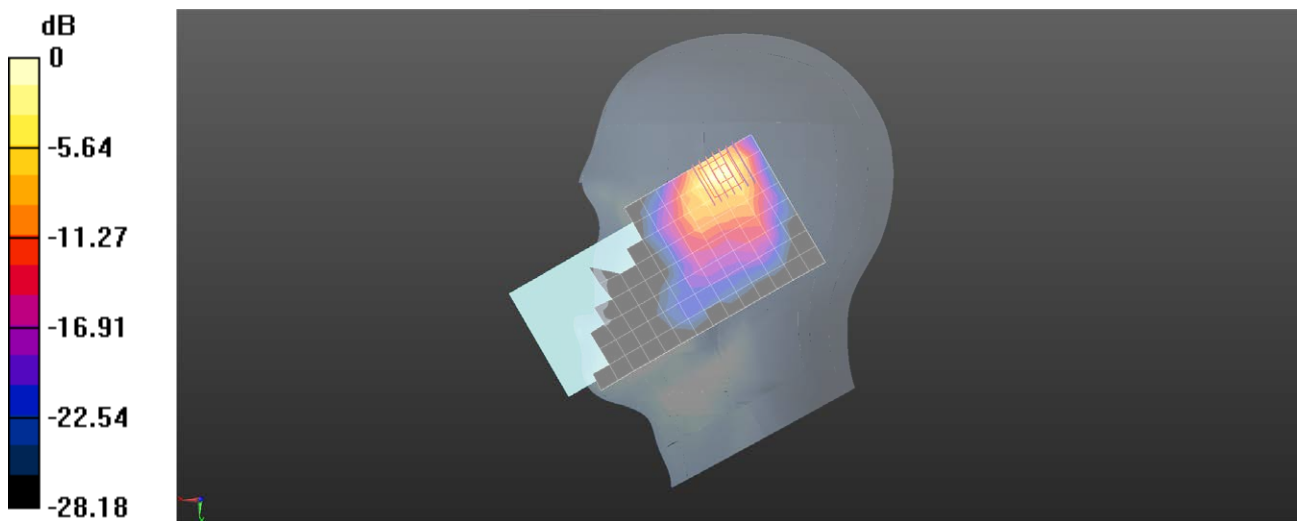

0 dB = 1.66 W/kg = 2.20 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 LTE Band 7 20M QPSK 50RB25 21350CH Left side 0mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.413$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 17.1 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.363 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 22.8 W/kg

SAR(1 g) = 8.74 W/kg; SAR(10 g) = 2.93 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 41.7%

Maximum value of SAR (measured) = 17.8 W/kg

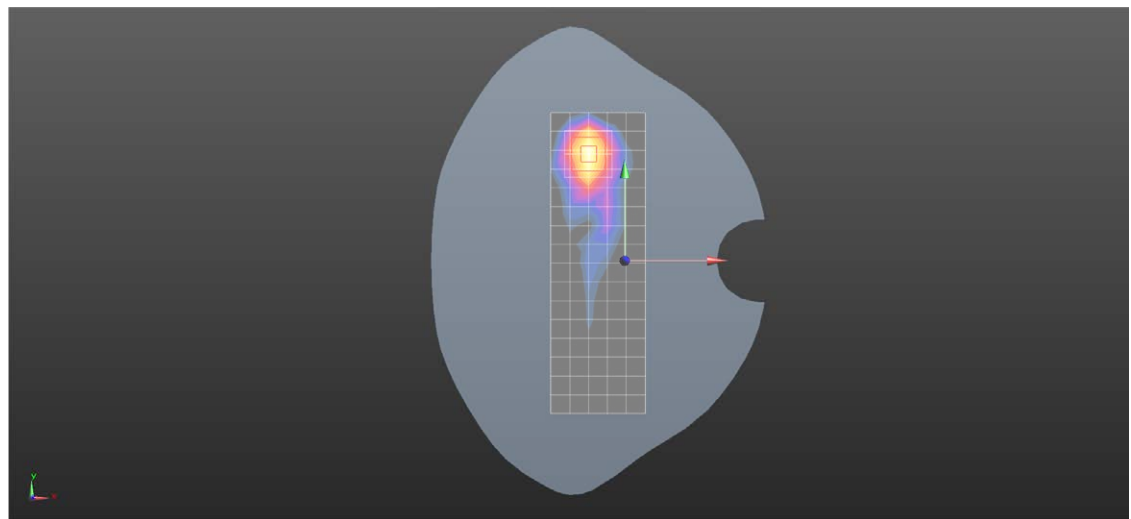

0 dB = 17.8 W/kg = 12.50 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 LTE Band 7 20M QPSK 1RB99 21350CH Left side 19mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 38.413$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.29 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.949 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.455 W/kg

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 1.31 W/kg

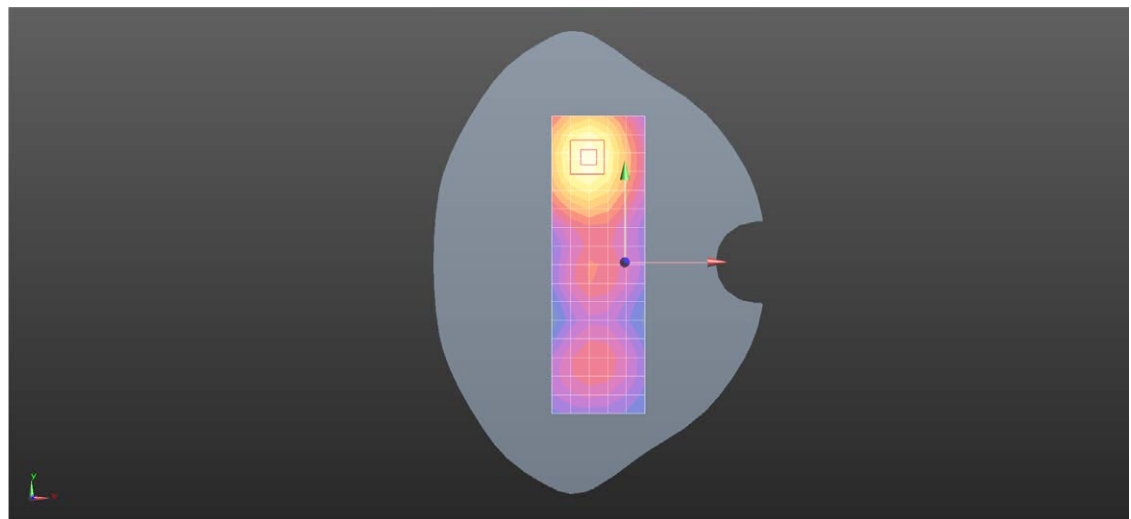

0 dB = 1.31 W/kg = 1.17 dBW/kg

X800 LTE Band 7 20M QPSK 50RB25 21350CH Left side 0mm Ant2


X800

Communication System: Band 7; Frequency: 2560.000
Medium: Head Simulating Liquid. Medium parameters used: f= 2560.000 MHz; σ = 1.94 S/m; ϵ_r = 40.0

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.33, 7.0, 7.21); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 5.55 W/kg; SAR (10g) = 2.03 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.03 dB
SAR (1g) = 6.30 W/kg; SAR (10g) = 2.14 W/kg;
M2/M1 [%]=72.4
Dist 3dB Peak [mm]=7.7

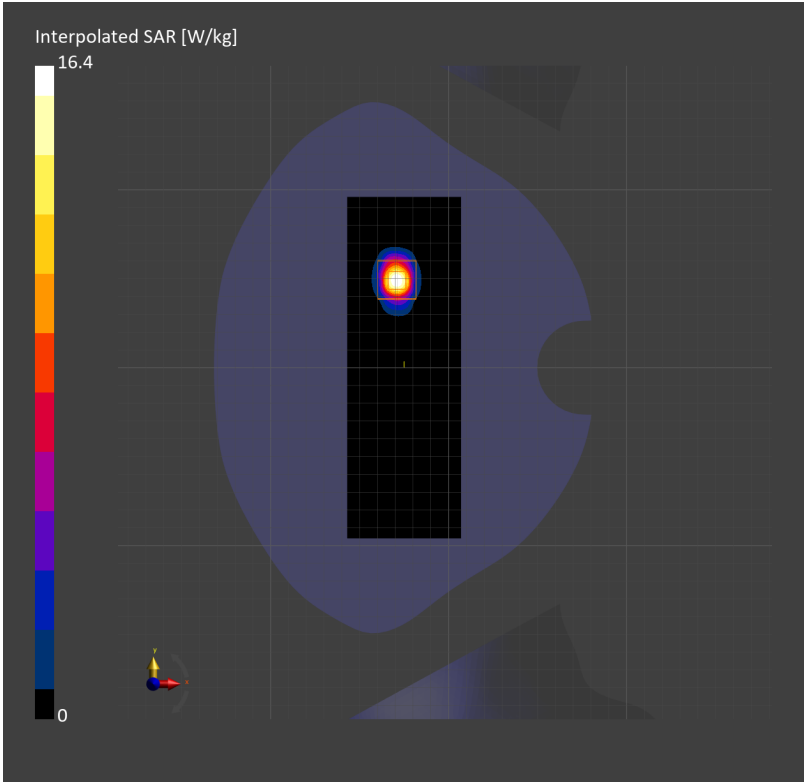

X800 LTE Band 7 20M QPSK 1RB99 21350CH Left side 19mm Ant2


X800

Communication System: Band 7; Frequency: 2560.000
Medium: Head Simulating Liquid. Medium parameters used: f= 2560.000 MHz; σ = 1.94 S/m; ϵ_r = 40.0

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.33, 7.0, 7.21); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.840 W/kg; SAR (10g) = 0.438 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.08 dB
SAR (1g) = 0.848 W/kg; SAR (10g) = 0.439 W/kg;
M2/M1 [%]=81.5
Dist 3dB Peak [mm]=14.9

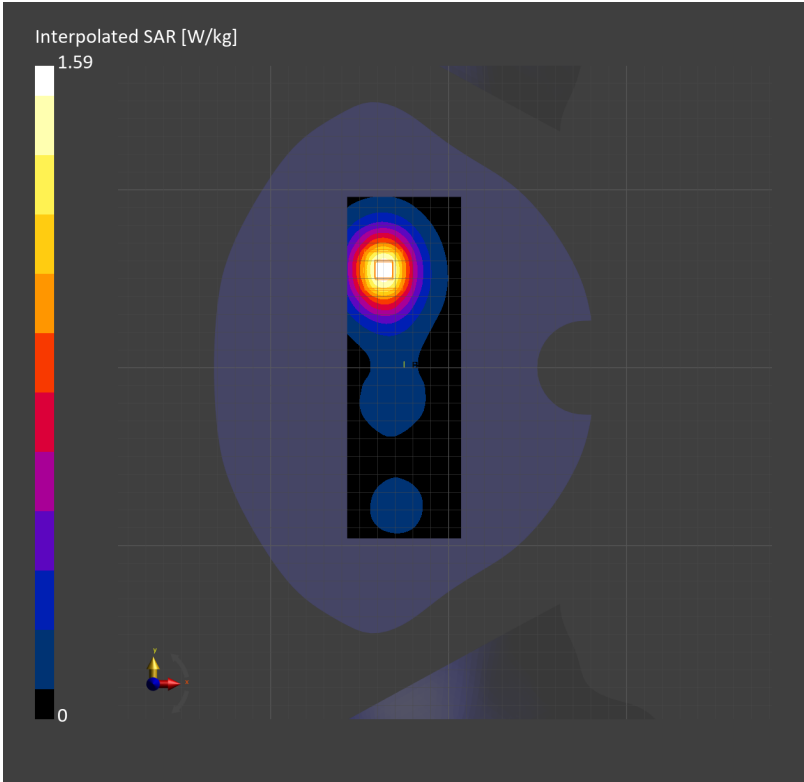

X800 LTE Band 12 10M QPSK 1RB25 23060CH Right cheek Ant1


X800

Communication System: Band 12; Frequency: 704.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 704.000$ MHz; $\sigma= 0.848$ S/m; $\epsilon_r = 43.3$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(9.45, 9.01, 9.28); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.853 W/kg; SAR (10g) = 0.569 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.01 dB
SAR (1g) = 0.889 W/kg; SAR (10g) = 0.538 W/kg;
M2/M1 [%]=56.9
Dist 3dB Peak [mm]=13.7

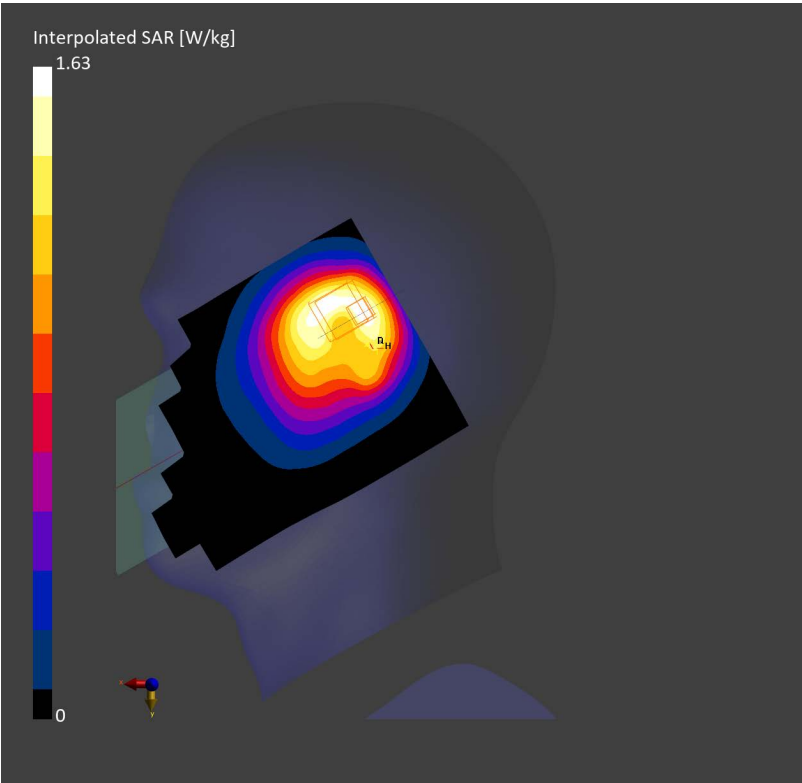

X800 LTE Band 12 10M QPSK 1RB49 23095CH Back side 10mm Ant1**X800**

Communication System: Band 12; Frequency: 707.500

Medium: Head Simulating Liquid. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.850$ S/m; $\epsilon_r = 43.3$

DASY6 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.45, 9.01, 9.28); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.476 W/kg; SAR (10g) = 0.331 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.07 dB

SAR (1g) = 0.503 W/kg; SAR (10g) = 0.371 W/kg;

M2/M1 [%]=77.2

Dist 3dB Peak [mm]= 16.0

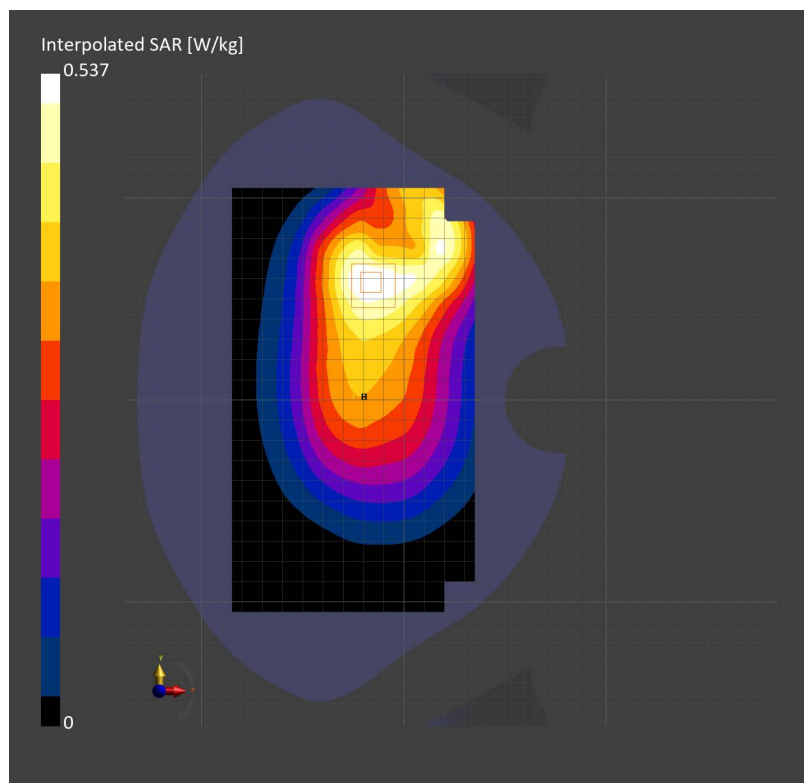

X800 LTE Band 13 10M QPSK 1RB0 23230CH Right cheek Ant1**X800**

Communication System: Band 13; Frequency: 782.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.8$

DASY6 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.45, 9.01, 9.28); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.953 W/kg; SAR (10g) = 0.604 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.960 W/kg; SAR (10g) = 0.566 W/kg;

M2/M1 [%]=58.2

Dist 3dB Peak [mm]=11.6

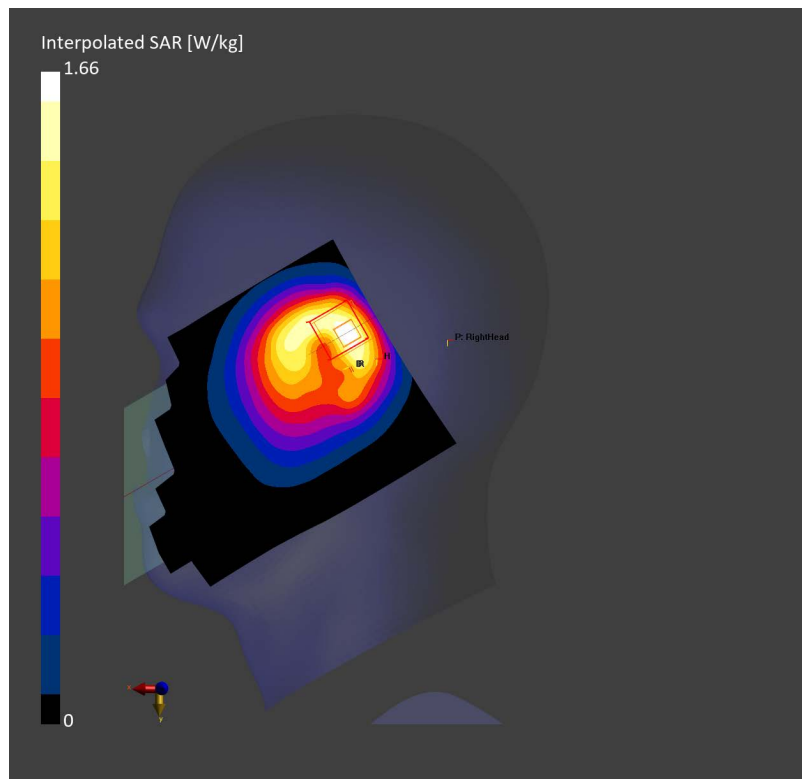

X800 LTE Band 13 10M QPSK 1RB0 23230CH Front side 10mm Ant1


X800

Communication System: Band 13; Frequency: 782.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 782.000$ MHz; $\sigma= 0.897$ S/m; $\epsilon_r = 42.8$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(9.45, 9.01, 9.28); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.598 W/kg; SAR (10g) = 0.393 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.07 dB
SAR (1g) = 0.644 W/kg; SAR (10g) = 0.393 W/kg;
M2/M1 [%]=60.2
Dist 3dB Peak [mm]=11.4

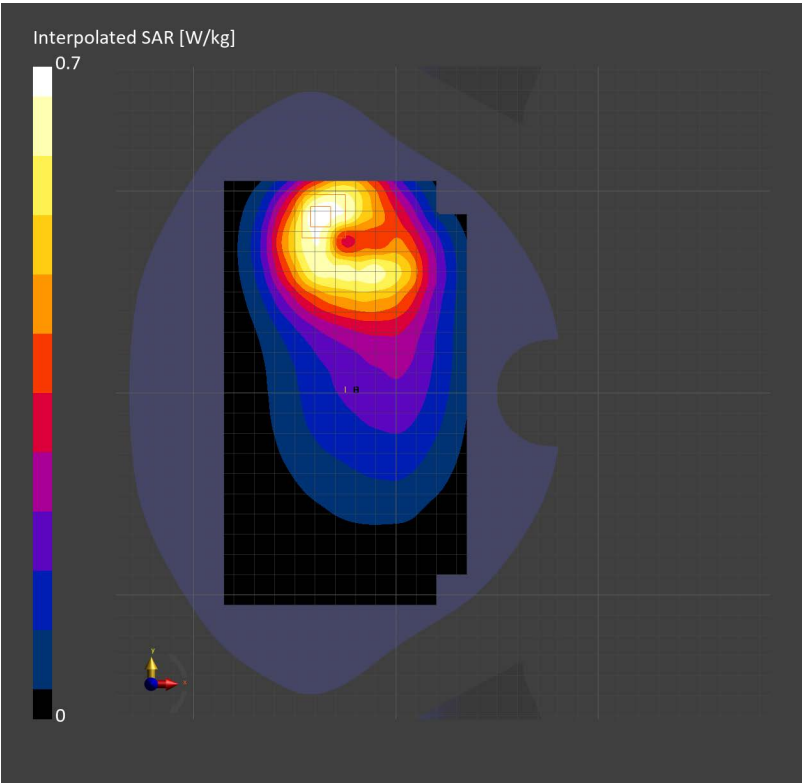

X800 LTE Band 13 10M QPSK 1RB0 23230CH Right cheek Ant1


X800

Communication System: Band 13; Frequency: 782.000
Medium: Head Simulating Liquid. Medium parameters used: $f=782.000\text{ MHz}$; $\sigma=0.908\text{ S/m}$; $\epsilon_r=42.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(9.45, 9.01, 9.28); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.935 W/kg; SAR (10g) = 0.602 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.02 dB
SAR (1g) = 0.868 W/kg; SAR (10g) = 0.488 W/kg;
M2/M1 [%]=79.3
Dist 3dB Peak [mm]=9.2

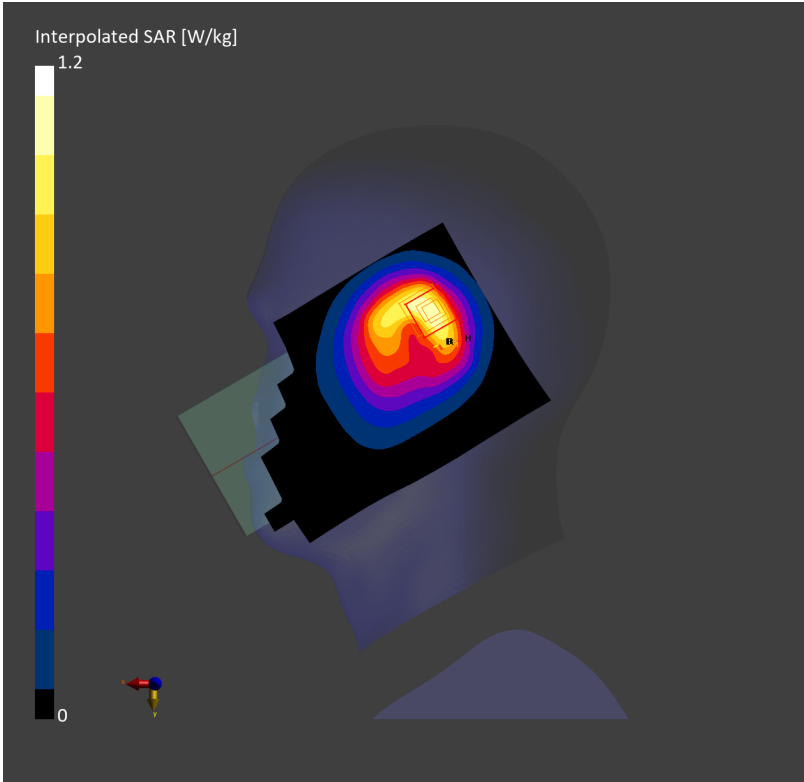

X800 LTE Band 14 10M QPSK 1RB0 23330CH Right cheek Ant1**X800**

Communication System: Band 14; Frequency: 793.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.8$

DASY6 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(9.45, 9.01, 9.28); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.825 W/kg; SAR (10g) = 0.558 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.10 dB

SAR (1g) = 0.955 W/kg; SAR (10g) = 0.544 W/kg;

M2/M1 [%]=36.6

Dist 3dB Peak [mm]=10.2

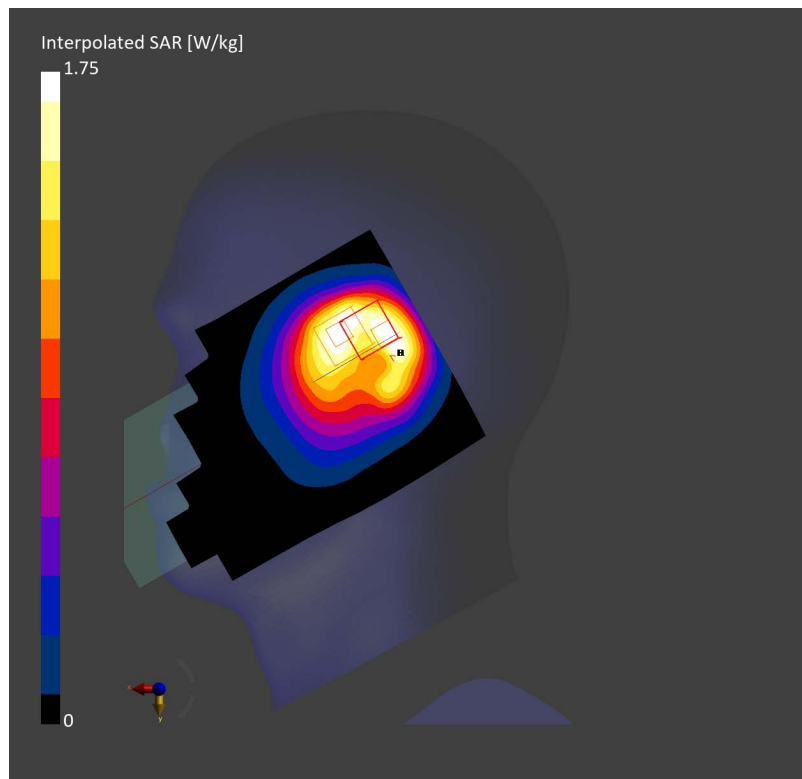

X800 LTE Band 14 10M QPSK 1RB0 23330CH Back side 10mm Ant1


X800

Communication System: Band 14; Frequency: 793.000
Medium: Head Simulating Liquid. Medium parameters used: $f=793.000\text{ MHz}$; $\sigma=0.901\text{ S/m}$; $\epsilon_r=42.6$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(9.45, 9.01, 9.28); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.547 W/kg; SAR (10g) = 0.373 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.00 dB
SAR (1g) = 0.585 W/kg; SAR (10g) = 0.418 W/kg;
M2/M1 [%]=73.9
Dist 3dB Peak [mm]= 16.0

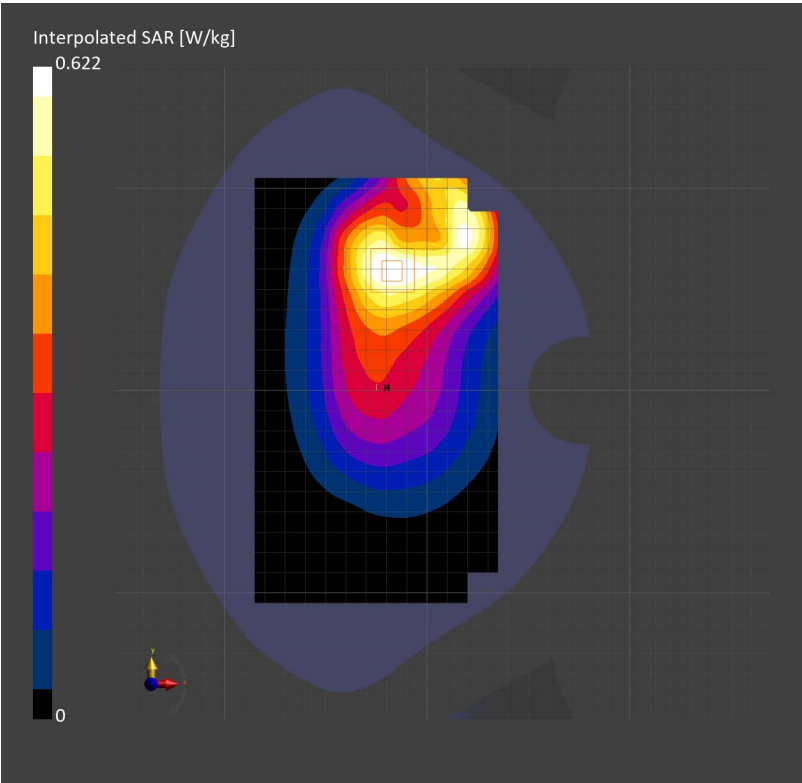

X800 LTE Band 25 20M QPSK 1RB99 26590CH Right cheek Ant2**X800**

Communication System: Band 25; Frequency: 1905.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.2$

DASY6 Configuration:

- Probe: EX3DV4 - SN7838; ConvF(7.77, 7.41, 7.63); Calibrated: 2024-11-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn896; Calibrated: 2024-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
- Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.628 W/kg; SAR (10g) = 0.353 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.644 W/kg; SAR (10g) = 0.363 W/kg;

M2/M1 [%]=57.4

Dist 3dB Peak [mm]=11.4

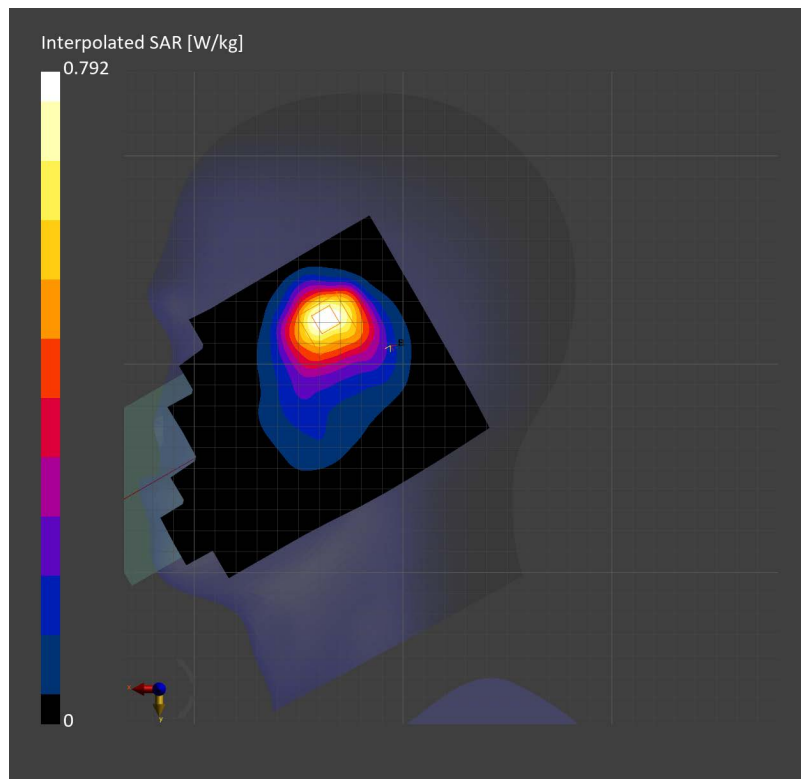

X800 LTE Band 25 20M QPSK 1RB50 26590CH Left side 10mm Ant5


X800

Communication System: Band 25; Frequency: 1905.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 1905.000$ MHz; $\sigma= 1.43$ S/m; $\epsilon_r = 39.2$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.77, 7.41, 7.63); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (40.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.430 W/kg; SAR (10g) = 0.248 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.08 dB
SAR (1g) = 0.501 W/kg; SAR (10g) = 0.283 W/kg;
M2/M1 [%]=61.8
Dist 3dB Peak [mm]=12.2

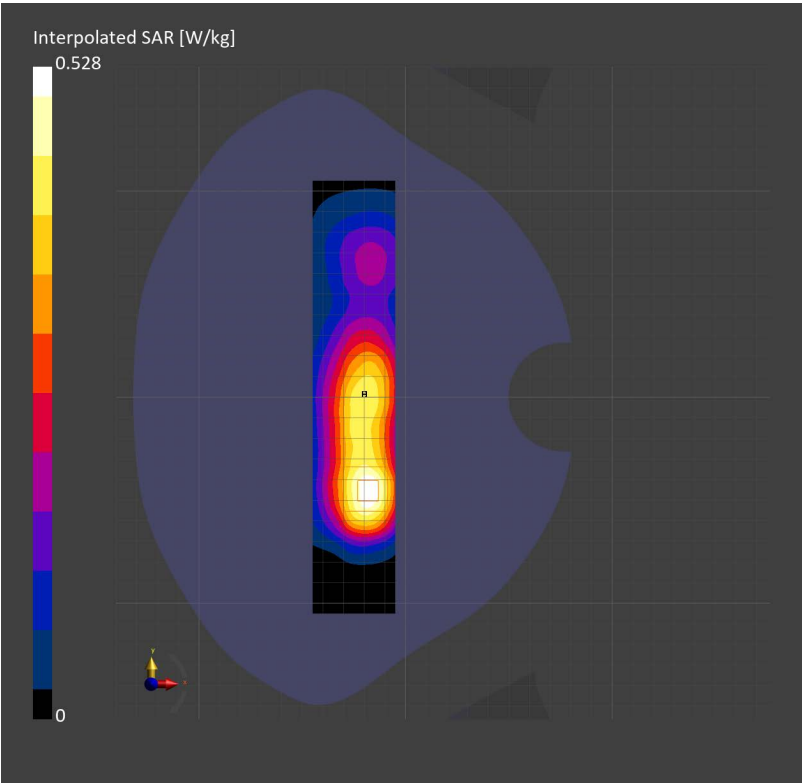

X800 LTE Band 26 15M QPSK 1RB38 26765CH Right cheek Ant1


X800

Communication System: Band 26; Frequency: 821.500
Medium: Head Simulating Liquid. Medium parameters used: $f= 821.500$ MHz; $\sigma= 0.869$ S/m; $\epsilon_r = 40.1$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.89, 8.49, 8.74); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.891 W/kg; SAR (10g) = 0.566 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.03 dB
SAR (1g) = 0.956 W/kg; SAR (10g) = 0.570 W/kg;
M2/M1 [%]=57.9
Dist 3dB Peak [mm]=12.6

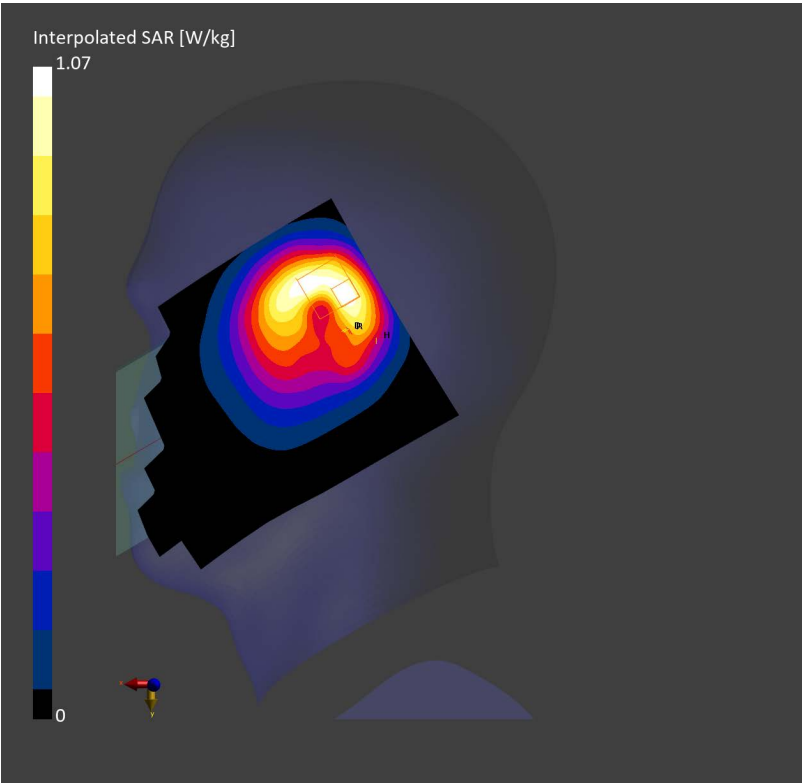

X800 LTE Band 26 15M QPSK 1RB38 26965CH Front side 10mm Ant1


X800

Communication System: Band 26; Frequency: 841.500
Medium: Head Simulating Liquid. Medium parameters used: $f= 841.500$ MHz; $\sigma= 0.922$ S/m; $\epsilon_r = 41.0$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.89, 8.49, 8.74); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.749 W/kg; SAR (10g) = 0.488 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.04 dB
SAR (1g) = 0.744 W/kg; SAR (10g) = 0.467 W/kg;
M2/M1 [%]=65.9
Dist 3dB Peak [mm]=16.0

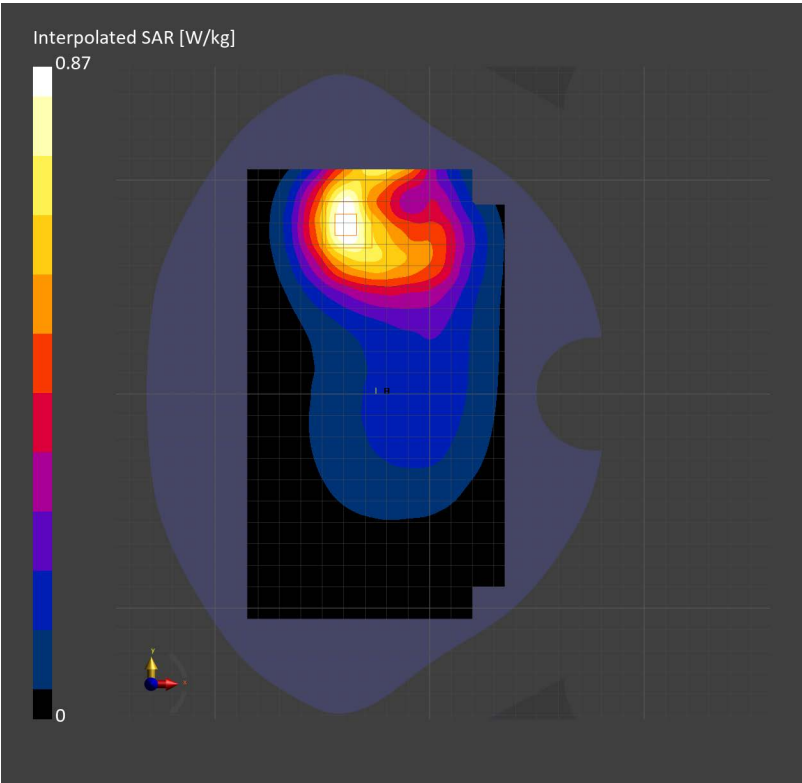

Test Laboratory: SGS-SAR Lab

X800 LTE Band 30 10M QPSK 1RB25 27710CH Right cheek Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.639$ S/m; $\epsilon_r = 40.491$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.6, 7.6, 7.6); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.23 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.55 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.900 W/kg; SAR(10 g) = 0.454 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 50.8%

Maximum value of SAR (measured) = 1.40 W/kg

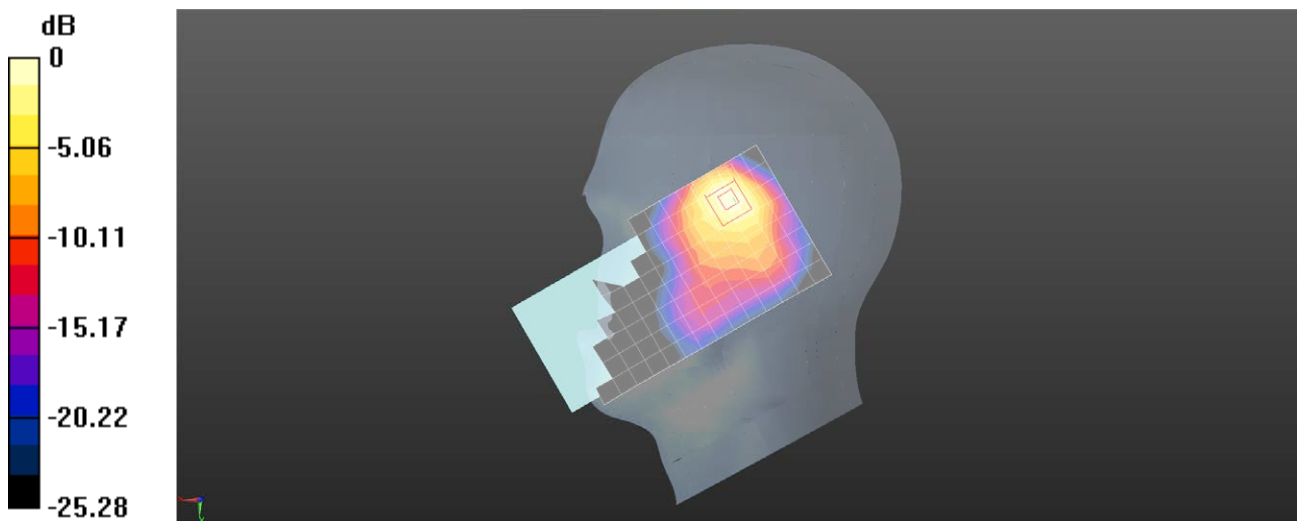

0 dB = 1.40 W/kg = 1.46 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 LTE Band 30 10M QPSK 1RB25 27710CH Back side 10mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.639$ S/m; $\epsilon_r = 40.491$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.6, 7.6, 7.6); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.17 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.694 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.379 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 1.19 W/kg

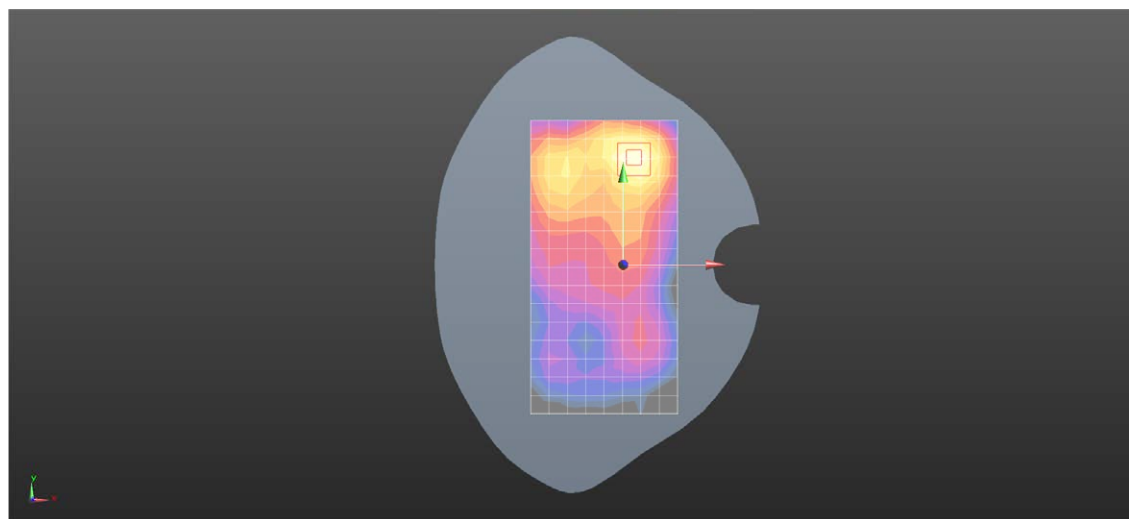

0 dB = 1.19 W/kg = 0.76 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 LTE Band 41 20M QPSK 50RB0 40620CH Right cheek Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.543$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.25 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.655 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.397 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 1.72 W/kg

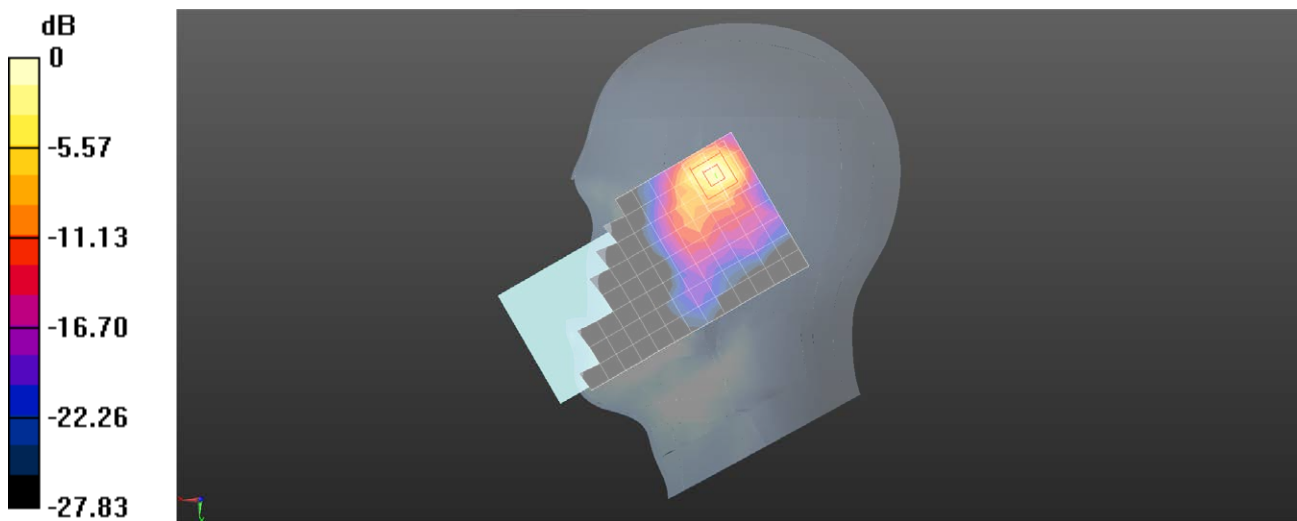

0 dB = 1.72 W/kg = 2.36 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 LTE Band 41 20M QPSK 1RB0 40620CH Left side 0mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.543$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 10.5 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.358 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 6.72 W/kg; SAR(10 g) = 2.27 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 13.4 W/kg

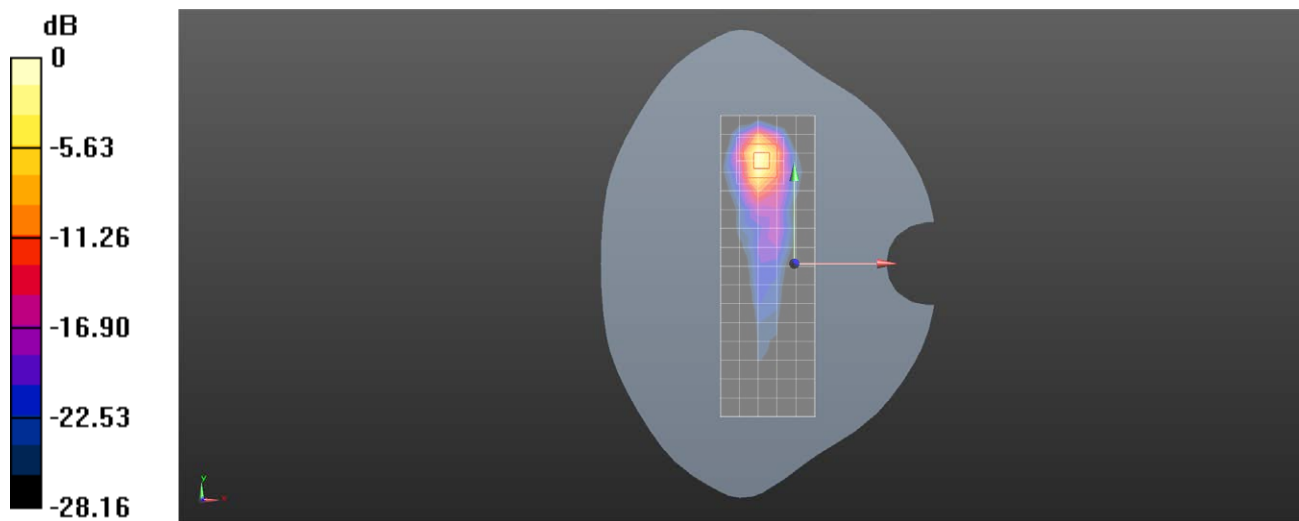

0 dB = 13.4 W/kg = 11.27 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 LTE Band 41 20M QPSK 1RB0 40620CH Left side 10mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.543$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.18 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.233 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 1.24 W/kg

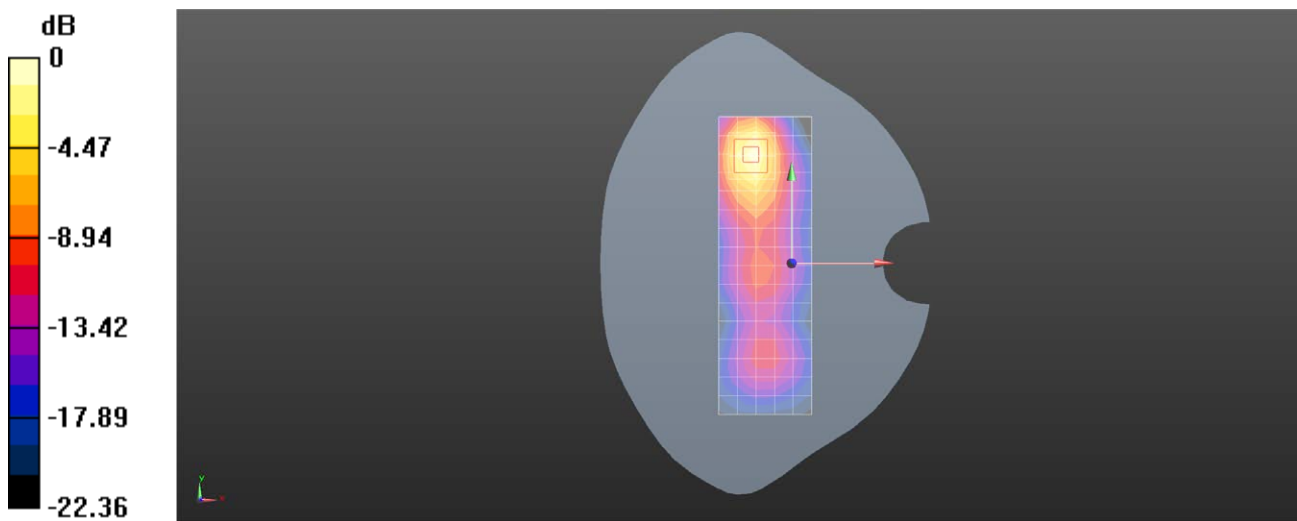

0 dB = 1.24 W/kg = 0.93 dBW/kg

X800 LTE Band 42 20M QPSK 1RB99 42590CH Right cheek Ant3


X800

Communication System: Band 42; Frequency: 3500.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 3500.000$ MHz; $\sigma= 2.79$ S/m; $\epsilon_r = 37.3$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.7, 6.7, 6.7); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.900 W/kg; SAR (10g) = 0.408 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.02 dB
SAR (1g) = 0.934 W/kg; SAR (10g) = 0.408 W/kg;
M2/M1 [%]=36.5
Dist 3dB Peak [mm]=9.6

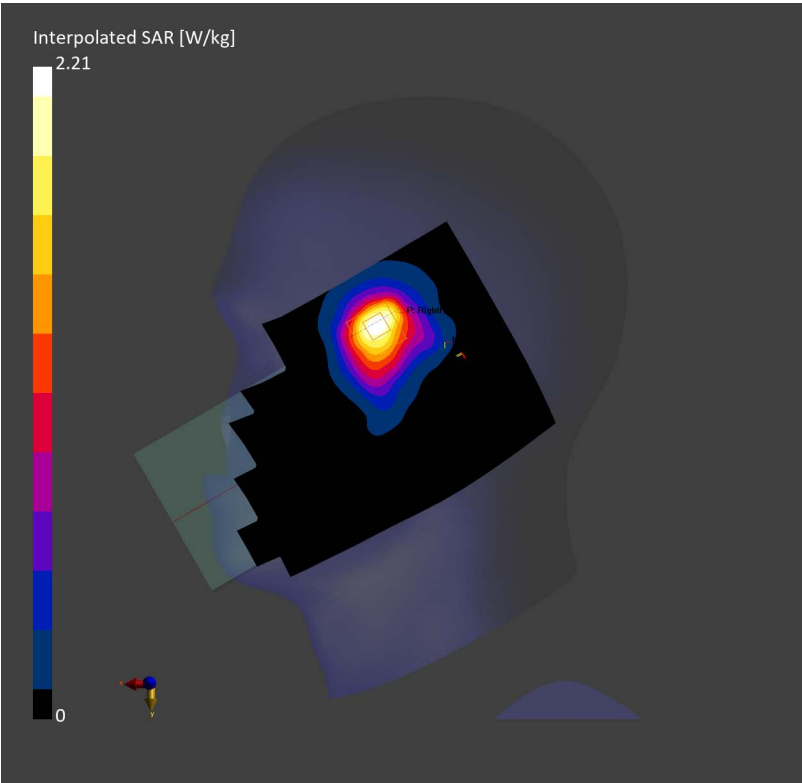

X800 LTE Band 42 20M QPSK 1RB99 43490CH Back side 10mm Ant3


X800

Communication System: Band 42; Frequency: 3590.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 3590.000$ MHz; $\sigma= 2.88$ S/m; $\epsilon_r = 37.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.7, 6.7, 6.7); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.680 W/kg; SAR (10g) = 0.320 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.07 dB
SAR (1g) = 0.713 W/kg; SAR (10g) = 0.319 W/kg;
M2/M1 [%]=38.2
Dist 3dB Peak [mm]=9.9

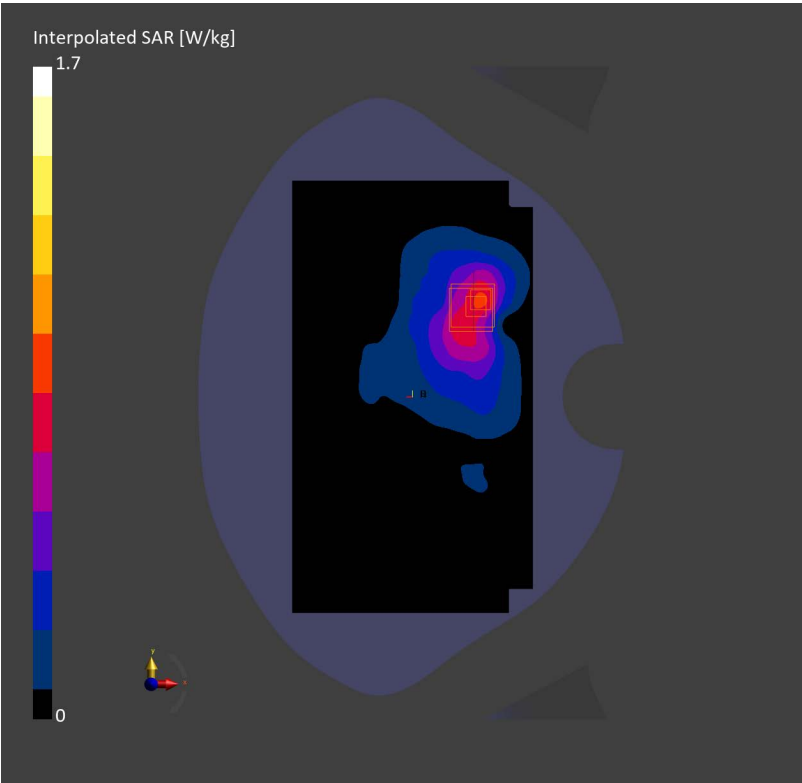

X800 LTE Band 43 20M QPSK 50RB25 43690CH Right cheek Ant3


X800

Communication System: Band 43; Frequency: 3610.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 3610.000$ MHz; $\sigma= 2.90$ S/m; $\epsilon_r = 37.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.48, 6.48, 6.48); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.628 W/kg; SAR (10g) = 0.277 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.02 dB
SAR (1g) = 0.644 W/kg; SAR (10g) = 0.274 W/kg;
M2/M1 [%]=35.3
Dist 3dB Peak [mm]=9.1

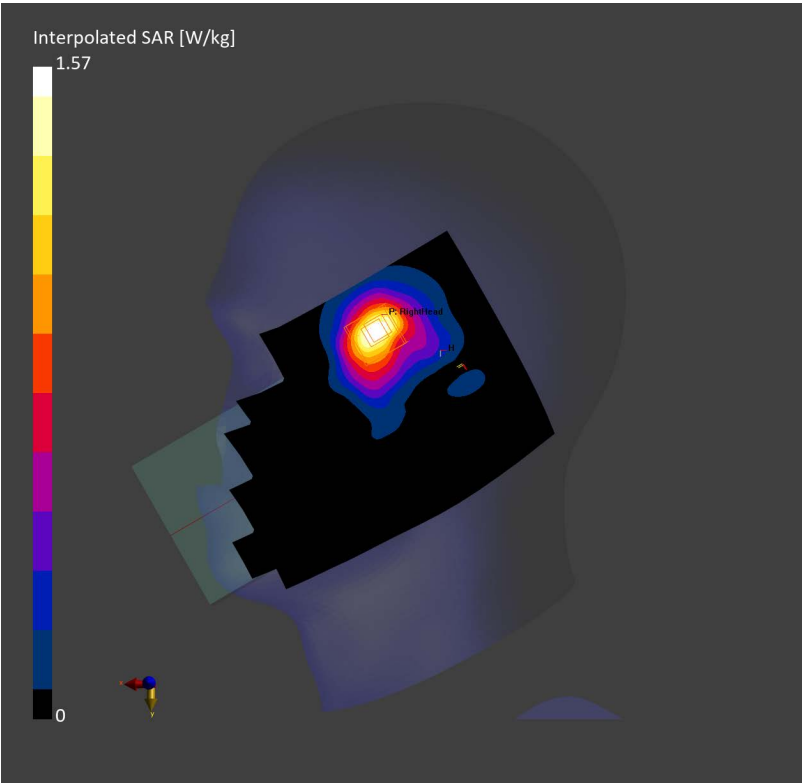

X800 LTE Band 43 20M QPSK 1RB99 43690CH Back side 10mm Ant3


X800

Communication System: Band 43; Frequency: 3610.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 3610.000$ MHz; $\sigma= 2.90$ S/m; $\epsilon_r = 37.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.48, 6.48, 6.48); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.739 W/kg; SAR (10g) = 0.337 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = 0.03 dB
SAR (1g) = 0.721 W/kg; SAR (10g) = 0.323 W/kg;
M2/M1 [%]=34.7
Dist 3dB Peak [mm]=9.5

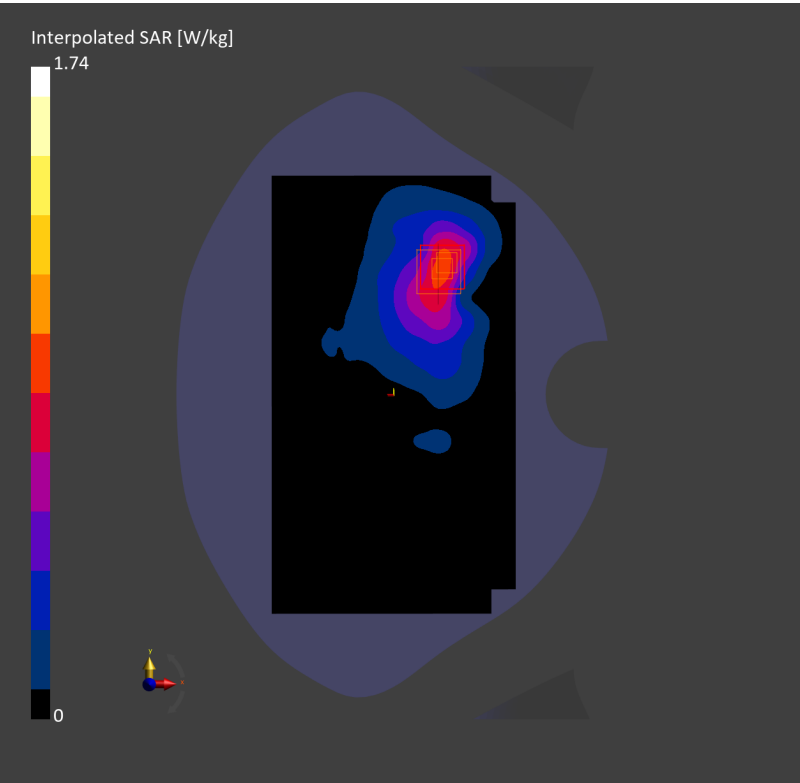

X800 LTE Band 48 20M QPSK 50RB50 55340CH Right cheek Ant3**X800**

Communication System: Band 48; Frequency: 3560.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.87$ S/m; $\epsilon_r = 37.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.7, 6.7, 6.7); Calibrated: 2024-08-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.870 W/kg; SAR (10g) = 0.387 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.878 W/kg; SAR (10g) = 0.378 W/kg;

M2/M1 [%]=36.6

Dist 3dB Peak [mm]=10.2

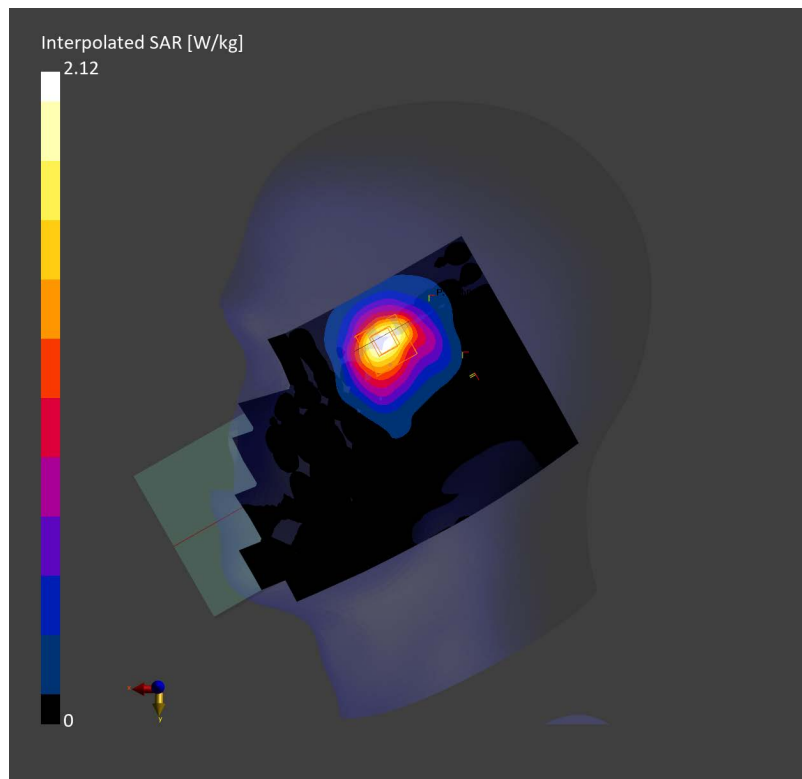

X800 LTE Band 48 20M QPSK 1RB0 55990CH Back side 10mm Ant3


X800

Communication System: Band 48; Frequency: 3625.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 3625.000$ MHz; $\sigma= 2.93$ S/m; $\epsilon_r = 36.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.48, 6.48, 6.48); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.761 W/kg; SAR (10g) = 0.350 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.02 dB
SAR (1g) = 0.757 W/kg; SAR (10g) = 0.329 W/kg;
M2/M1 [%]=36.9
Dist 3dB Peak [mm]=9.9

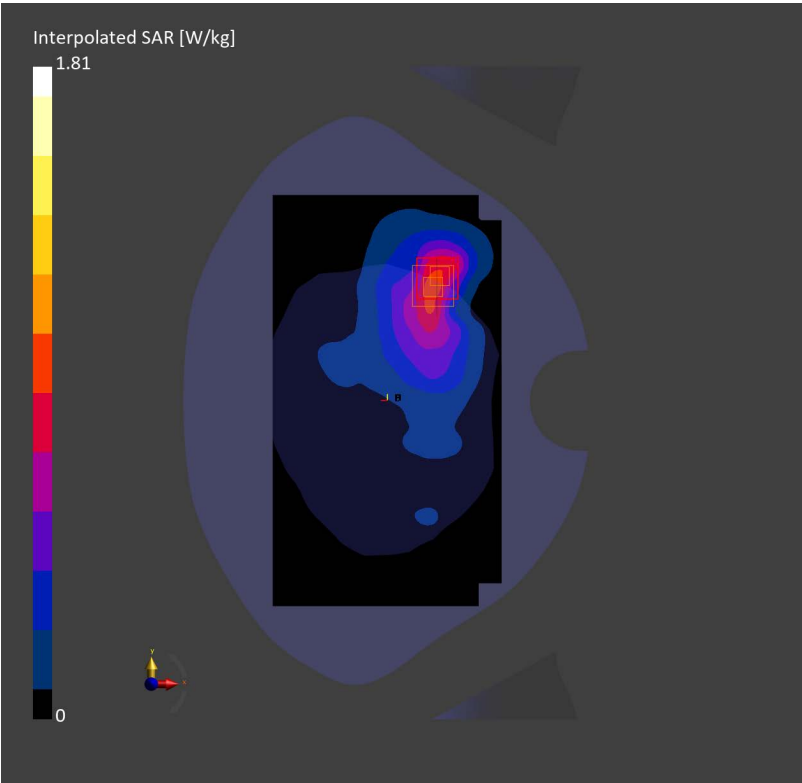

X800 LTE Band 66 20M QPSK 1RB99 132572CH Right cheek Ant2


X800

Communication System: Band 66; Frequency: 1770.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 1770.000$ MHz; $\sigma= 1.34$ S/m; $\epsilon_r = 40.2$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.05, 7.68, 7.91); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.631 W/kg; SAR (10g) = 0.364 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.00 dB
SAR (1g) = 0.636 W/kg; SAR (10g) = 0.378 W/kg;
M2/M1 [%]=58.6
Dist 3dB Peak [mm]=12.6

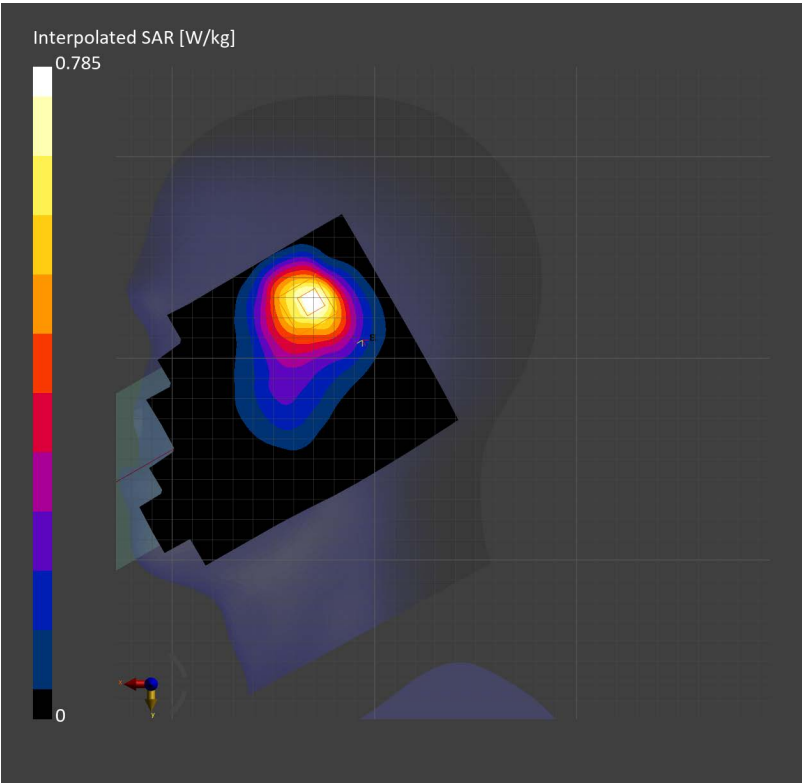

X800 LTE Band 66 20M QPSK 1RB0 132572CH Left side 10mm Ant5


X800

Communication System: Band 66; Frequency: 1770.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 1770.000$ MHz; $\sigma= 1.34$ S/m; $\epsilon_r = 40.2$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(8.05, 7.68, 7.91); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (40.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.650 W/kg; SAR (10g) = 0.384 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.07 dB
SAR (1g) = 0.664 W/kg; SAR (10g) = 0.328 W/kg;
M2/M1 [%]=62.8
Dist 3dB Peak [mm]=12.8

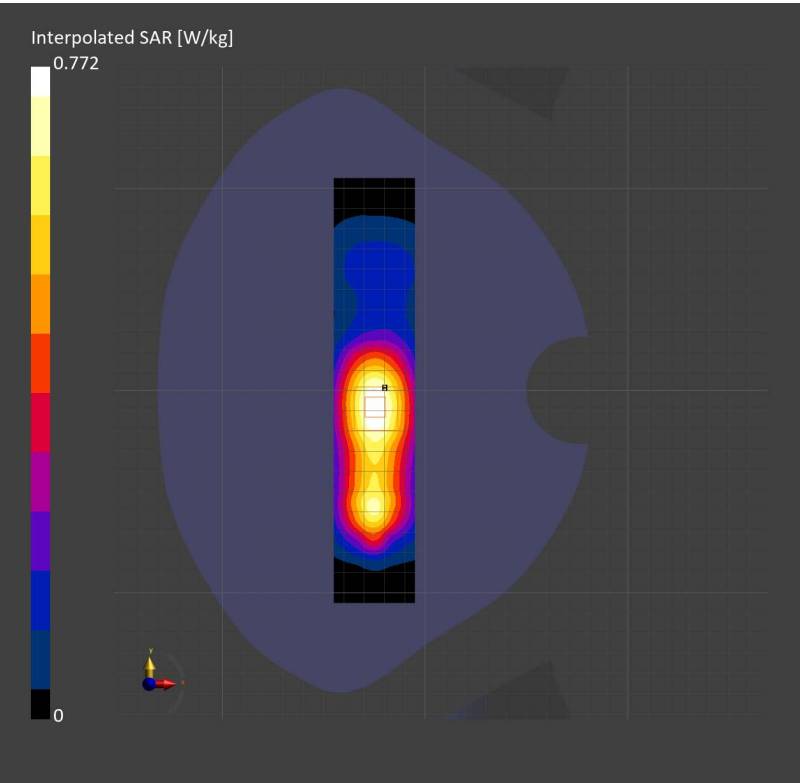

X800 LTE Band 71 20M QPSK 1RB50 133222CH Right cheek Ant1


X800

Communication System: Band 71; Frequency: 673.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 673.000$ MHz; $\sigma= 0.827$ S/m; $\epsilon_r = 43.3$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(9.45, 9.01, 9.28); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.838 W/kg; SAR (10g) = 0.564 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.01 dB
SAR (1g) = 0.867 W/kg; SAR (10g) = 0.524 W/kg;
M2/M1 [%]=49.1
Dist 3dB Peak [mm]=11.4

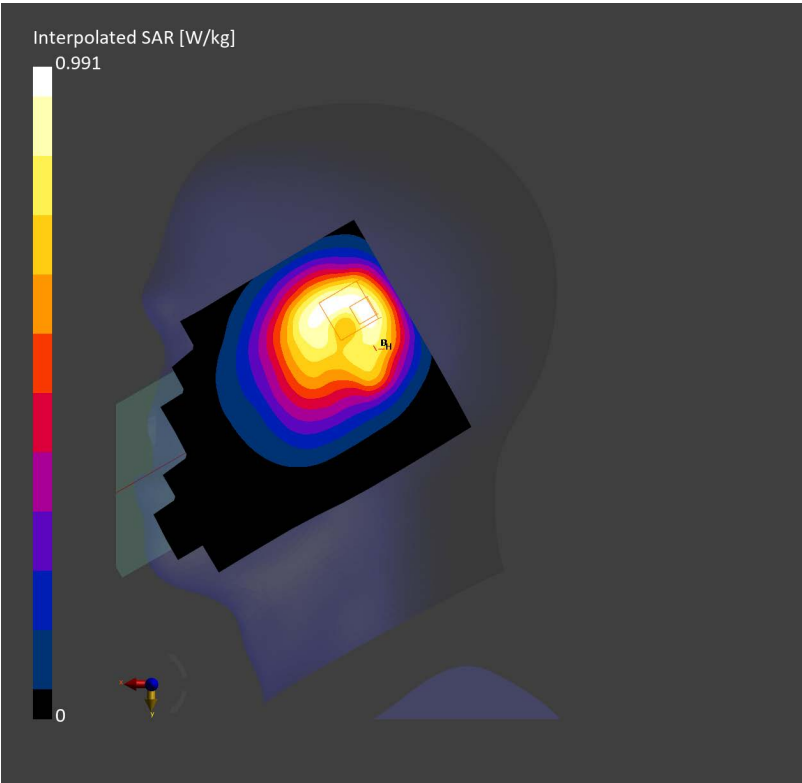

X800 LTE Band 71 20M QPSK 1RB50 133322CH Front side 10mm Ant1


X800

Communication System: Band 71; Frequency: 683.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 683.000$ MHz; $\sigma= 0.833$ S/m; $\epsilon_r = 43.2$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(9.45, 9.01, 9.28); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.389 W/kg; SAR (10g) = 0.262 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.04 dB
SAR (1g) = 0.386 W/kg; SAR (10g) = 0.229 W/kg;
M2/M1 [%]=58.4
Dist 3dB Peak [mm]=12.2

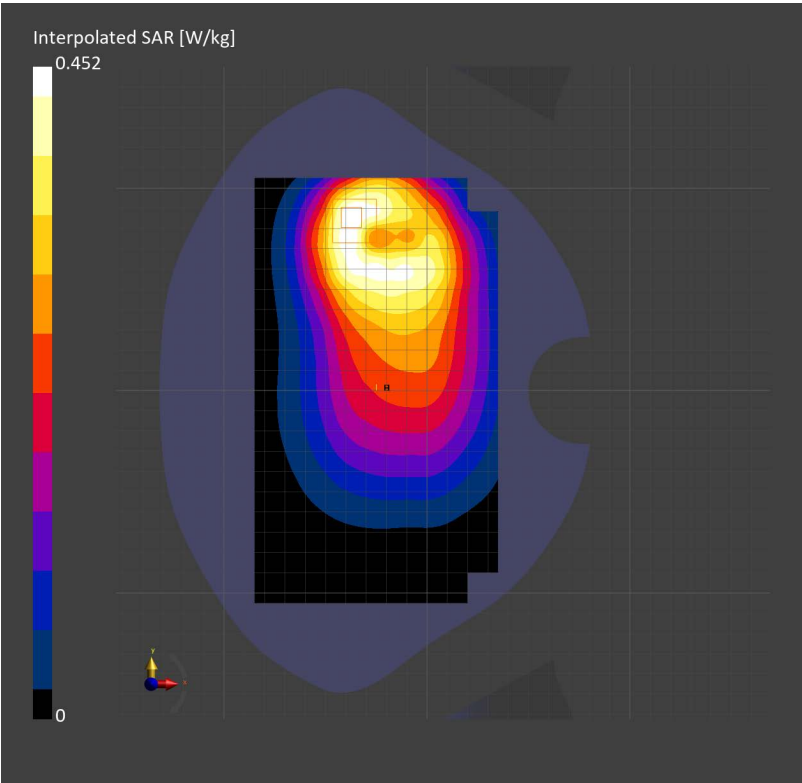

Test Laboratory: SGS-SAR Lab

X800 5G NR N7 20M QPSK 1RB1 512000CH Right cheek Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, NR (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.881$ S/m; $\epsilon_r = 39.498$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.34 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.839 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 1.46 W/kg

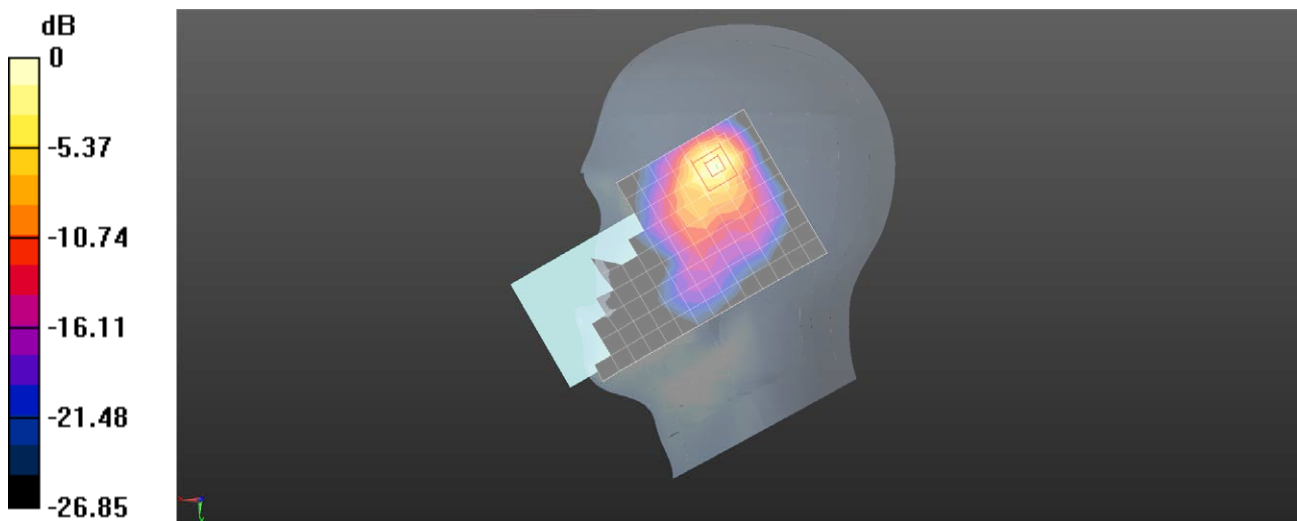

0 dB = 1.46 W/kg = 1.64 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 5G NR N7 20M QPSK 1RB1 512000CH Left side 0mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, NR (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.881$ S/m; $\epsilon_r = 39.498$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 10.3 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.26 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 20.2 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.55 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 41%

Maximum value of SAR (measured) = 15.6 W/kg

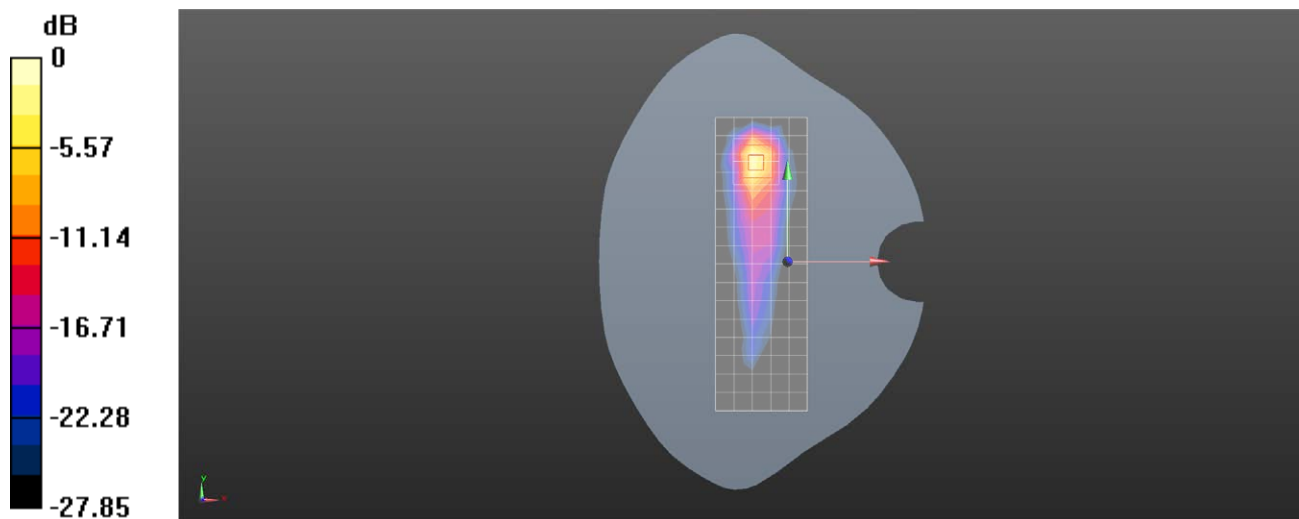

0 dB = 15.6 W/kg = 11.93 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 5G NR N7 20M QPSK 50RB28 502000CH Left side 19mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, NR (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2510$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.64$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.35, 7.35, 7.35); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.47 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.39 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.525 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 1.47 W/kg

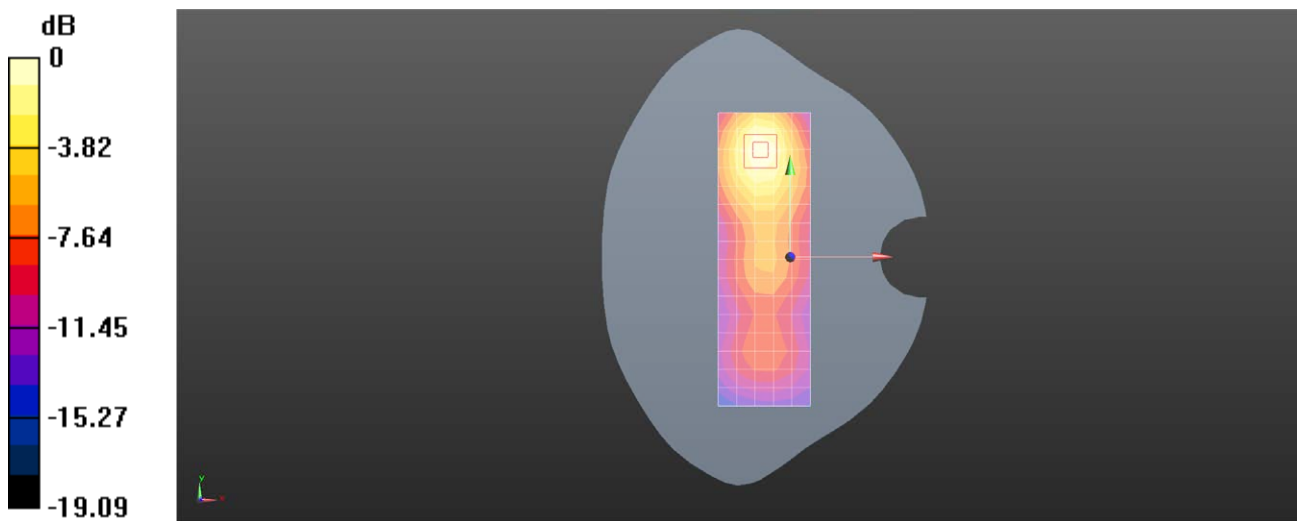

0 dB = 1.47 W/kg = 1.67 dBW/kg

X800 5G NR N7 20M QPSK 50RB28 502000CH Left side 19mm Ant2


X800

Communication System: Band n7; Frequency: 2510.000
Medium: Head Simulating Liquid. Medium parameters used: f= 2510.000 MHz; σ = 1.89 S/m; ϵ_r = 39.8

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(7.5, 7.5, 7.5); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.833 W/kg; SAR (10g) = 0.439 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.07 dB
SAR (1g) = 0.819 W/kg; SAR (10g) = 0.433 W/kg;
M2/M1 [%]=70.9
Dist 3dB Peak [mm]=14.9

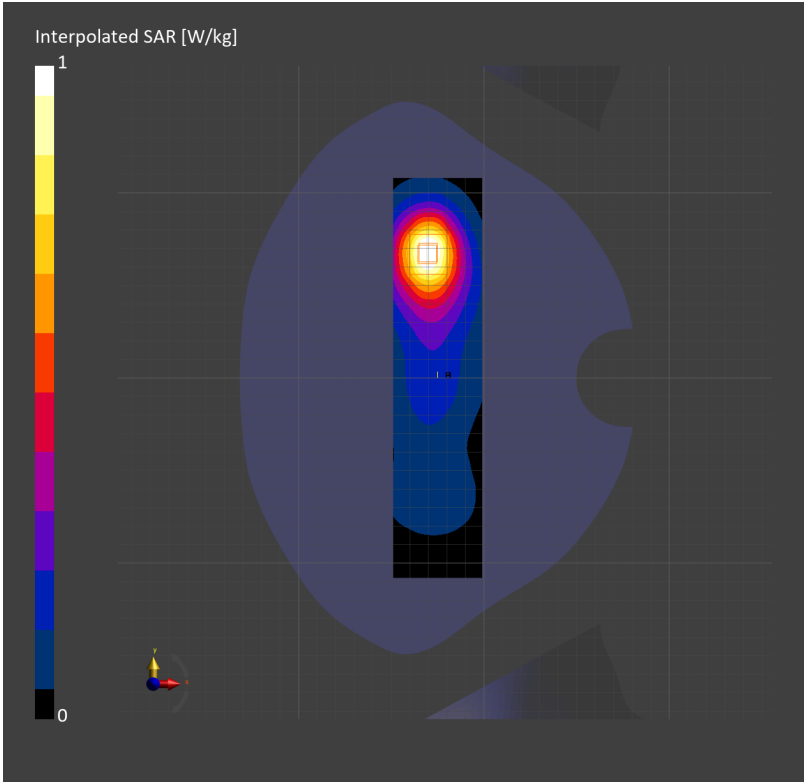

X800 5G NR N14 10M QPSK 1RB1 158600CH Right cheek Ant1


X800

Communication System: Band n14; Frequency: 793.000
Medium: Head Simulating Liquid. Medium parameters used: $f=793.000\text{ MHz}$; $\sigma=0.909\text{ S/m}$; $\epsilon_r=41.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(10.65, 10.65, 10.65); Calibrated: 2024-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.916 W/kg; SAR (10g) = 0.587 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.04 dB
SAR (1g) = 0.862 W/kg; SAR (10g) = 0.490 W/kg;
M2/M1 [%]=53.5
Dist 3dB Peak [mm]=10.8

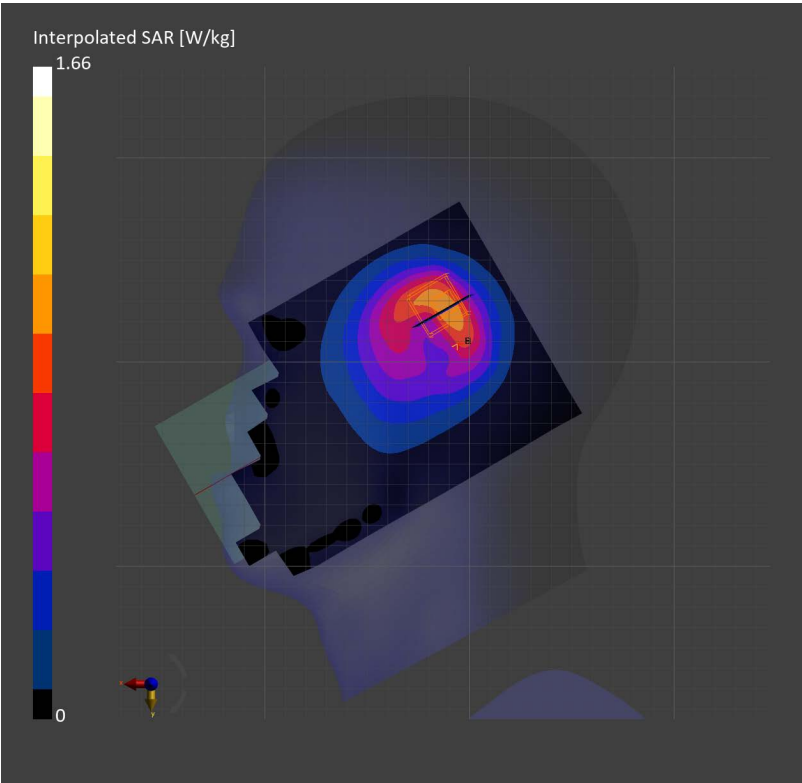

X800 5G NR N14 10M QPSK 25RB14 158600CH Front side 10mm Ant1


X800

Communication System: Band n14; Frequency: 793.000
Medium: Head Simulating Liquid. Medium parameters used: $f=793.000\text{ MHz}$; $\sigma=0.909\text{ S/m}$; $\epsilon_r=41.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(10.65, 10.65, 10.65); Calibrated: 2024-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.550 W/kg; SAR (10g) = 0.363 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.08 dB
SAR (1g) = 0.548 W/kg; SAR (10g) = 0.330 W/kg;
M2/M1 [%]=55.7
Dist 3dB Peak [mm]=12.5

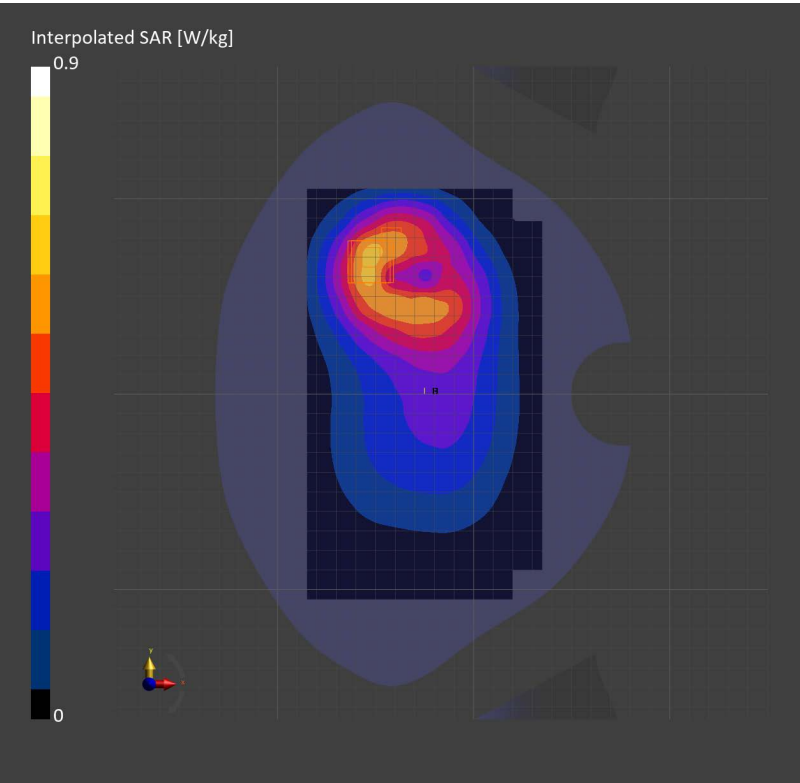

X800 5G NR N25 30M QPSK 1RB1 37300CH Right cheek Ant2


X800

Communication System: Band n25; Frequency: 1865.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 1865.000$ MHz; $\sigma= 1.43$ S/m; $\epsilon_r = 40.6$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(8.51, 8.51, 8.51); Calibrated: 2024-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.913 W/kg; SAR (10g) = 0.520 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.00 dB
SAR (1g) = 0.918 W/kg; SAR (10g) = 0.522 W/kg;
M2/M1 [%]=49.3
Dist 3dB Peak [mm]=11.0

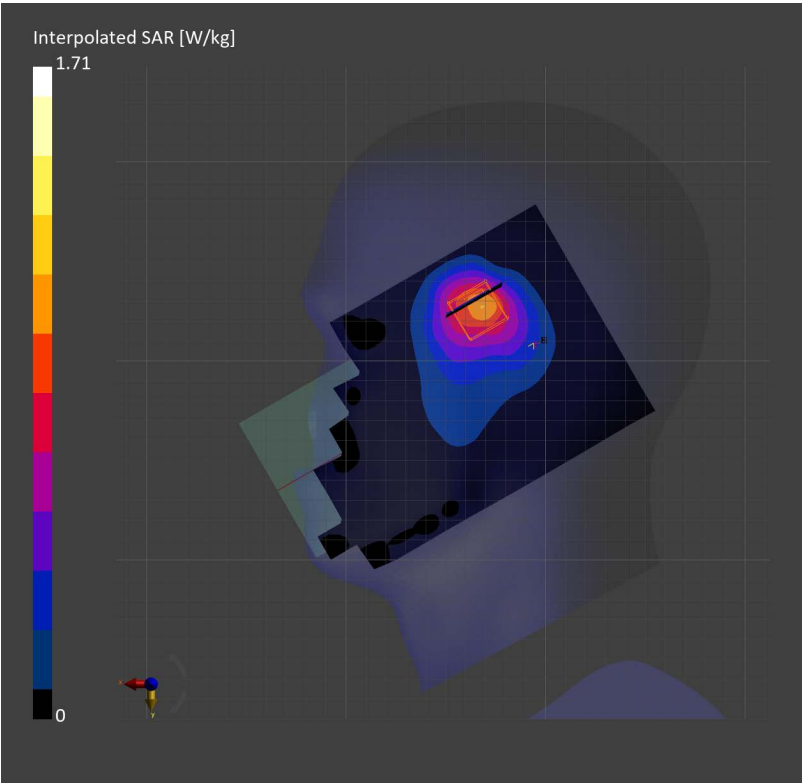

X800 5G NR N25 30M QPSK 1RB1 37300CH Back side 10mm Ant2


X800

Communication System: Band n25; Frequency: 1865.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 1865.000$ MHz; $\sigma= 1.43$ S/m; $\epsilon_r = 40.6$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(8.51, 8.51, 8.51); Calibrated: 2024-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.756 W/kg; SAR (10g) = 0.457 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = -0.12 dB
SAR (1g) = 0.683 W/kg; SAR (10g) = 0.406 W/kg;
M2/M1 [%]=52.0
Dist 3dB Peak [mm]=14.4

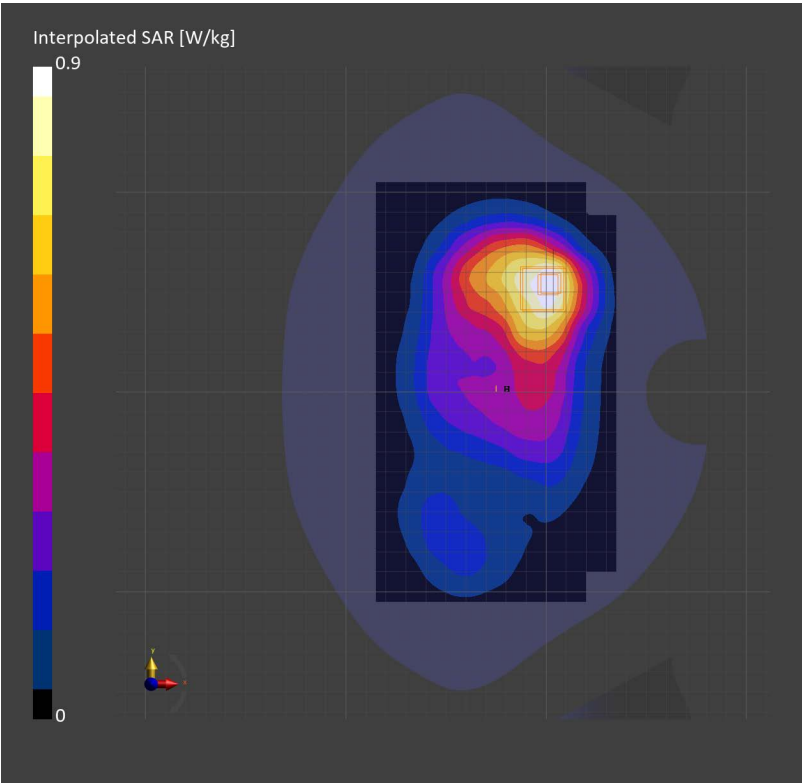

X800 5G NR N26 20M QPSK 1RB1 166300CH Right cheek Ant1


X800

Communication System: Band n26; Frequency: 831.500
Medium: Head Simulating Liquid. Medium parameters used: $f= 831.500$ MHz; $\sigma= 0.888$ S/m; $\epsilon_r = 41.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(10.36, 10.36, 10.36); Calibrated: 2024-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.762 W/kg; SAR (10g) = 0.489 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.03 dB
SAR (1g) = 0.793 W/kg; SAR (10g) = 0.462 W/kg;
M2/M1 [%]=53.8
Dist 3dB Peak [mm]=11.5

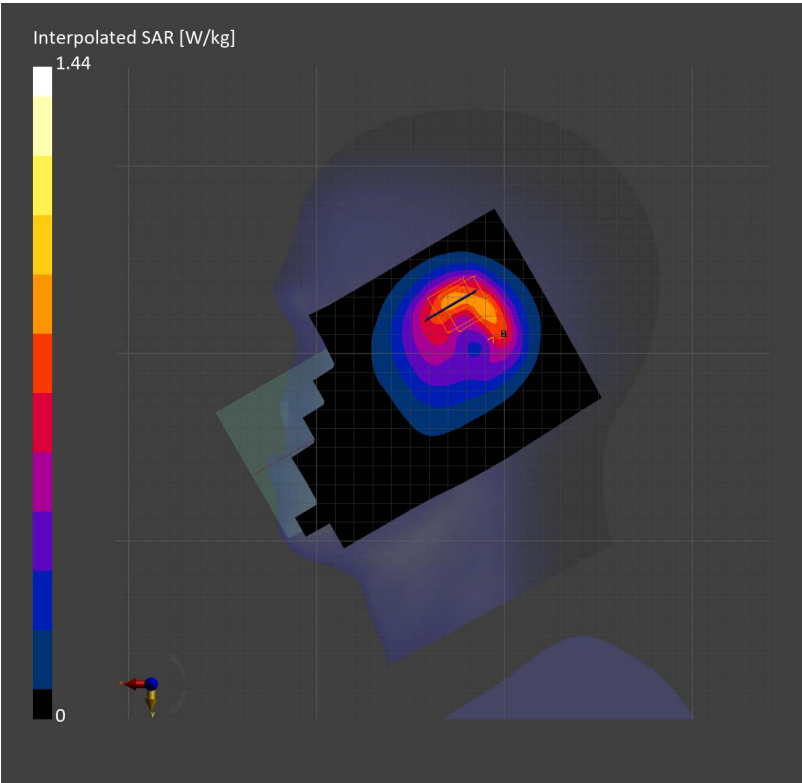

X800 5G NR N26 20M QPSK 50RB28 167800CH Front side 10mm Ant1


X800

Communication System: Band n26; Frequency: 839.000
Medium: Head Simulating Liquid. Medium parameters used: $f=839.000\text{ MHz}$; $\sigma=0.927\text{ S/m}$; $\epsilon_r=41.1$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(10.36, 10.36, 10.36); Calibrated: 2024-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.579 W/kg; SAR (10g) = 0.378 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.03 dB
SAR (1g) = 0.595 W/kg; SAR (10g) = 0.368 W/kg;
M2/M1 [%]=58.1
Dist 3dB Peak [mm]=14.8

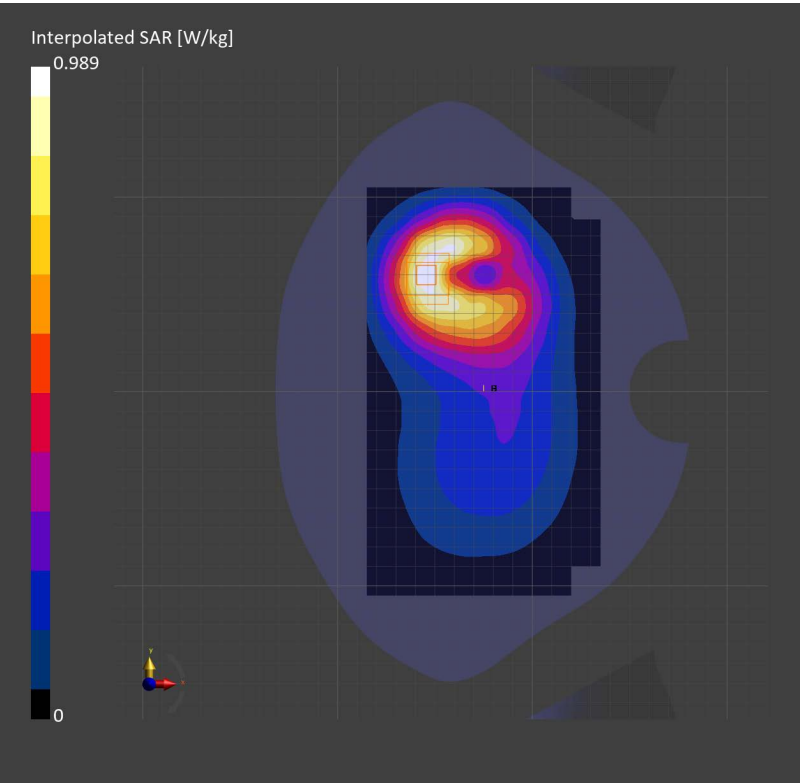

Test Laboratory: SGS-SAR Lab

X800 5G NR N30 10M QPSK 25RB14 462000CH Right cheek Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, NR (0); Frequency: 2310 MHz;Duty Cycle: 1:1


Medium: HSL2300;Medium parameters used: $f = 2310 \text{ MHz}$; $\sigma = 1.639 \text{ S/m}$; $\epsilon_r = 40.491$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.6, 7.6, 7.6); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 1.35 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.39 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.73 W/kg
SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.420 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 52.4%
Maximum value of SAR (measured) = 1.33 W/kg

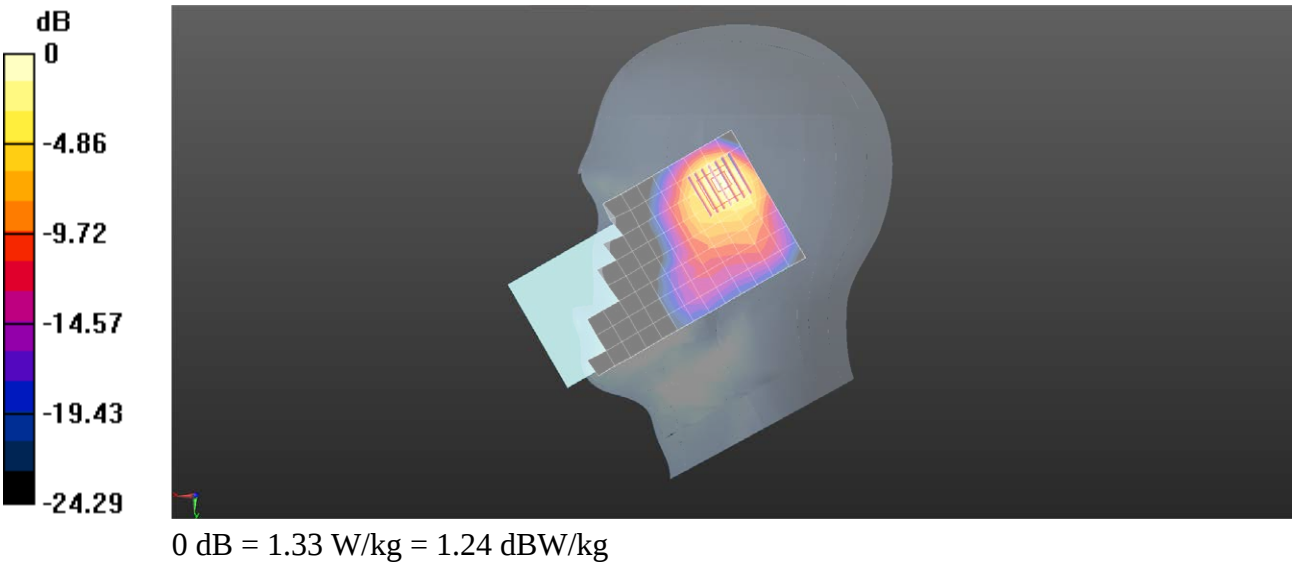

Test Laboratory: SGS-SAR Lab

X800 5G NR N30 10M QPSK 1RB50 462000CH Front side 10mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.639$ S/m; $\epsilon_r = 40.491$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.6, 7.6, 7.6); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.943 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.888 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.676 W/kg; SAR(10 g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 50.8%

Maximum value of SAR (measured) = 1.08 W/kg

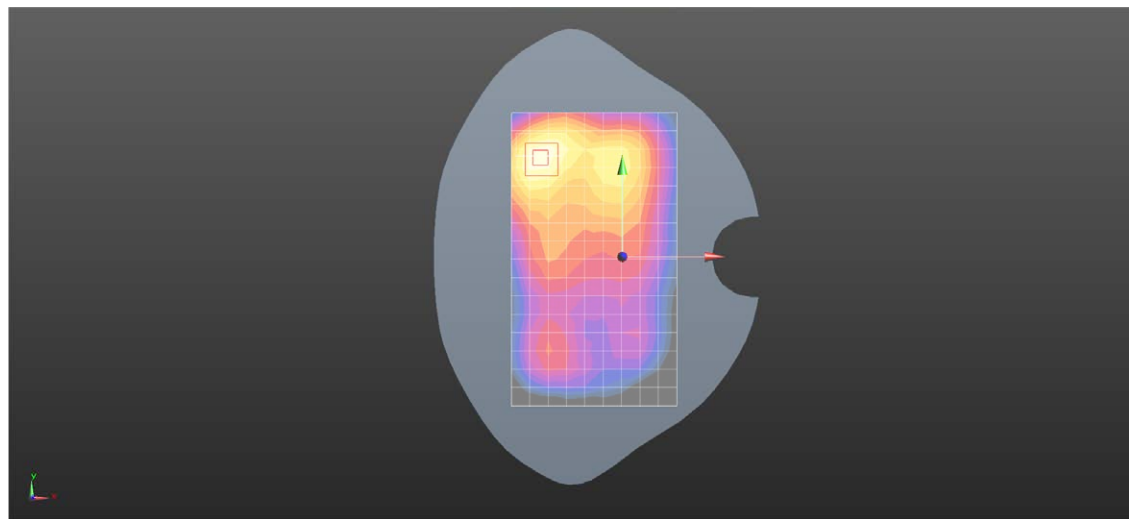

0 dB = 1.08 W/kg = 0.33 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 5G NR N41 100M QPSK 1RB1 523302CH Right cheek Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, NR (0); Frequency: 2616.51 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2617$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 38.683$; $\rho = 1200$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.37 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.975 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.890 W/kg; SAR(10 g) = 0.382 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 1.49 W/kg

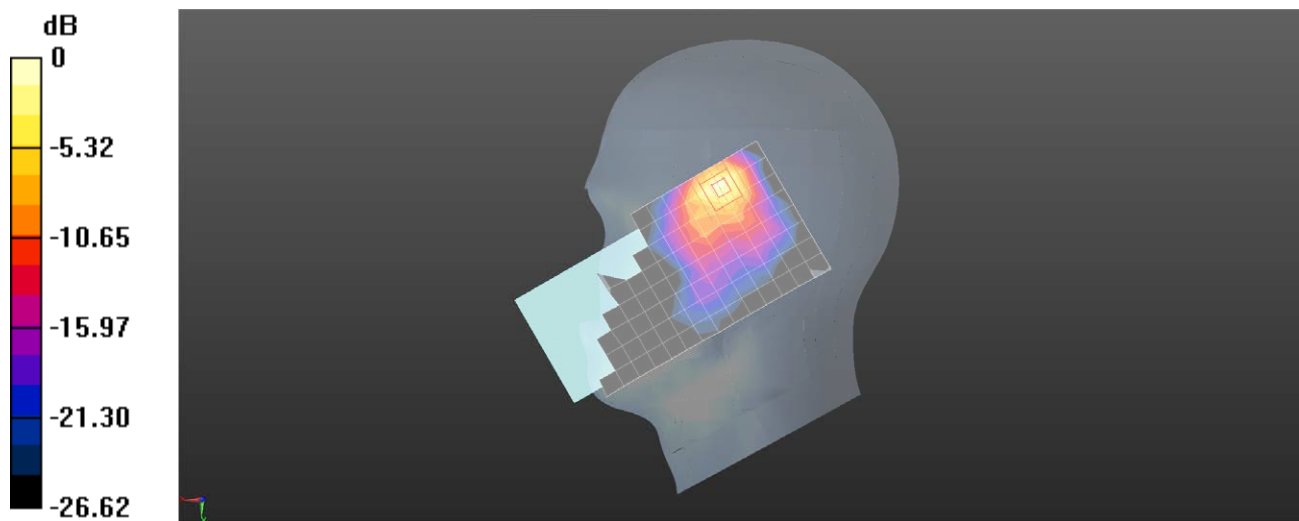

0 dB = 1.49 W/kg = 1.73 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 5G NR N41 100M QPSK 1RB137 518598CH Left side 0mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used: $f = 2593 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 38.725$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 12.1 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.89 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 19.3 W/kg

SAR(1 g) = 7.31 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.1%

Maximum value of SAR (measured) = 15.0 W/kg

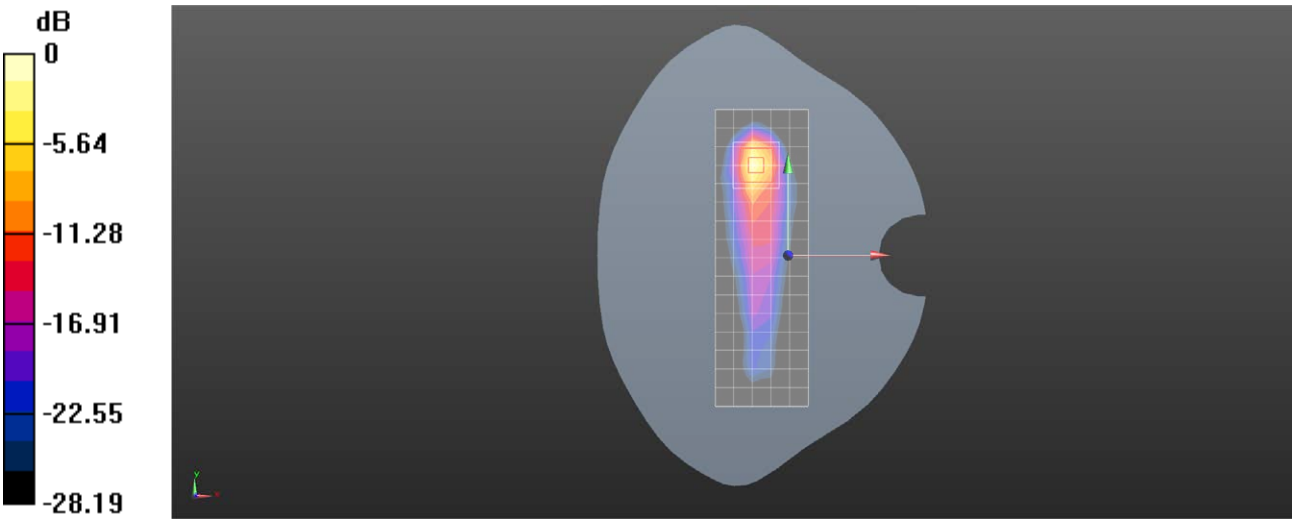

0 dB = 15.0 W/kg = 11.76 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 5G NR N41 100M QPSK 1RB137 518598CH Left side 10mm Ant2

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 38.725$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.34 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.999 V/m; Power Drift = 0.10 dB



Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.392 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 1.39 W/kg

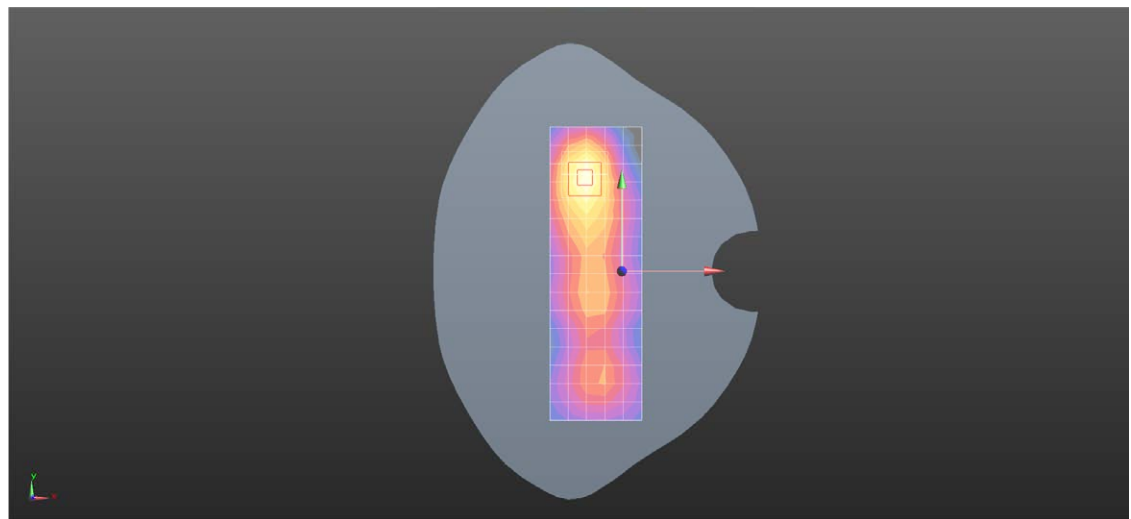

0 dB = 1.39 W/kg = 1.43 dBW/kg

X800 5G NR N41 100M QPSK 1RB137 518598CH Left side 0mm Ant2


X800

Communication System: Band n41; Frequency: 2592.990
Medium: Head Simulating Liquid. Medium parameters used: $f= 2592.990$ MHz; $\sigma= 1.99$ S/m; $\epsilon_r = 39.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(7.33, 7.33, 7.33); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 5.46 W/kg; SAR (10g) = 1.84 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.04 dB
SAR (1g) = 5.67 W/kg; SAR (10g) = 1.88 W/kg;
M2/M1 [%]=60.4
Dist 3dB Peak [mm]=7.4

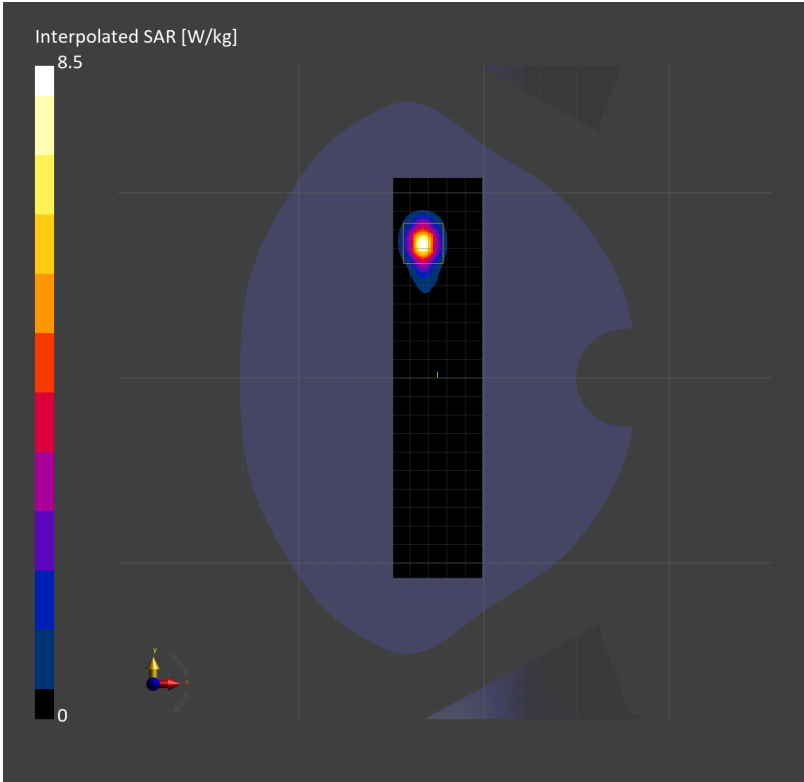

X800 5G NR N48 40M QPSK 1RB104 638000CH Right cheek Ant3


X800

Communication System: Band n48; Frequency: 3569.995
Medium: Head Simulating Liquid. Medium parameters used: $f= 3569.995$ MHz; $\sigma= 2.87$ S/m; $\epsilon_r = 37.1$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.7, 6.7, 6.7); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.914 W/kg; SAR (10g) = 0.402 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.07 dB
SAR (1g) = 0.887 W/kg; SAR (10g) = 0.392 W/kg;
M2/M1 [%]=37.8
Dist 3dB Peak [mm]=10.9

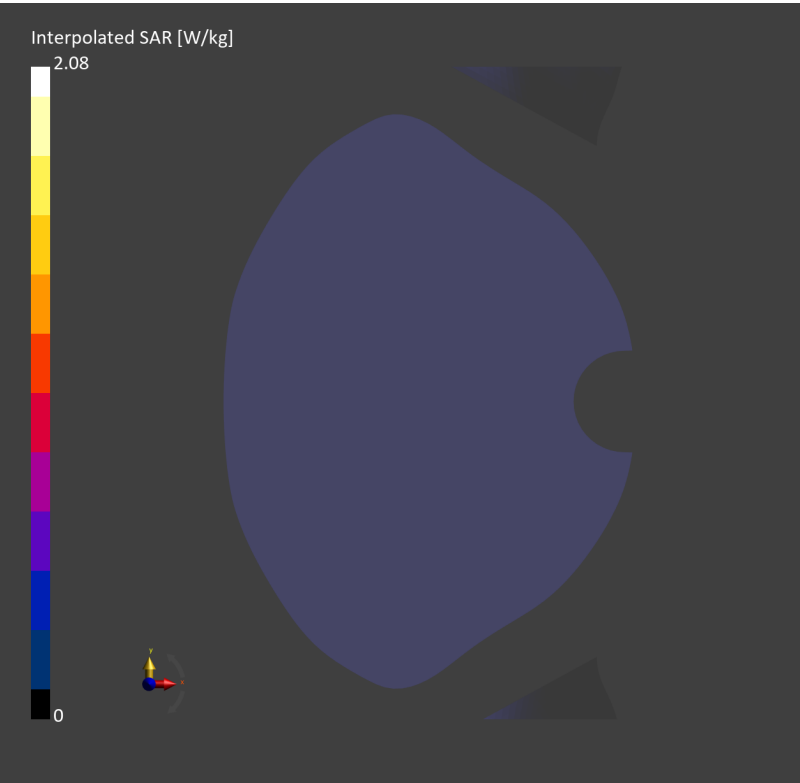

X800 5G NR N48 40M QPSK 50RB28 645332CH Left side 10mm Ant3


X800

Communication System: Band n48; Frequency: 3679.975
Medium: Head Simulating Liquid. Medium parameters used: $f= 3679.975$ MHz; $\sigma= 2.96$ S/m; $\epsilon_r = 36.7$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.48, 6.48, 6.48); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.464 W/kg; SAR (10g) = 0.216 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = 0.01 dB
SAR (1g) = 0.474 W/kg; SAR (10g) = 0.210 W/kg;
M2/M1 [%]=36.1
Dist 3dB Peak [mm]=12.1

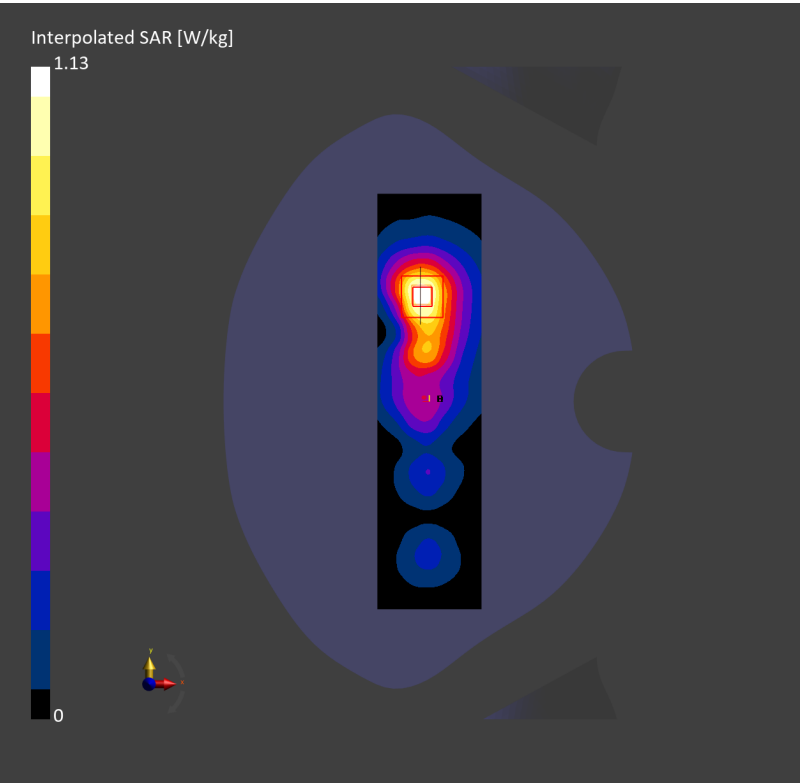

X800 5G NR N66 30M QPSK 1RB158 353000CH Right cheek Ant2


X800

Communication System: Band n66; Frequency: 1765.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 1765.000$ MHz; $\sigma= 1.26$ S/m; $\epsilon_r = 40.2$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(8.85, 8.85, 8.85); Calibrated: 2024-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (105.0 mm x 105.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.928 W/kg; SAR (10g) = 0.546 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.00 dB
SAR (1g) = 0.951 W/kg; SAR (10g) = 0.548 W/kg;
M2/M1 [%]=53.5
Dist 3dB Peak [mm]=12.5

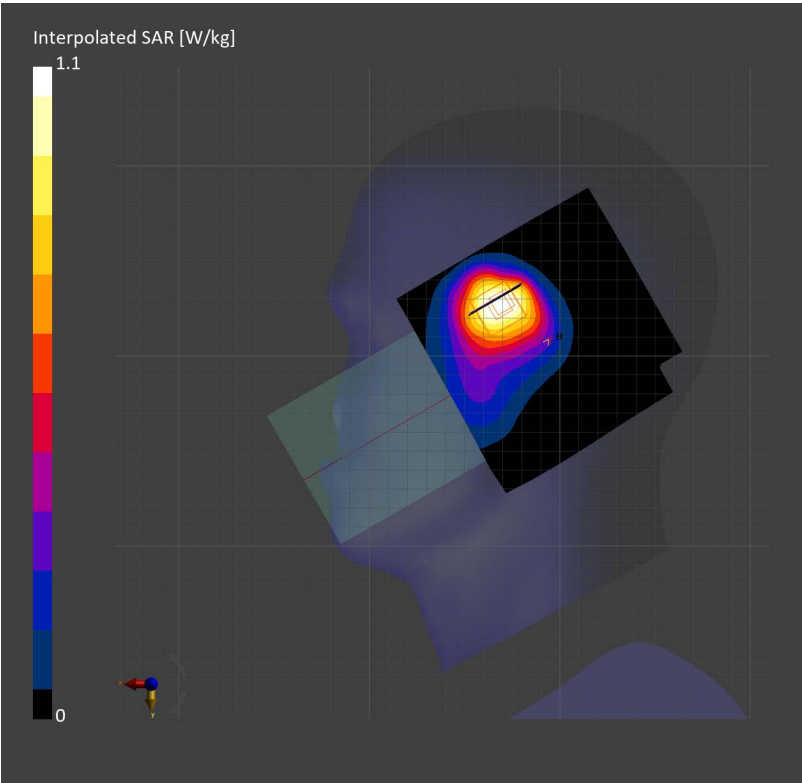

X800 5G NR N66 30M QPSK 1RB158 353000CH Back side 10mm Ant2


X800

Communication System: Band n66; Frequency: 1765.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 1765.000$ MHz; $\sigma= 1.40$ S/m; $\epsilon_r = 40.6$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(8.85, 8.85, 8.85); Calibrated: 2024-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.898 W/kg; SAR (10g) = 0.541 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 15.0 mm
Power Drift = -0.10 dB
SAR (1g) = 0.916 W/kg; SAR (10g) = 0.523 W/kg;
M2/M1 [%]=52.5
Dist 3dB Peak [mm]=15.8

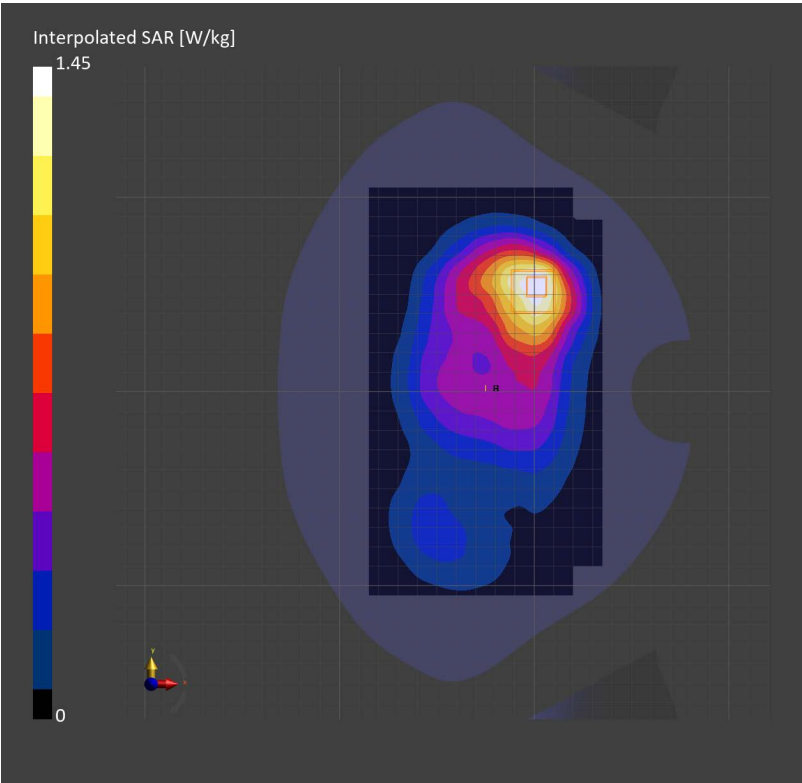

X800 5G NR N70 15M QPSK 1RB40 304500CH Left cheek Ant5**X800**

Communication System: Band n70; Frequency: 1702.500

Medium: Head Simulating Liquid. Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.37$ S/m; $\epsilon_T = 40.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(8.85, 8.85, 8.85); Calibrated: 2024-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (105.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.411 W/kg; SAR (10g) = 0.247 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.10 dB

SAR (1g) = 0.437 W/kg; SAR (10g) = 0.281 W/kg;

M2/M1 [%]=67.4

Dist 3dB Peak [mm]=14.1

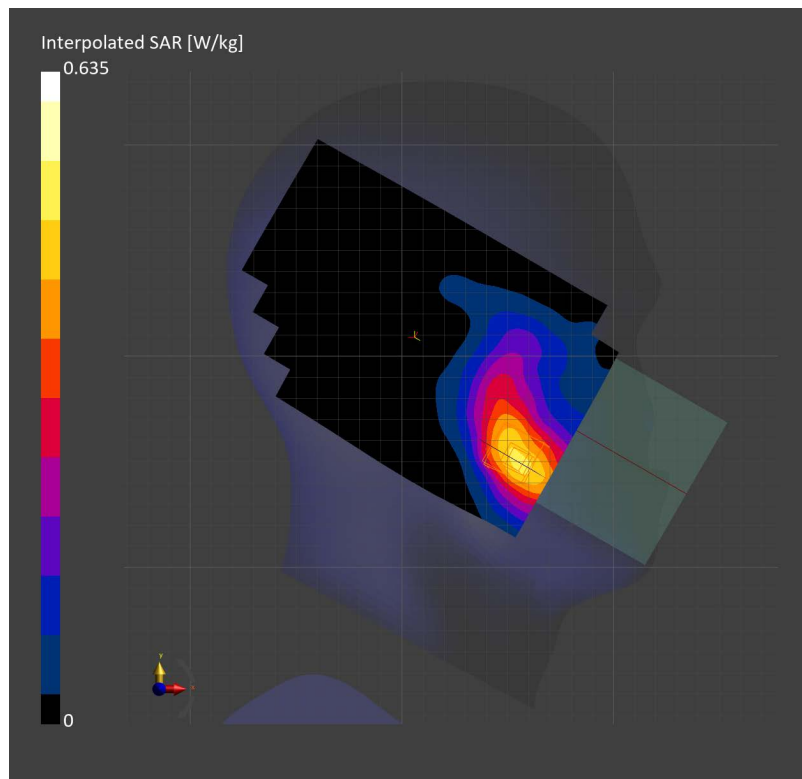

Test Laboratory: SGS-SAR Lab

X800 5G NR N70 15M QPSK 1RB77 340500CH Back side 10mm Ant5

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, NR (0); Frequency: 1702.5 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used (interpolated): $f = 1702.5 \text{ MHz}$; $\sigma = 1.356 \text{ S/m}$; $\epsilon_r = 40.62$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.02, 8.02, 8.02); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.909 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.57 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.715 W/kg; SAR(10 g) = 0.446 W/kg

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.1%

Maximum value of SAR (measured) = 0.985 W/kg

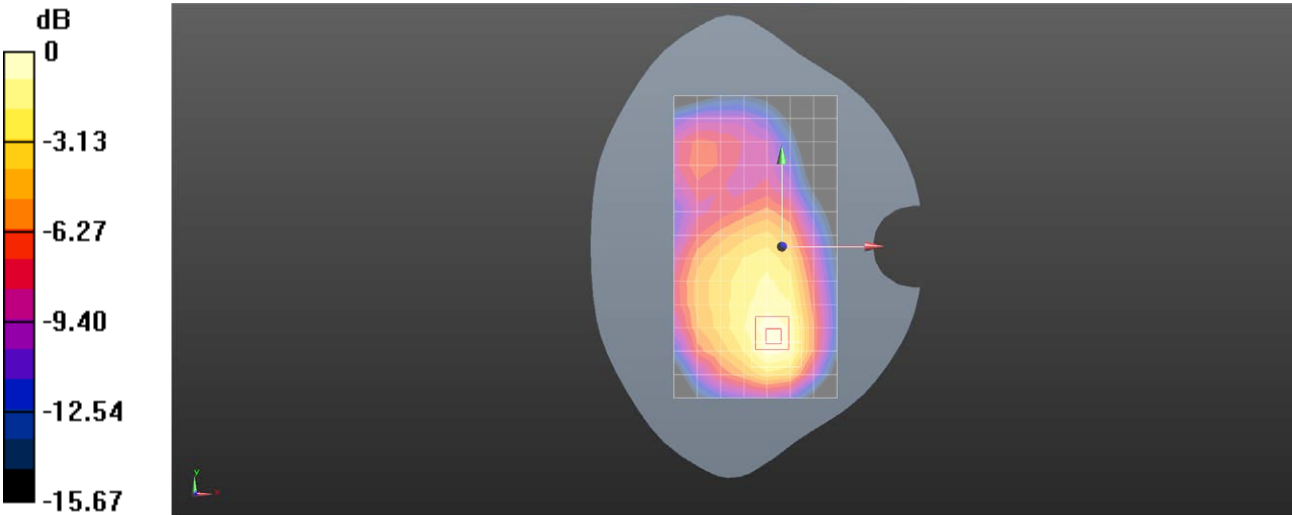

0 dB = 0.985 W/kg = -0.07 dBW/kg

X800 5G NR N71 20M QPSK 1RB1 134600CH Left cheek Ant1**X800**

Communication System: Band n71; Frequency: 673.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 673.000$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(10.65, 10.65, 10.65); Calibrated: 2024-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (105.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.722 W/kg; SAR (10g) = 0.456 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.12 dB

SAR (1g) = 0.723 W/kg; SAR (10g) = 0.425 W/kg;

M2/M1 [%]=49.7

Dist 3dB Peak [mm]=> 16.0

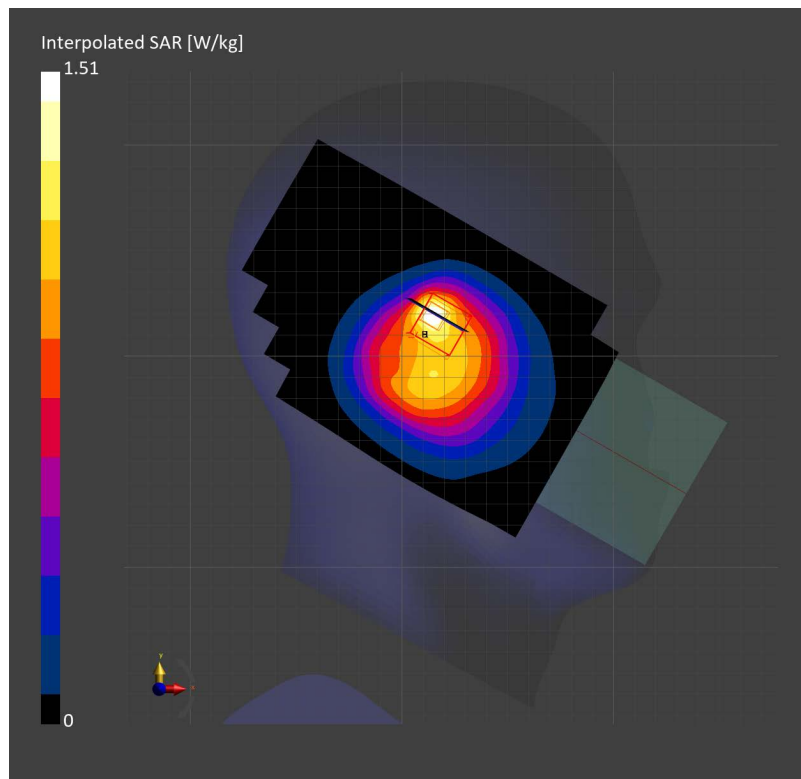

X800 5G NR N71 20M QPSK 50RB28 134600CH Front side 10mm Ant1


X800

Communication System: Band n71; Frequency: 673.000
Medium: Head Simulating Liquid. Medium parameters used: $f = 673.000$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 41.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(10.65, 10.65, 10.65); Calibrated: 2024-07-17
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2024-08-08
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.365 W/kg; SAR (10g) = 0.255 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm
Power Drift = 0.00 dB
SAR (1g) = 0.379 W/kg; SAR (10g) = 0.268 W/kg;
M2/M1 [%]=58.2
Dist 3dB Peak [mm]=> 16.0

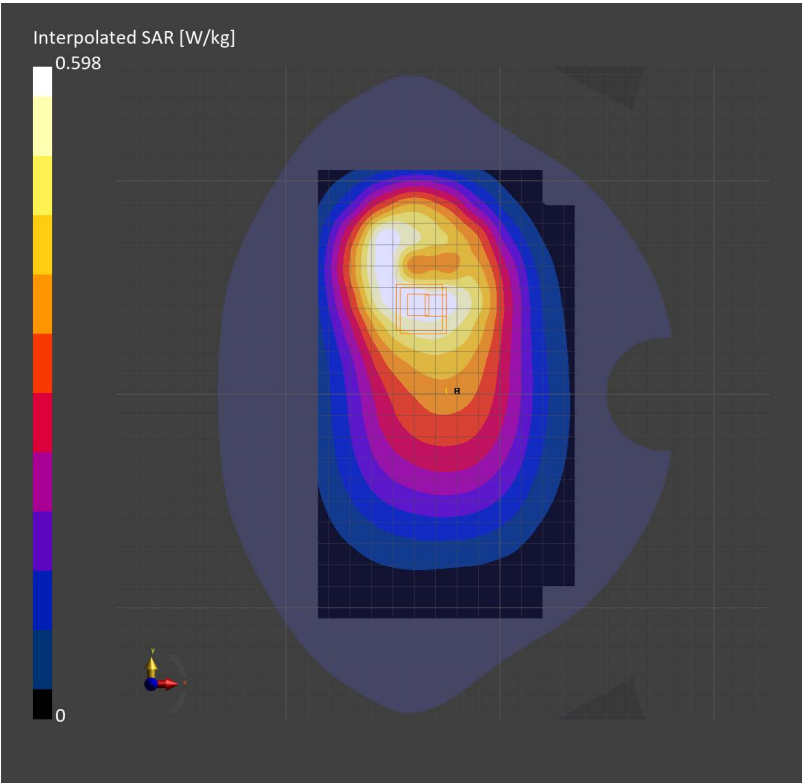

X800 5G NR N77 100M QPSK 1RB271 633334CH Right cheek Ant7


X800

Communication System: Band n77; Frequency: 3500.010
Medium: Head Simulating Liquid. Medium parameters used: $f= 3500.010$ MHz; $\sigma= 2.81$ S/m; $\epsilon_r = 37.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.7, 6.7, 6.7); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.976 W/kg; SAR (10g) = 0.371 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.08 dB
SAR (1g) = 1.00 W/kg; SAR (10g) = 0.364 W/kg;
M2/M1 [%]=34.5
Dist 3dB Peak [mm]=7.4

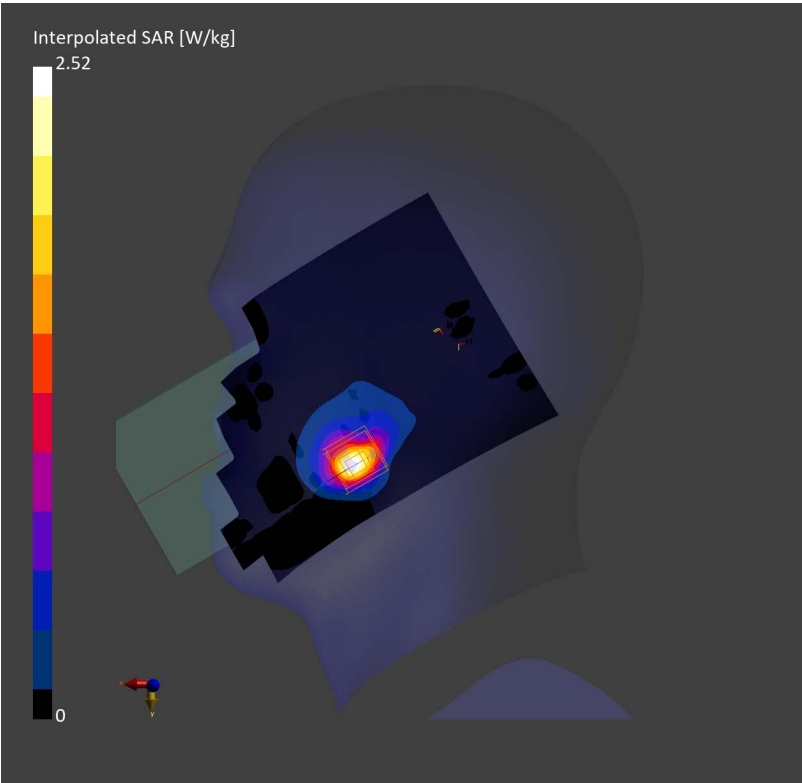

X800 5G NR N77 100M QPSK 1RB271 633334CH Right side 10mm Ant7


X800

Communication System: Band n77; Frequency: 3500.010
Medium: Head Simulating Liquid. Medium parameters used: $f= 3500.010$ MHz; $\sigma= 2.81$ S/m; $\epsilon_r = 37.4$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.7, 6.7, 6.7); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (60.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.869 W/kg; SAR (10g) = 0.389 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.03 dB
SAR (1g) = 0.942 W/kg; SAR (10g) = 0.396 W/kg;
M2/M1 [%]=37.7
Dist 3dB Peak [mm]=9.0

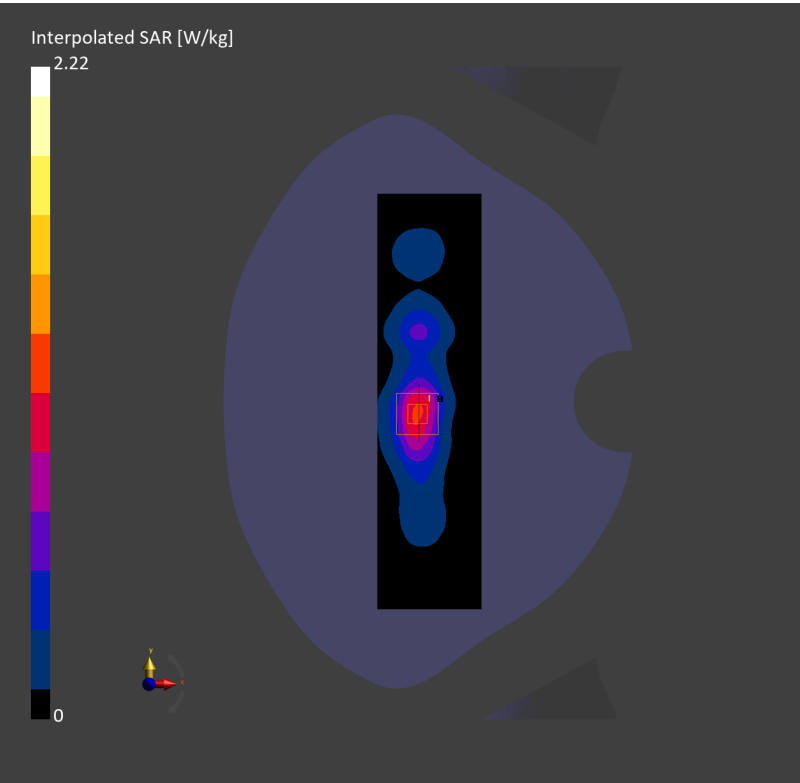

X800 5G NR N77 100M QPSK 1RB271 633334CH Right cheek Ant7


X800

Communication System: Band n77; Frequency: 3500.010
Medium: Head Simulating Liquid. Medium parameters used: $f= 3500.010$ MHz; $\sigma= 2.89$ S/m; $\epsilon_r = 40.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(6.7, 6.7, 6.7); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.766 W/kg; SAR (10g) = 0.314 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 24.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm
Power Drift = -0.14 dB
SAR (1g) = 0.834 W/kg; SAR (10g) = 0.309 W/kg;
M2/M1 [%]=65.9
Dist 3dB Peak [mm]=7.6

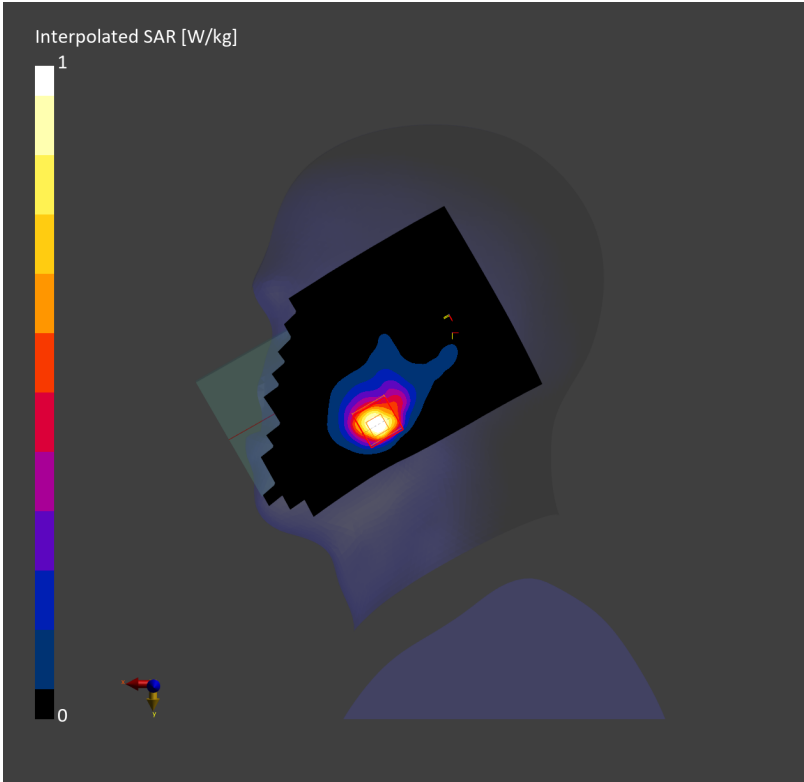

Test Laboratory: SGS-SAR Lab

X800 WIFI 2.4G 802.11b 6CH Left cheek MIMO

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.015


Medium: HSL2450;Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.742 \text{ S/m}$; $\epsilon_r = 39.894$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.35, 7.35, 7.35); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 1.13 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 7.523 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.405 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 48%
Maximum value of SAR (measured) = 1.23 W/kg

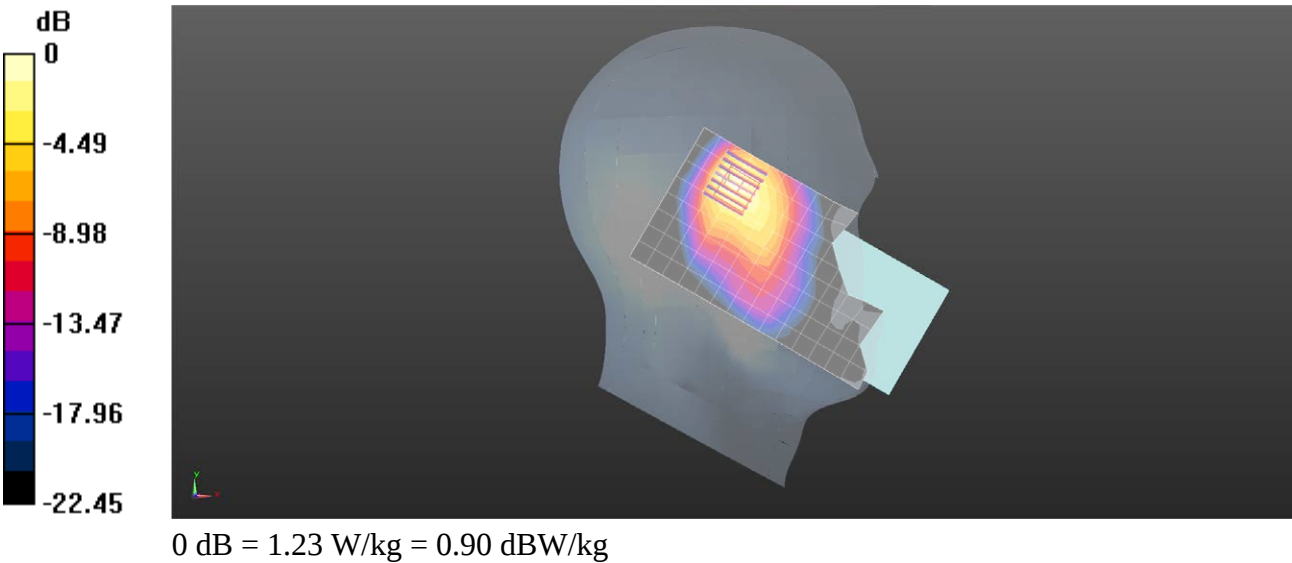

X800 WIFI 2.4G 802.11b 6CH Left cheek MIMO


X800

Communication System: WLAN 2.4GHz; Frequency: 2437.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 2437.000$ MHz; $\sigma= 1.80$ S/m; $\epsilon_r = 40.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(7.5, 7.5, 7.5); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.489 W/kg; SAR (10g) = 0.251 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.18 dB
SAR (1g) = 0.558 W/kg; SAR (10g) = 0.269 W/kg;
M2/M1 [%]=60.1
Dist 3dB Peak [mm]=9.9

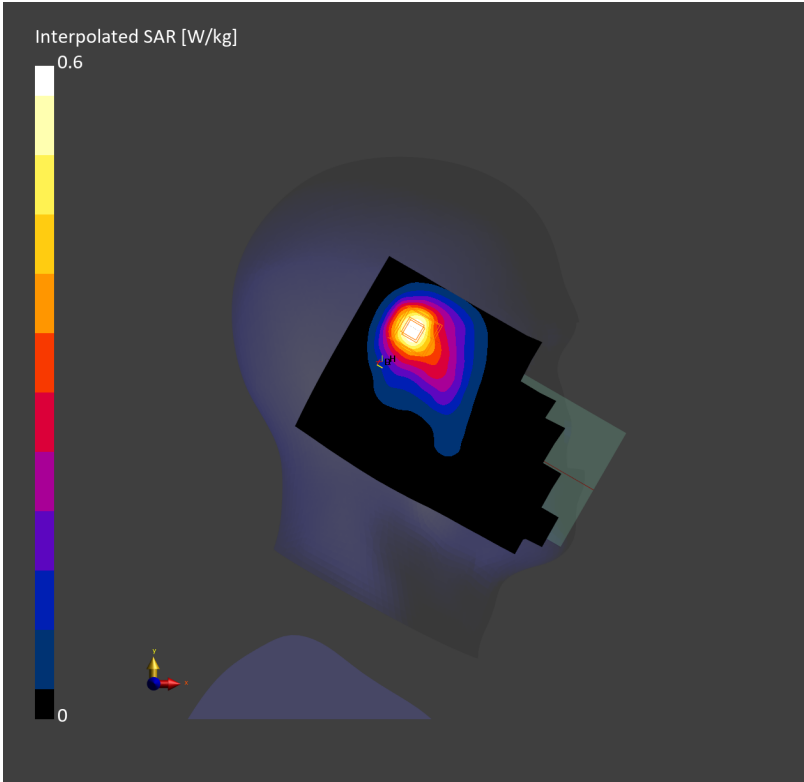

Test Laboratory: SGS-SAR Lab

X800 WIFI 2.4G 802.11b 6CH Back side 10mm MIMO

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz; Duty Cycle: 1:1.015

Medium: HSL2450; Medium parameters used: $f = 2437$ MHz; $\sigma = 1.742$ S/m; $\epsilon_r = 39.894$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.35, 7.35, 7.35); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.27 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.933 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.774 W/kg; SAR(10 g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 1.21 W/kg

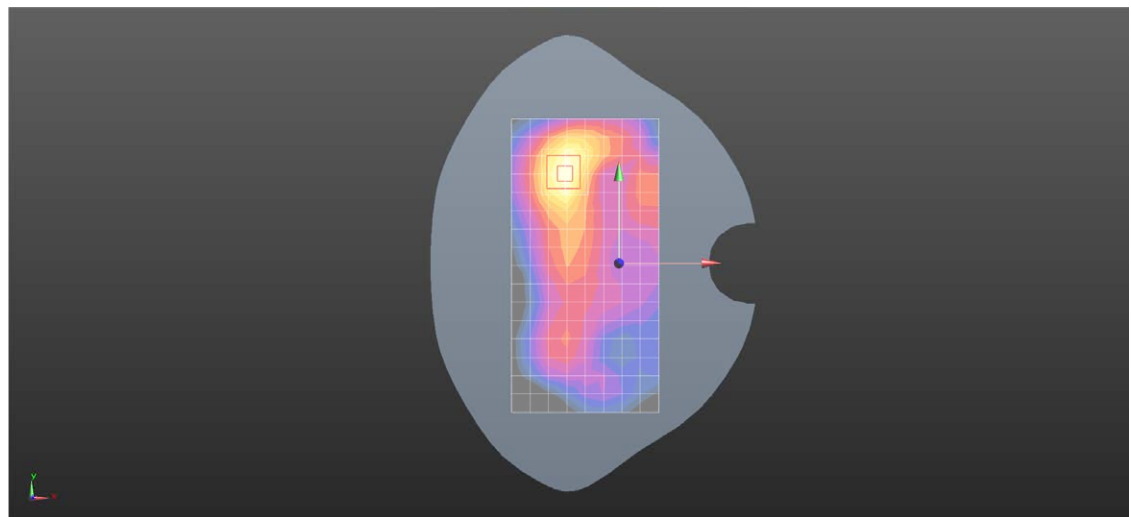

0 dB = 1.21 W/kg = 0.83 dBW/kg

X800 WIFI 2.4G 802.11b 6CH Back side 10mm MIMO


X800

Communication System: WLAN 2.4GHz; Frequency: 2437.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 2437.000$ MHz; $\sigma= 1.80$ S/m; $\epsilon_r = 40.0$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(7.5, 7.5, 7.5); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.536 W/kg; SAR (10g) = 0.258 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm
Power Drift = -0.04 dB
SAR (1g) = 0.630 W/kg; SAR (10g) = 0.294 W/kg;
M2/M1 [%]=53.3
Dist 3dB Peak [mm]=9.0

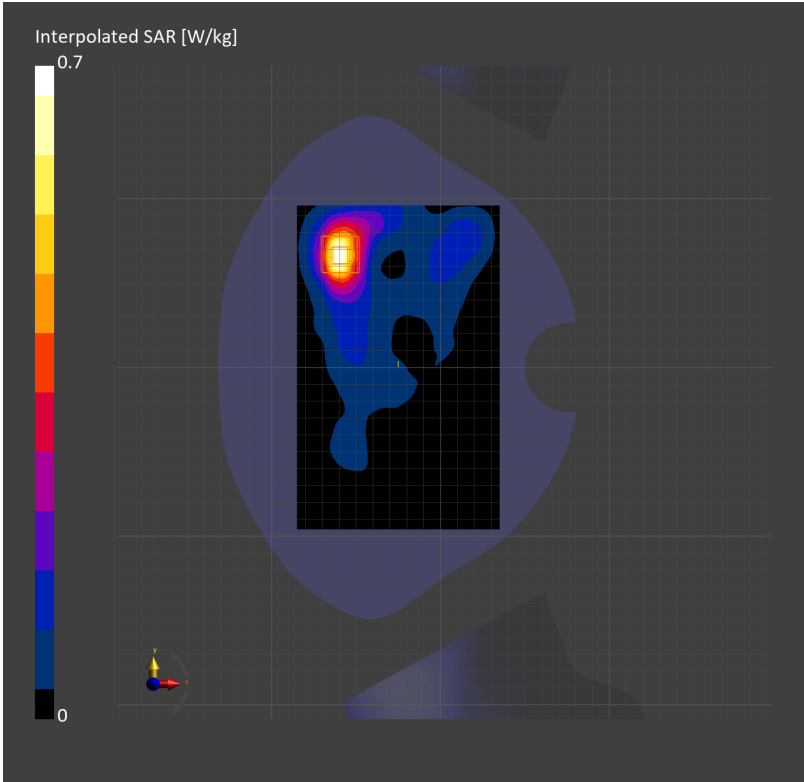

X800 WIFI 5G 802.11ac 80M 138CH Left cheek MIMO**X800**

Communication System: WLAN 5GHz; Frequency: 5690.000

Medium: Head Simulating Liquid. Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.23$ S/m; $\epsilon_r = 35.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(4.6, 4.6, 4.6); Calibrated: 2024-08-29
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.614 W/kg; SAR (10g) = 0.200 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.539 W/kg; SAR (10g) = 0.148 W/kg;

M2/M1 [%]=58.2

Dist 3dB Peak [mm]=6.8

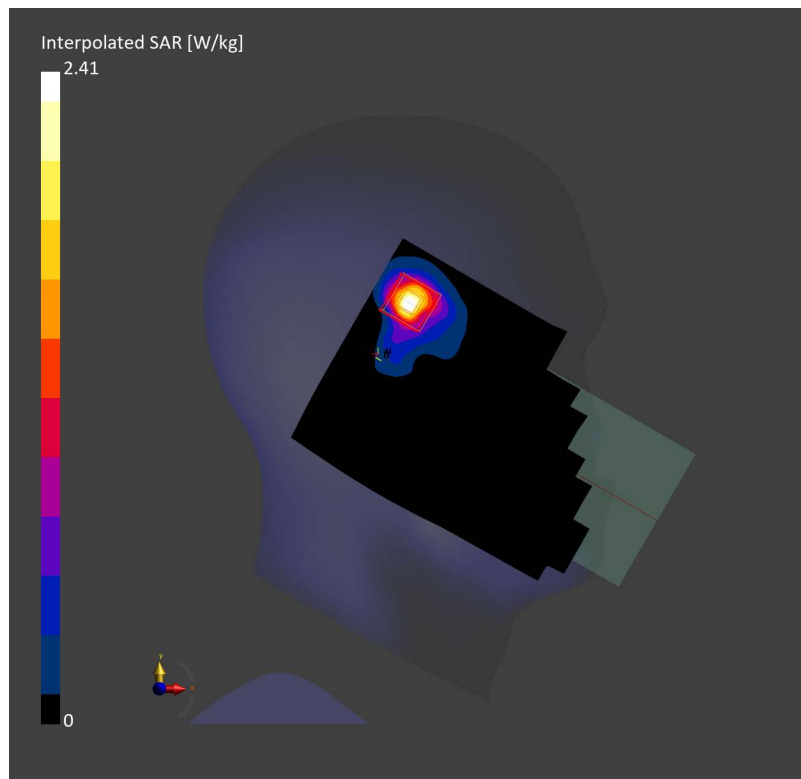

X800 WIFI 5G 802.11ac 80M 138CH Back side 10mm MIMO


X800

Communication System: WLAN 5GHz; Frequency: 5690.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 5690.000$ MHz; $\sigma= 5.23$ S/m; $\epsilon_r = 35.1$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(4.6, 4.6, 4.6); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.310 W/kg; SAR (10g) = 0.104 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.04 dB
SAR (1g) = 0.333 W/kg; SAR (10g) = 0.094 W/kg;
M2/M1 [%]=58.4
Dist 3dB Peak [mm]=8.0

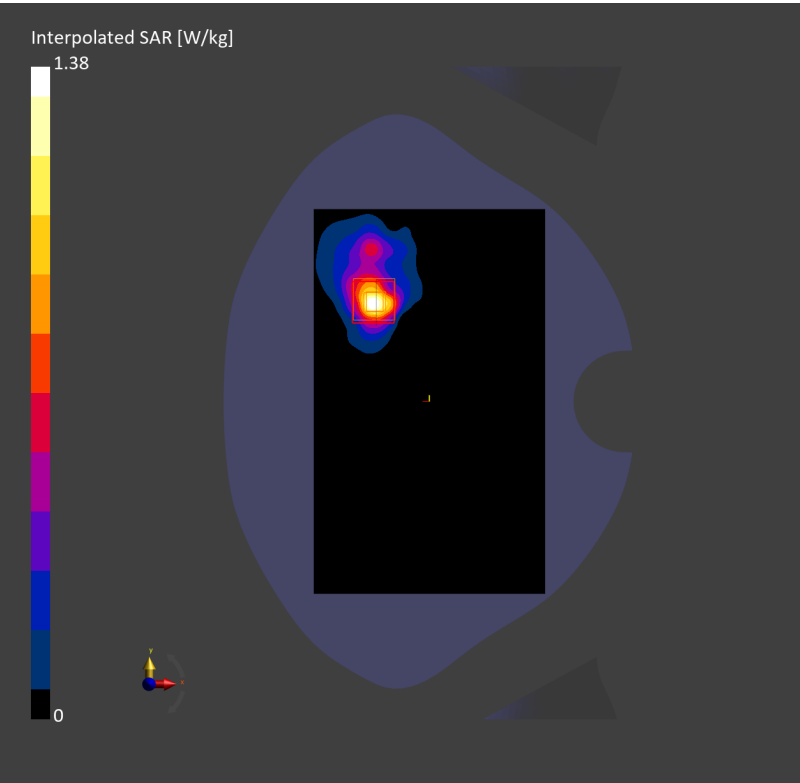

X800 WIFI 5G 802.11ac 80M 138CH Right side 0mm MIMO


X800

Communication System: WLAN 5GHz; Frequency: 5690.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 5690.000$ MHz; $\sigma= 5.23$ S/m; $\epsilon_r = 35.1$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(4.6, 4.6, 4.6); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (50.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 1.53 W/kg; SAR (10g) = 0.478 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.09 dB
SAR (1g) = 1.64 W/kg; SAR (10g) = 0.473 W/kg;
M2/M1 [%]=56.2
Dist 3dB Peak [mm]=5.7

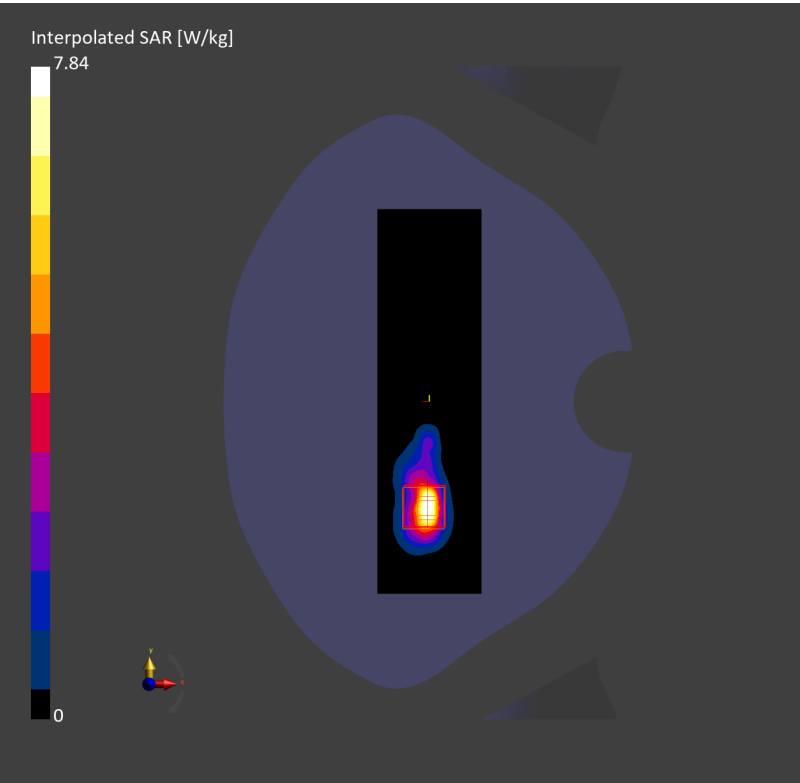

X800 WIFI 5G 802.11ac 80M 138CH Right side 0mm MIMO


X800

Communication System: WLAN 5GHz; Frequency: 5690.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 5690.000$ MHz; $\sigma= 5.12$ S/m; $\epsilon_r = 35.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7821; ConvF(4.6, 4.6, 4.6); Calibrated: 2024-08-29
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2024-10-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 2.22 W/kg; SAR (10g) = 0.755 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm
Power Drift = -0.01 dB
SAR (1g) = 2.10 W/kg; SAR (10g) = 0.611 W/kg;
M2/M1 [%]=48.7
Dist 3dB Peak [mm]=7.4

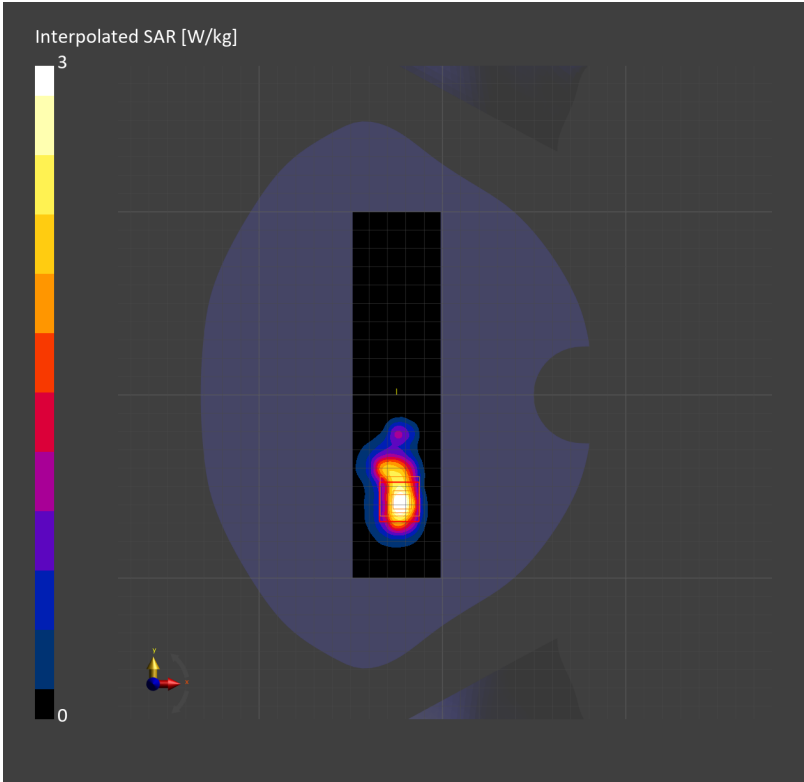

X800 WIFI 6E 802.11ax 160M 143CH Left cheek MIMO


X800

Communication System: U-NII-7; Frequency: 6665.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 6665.000$ MHz; $\sigma= 6.55$ S/m; $\epsilon_r = 33.9$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(5.2, 4.96, 5.11); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.154 W/kg; SAR (10g) = 0.050 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = -0.80 dB
SAR (1g) = 0.198 W/kg; SAR (10g) = 0.067 W/kg;
psAPD (4.0cm2)=0.481 W/m2
M2/M1 [%]=52.7
Dist 3dB Peak [mm]=6.9

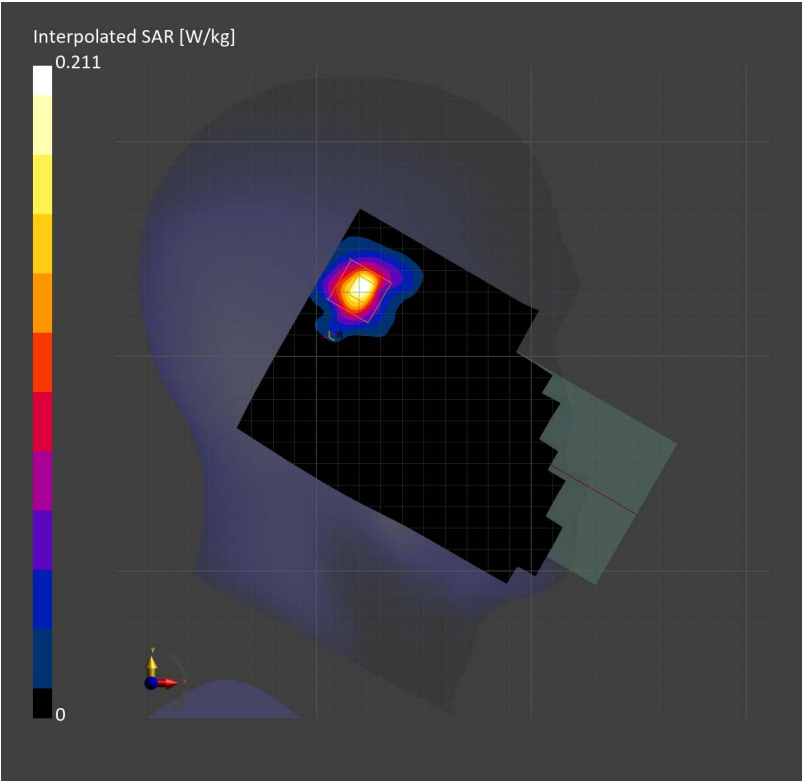

X800 WIFI 6E 802.11ax 160M 143CH Back side 10mm Ant10


X800

Communication System: U-NII-7; Frequency: 6665.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 6665.000$ MHz; $\sigma= 6.55$ S/m; $\epsilon_r = 33.9$

- DASY6 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(5.2, 4.96, 5.11); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.068 W/kg; SAR (10g) = 0.023 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = -0.08 dB
SAR (1g) = 0.068 W/kg; SAR (10g) = 0.022 W/kg;
SAR (1g) = 0.068 W/kg; SAR (10g) = 0.022 W/kg;
psAPD (4.0cm2)=1.51 W/m2
M2/M1 [%]=54.9
Dist 3dB Peak [mm]=5.9

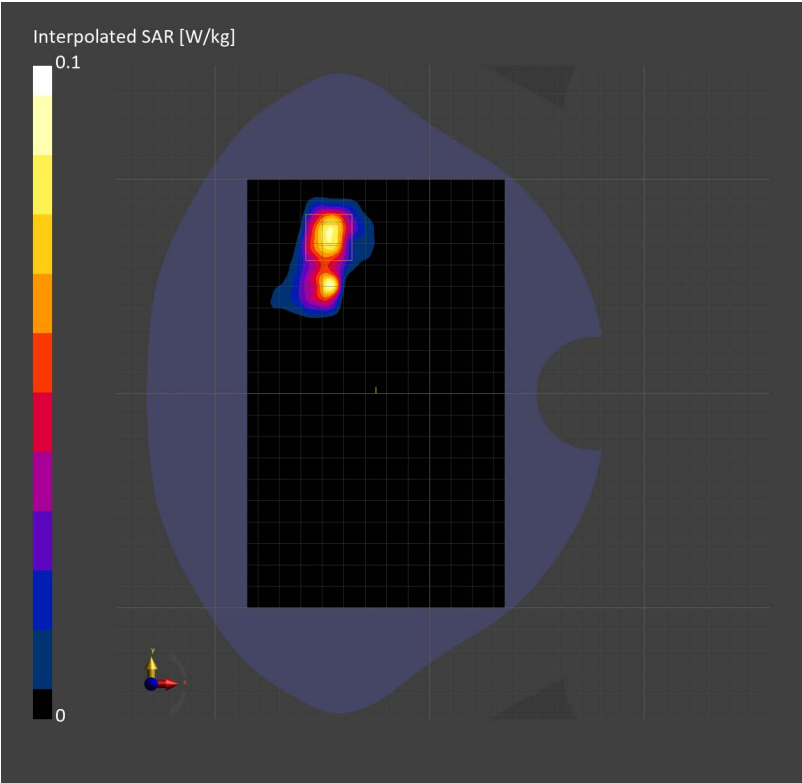

X800 WIFI 6E 802.11ax 160M 143CH Right side 0mm MIMO


X800

Communication System: U-NII-7; Frequency: 6665.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 6665.000$ MHz; $\sigma= 6.55$ S/m; $\epsilon_r = 33.9$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(5.2, 4.96, 5.11); Calibrated: 2024-11-20
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4 Sn896; Calibrated: 2024-03-18
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2031
 - Measurement Software: cDASY6 V16.4.0.5005

Area Scan (40.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.582 W/kg; SAR (10g) = 0.190 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = 0.02 dB
SAR (1g) = 0.614 W/kg; SAR (10g) = 0.197 W/kg;
psAPD (4.0cm2)=4.46 W/m2
M2/M1 [%]=51.7
Dist 3dB Peak [mm]=5.9

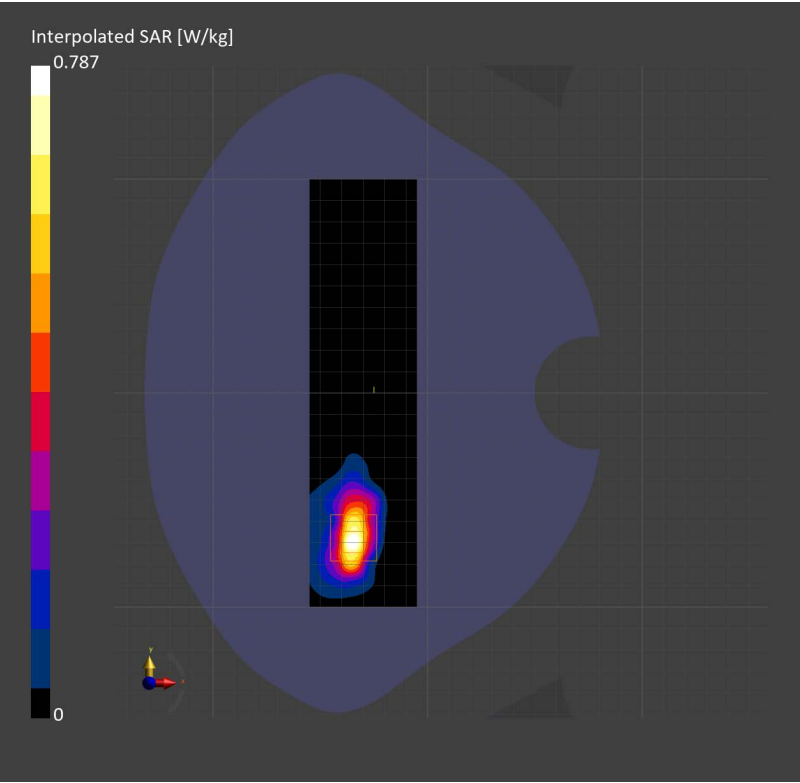

Test Laboratory: SGS-SAR Lab

X800 Bluetooth DH5 39CH Left cheek Ant9

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz;Duty Cycle: 1:1.299


Medium: HSL2450;Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.746 \text{ S/m}$; $\epsilon_r = 39.884$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.35, 7.35, 7.35); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.316 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.561 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.430 W/kg
SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.112 W/kg
Smallest distance from peaks to all points 3 dB below = 8.9 mm
Ratio of SAR at M2 to SAR at M1 = 52.5%
Maximum value of SAR (measured) = 0.343 W/kg

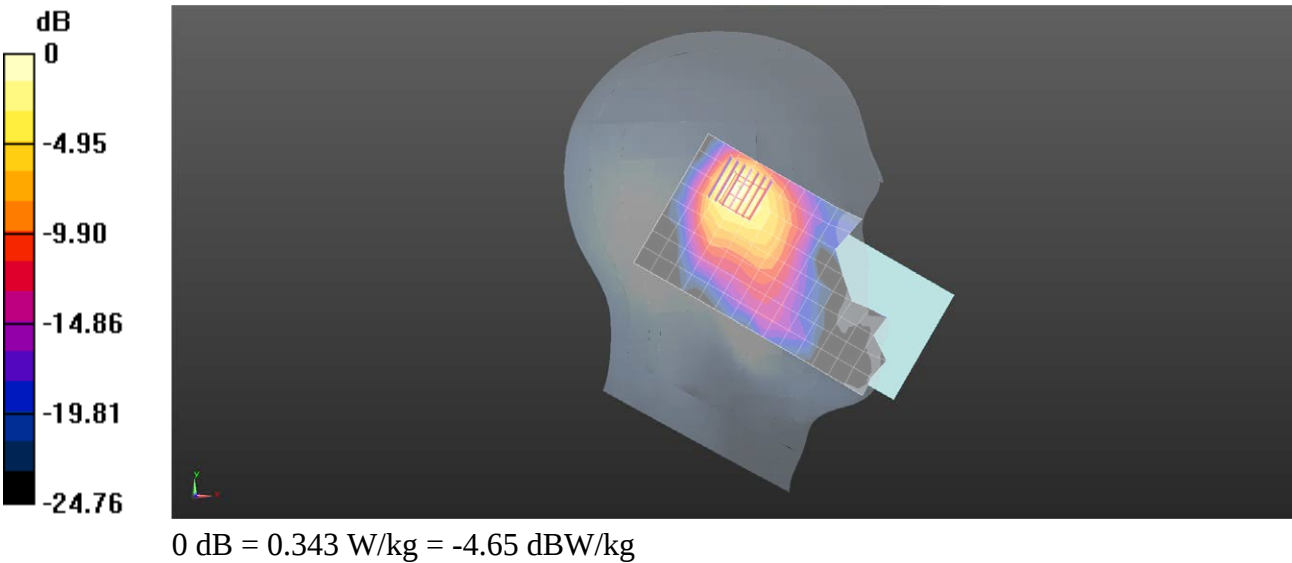

Test Laboratory: SGS-SAR Lab

X800 Bluetooth DH5 39CH Back side 10mm Ant10

DUT: X800; Type: smartphone; Serial: 016582000014737

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz;Duty Cycle: 1:1.299


Medium: HSL2450;Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.746 \text{ S/m}$; $\epsilon_r = 39.884$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.35, 7.35, 7.35); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.238 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 1.056 V/m ; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.302 W/kg
SAR(1 g) = 0.150 W/kg ; SAR(10 g) = 0.067 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 51.9%
Maximum value of SAR (measured) = 0.246 W/kg

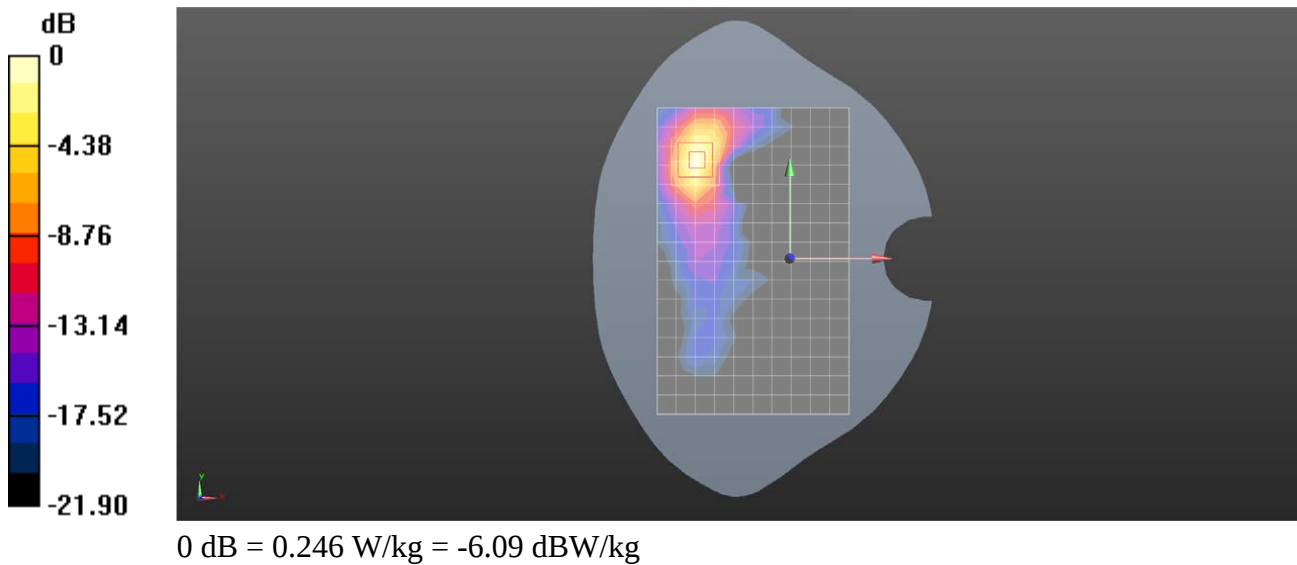

Test Laboratory:SGS-SAR Lab
X800 WIFI 6E 802.11ax 160M 207CH Right side 2mm MIMO

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	170.0 x 80.0 x 14.0	016582000014737	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE RIGHT, 2.00	U-NII-8	WLAN, 10743-AAC	6985.0, 207	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1777	Air –	EUmmWV4 – SN9533_F1–55GHz, 2024–08–23	DAE4 Sn896, 2024–03–18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	Y

Measurement Results

Scan Type	5G Scan
Date	2024-12-11
Avg. Area [cm2]	4.00
psPDn+ [W/m2]	2.93
psPDtot+ [W/m2]	5.47
psPDmod+ [W/m2]	6.39
E _{max} [V/m]	63.6
Power Drift [dB]	0.05

