



FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : Smartphone
BRAND NAME : Sonim
MODEL NAME : X802
FCC ID : WYPS3111
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jan. 11, 2025 ~ Mar. 27, 2025

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	18
3.5 Radiated Band Edges and Spurious Emission Measurement	19
3.6 AC Conducted Emission Measurement.....	23
3.7 Antenna Requirements.....	25
4 LIST OF MEASURING EQUIPMENT	26
5 MEASUREMENT UNCERTAINTY	27
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4O2403C	Rev. 01	Initial issue of report	May 22, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.41 dB at 2483.54 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.67 dB at 0.50 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego,CA92121,USA

1.2 Manufacturer

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego,CA92121,USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	Sonim
Model Name	X802
FCC ID	WYPS3111
HW Version	V1.0
SW Version	X80.0-01-14.0-42.18.00
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	<MIMO Ant10+11> 802.11b : 24.28 dBm (0.2679 W) 802.11g : 26.34 dBm (0.4305 W) 802.11n HT20 : 26.16 dBm (0.4130 W) 802.11n HT40 : 23.75 dBm (0.2371 W) 802.11ax HE20 : 27.67 dBm (0.5848 W) 802.11ax HE40 : 24.96 dBm (0.3133 W)
99% Occupied Bandwidth	<MIMO Ant10+11> 802.11b : 14.879MHz 802.11g : 21.654MHz 802.11n HT20 : 20.926MHz 802.11n HT40 : 39.652MHz 802.11ax HE20 : 23.322MHz 802.11ax HE40 : 45.323MHz
Antenna Type / Gain	<Ant 10> : PIFA Antenna with gain -9.57 dBi <Ant 11> : PIFA Antenna with gain -0.88 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. WLAN MIMO only support STBC mode, for WLAN SISO & MIMO (STBC) mode, the whole testing has assessed only MIMO mode to cover SISO mode.
2. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power/PSD > partial RU, therefore the full RU perform full, and partial RU verify bandedge/spurious.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ 03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Antenna


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS8
802.11n HT40	MCS8
802.11ax HE20	MCS8
802.11ax HE40	MCS8

Test Cases	
AC Conducted Emission	Mode 1 :WDMA B5 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable (Charging from Adapter) + Battery
Remark: For Radiated Test Cases, The tests were performed with Adapter and USB Cable.	


RSE Co-location
802.11ax HE40 CH09_TX + LTE Band48 Link

2.3 Connection Diagram of Test System

AC Conducted Emission:

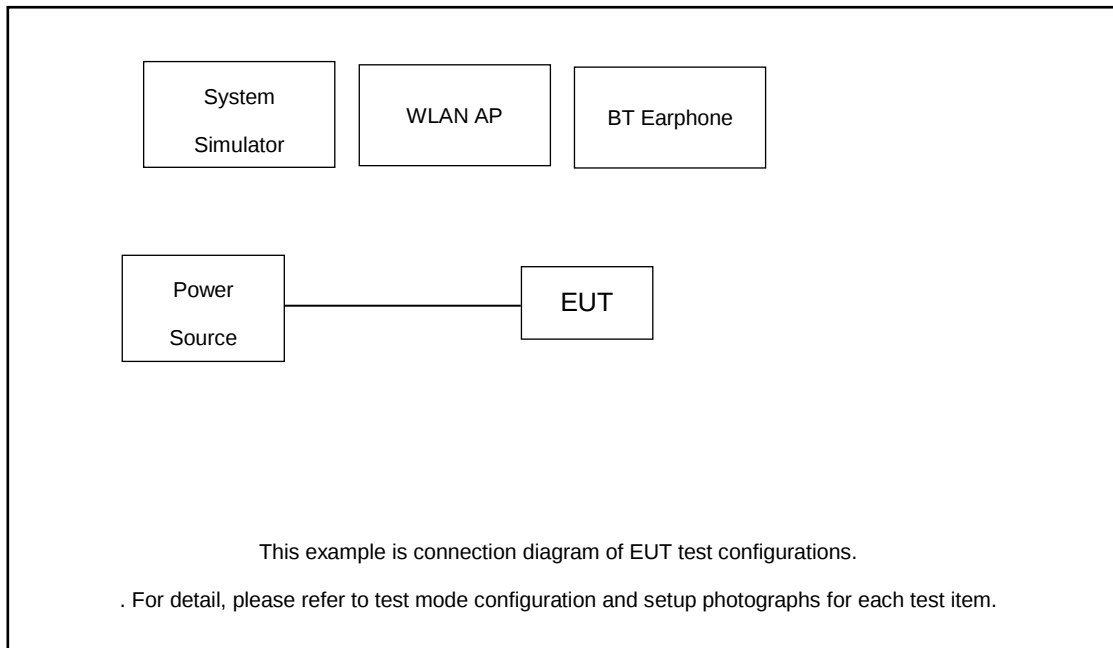

Radiated Emission:

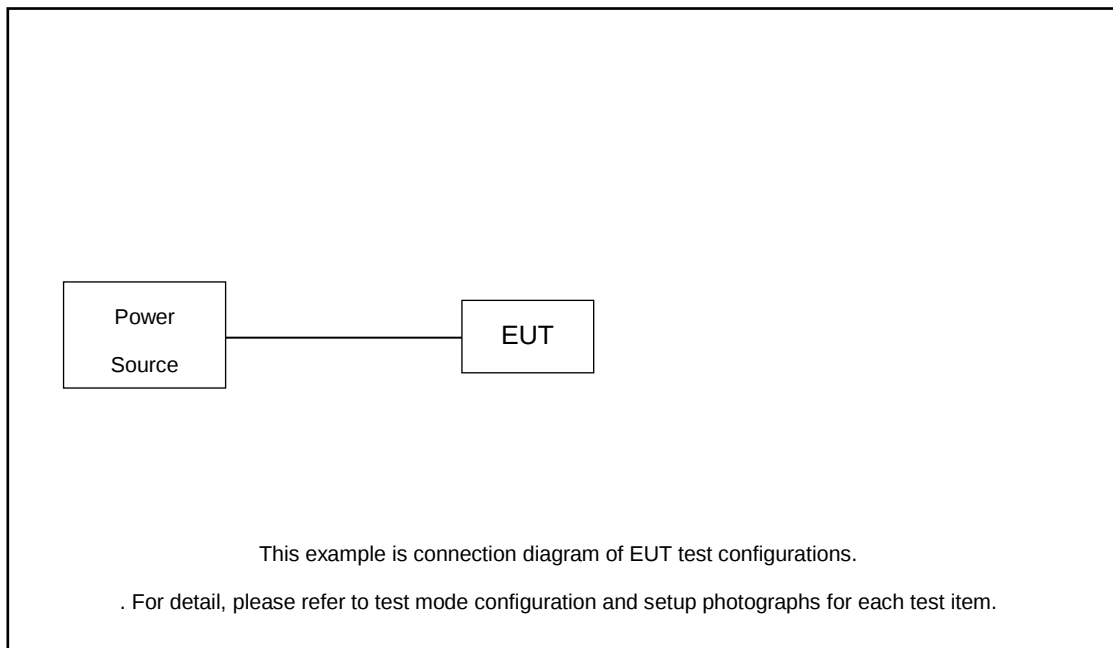

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.12 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 2.12 + 10 = 12.12 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup





3.2.5 Test Result of Peak Output Power

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant11	Ant10	SUM	Ant11	Ant10	Ant11	Ant10	Ant11	Ant10	Ant11	Ant10	
11b	1Mbps	2	1	2412	20.83	20.88	23.87	30.00		-0.88		22.99		36.00		Pass
11b	1Mbps	2	6	2437	21.65	20.85	24.28	30.00		-0.88		23.40		36.00		Pass
11b	1Mbps	2	11	2462	20.97	20.81	23.90	30.00		-0.88		23.02		36.00		Pass
11g	6Mbps	2	1	2412	21.48	21.40	24.45	30.00		-0.88		23.57		36.00		Pass
11g	6Mbps	2	6	2437	23.74	22.88	26.34	30.00		-0.88		25.46		36.00		Pass
11g	6Mbps	2	10	2457	22.34	22.22	25.29	30.00		-0.88		24.41		36.00		Pass
11g	6Mbps	2	11	2462	20.17	20.04	23.12	30.00		-0.88		22.24		36.00		Pass
HT20	MCS8	2	1	2412	19.86	19.48	22.68	30.00		-0.88		21.80		36.00		Pass
HT20	MCS8	2	2	2417	22.88	22.22	25.57	30.00		-0.88		24.69		36.00		Pass
HT20	MCS8	2	6	2437	23.53	22.73	26.16	30.00		-0.88		25.28		36.00		Pass
HT20	MCS8	2	9	2452	22.57	21.88	25.25	30.00		-0.88		24.37		36.00		Pass
HT20	MCS8	2	10	2457	20.24	20.01	23.14	30.00		-0.88		22.26		36.00		Pass
HT20	MCS8	2	11	2462	17.93	17.81	20.88	30.00		-0.88		20.00		36.00		Pass
HT40	MCS8	2	3	2422	19.75	18.69	22.26	30.00		-0.88		21.38		36.00		Pass
HT40	MCS8	2	4	2427	20.23	19.11	22.72	30.00		-0.88		21.84		36.00		Pass
HT40	MCS8	2	6	2437	21.28	20.12	23.75	30.00		-0.88		22.87		36.00		Pass
HT40	MCS8	2	7	2442	19.77	19.26	22.53	30.00		-0.88		21.65		36.00		Pass
HT40	MCS8	2	8	2447	18.99	18.55	21.79	30.00		-0.88		20.91		36.00		Pass
HT40	MCS8	2	9	2452	17.29	16.87	20.10	30.00		-0.88		19.22		36.00		Pass

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant11	Ant10	SUM	Ant11	Ant10	Ant11	Ant10	Ant11	Ant10	Ant11	Ant10	
HE20	MCS8	2	1	2412	Full	21.23	21.14	24.20	30.00		-0.88		23.32		36.00		Pass
HE20	MCS8	2	1	2412	26/0	15.89	16.14	19.03	30.00		-0.88		18.15		36.00		Pass
HE20	MCS8	2	1	2412	52/37	16.93	16.89	19.92	30.00		-0.88		19.04		36.00		Pass
HE20	MCS8	2	1	2412	106/53	18.95	18.60	21.79	30.00		-0.88		20.91		36.00		Pass
HE20	MCS8	2	2	2417	Full	23.16	22.94	26.06	30.00		-0.88		25.18		36.00		Pass
HE20	MCS8	2	6	2437	Full	24.81	24.51	27.67	30.00		-0.88		26.79		36.00		Pass
HE20	MCS8	2	9	2452	Full	22.62	22.76	25.70	30.00		-0.88		24.82		36.00		Pass
HE20	MCS8	2	10	2457	Full	21.37	21.54	24.47	30.00		-0.88		23.59		36.00		Pass
HE20	MCS8	2	11	2462	Full	19.47	19.44	22.47	30.00		-0.88		21.59		36.00		Pass
HE20	MCS8	2	11	2462	26/8	14.95	15.20	18.09	30.00		-0.88		17.21		36.00		Pass
HE20	MCS8	2	11	2462	52/40	15.48	15.77	18.64	30.00		-0.88		17.76		36.00		Pass
HE20	MCS8	2	11	2462	106/54	17.51	17.25	20.39	30.00		-0.88		19.51		36.00		Pass
HE40	MCS8	2	3	2422	Full	20.67	20.23	23.47	30.00		-0.88		22.59		36.00		Pass
HE40	MCS8	2	4	2427	Full	21.14	20.54	23.86	30.00		-0.88		22.98		36.00		Pass
HE40	MCS8	2	6	2437	Full	22.04	21.86	24.96	30.00		-0.88		24.08		36.00		Pass
HE40	MCS8	2	7	2442	Full	20.98	20.42	23.72	30.00		-0.88		22.84		36.00		Pass
HE40	MCS8	2	8	2447	Full	20.62	20.25	23.45	30.00		-0.88		22.57		36.00		Pass
HE40	MCS8	2	9	2452	Full	18.68	18.55	21.63	30.00		-0.88		20.75		36.00		Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail	Power Setting
					Ant 11	Ant 10	SUM	Ant 11	Ant 10	Ant 11	Ant 10	Ant 11	Ant 10	Ant 11	Ant 10		
11b	1Mbps	2	1	2412	18.10	18.10	21.11	30.00		-0.88		20.23		36.00		Pass	18.00
11b	1Mbps	2	6	2437	18.80	18.00	21.43	30.00		-0.88		20.55		36.00		Pass	18.00
11b	1Mbps	2	11	2462	18.00	18.00	21.01	30.00		-0.88		20.13		36.00		Pass	18.00
11g	6Mbps	2	1	2412	16.20	16.10	19.16	30.00		-0.88		18.28		36.00		Pass	16.00
11g	6Mbps	2	6	2437	18.90	18.00	21.48	30.00		-0.88		20.60		36.00		Pass	18.00
11g	6Mbps	2	10	2457	17.10	17.00	20.06	30.00		-0.88		19.18		36.00		Pass	17.00
11g	6Mbps	2	11	2462	14.60	14.50	17.56	30.00		-0.88		16.68		36.00		Pass	14.50
HT20	MCS8	2	1	2412	14.90	14.90	17.91	30.00		-0.88		17.03		36.00		Pass	15.00
HT20	MCS8	2	2	2417	17.60	17.70	20.66	30.00		-0.88		19.78		36.00		Pass	17.50
HT20	MCS8	2	6	2437	18.70	18.10	21.42	30.00		-0.88		20.54		36.00		Pass	18.00
HT20	MCS8	2	9	2452	16.80	16.70	19.76	30.00		-0.88		18.88		36.00		Pass	17.00
HT20	MCS8	2	10	2457	15.00	15.10	18.06	30.00		-0.88		17.18		36.00		Pass	15.50
HT20	MCS8	2	11	2462	12.60	12.60	15.61	30.00		-0.88		14.73		36.00		Pass	13.00
HT40	MCS8	2	3	2422	14.60	13.60	17.14	30.00		-0.88		16.26		36.00		Pass	14.00
HT40	MCS8	2	4	2427	15.10	14.10	17.64	30.00		-0.88		16.76		36.00		Pass	14.50
HT40	MCS8	2	6	2437	16.60	15.60	19.14	30.00		-0.88		18.26		36.00		Pass	16.00
HT40	MCS8	2	7	2442	14.30	14.00	17.16	30.00		-0.88		16.28		36.00		Pass	14.50
HT40	MCS8	2	8	2447	13.80	13.50	16.66	30.00		-0.88		15.78		36.00		Pass	14.00
HT40	MCS8	2	9	2452	12.30	12.00	15.16	30.00		-0.88		14.28		36.00		Pass	12.50

2.4GHz Band MIMO																		
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail	Power Setting
						Ant 11	Ant 10	SUM	Ant 11	Ant 10	Ant 11	Ant 10	Ant 11	Ant 10	Ant 11	Ant 10		
HE20	MCS8	2	1	2412	Full	15.00	15.00	18.01	30.00		-0.88		17.13		36.00		Pass	15.00
HE20	MCS8	2	1	2412	26/0	6.00	5.70	8.86	30.00		-0.88		7.98		36.00		Pass	6.00
HE20	MCS8	2	1	2412	52/37	7.00	6.70	9.86	30.00		-0.88		8.98		36.00		Pass	7.00
HE20	MCS8	2	1	2412	106/53	10.10	10.00	13.06	30.00		-0.88		12.18		36.00		Pass	10.00
HE20	MCS8	2	2	2417	Full	17.50	17.40	20.46	30.00		-0.88		19.58		36.00		Pass	17.50
HE20	MCS8	2	6	2437	Full	18.80	18.20	21.52	30.00		-0.88		20.64		36.00		Pass	18.50
HE20	MCS8	2	9	2452	Full	16.90	16.80	19.86	30.00		-0.88		18.98		36.00		Pass	17.00
HE20	MCS8	2	10	2457	Full	15.30	15.20	18.26	30.00		-0.88		17.38		36.00		Pass	15.50
HE20	MCS8	2	11	2462	Full	12.70	12.70	15.71	30.00		-0.88		14.83		36.00		Pass	13.00
HE20	MCS8	2	11	2462	26/8	2.80	3.20	6.01	30.00		-0.88		5.13		36.00		Pass	4.00
HE20	MCS8	2	11	2462	52/40	4.90	5.50	8.22	30.00		-0.88		7.34		36.00		Pass	6.00
HE20	MCS8	2	11	2462	106/54	8.20	8.10	11.16	30.00		-0.88		10.28		36.00		Pass	8.50
HE40	MCS8	2	3	2422	Full	14.00	13.50	16.77	30.00		-0.88		15.89		36.00		Pass	14.00
HE40	MCS8	2	4	2427	Full	14.40	13.90	17.17	30.00		-0.88		16.29		36.00		Pass	14.50
HE40	MCS8	2	6	2437	Full	15.80	15.50	18.66	30.00		-0.88		17.78		36.00		Pass	16.00
HE40	MCS8	2	7	2442	Full	14.30	13.80	17.07	30.00		-0.88		16.19		36.00		Pass	14.50
HE40	MCS8	2	8	2447	Full	14.00	13.50	16.77	30.00		-0.88		15.89		36.00		Pass	14.00
HE40	MCS8	2	9	2452	Full	12.10	11.90	15.01	30.00		-0.88		14.13		36.00		Pass	12.50



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01:

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

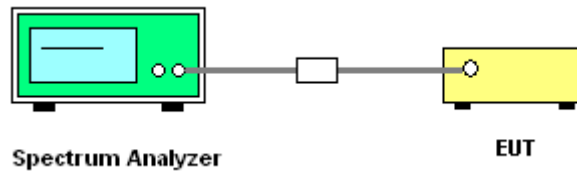

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

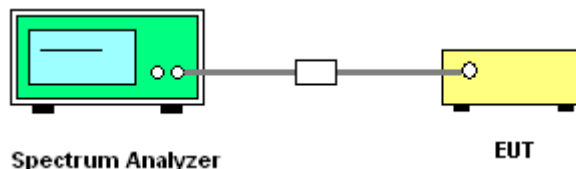

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

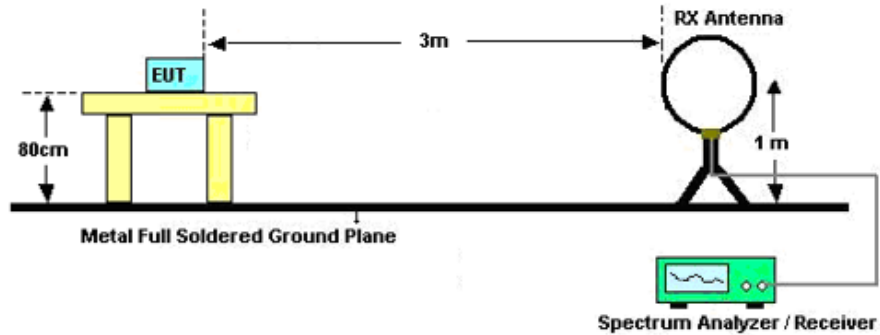

For radiated emissions from 30MHz to 1GHz

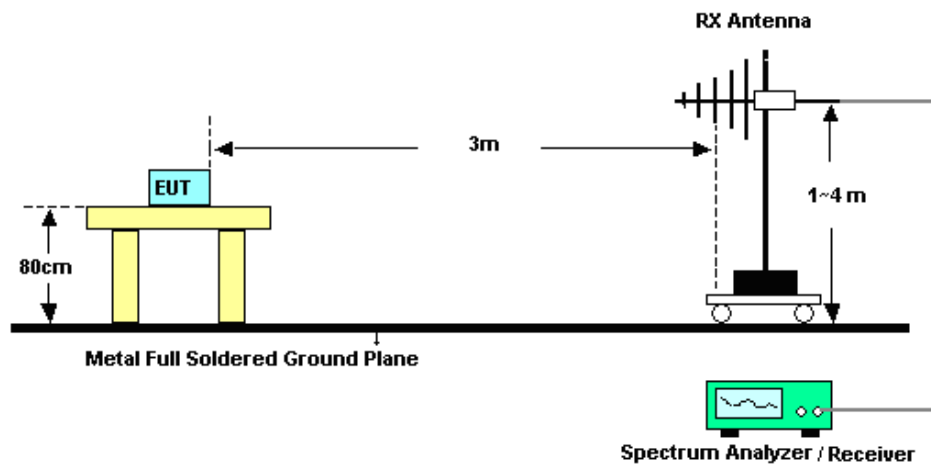

For radiated emissions above 1GHz

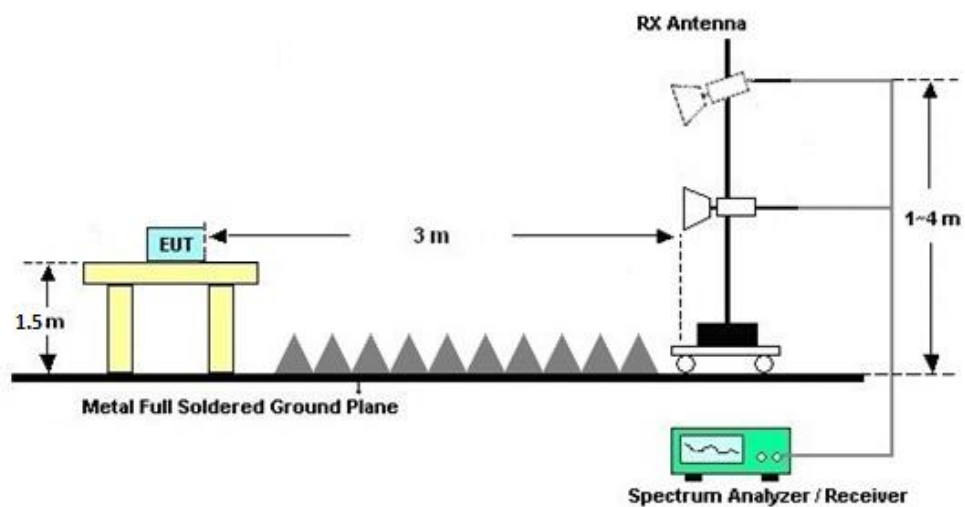

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

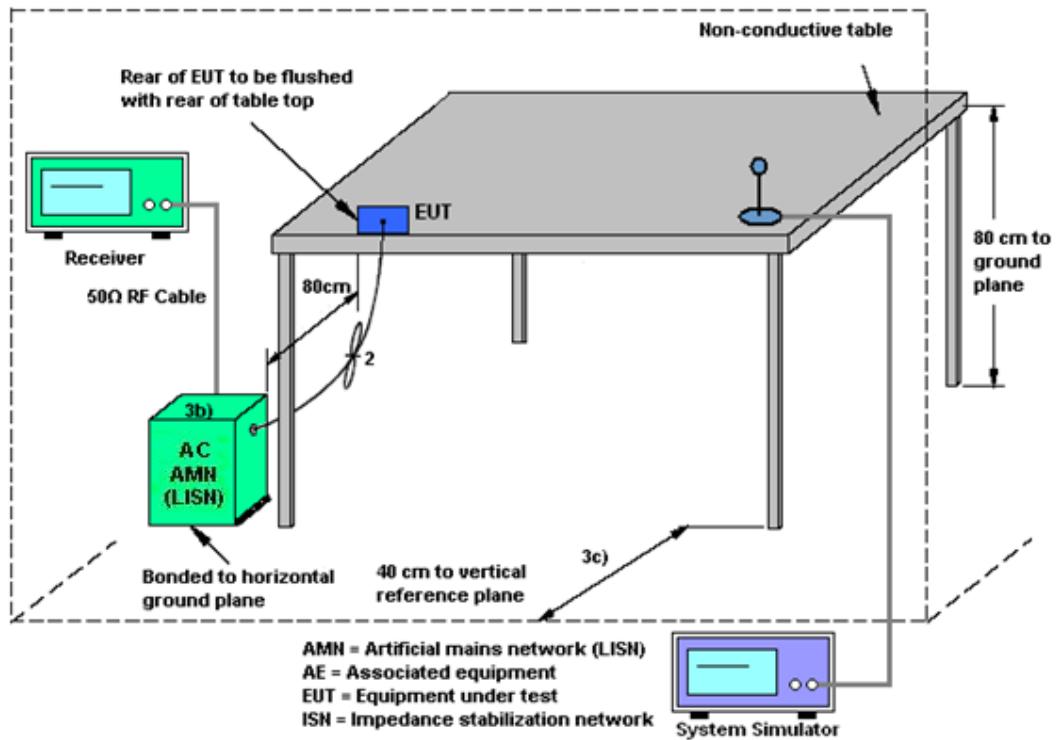

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<STBC Modes>

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e.,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots) + \text{Array Gain}$, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots)$.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<STBC Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 11 (dBi)	Ant. 10 (dBi)				
2.4 GHz	-0.88	-9.15	-0.88	-0.88	0.00	0.00

$\text{Power Limit Reduction} = DG(\text{Power}) - 6\text{dBi}, (\text{min} = 0)$

$\text{PSD Limit Reduction} = DG(\text{PSD}) - 6\text{dBi}, (\text{min} = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Feb. 12, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Feb. 12, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Feb. 12, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 14, 2024	Jan. 23, 2025~Mar. 27, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Jan. 23, 2025~Mar. 27, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jan. 23, 2025~Mar. 27, 2025	Dec. 27, 2025	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 09, 2024	Jan. 23, 2025~Mar. 27, 2025	May 08, 2025	Radiation (03CH04-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240057	1GHz~18GHz	Jul. 13, 2024	Jan. 23, 2025~Mar. 27, 2025	Jul. 12, 2025	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2024	Jan. 23, 2025~Mar. 27, 2025	Jul. 03, 2025	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024	Jan. 23, 2025~Mar. 27, 2025	Oct. 17, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Jan. 23, 2025~Mar. 27, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Jan. 23, 2025~Mar. 27, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Jul. 03, 2024	Jan. 23, 2025~Mar. 27, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 14, 2024	Jan. 23, 2025~Mar. 27, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 23, 2025~Mar. 27, 2025	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 23, 2025~Mar. 27, 2025	NCR	Radiation (03CH04-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jan. 11, 2025~Jan. 23, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Jan. 11, 2025~Jan. 23, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA24440A	11707	50MHz~40GHz	Jan. 02, 2025	Jan. 11, 2025~Jan. 23, 2025	Jan. 01, 2026	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10°C ~ 50°C 10%RH~99%RH	Apr. 09, 2024	Jan. 11, 2025~Jan. 23, 2025	Apr. 08, 2025	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.3 Hz
Frequency	±1.34 dB

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.9 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

**Ambient Condition:** 24-26 °C, 45-55 %RH**According Standard:** ■Part15C**Test Date:** 2025.01.11~2025.01.23**Test Engineer:** Chen ZhiQiang


DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant11	2412	9.04	2407.48	2416.52	0.5	PASS
	Ant10	2412	9.04	2407.48	2416.52	0.5	PASS
	Ant11	2437	8.52	2432.48	2441.00	0.5	PASS
	Ant10	2437	8.56	2432.96	2441.52	0.5	PASS
	Ant11	2462	8.60	2457.44	2466.04	0.5	PASS
	Ant10	2462	9.04	2457.48	2466.52	0.5	PASS
11G-CDD	Ant11	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant10	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant11	2437	15.92	2428.84	2444.76	0.5	PASS
	Ant10	2437	16.36	2428.80	2445.16	0.5	PASS
	Ant11	2462	16.36	2453.80	2470.16	0.5	PASS
	Ant10	2462	16.32	2453.84	2470.16	0.5	PASS
11N20MIMO	Ant11	2412	17.52	2403.24	2420.76	0.5	PASS
	Ant10	2412	17.16	2403.24	2420.40	0.5	PASS
	Ant11	2437	17.60	2428.20	2445.80	0.5	PASS
	Ant10	2437	17.60	2428.20	2445.80	0.5	PASS
	Ant11	2462	16.64	2453.24	2469.88	0.5	PASS
	Ant10	2462	17.56	2453.20	2470.76	0.5	PASS
11N40MIMO	Ant11	2422	36.40	2403.76	2440.16	0.5	PASS
	Ant10	2422	36.32	2403.84	2440.16	0.5	PASS
	Ant11	2437	36.32	2418.84	2455.16	0.5	PASS
	Ant10	2437	36.32	2418.84	2455.16	0.5	PASS
	Ant11	2452	35.68	2433.84	2469.52	0.5	PASS
	Ant10	2452	36.32	2433.84	2470.16	0.5	PASS
11AX20MIMO	Ant11	2412	19.08	2402.44	2421.52	0.5	PASS
	Ant10	2412	19.04	2402.44	2421.48	0.5	PASS
	Ant11	2437	19.08	2427.48	2446.56	0.5	PASS
	Ant10	2437	19.08	2427.44	2446.52	0.5	PASS
	Ant11	2462	19.12	2452.40	2471.52	0.5	PASS
	Ant10	2462	19.08	2452.44	2471.52	0.5	PASS
11AX40MIMO	Ant11	2422	38.24	2402.88	2441.12	0.5	PASS
	Ant10	2422	38.08	2402.96	2441.04	0.5	PASS
	Ant11	2437	38.16	2417.88	2456.04	0.5	PASS
	Ant10	2437	38.16	2417.88	2456.04	0.5	PASS
	Ant11	2452	37.92	2432.88	2470.80	0.5	PASS
	Ant10	2452	38.08	2432.96	2471.04	0.5	PASS




Test Graphs

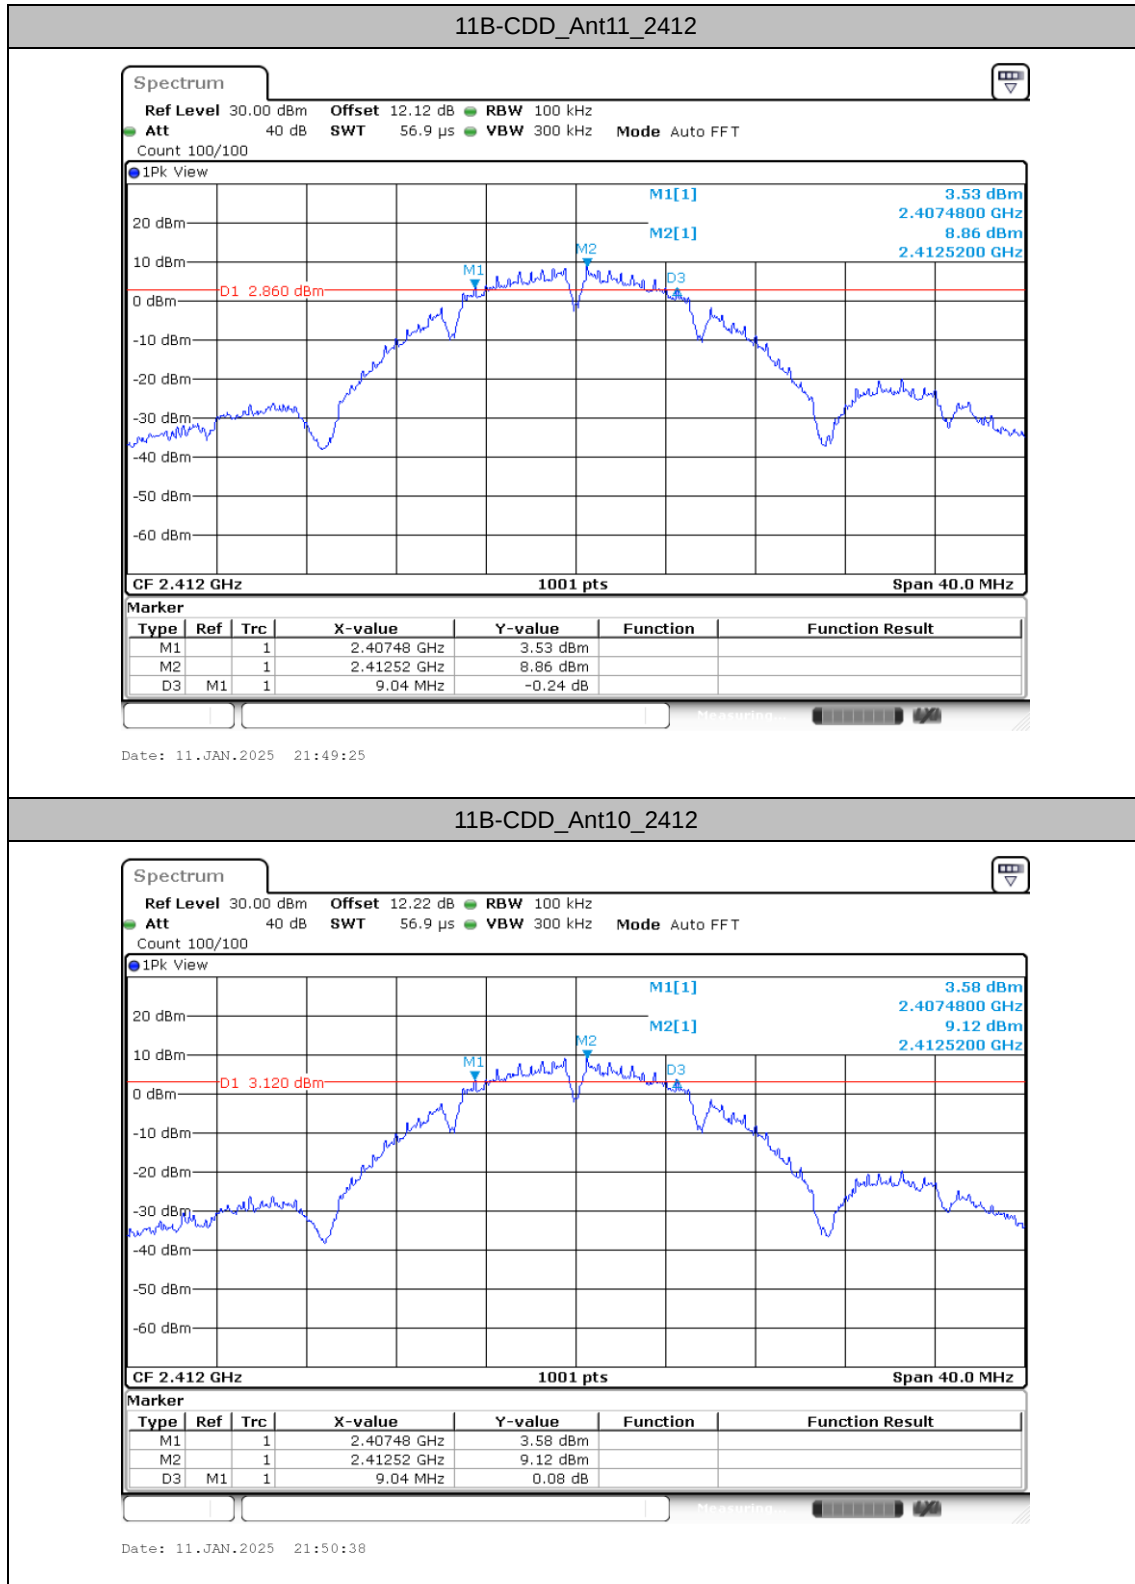




11B-CDD_Ant11_2437

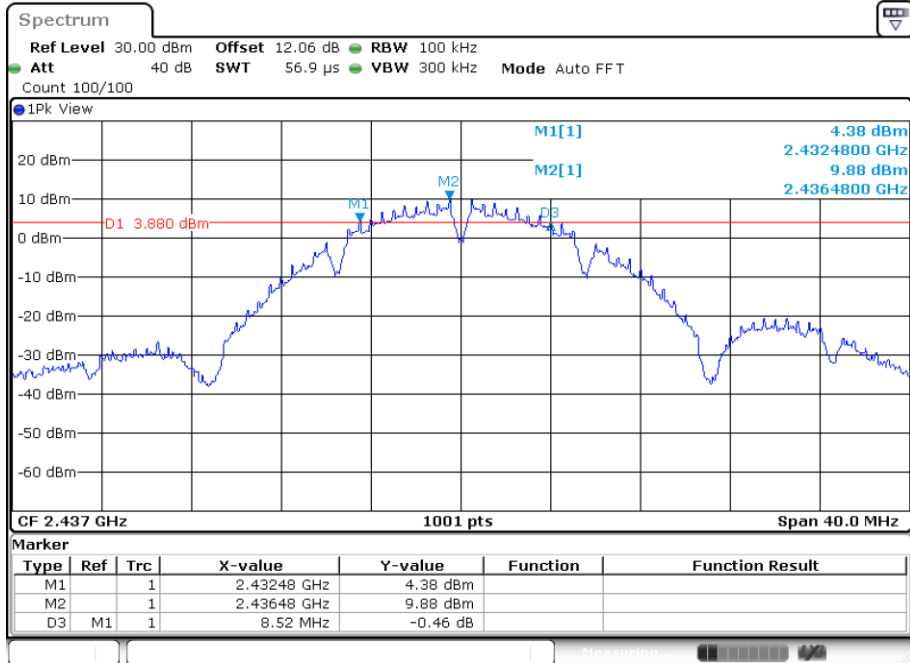

Date: 11.JAN.2025 21:53:08


11B-CDD_Ant10_2437

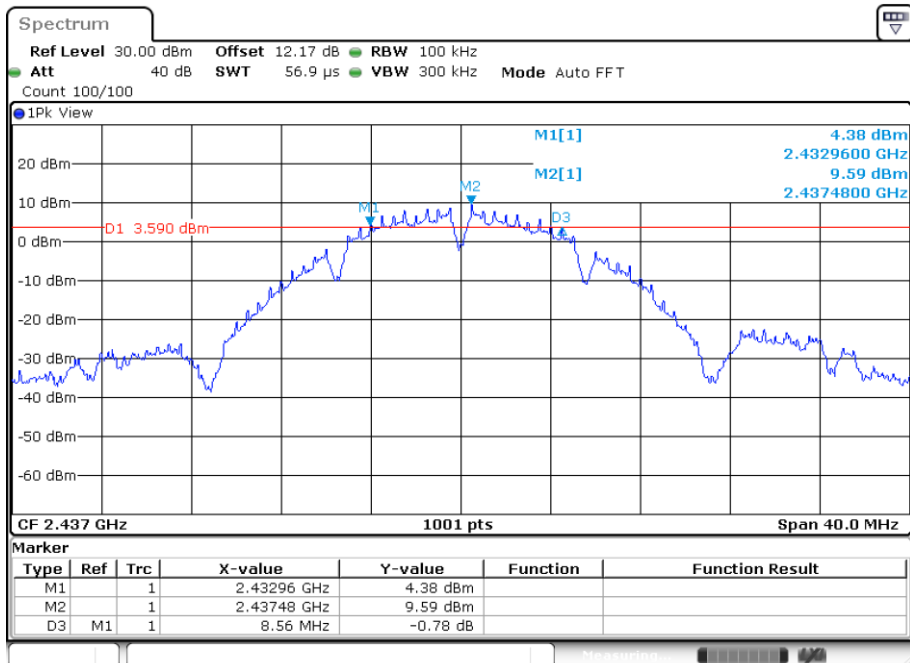

Date: 11.JAN.2025 21:54:10




11B-CDD_Ant11_2462


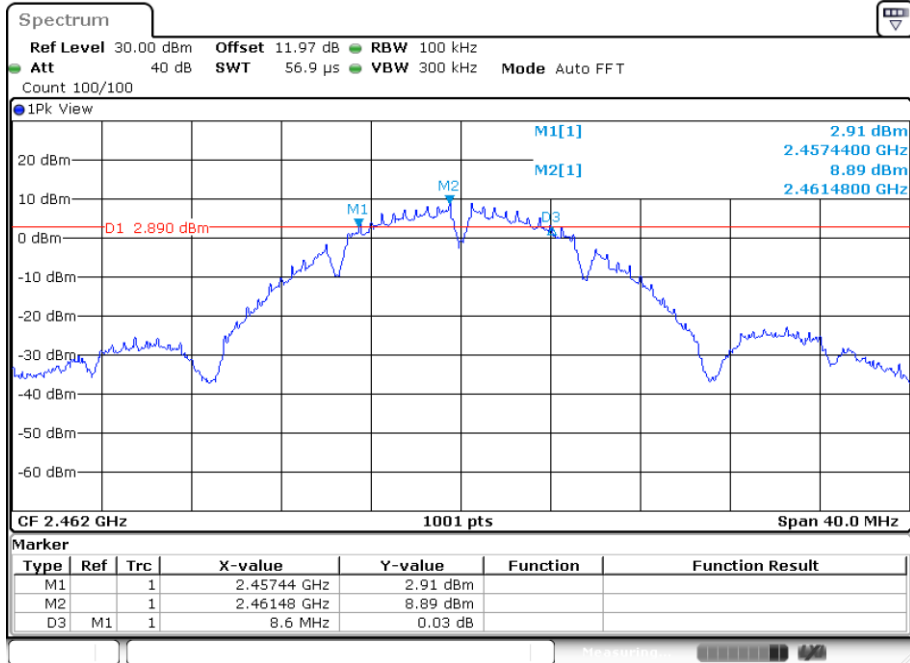




Date: 11.JAN.2025 21:59:22

11B-CDD_Ant10_2462

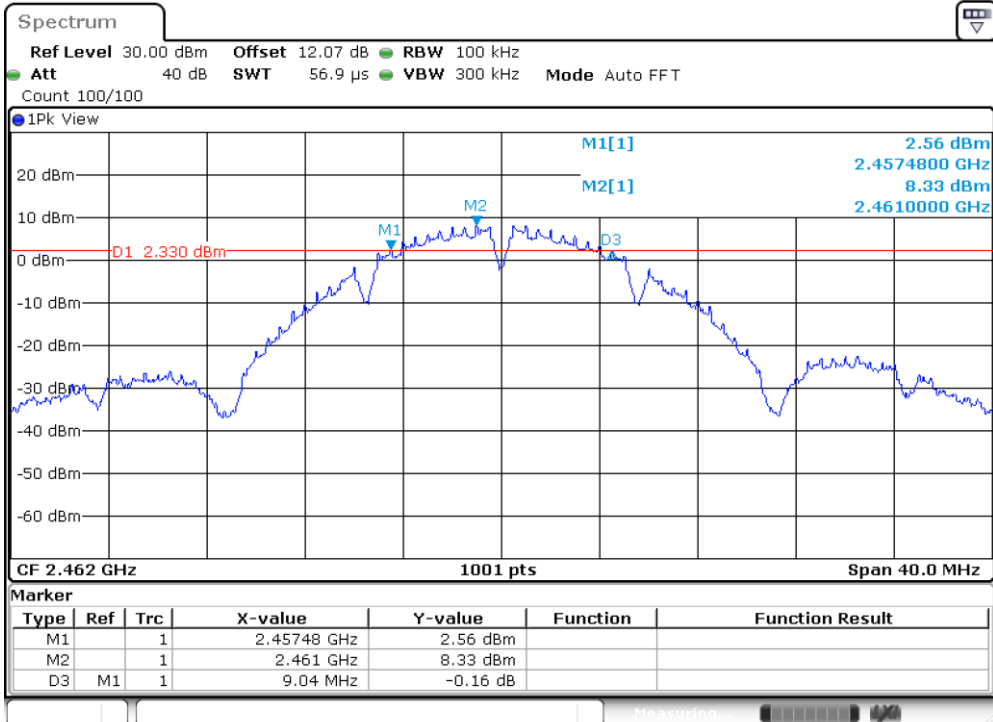


Date: 11.JAN.2025 22:00:34

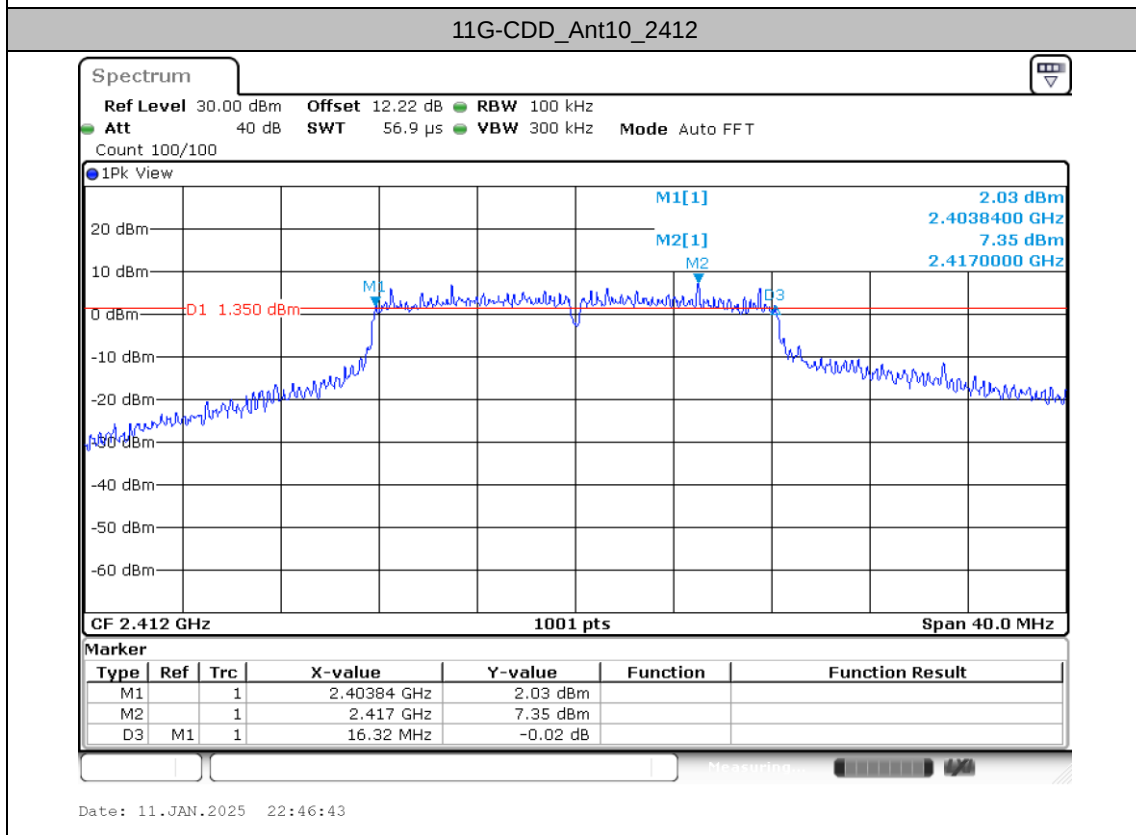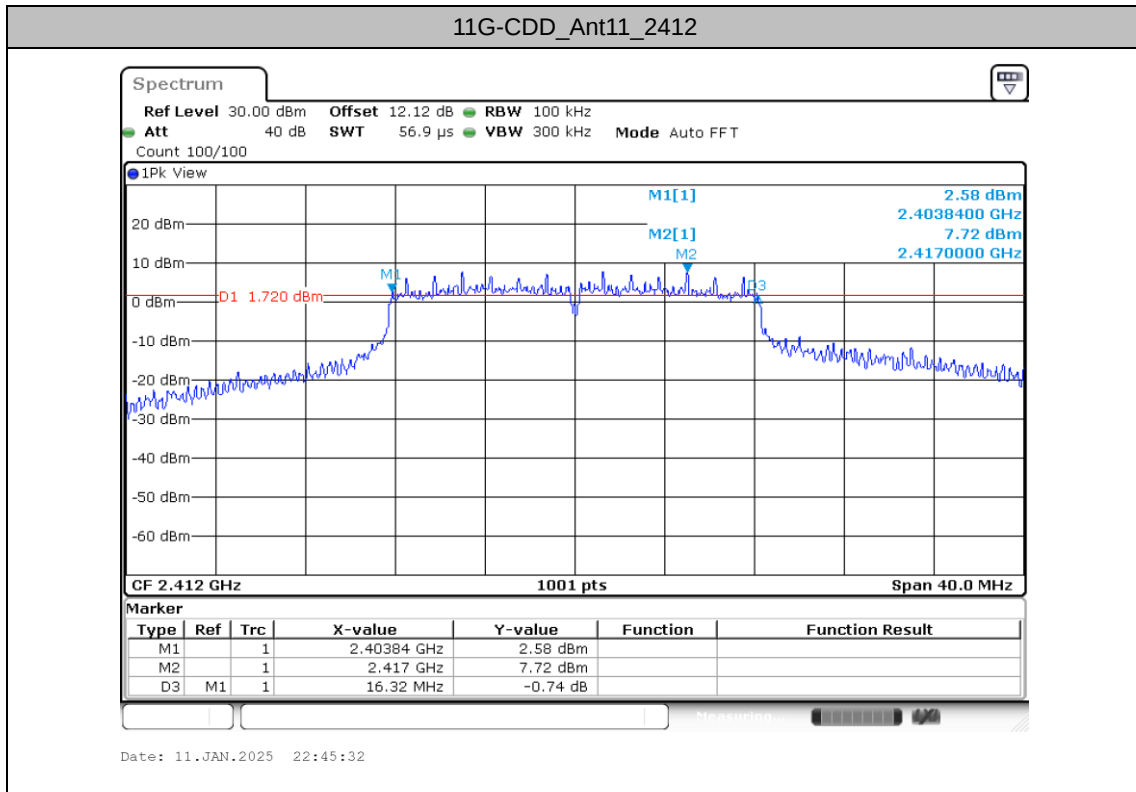

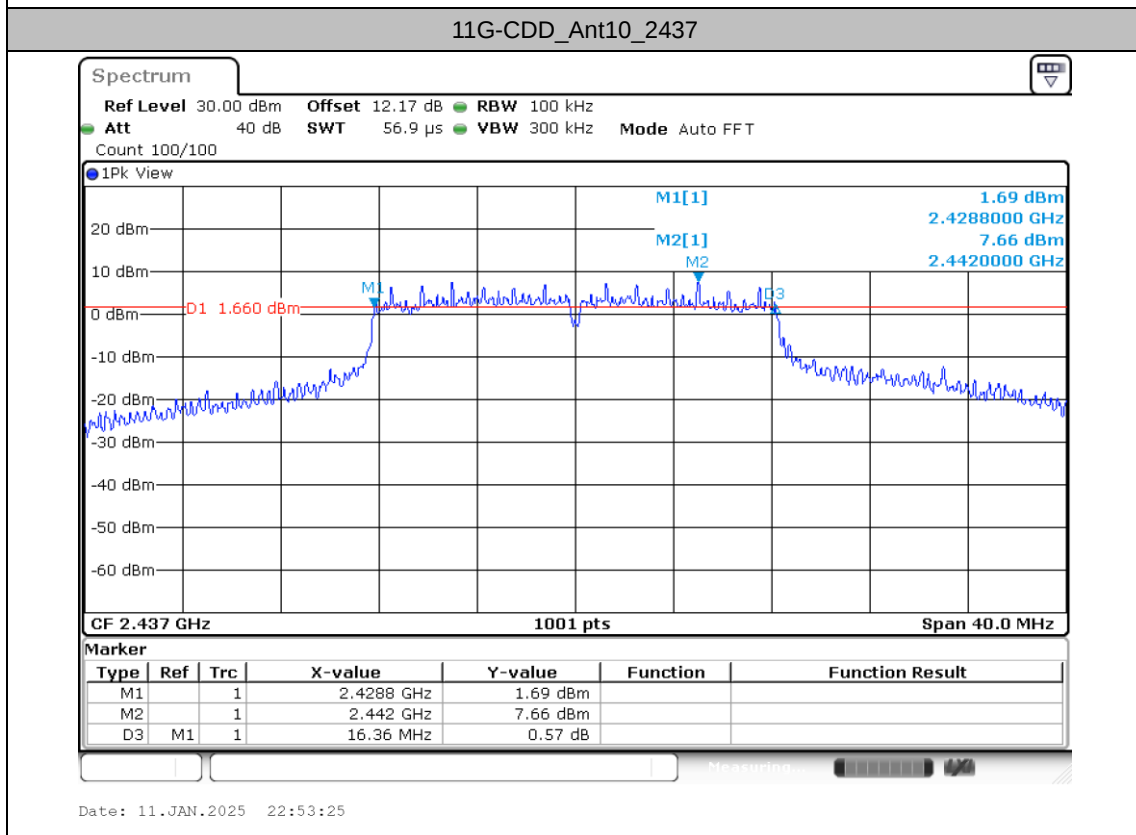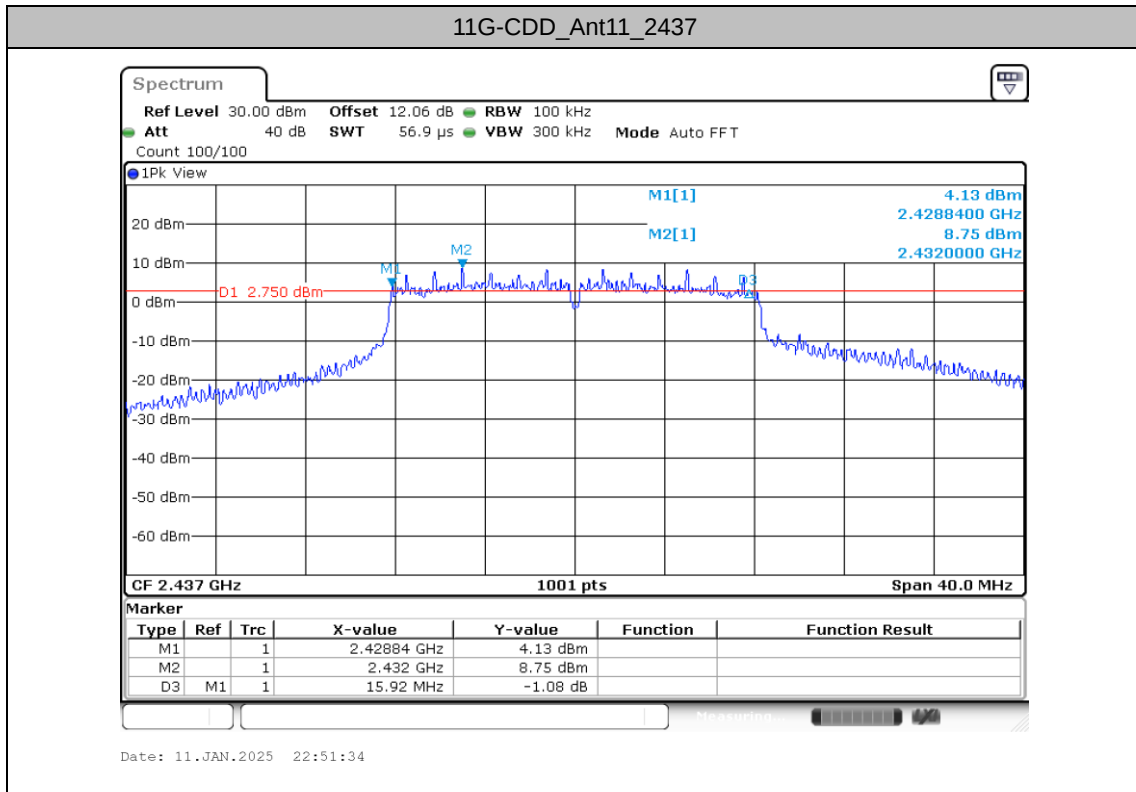




11G-CDD_Ant11_2462


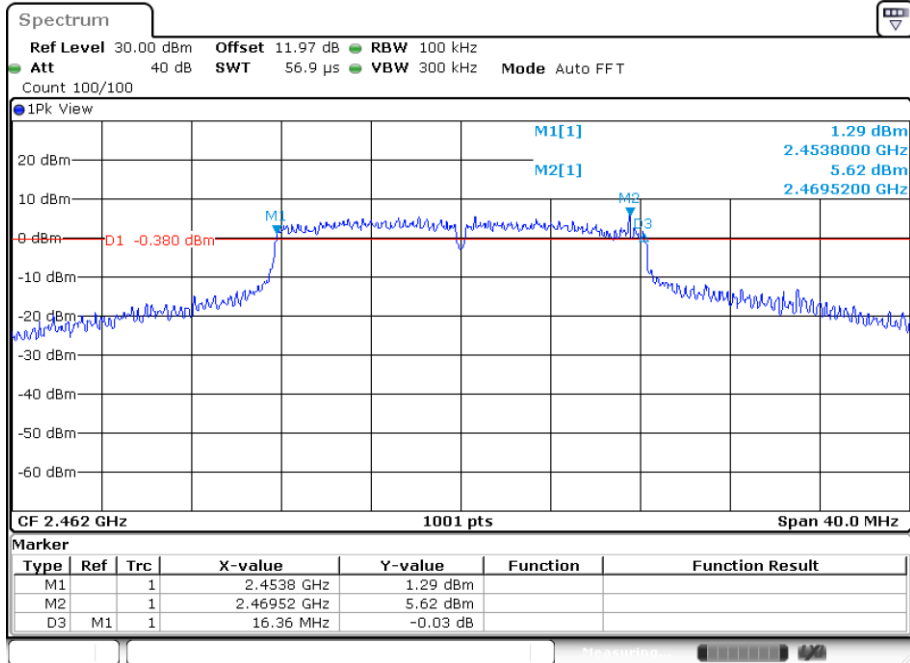




Date: 11.JAN.2025 22:55:14



11G-CDD_Ant10_2462


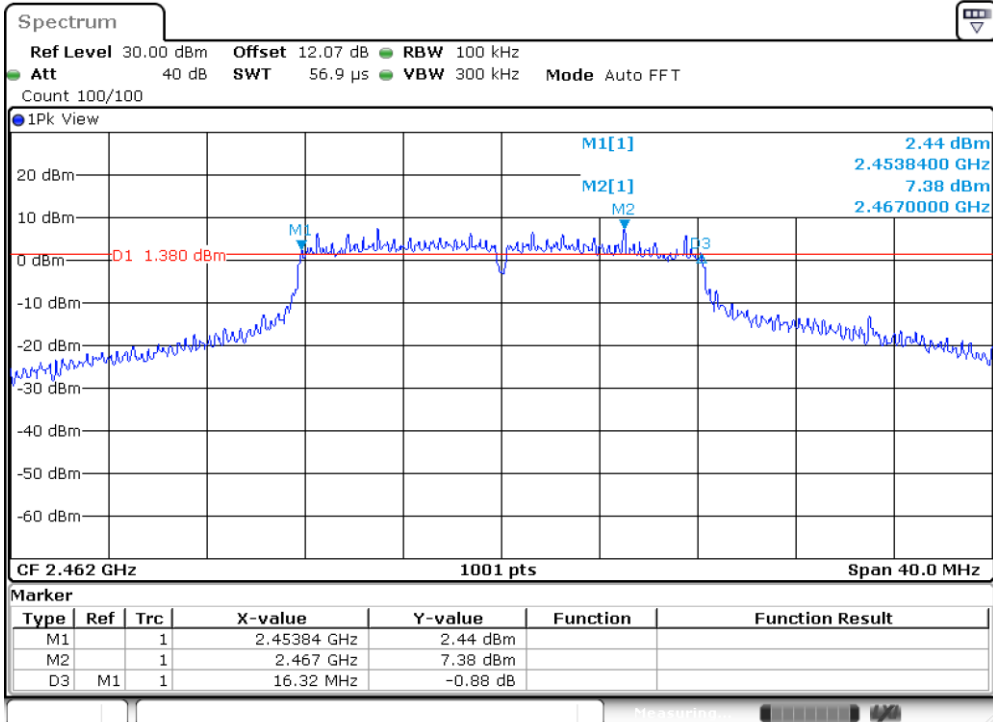




Date: 11.JAN.2025 22:56:25

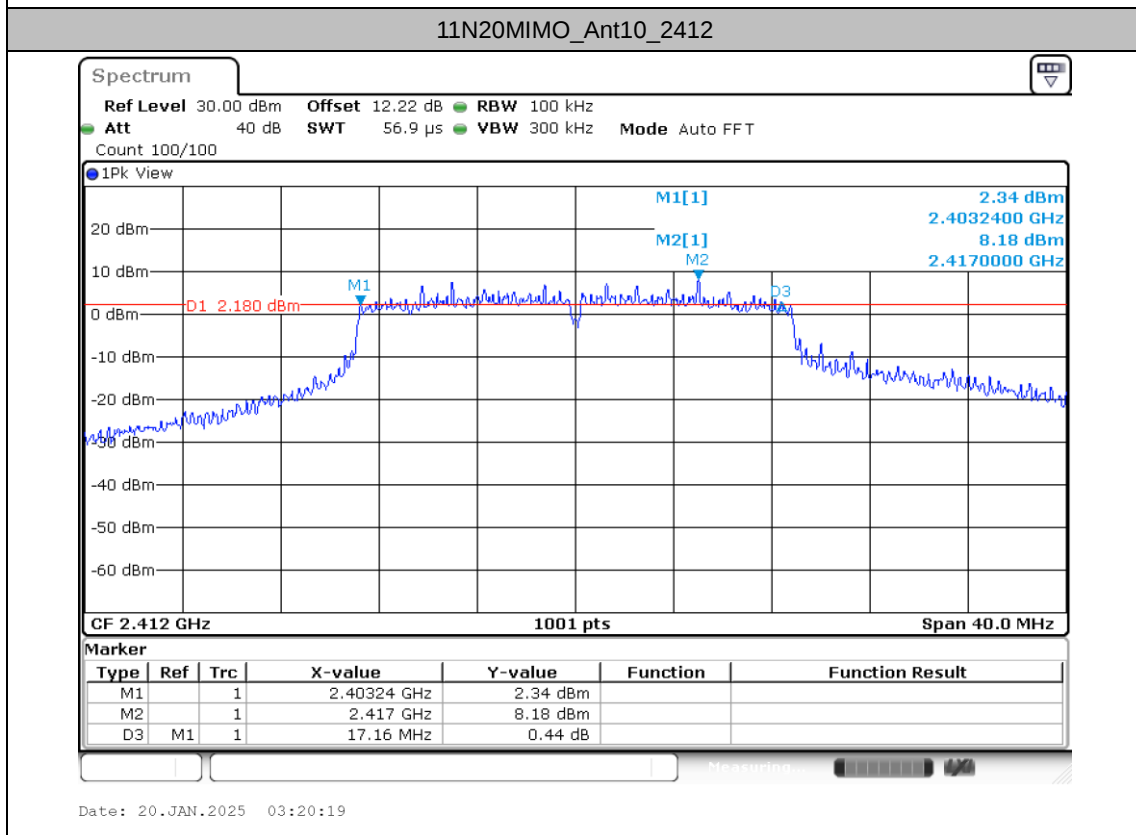
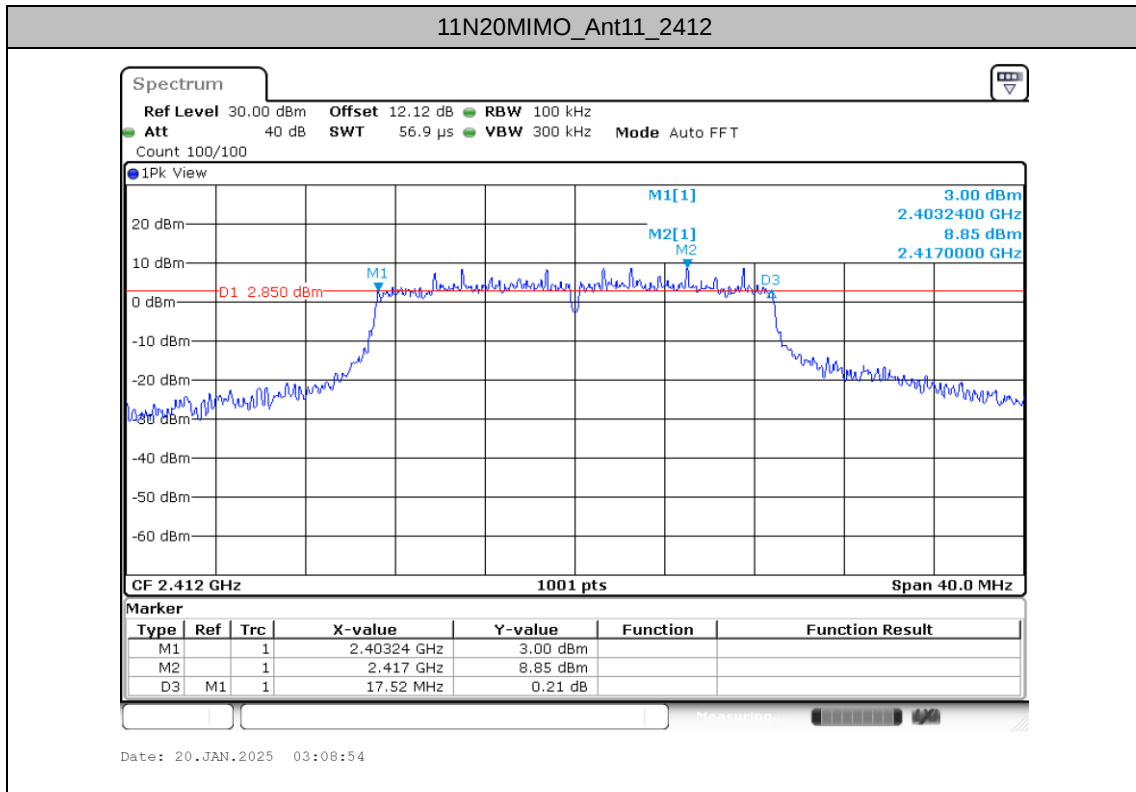


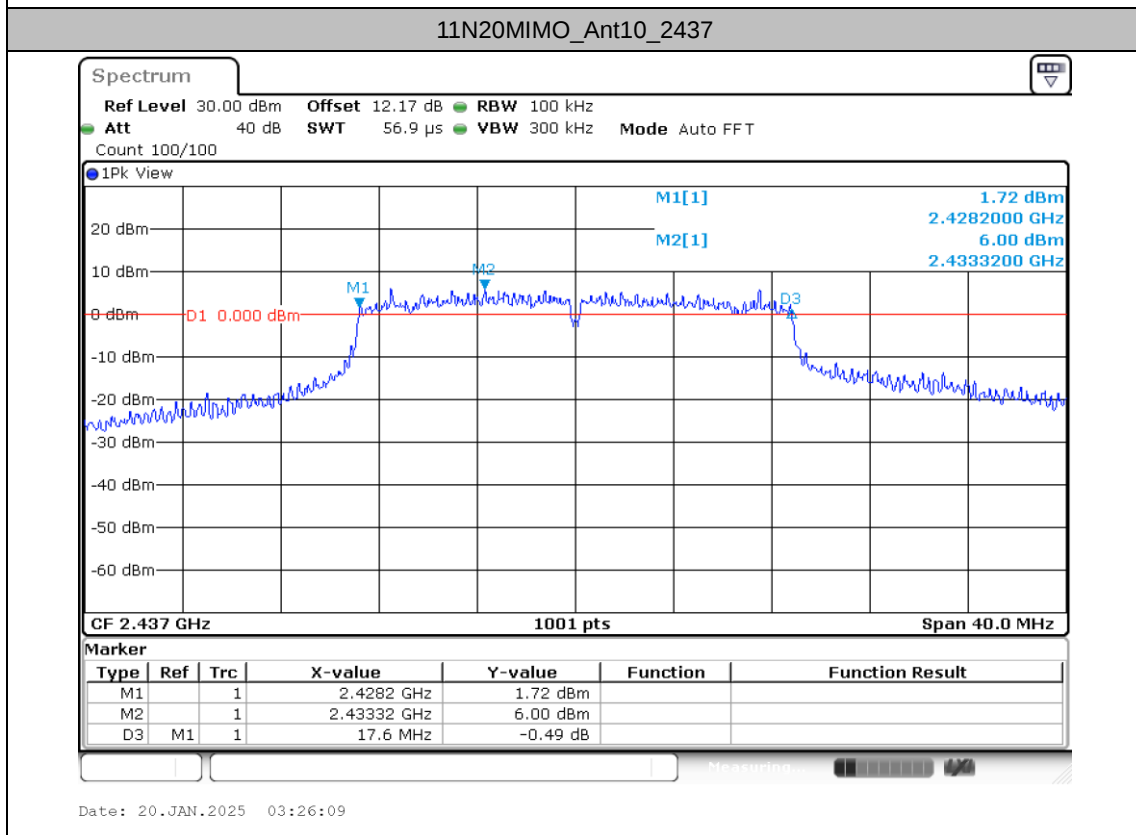
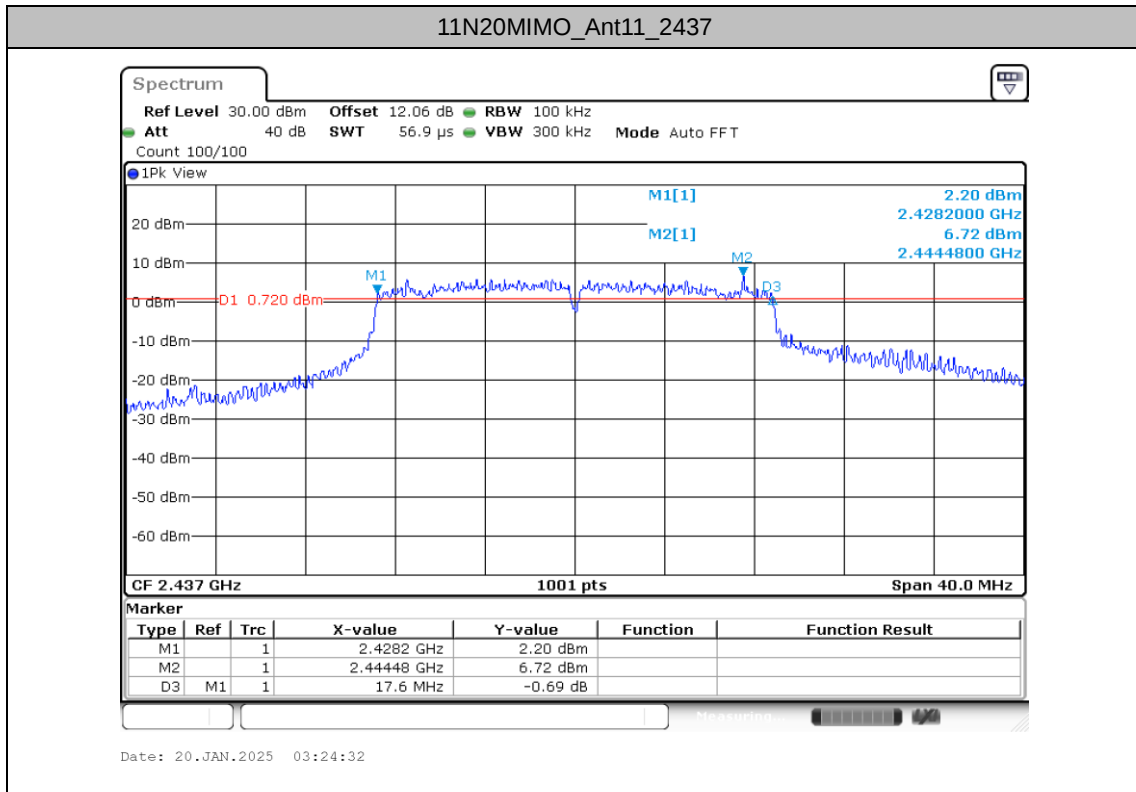


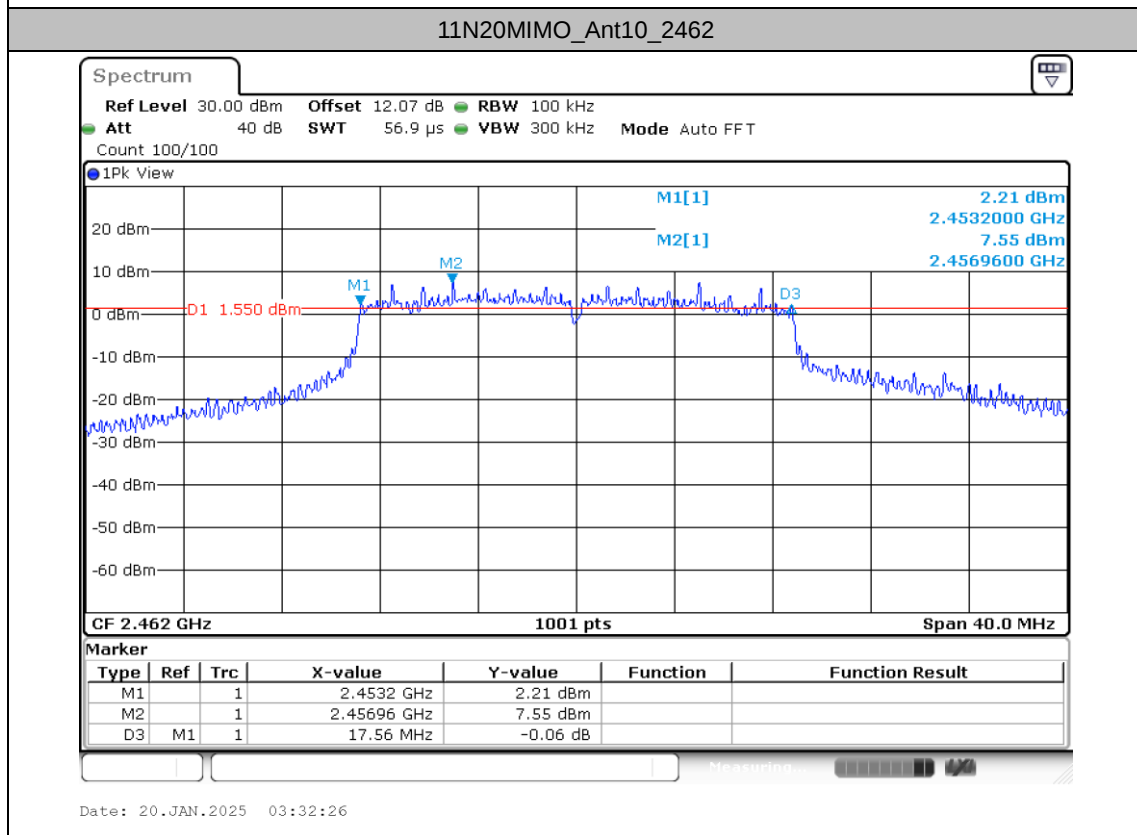
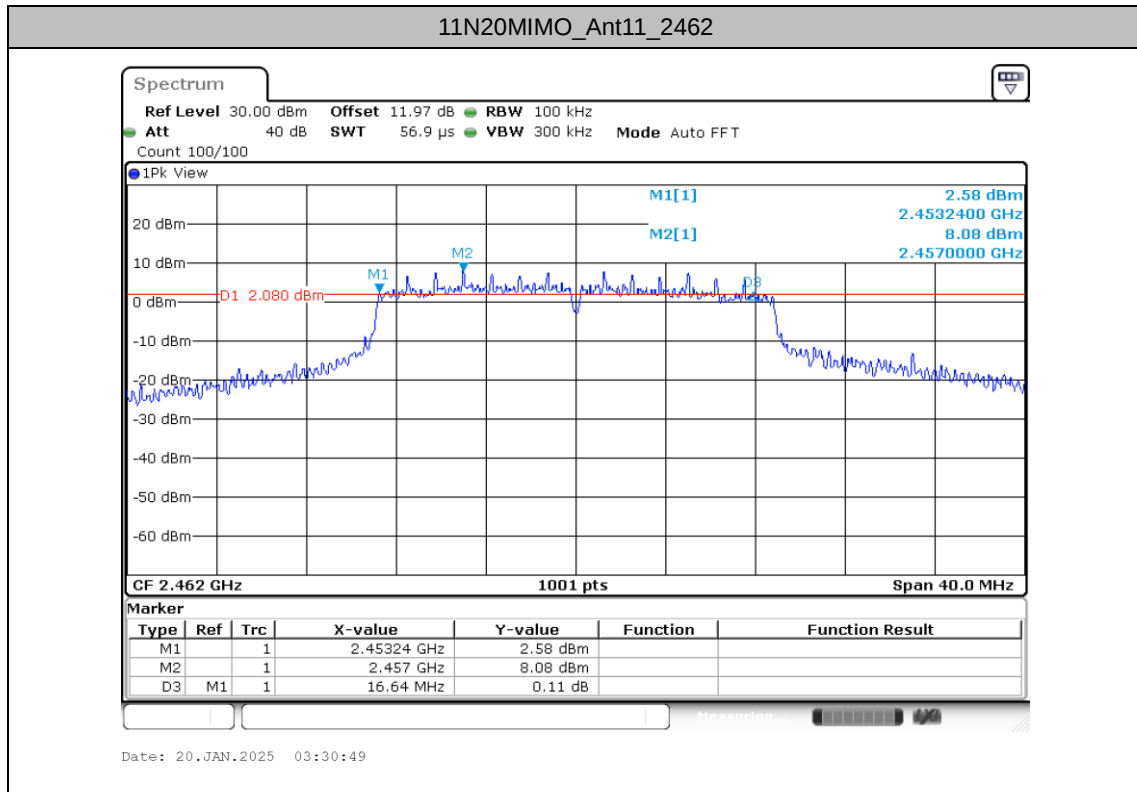


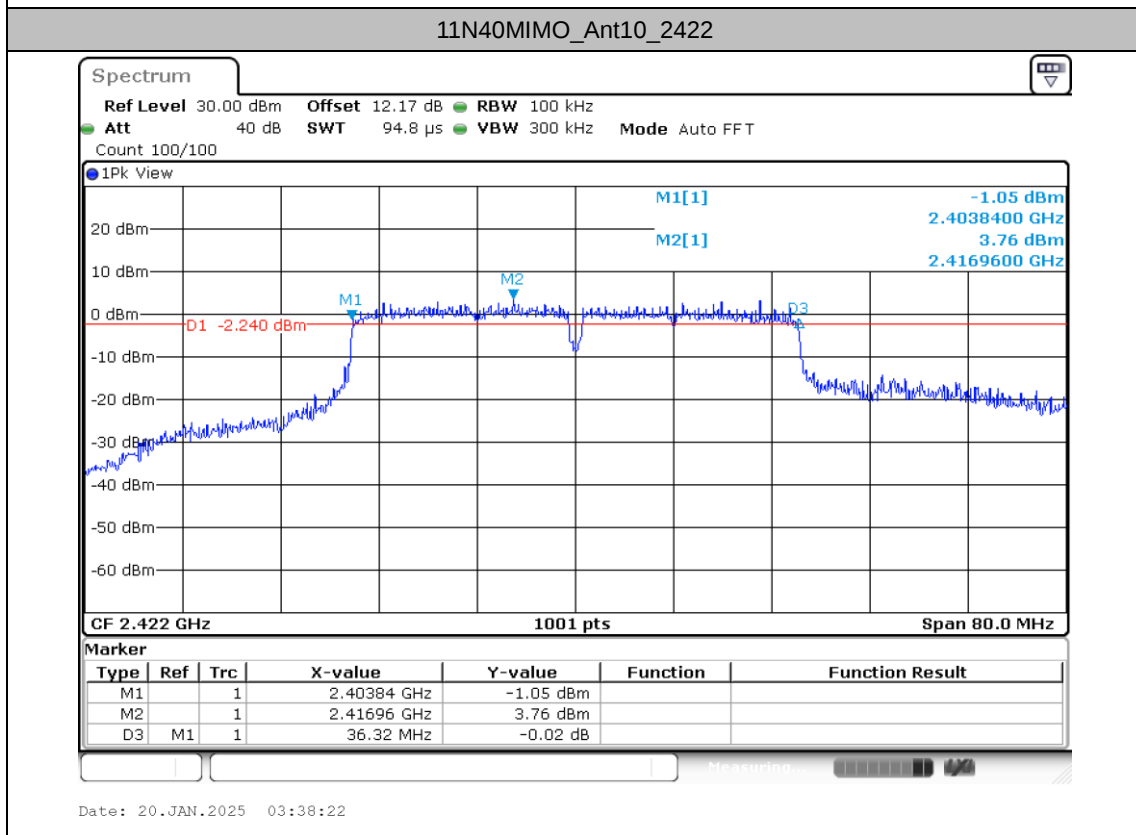
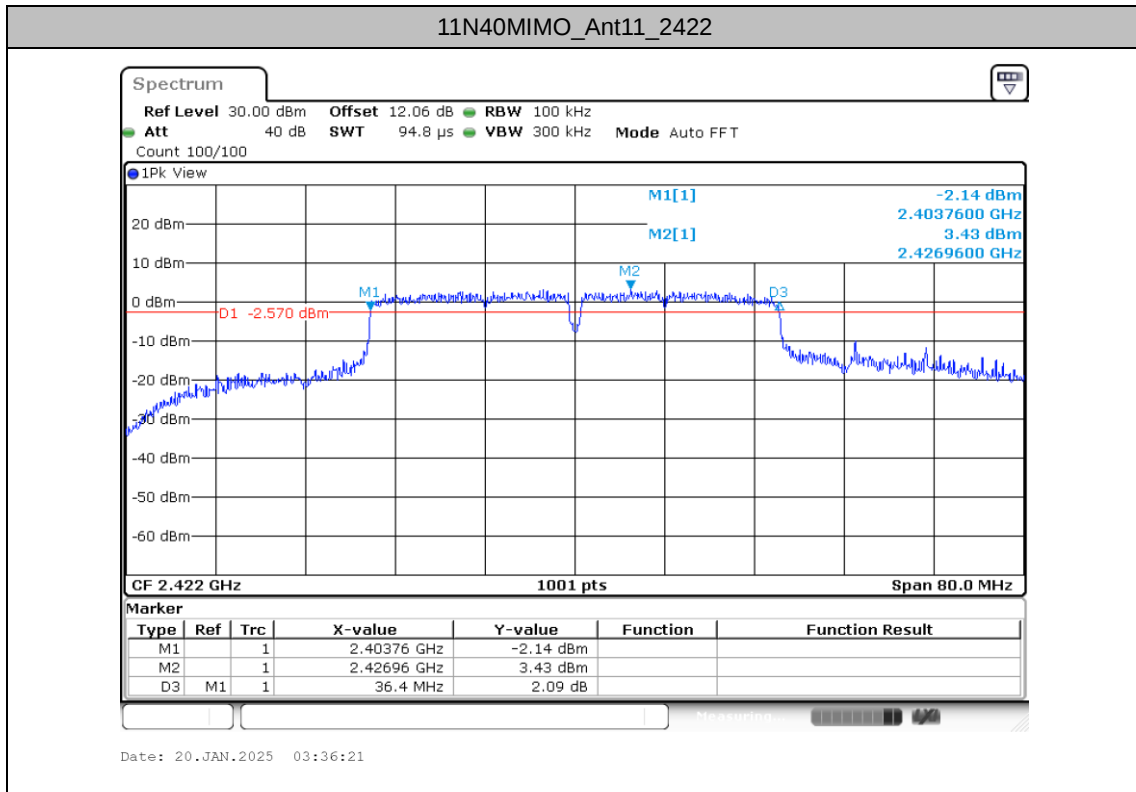


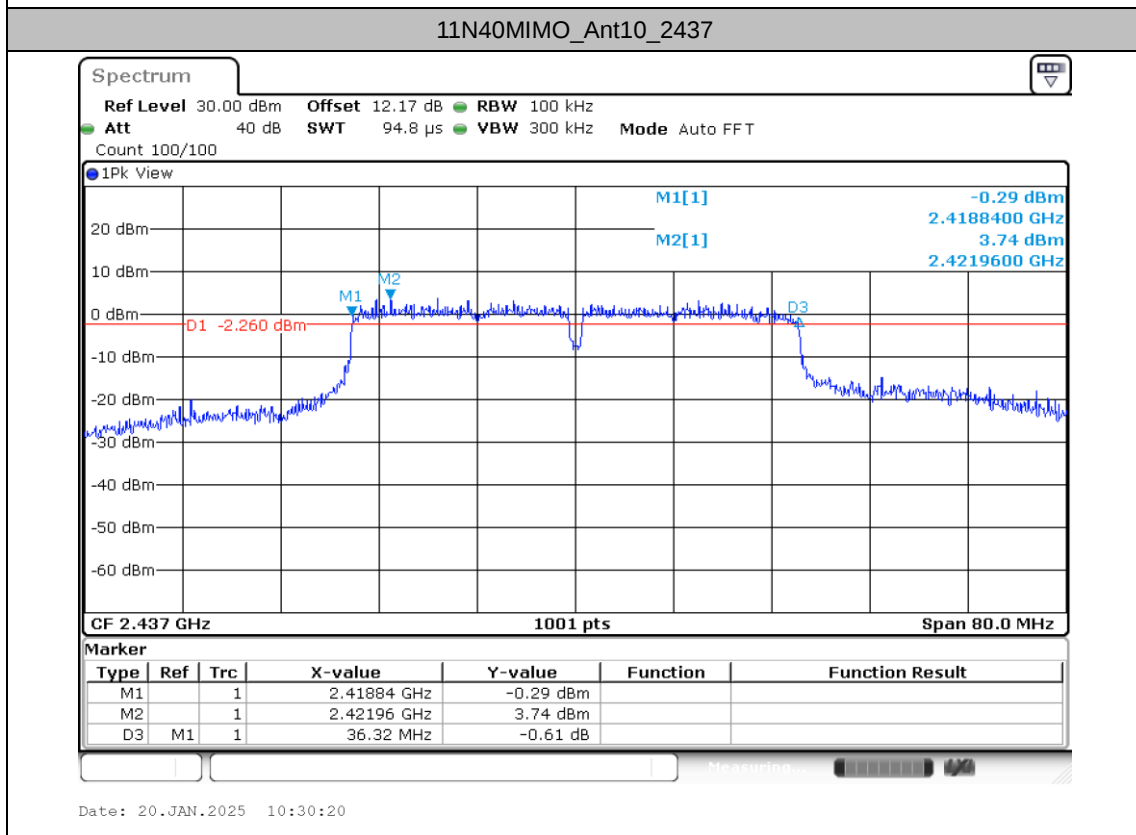
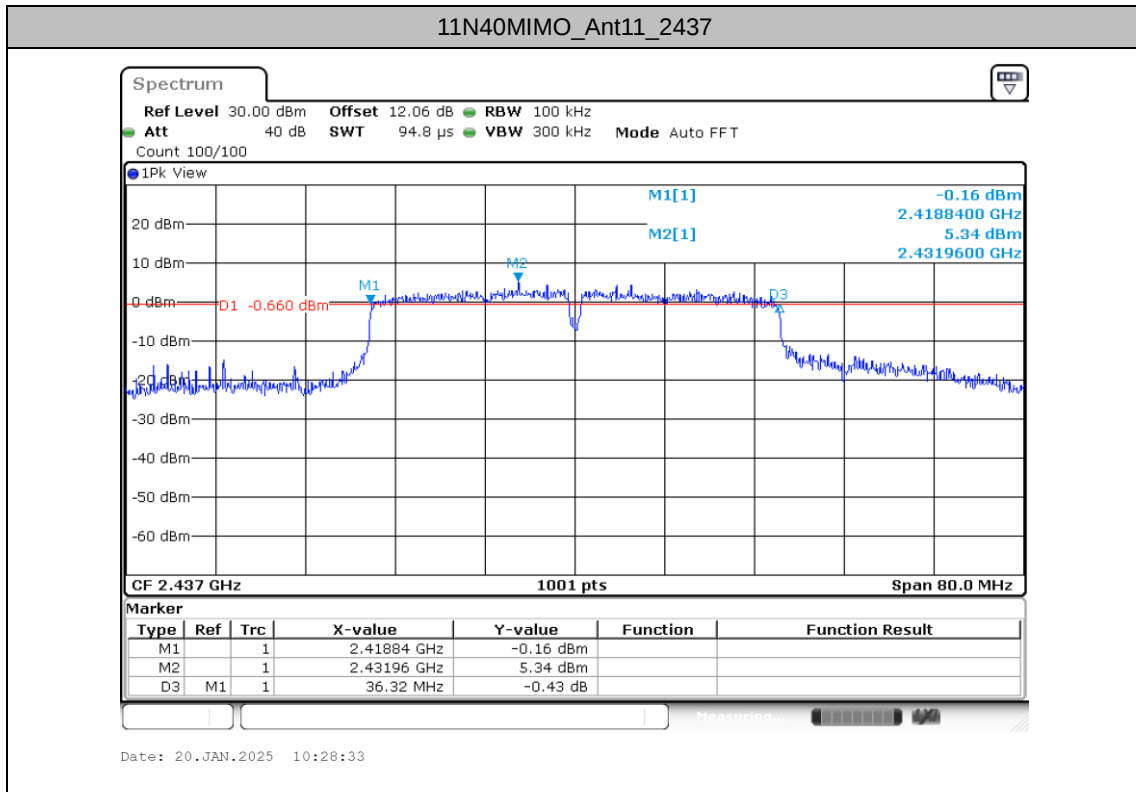


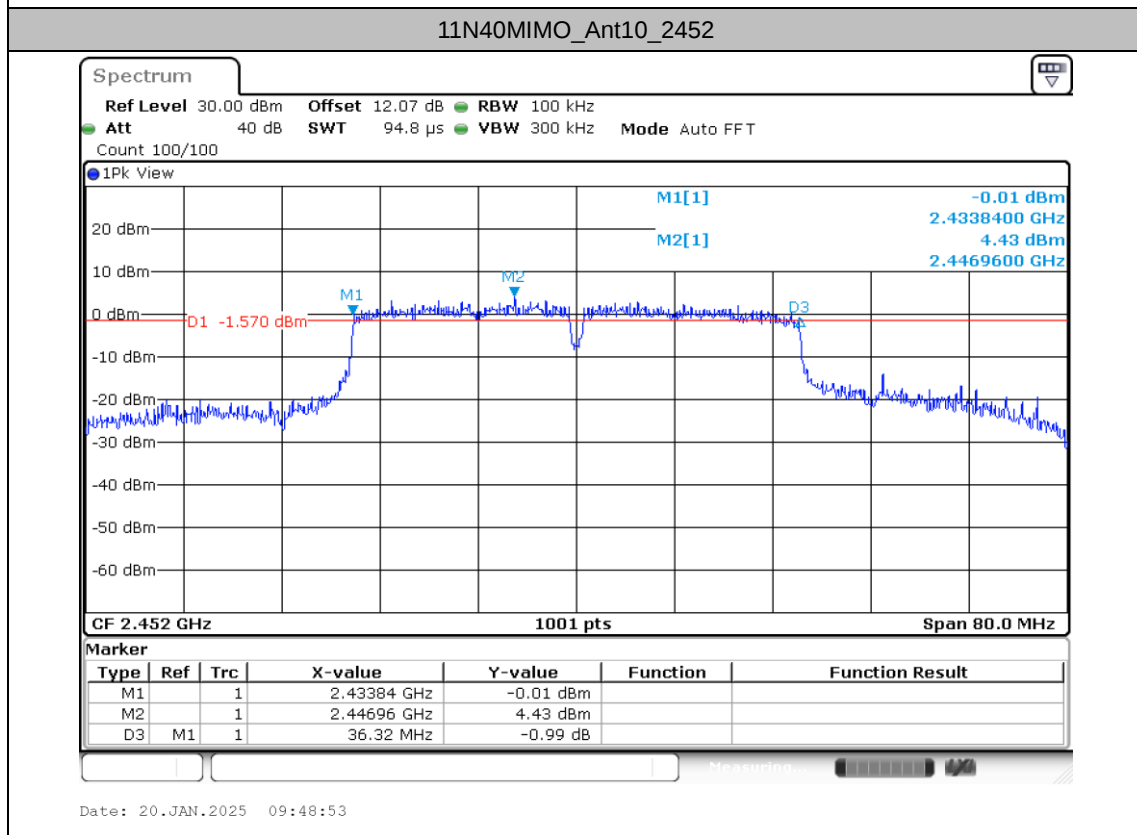
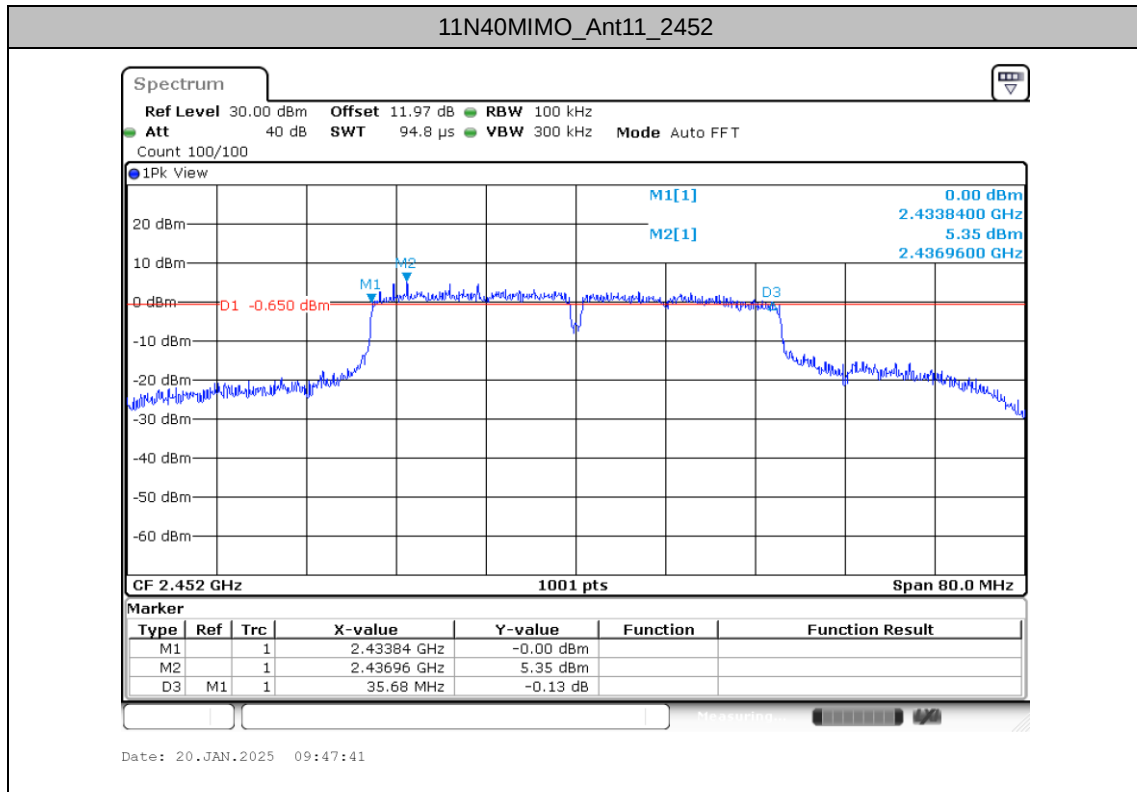


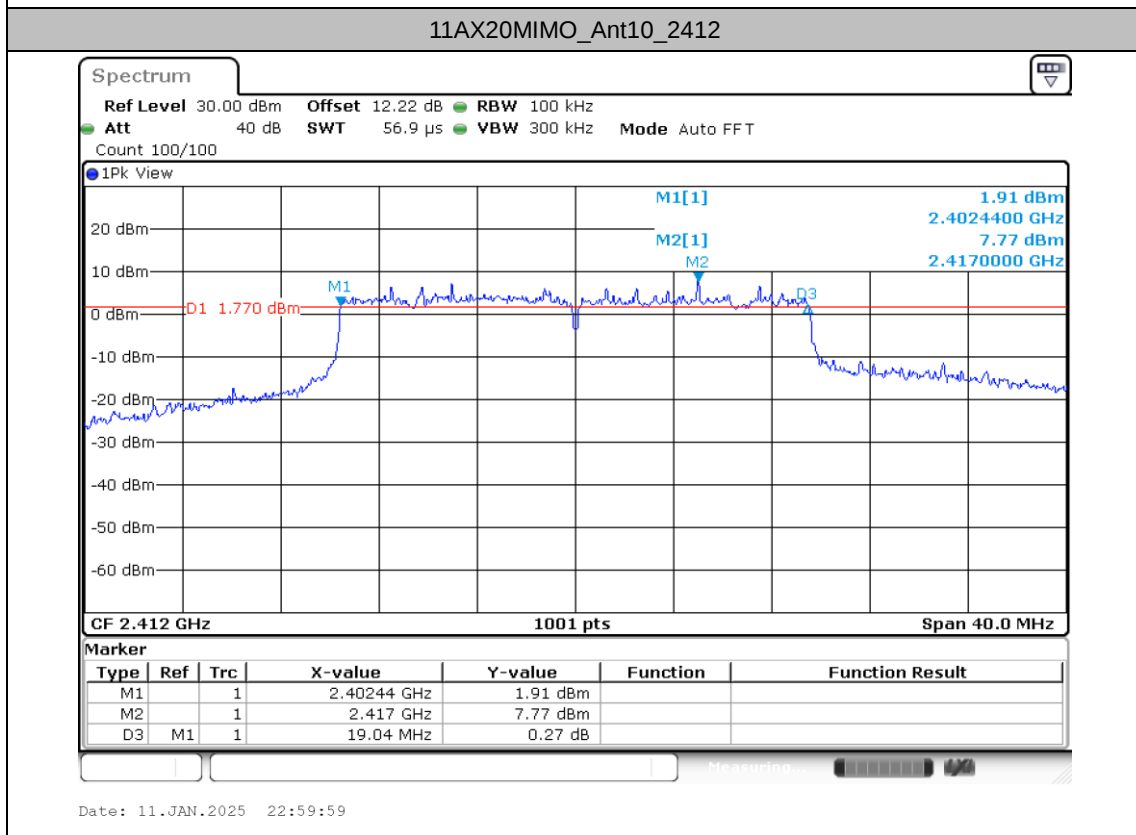
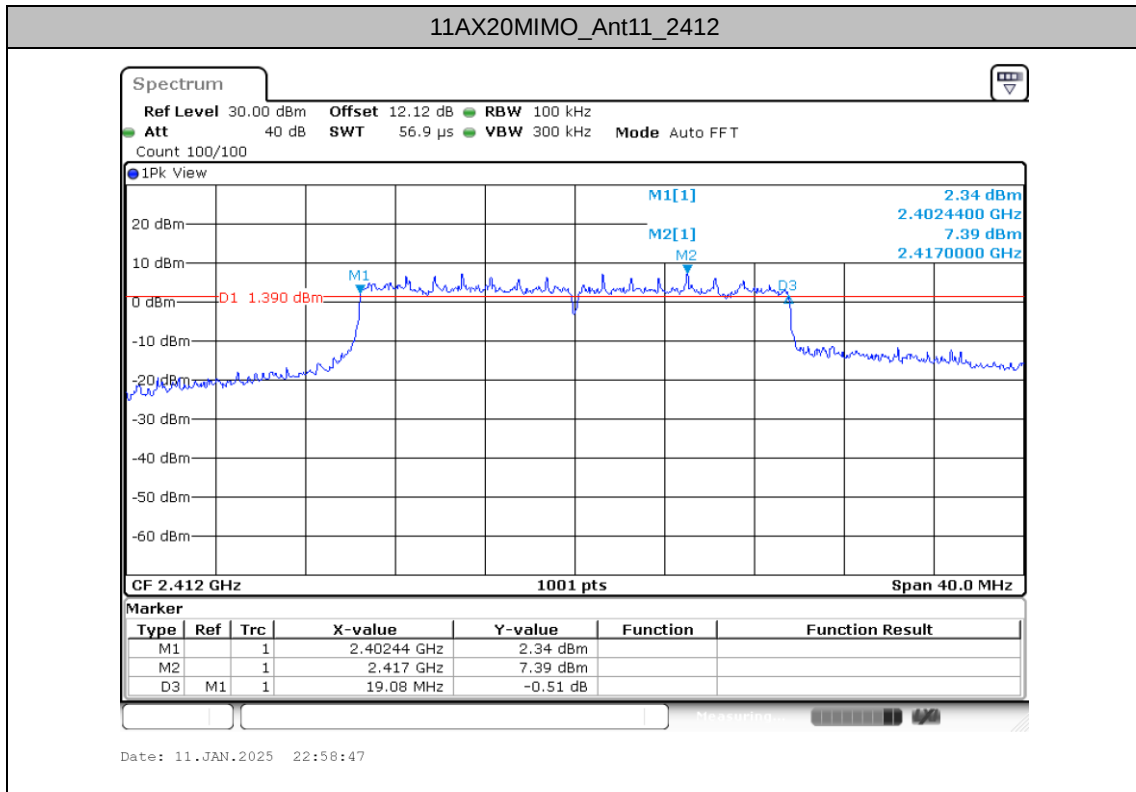


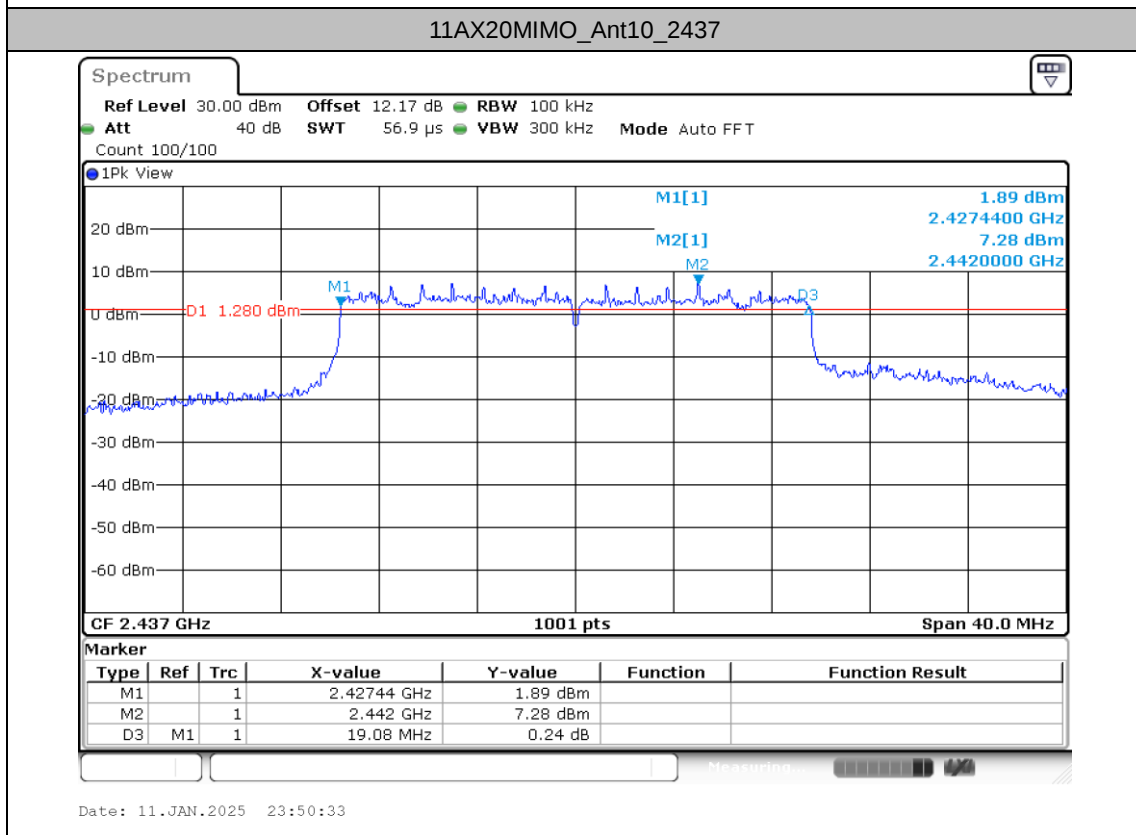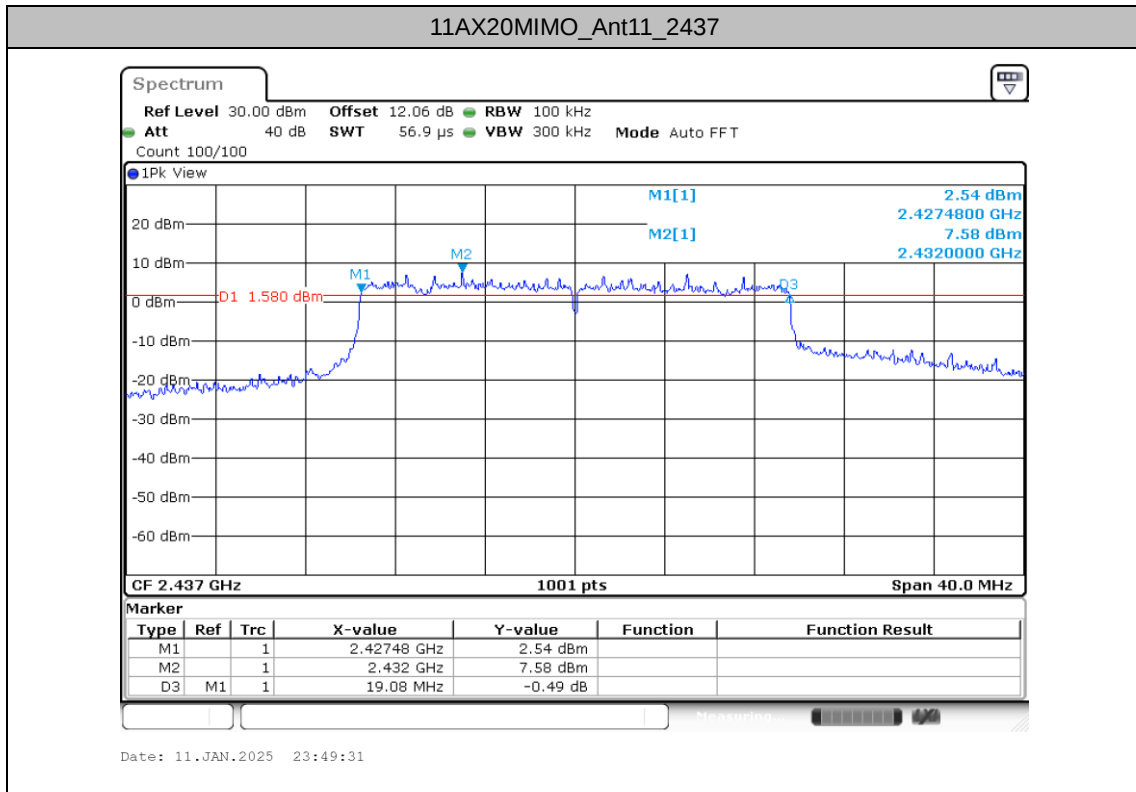

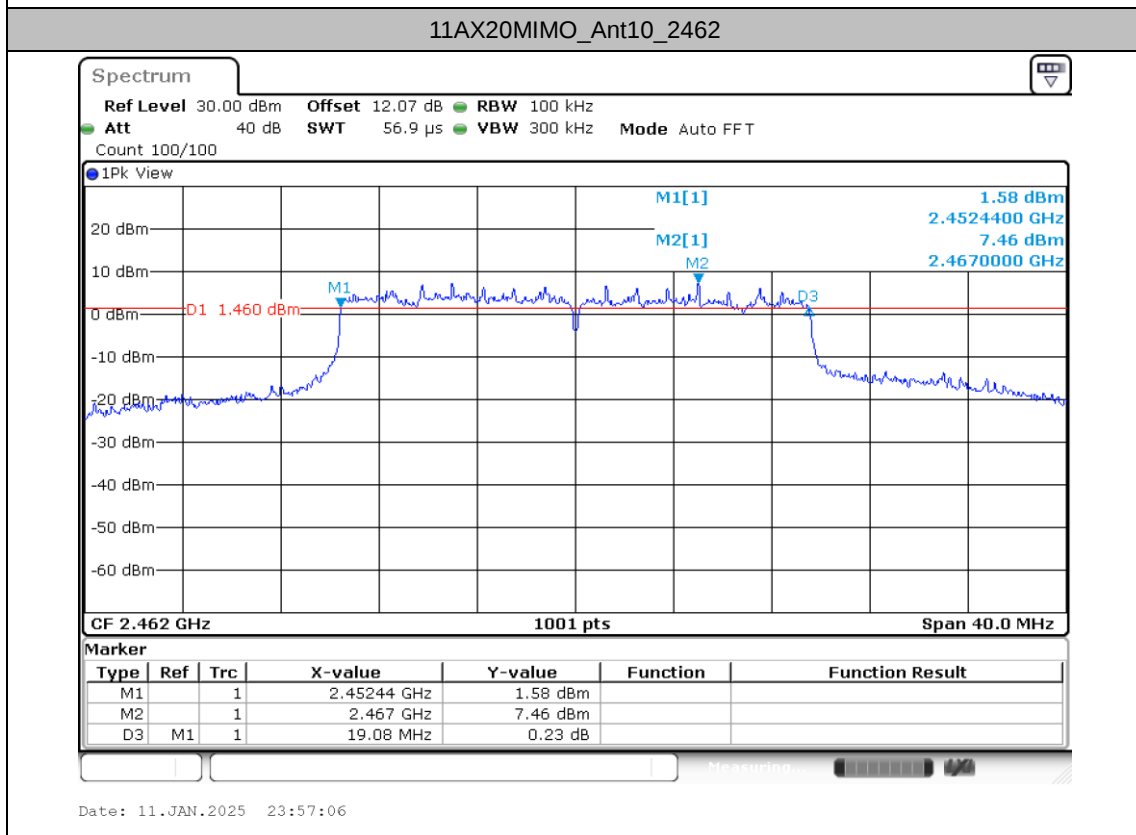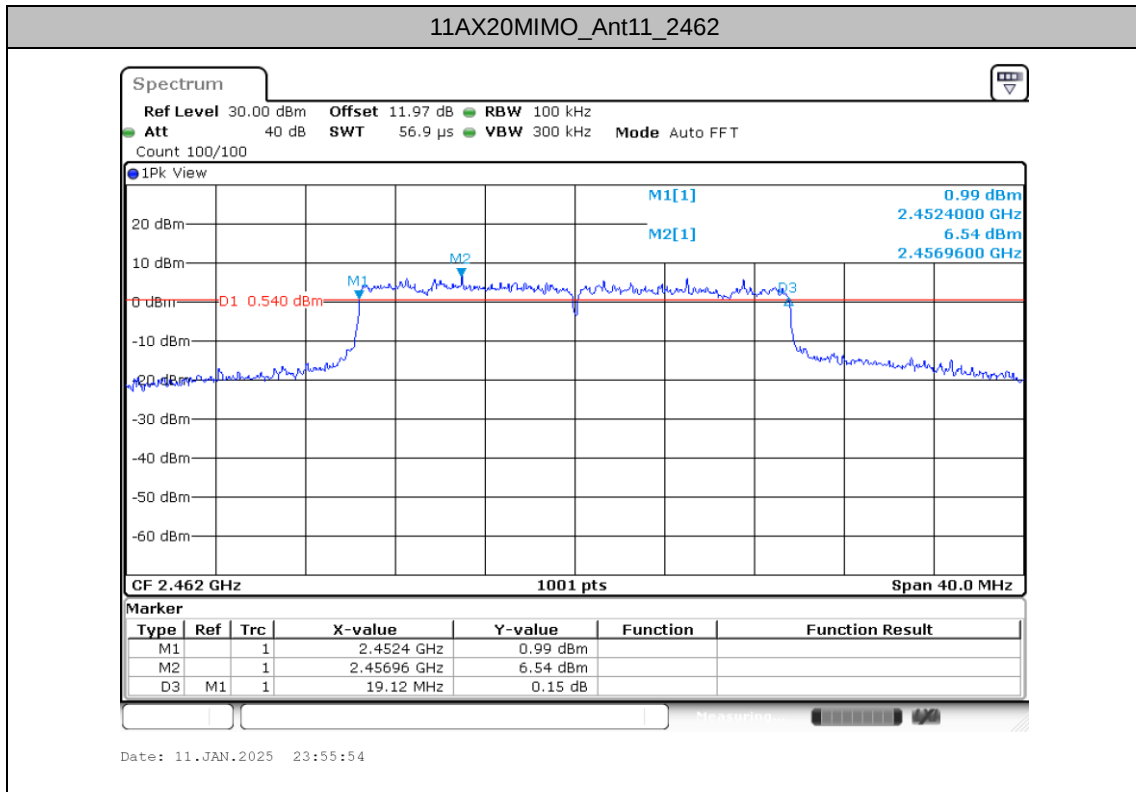

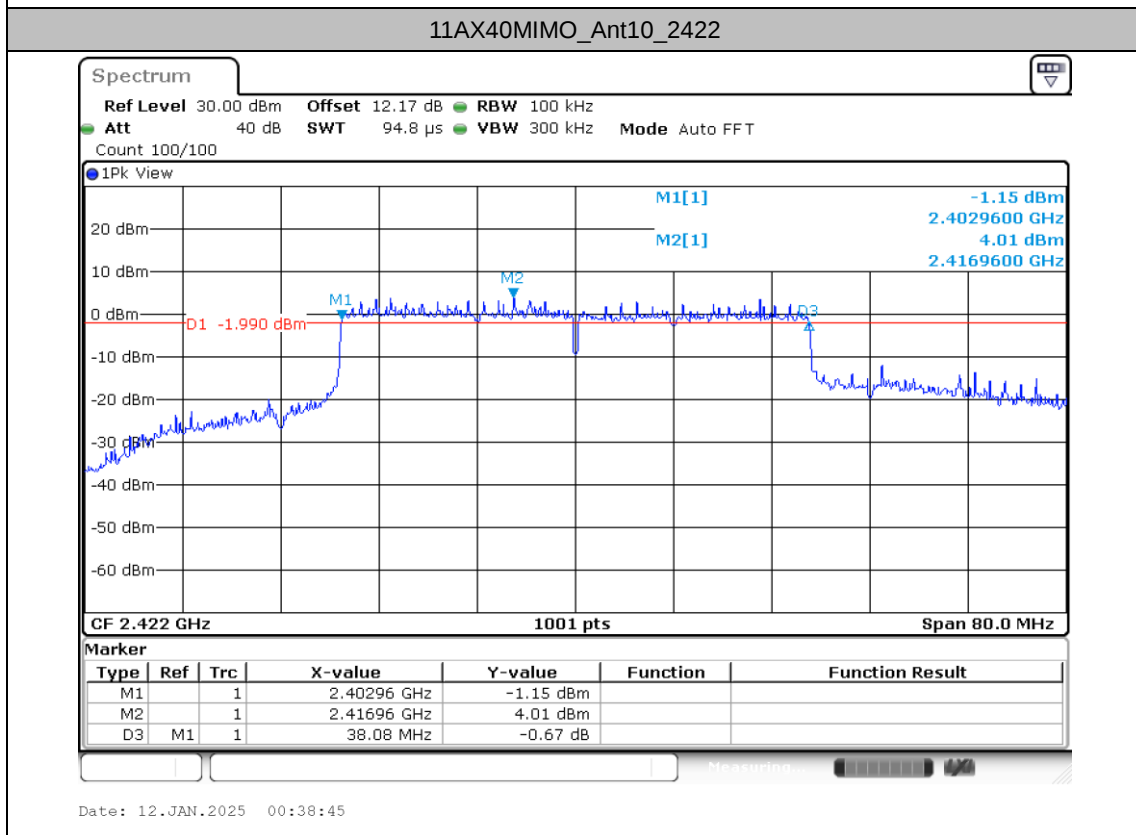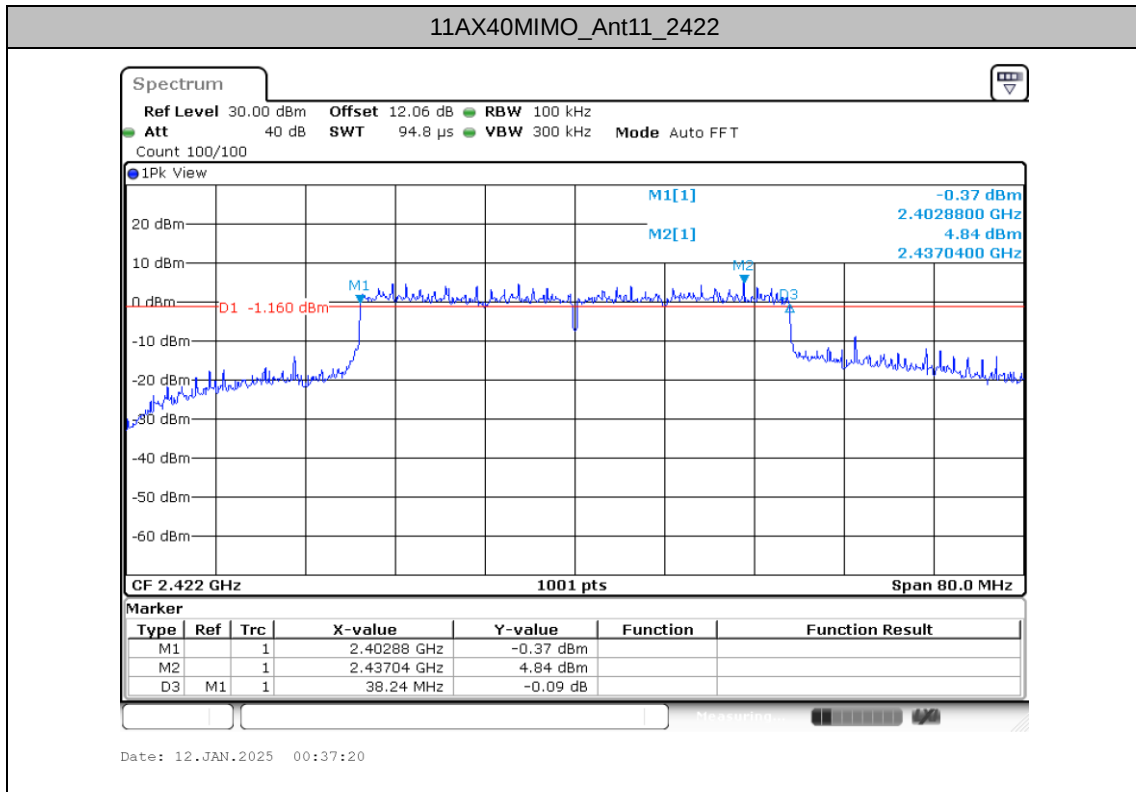

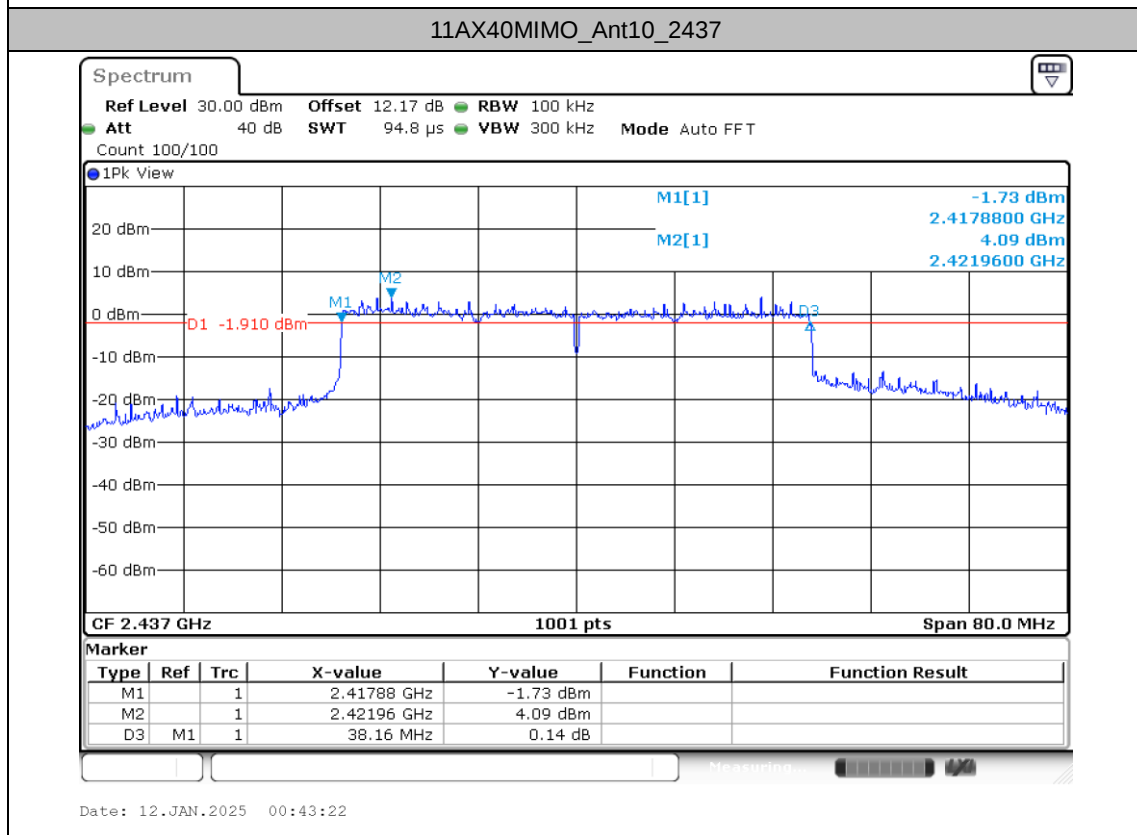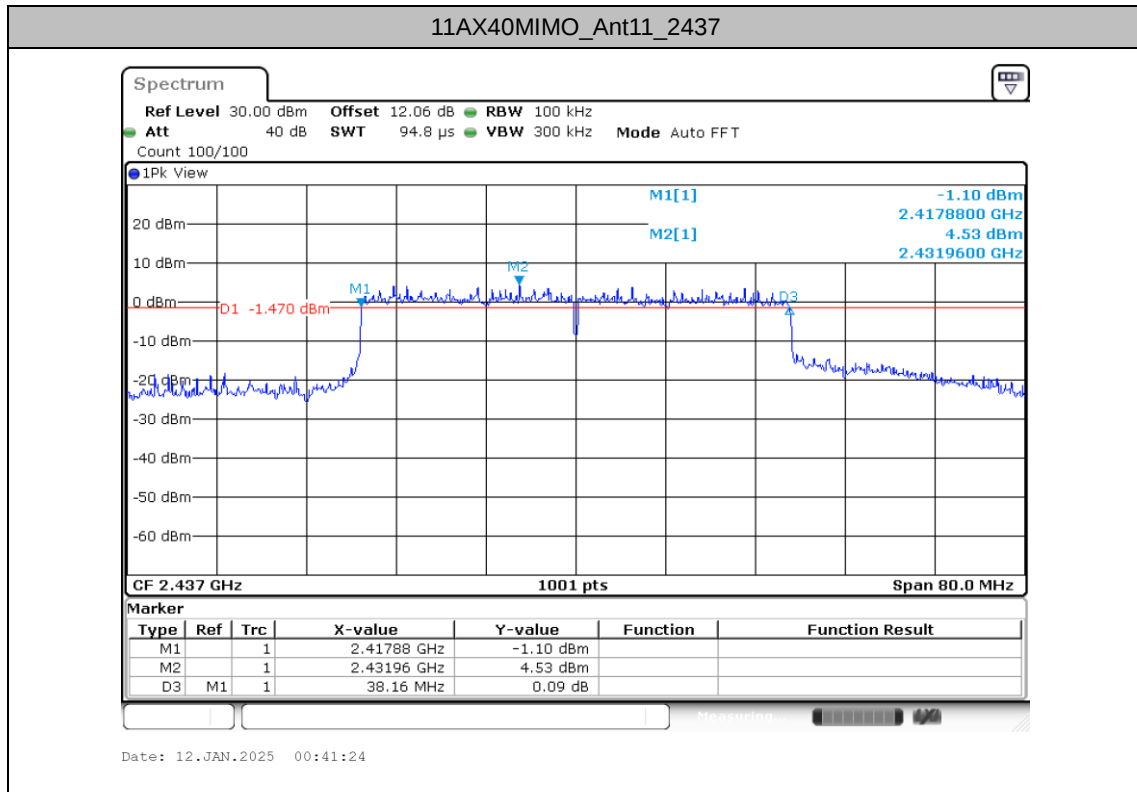

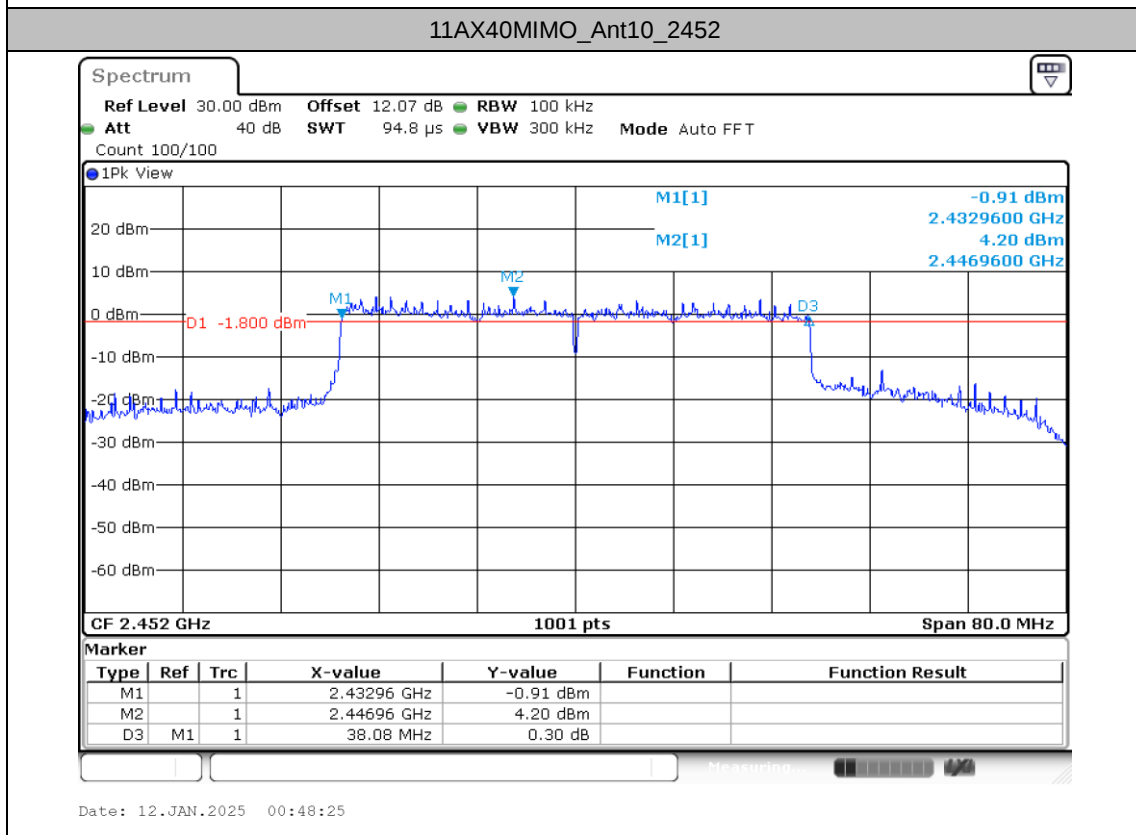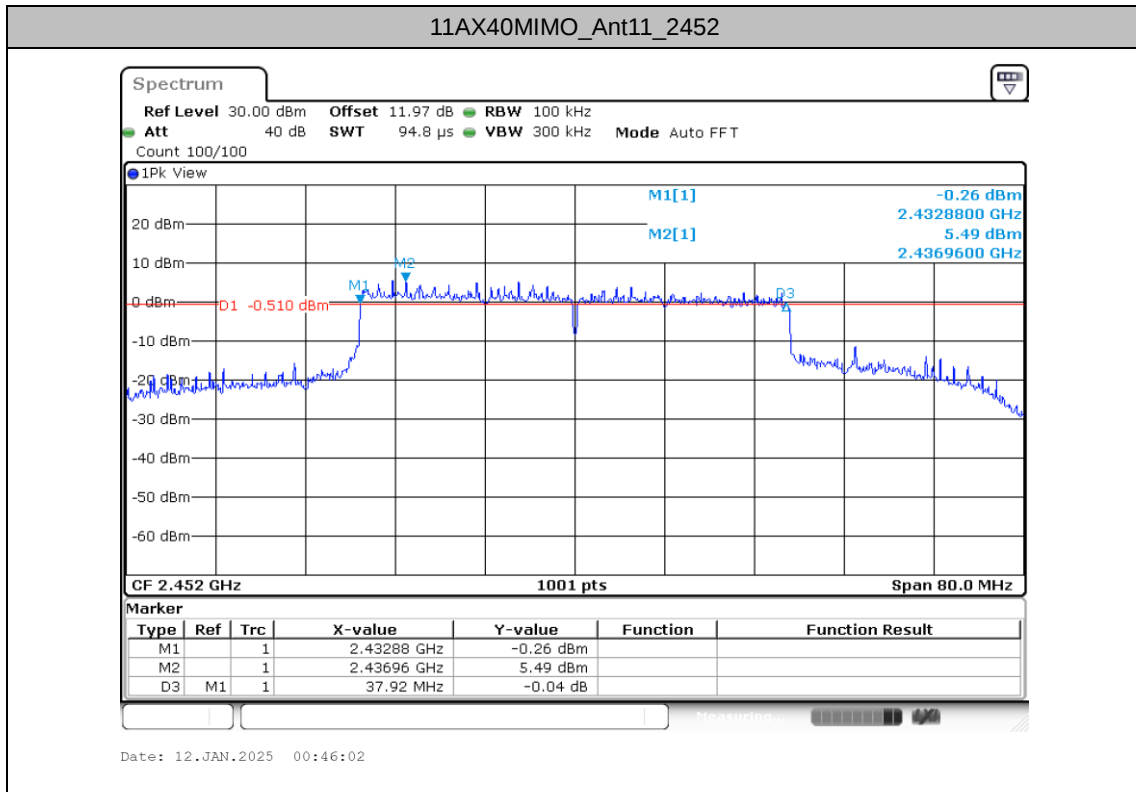



Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]
11B-CDD	Ant11	2412	14.823	2404.7127	2419.5352
	Ant10	2412	14.879	2404.8447	2419.7232
	Ant11	2437	14.619	2429.9527	2444.5712
	Ant10	2437	14.571	2429.8487	2444.4193
	Ant11	2462	14.539	2454.7807	2469.3193
	Ant10	2462	14.619	2454.8447	2469.4633
11G-CDD	Ant11	2412	21.654	2403.2249	2424.8787
	Ant10	2412	20.542	2403.5368	2424.0788
	Ant11	2437	20.298	2428.4489	2448.7468
	Ant10	2437	19.658	2428.3649	2448.0229
	Ant11	2462	19.49	2453.2089	2472.6989
	Ant10	2462	19.062	2453.3329	2472.3950
11N20MIMO	Ant11	2412	18.138	2403.0089	2421.1471
	Ant10	2412	20.926	2402.9809	2423.9068
	Ant11	2437	20.854	2427.8569	2448.7108
	Ant10	2437	19.602	2427.9649	2447.5669
	Ant11	2462	19.446	2452.7289	2472.1750
	Ant10	2462	18.646	2452.9849	2471.6310
11N40MIMO	Ant11	2422	43.444	2403.5858	2447.0295
	Ant10	2422	39.652	2403.8418	2443.4939
	Ant11	2437	39.412	2418.6098	2458.0219
	Ant10	2437	37.564	2418.6338	2456.1981
	Ant11	2452	37.596	2433.5218	2471.1181
	Ant10	2452	36.988	2433.5298	2470.5181
11AX20MIMO	Ant11	2412	23.322	2402.0650	2425.3867
	Ant10	2412	23.066	2402.2050	2425.2707
	Ant11	2437	21.934	2427.2690	2449.2028
	Ant10	2437	22.062	2427.1850	2449.2468
	Ant11	2462	20.35	2452.1650	2472.5149
	Ant10	2462	20.35	2452.0650	2472.4150
11AX40MIMO	Ant11	2422	45.323	2402.3060	2447.6294
	Ant10	2422	44.964	2402.6659	2447.6294
	Ant11	2437	41.716	2417.6419	2459.3578
	Ant10	2437	43.732	2417.6659	2461.3976
	Ant11	2452	39.892	2432.5779	2472.4700
	Ant10	2452	39.484	2432.4500	2471.9340



Test Graphs

