



FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : Smartphone
BRAND NAME : Sonim
MODEL NAME : X802
FCC ID : WYPS3111
STANDARD : 47 CFR Part 27M
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Nov. 16, 2024 ~ Apr. 21, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum EIRP and Emission Designator	6
1.7 Testing Location	7
1.8 Test Software	8
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup	13
3.3 Test Result of Conducted Test	13
3.4 Conducted Output Power and EIRP	14
3.5 Peak-to-Average Ratio	15
3.6 Occupied Bandwidth	16
3.7 Conducted Band Edge	17
3.8 Conducted Spurious Emission	18
3.9 Frequency Stability	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission	22
5 LIST OF MEASURING EQUIPMENT	23
6 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG4O2403N	Rev. 01	Initial issue of report	May 22, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7, n41, n38)	EIRP < 2Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	-	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n41, n38)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])	PASS	Under limit 21.65 dB at 7652.25 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego,CA92121,USA

1.2 Manufacturer

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego,CA92121,USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Brand Name	Sonim
Model Name	X802
FCC ID	WYPS3111
HW Version	V1.0
SW Version	X80.0-01-14.0-42.18.00
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz
Rx Frequency	5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz
Bandwidth	n7: 5MHz / 10MHz / 15MHz / 20MHz n38 : 20MHz / 30MHz / 40MHz n41: 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
SCS	15kHz for FDD Bands, 30kHz for TDD Bands
Antenna Gain	<Ant. 2>: n7: -1.77 dBi n38: -1.77 dBi n41: -1.52 dBi <Ant. 5>: n7: -1.51 dBi n38: 1.05 dBi n41: 1.51 dBi

	<Ant. 6>: n38: -9.24 dBi n41: -7.39 dBi <Ant. 8>: n38: -1.96 dBi n41: -1.88 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, so only the maximum EIRP of Antenna 2 for 5G NR n7/n38/n41 are shown in the report.
2. 5G NR support SA (n7/n38/n41) mode and NSA(n7/n41) mode. According to the maximum power between SA and NSA mode, SA covers NSA mode for n7/n41.
3. The device supports two PAs for 5G NR n7/n41 (main PA, and other PA for NSA mode only), both the PAs are full tested, only the worst EIRP are shown in the report.
4. 5G NR n41 Single Carrier supports PC2.
5. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
6. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NR n7		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.1786	4M49G7D	0.1312	4M50W7D
10	2505.0 ~ 2565.0	0.1758	9M28G7D	0.1324	9M29W7D
15	2507.5 ~ 2562.5	0.1820	14M1G7D	0.1396	14M1W7D
20	2510.0 ~ 2560.0	0.1832	18M9G7D	0.1432	18M9W7D

5G NR n38		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	2580.0 ~ 2610.0	0.1811	18M2G7D	0.1489	18M2W7D
30	2585.0 ~ 2605.0	0.1730	27M8G7D	0.1390	27M9W7D
40	2590.0 ~ 2600.0	0.1774	37M9G7D	0.1409	37M9W7D



5G NR n41		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	2506.02 ~ 2679.99	0.3013	18M2G7D	0.2415	18M2W7D
30	2511.00 ~ 2674.98	0.2972	27M8G7D	0.2388	27M9W7D
40	2516.01 ~ 2670.00	0.3034	37M9G7D	0.2415	37M9W7D
50	2521.02 ~ 2664.99	0.2844	47M5G7D	0.2286	47M6W7D
60	2526.00 ~ 2659.98	0.2871	57M9G7D	0.2234	57M9W7D
70	2531.01 ~ 2655.00	0.2767	67M4G7D	0.2158	67M5W7D
80	2536.02 ~ 2649.99	0.2729	77M5G7D	0.2208	77M6W7D
90	2541.00 ~ 2644.98	0.2704	87M6G7D	0.2178	87M6W7D
100	2546.01 ~ 2640.00	0.2877	97M6G7D	0.2244	97M6W7D

Note:

- 5G NR n41 overlaps the entire frequency range of 5G NR n38. Therefore, the test results provided in this report covers 5G NR n41 as well as 5G NR n38.
- All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309



Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

Test data subcontracted: Radiated Spurious Emission test case in section 4.4 of this report

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27M
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

Test Items	5G NR	Bandwidth (MHz)																Modulation					RB #		Test Channel		
		5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H	
Max. Output Power	n7	v	v	v	v	-	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n38	-	-	-	v	-	v	-	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v
	n41	-	-	-	v	-	v	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n7				v	-	-	-	-	-	-	-	-	-	-	-	v	v					v		v		
	n41				v	-	-	-	-	-	-	-	-	-	-	-	v	v					v		v		
26dB and 99% Bandwidth	n7	v	v	v	v	-	-	-	-	-	-	-	-	-	-	-		v	v	v	v		v		v		
	n41	-	-	-	v	-	v	-	v	-	v	v	v	v	v	v		v	v	v	v		v		v		
Conducted Band Edge	n7	v		v	v	-	-	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v	
	n41	-	-	-	v	-		-		-		v				v	v	v				v	v	v		v	
Conducted Spurious Emission	n7	v		v	v	-	-	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v	
	n41	-	-	-	v	-		-		-		v				v	v	v				v		v	v	v	
Frequency Stability	n7				v	-	-	-	-	-	-	-	-	-	-	-		v					v		v		
	n41				v	-		-		-								v					v		v		
E.I.R.P.	n7	v	v	v	v	-	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n38	-	-	-	v	-	v	-	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n41	-	-	-	v	-	v	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	



Test Items	5G NR	Bandwidth (MHz)														Modulation					RB #		Test Channel				
		5	10	15	20	25	30	35	40	45	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H	
Radiated Spurious Emission	n7	Worst Case																					v	v	v		
	n41	Worst Case																					v	v	v		
Note	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.87V ; Low Voltage =3.65V. ; High Voltage =4.45V																										

2.2 Connection Diagram of Test System

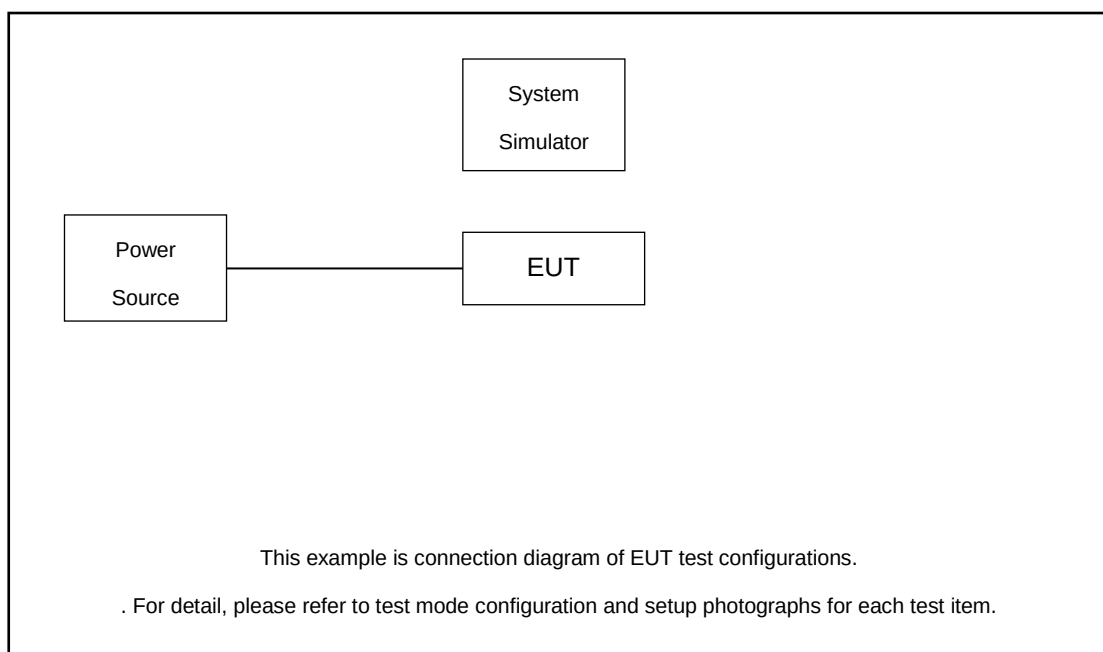

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.4 dB and 20dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.4 + 20 = 25.4 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

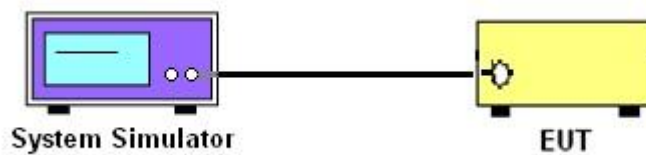

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

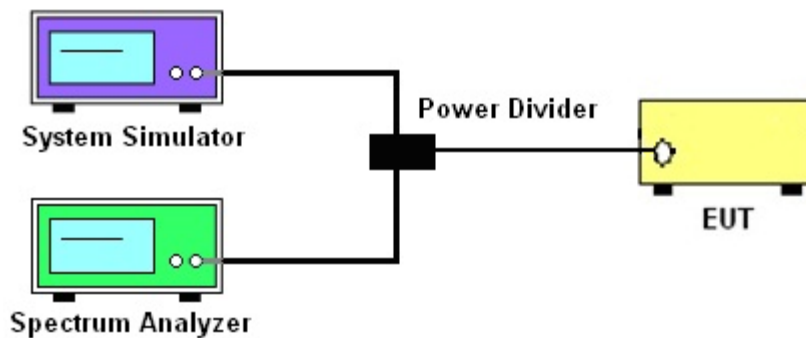

3.2.3 Frequency Stability

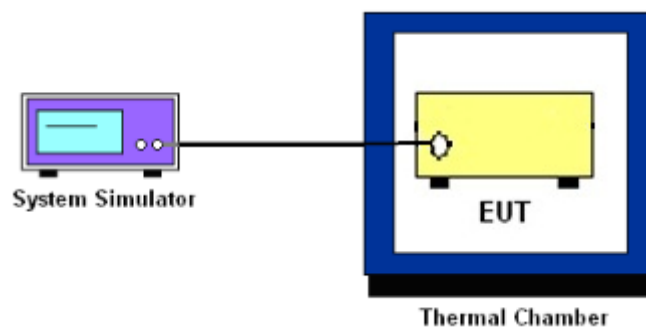

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7, n38, n41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. For 5G NR n7/n38/n41, the other 40 dB, and 55 dB have additionally applied same calculation above.
10. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and power divider.
The path loss was compensated to the results for each measurement.
Path Loss Factor = Cable + Power Divider, Where the cable and power divider are the total path loss for the system calibration.
4. The low/middle/high channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For 5G NR n7/n38/n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

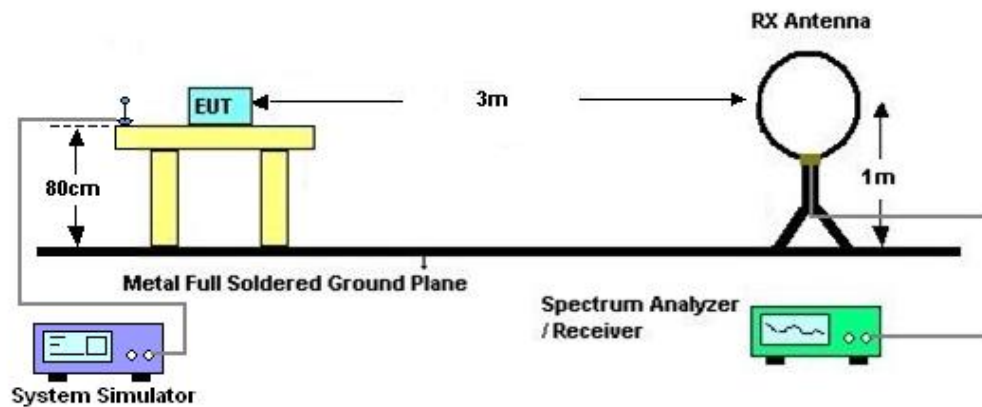

4.2.2 For radiated test from 30MHz to 1GHz

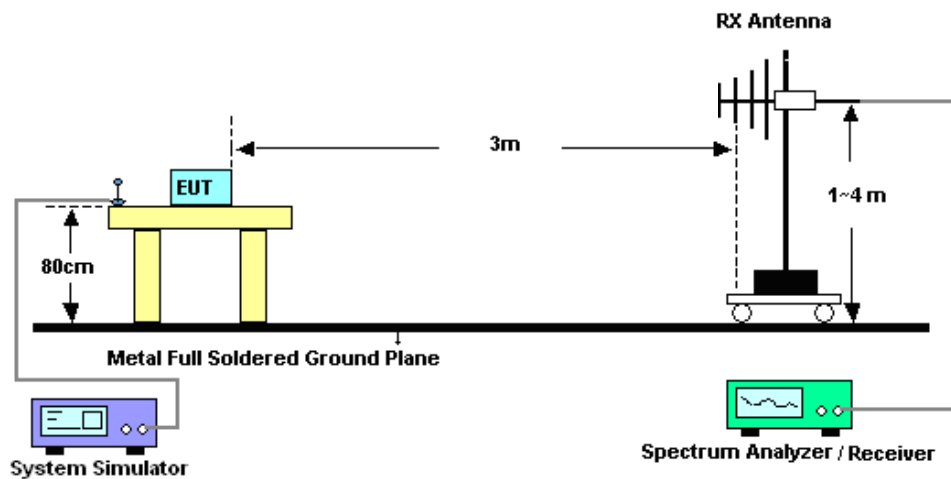

4.2.3 For radiated test above 1GHz

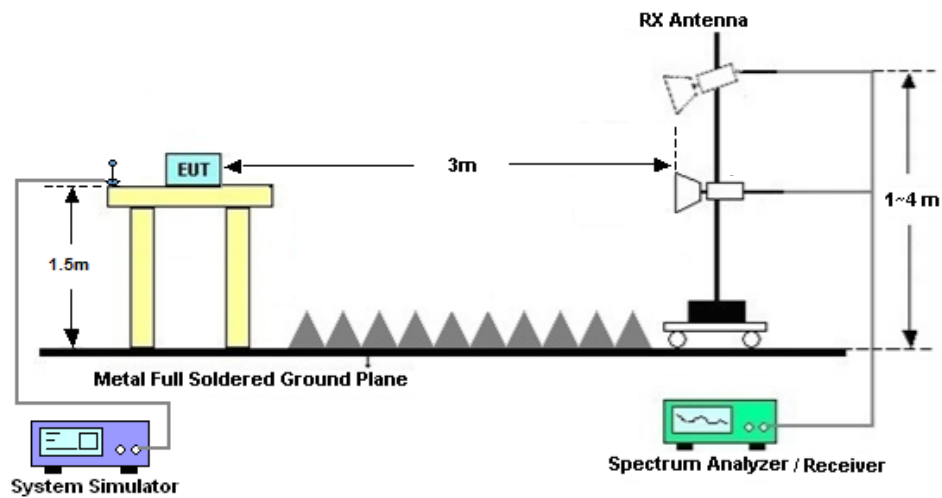

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For 5G NR n7/n38/n41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 16, 2024~ Apr. 21 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 16, 2024~ Apr. 21 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H201401144 0	-40~+150°C 20%~95%RH	Jul. 04, 2024	Nov. 16, 2024~ Apr. 21 2025	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY5515021 3	10Hz~44GHz	Jul. 03, 2024	Feb. 10, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Feb. 10, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY5327010 5	0.5GHz~26.5GHz	Oct. 14, 2024	Feb. 10, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Feb. 10, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Feb. 10, 2025	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	Feb. 10, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30- 10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Feb. 10, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Feb. 10, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	6160100019 85	N/A	Oct. 14, 2024	Feb. 10, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 10, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 10, 2025	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Peak to Average Ratio	± 0.90 dB
Frequency Stability	± 0.04 ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.48 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.53 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.02 dB
--	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23℃
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N7 ANT2

Transmitter Conducted Output Power And EIRP, ($G_T - L_c$)=-1.77dB

NR Band	SCS	Bandwidth	Arfcn	Freq(M Hz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	50@25	23.80	22.03	0.1596
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	1@1	24.26	22.49	0.1774
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	1@104	23.48	21.71	0.1483
7	15	20	502000	2510	DFT-s-OFDM QPSK	50@25	23.88	22.11	0.1626
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@1	24.30	22.53	0.1791
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@104	23.89	22.12	0.1629
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	50@25	22.75	20.98	0.1253
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@1	23.14	21.37	0.1371
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@104	22.51	20.74	0.1186
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	50@25	21.21	19.44	0.0879
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	1@1	22.01	20.24	0.1057
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	1@104	21.36	19.59	0.0910
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	50@25	19.16	17.39	0.0548
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	1@1	19.32	17.55	0.0569
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	1@104	18.70	16.93	0.0493
7	15	20	502000	2510	CP-OFDM QPSK	53@26	22.14	20.37	0.1089
7	15	20	502000	2510	CP-OFDM QPSK	1@1	22.90	21.13	0.1297
7	15	20	502000	2510	CP-OFDM QPSK	1@104	22.23	20.46	0.1112
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	50@25	24.25	22.48	0.1770
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.20	22.43	0.1750
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	1@104	23.55	21.78	0.1507
7	15	20	507000	2535	DFT-s-OFDM QPSK	50@25	24.33	22.56	0.1803
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@1	24.23	22.46	0.1762
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@104	23.66	21.89	0.1545
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	50@25	23.33	21.56	0.1432
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.97	21.20	0.1318



7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@104	22.53	20.76	0.1191
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	50@25	21.90	20.13	0.1030
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	1@1	21.91	20.14	0.1033
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	1@104	21.29	19.52	0.0895
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	50@25	18.79	17.02	0.0504
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.12	17.35	0.0543
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	1@104	18.56	16.79	0.0478
7	15	20	507000	2535	CP-OFDM QPSK	53@26	22.71	20.94	0.1242
7	15	20	507000	2535	CP-OFDM QPSK	1@1	22.78	21.01	0.1262
7	15	20	507000	2535	CP-OFDM QPSK	1@104	21.91	20.14	0.1033
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	50@25	24.24	22.47	0.1766
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	1@1	23.66	21.89	0.1545
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	1@104	24.40	22.63	0.1832
7	15	20	512000	2560	DFT-s-OFDM QPSK	50@25	24.27	22.50	0.1778
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@1	23.75	21.98	0.1578
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@104	24.39	22.62	0.1828
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	50@25	23.25	21.48	0.1406
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@1	22.53	20.76	0.1191
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@104	23.30	21.53	0.1422
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	50@25	21.83	20.06	0.1014
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	1@1	21.31	19.54	0.0899
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	1@104	22.04	20.27	0.1064
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	50@25	18.77	17.00	0.0501
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	1@1	18.58	16.81	0.0480
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	1@104	19.34	17.57	0.0571
7	15	20	512000	2560	CP-OFDM QPSK	53@26	22.70	20.93	0.1239
7	15	20	512000	2560	CP-OFDM QPSK	1@1	22.15	20.38	0.1091
7	15	20	512000	2560	CP-OFDM QPSK	1@104	22.61	20.84	0.1213
7	15	5	500500	2502.5	DFT-s-OFDM PI/2 BPSK	1@1	24.10	22.33	0.1710
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@1	24.07	22.30	0.1698
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	1@1	22.89	21.12	0.1294
7	15	5	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.18	22.41	0.1742
7	15	5	507000	2535	DFT-s-OFDM QPSK	1@1	24.09	22.32	0.1706



7	15	5	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.95	21.18	0.1312
7	15	5	513500	2567.5	DFT-s-OFDM PI/2 BPSK	1@1	24.25	22.48	0.1770
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@1	24.29	22.52	0.1786
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	1@1	22.95	21.18	0.1312
7	15	10	501000	2505	DFT-s-OFDM PI/2 BPSK	1@1	24.16	22.39	0.1734
7	15	10	501000	2505	DFT-s-OFDM QPSK	1@1	24.18	22.41	0.1742
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	1@1	22.98	21.21	0.1321
7	15	10	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.11	22.34	0.1714
7	15	10	507000	2535	DFT-s-OFDM QPSK	1@1	24.22	22.45	0.1758
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.99	21.22	0.1324
7	15	10	513000	2565	DFT-s-OFDM PI/2 BPSK	1@1	24.07	22.30	0.1698
7	15	10	513000	2565	DFT-s-OFDM QPSK	1@1	24.08	22.31	0.1702
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	1@1	22.90	21.13	0.1297
7	15	15	501500	2507.5	DFT-s-OFDM PI/2 BPSK	1@1	24.22	22.45	0.1758
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@1	24.31	22.54	0.1795
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	1@1	23.05	21.28	0.1343
7	15	15	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.27	22.50	0.1778
7	15	15	507000	2535	DFT-s-OFDM QPSK	1@1	24.37	22.60	0.1820
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.22	21.45	0.1396
7	15	15	512500	2562.5	DFT-s-OFDM PI/2 BPSK	1@1	23.85	22.08	0.1614
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@1	23.90	22.13	0.1633
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	1@1	22.77	21.00	0.1259



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0036	PASS	NV
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0010	PASS	LV
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0096	PASS	HV
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0000	PASS	-30℃
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0054	PASS	-20℃
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0004	PASS	-10℃
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0006	PASS	0℃
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0071	PASS	10℃
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0032	PASS	20℃
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0006	PASS	30℃
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0054	PASS	40℃
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0016	PASS	50℃






Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	3.63	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	1@0	2.67	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	4.37	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	3.24	13	PASS



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH






Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
7	15	5	507000	2535.0	CP-OFDM QPSK	25@0	4.485	5.244
7	15	5	507000	2535.0	CP-OFDM 16 QAM	25@0	4.4956	5.129
7	15	5	507000	2535.0	CP-OFDM 64 QAM	25@0	4.4842	5.079
7	15	5	507000	2535.0	CP-OFDM 256 QAM	25@0	4.4696	5.083
7	15	10	507000	2535.0	CP-OFDM QPSK	52@0	9.2844	9.993
7	15	10	507000	2535.0	CP-OFDM 16 QAM	52@0	9.2888	10.07
7	15	10	507000	2535.0	CP-OFDM 64 QAM	52@0	9.2878	9.951
7	15	10	507000	2535.0	CP-OFDM 256 QAM	52@0	9.286	10.0
7	15	15	507000	2535.0	CP-OFDM QPSK	79@0	14.125	15.52
7	15	15	507000	2535.0	CP-OFDM 16 QAM	79@0	14.109	14.83
7	15	15	507000	2535.0	CP-OFDM 64 QAM	79@0	14.135	14.82
7	15	15	507000	2535.0	CP-OFDM 256 QAM	79@0	14.076	14.83
7	15	20	507000	2535.0	CP-OFDM QPSK	106@0	18.946	19.92
7	15	20	507000	2535.0	CP-OFDM 16 QAM	106@0	18.944	21.43
7	15	20	507000	2535.0	CP-OFDM 64 QAM	106@0	18.936	19.83
7	15	20	507000	2535.0	CP-OFDM 256 QAM	106@0	18.946	19.85




N7(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

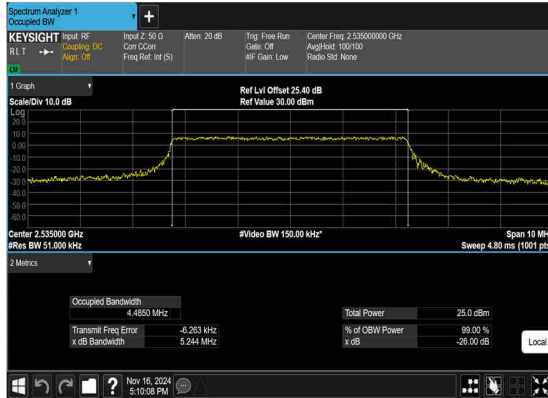

N7(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH



N7(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

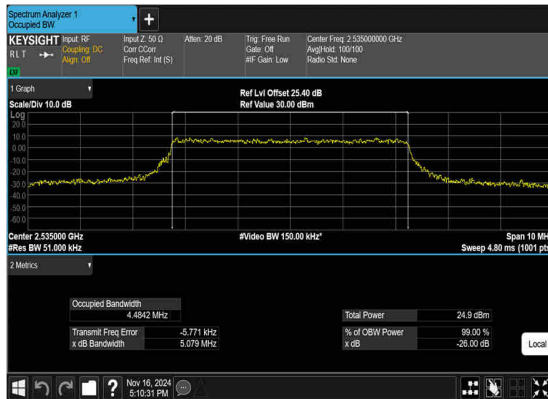

N7(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH






N7(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N7(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH








N7(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

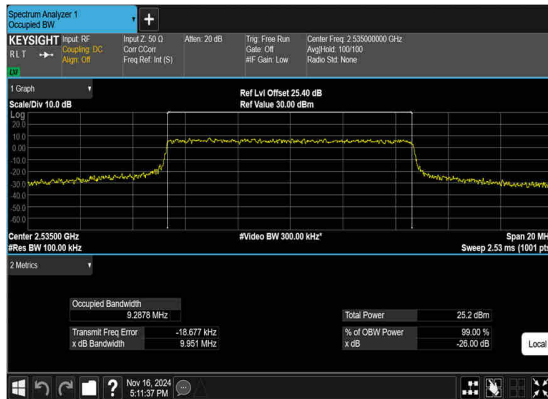

N7(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

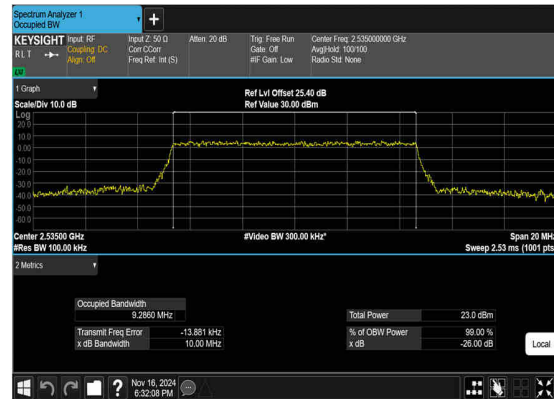

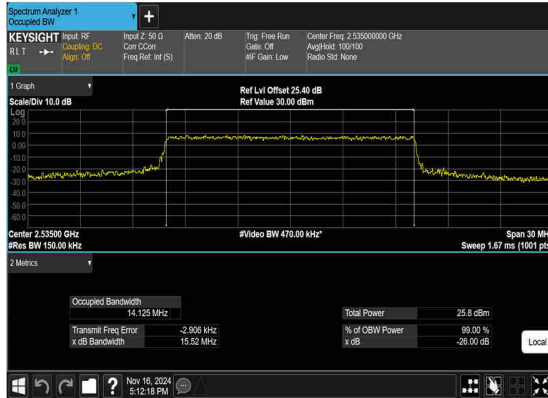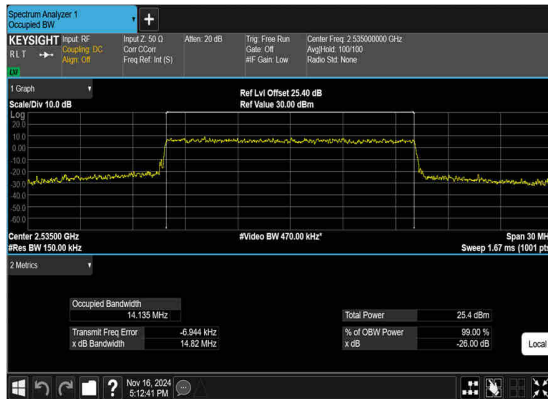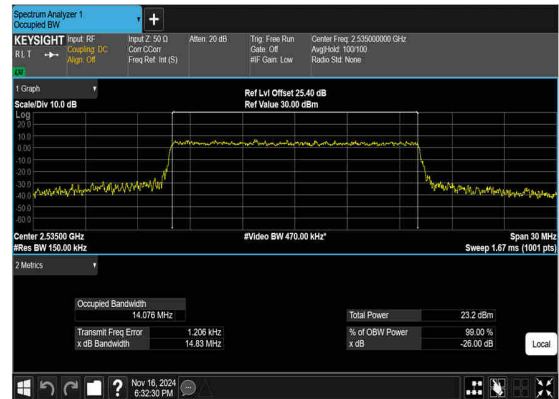N7(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CHN7(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CHN7(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CHN7(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

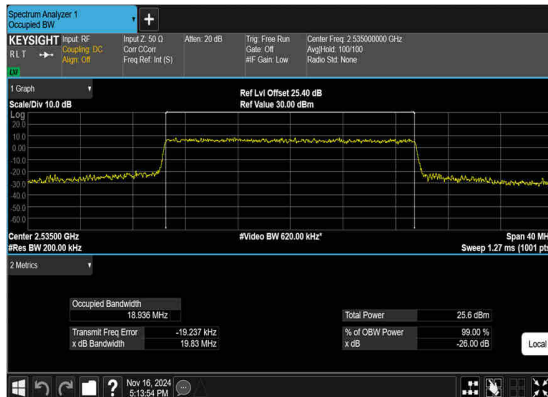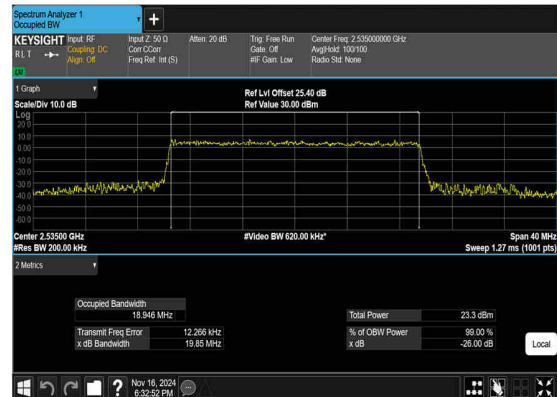N7(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CHN7(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CHN7(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CHN7(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH



Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	15	501500	2507.5	DFT-s-OFDM BPSK	1@0	see graph	---




7	15	15	501500	2507.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	15	501500	2507.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	15	507000	2507.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	15	507000	2507.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	15	507000	2507.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	15	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	15	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	15	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	15	512500	2562.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	15	512500	2562.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	15	512500	2562.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	20	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N7(5M)_DFT-s-
OFDM BPSK Edge 1RB Left Low CH

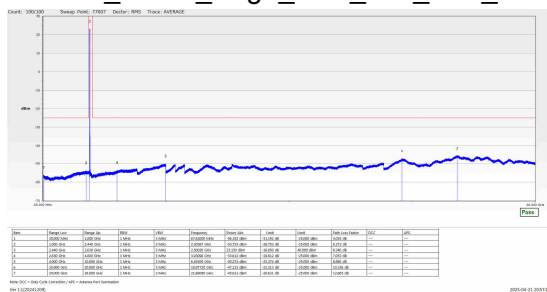


N7(5M)_DFT-s-
OFDM QPSK Edge 1RB Left Low CH

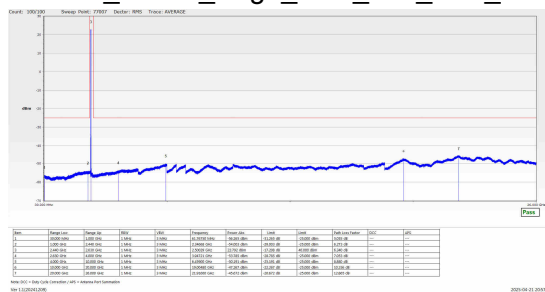

N7(5M)_DFT-s-OFDM BPSK Edge 1RB Left Mid CH

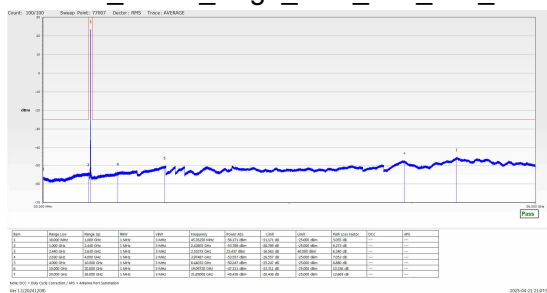


N7(5M)_DFT-s-
OFDM QPSK Edge 1RB Left Mid CH

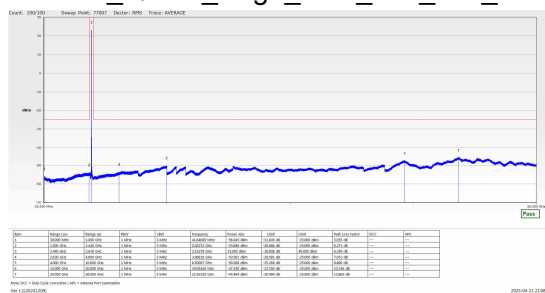





N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

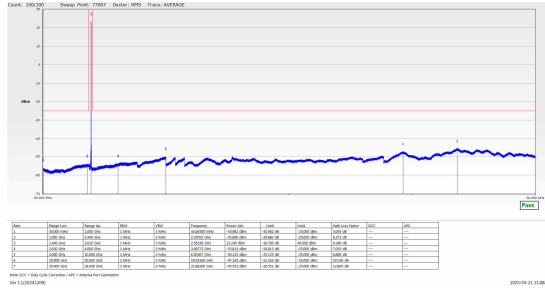


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

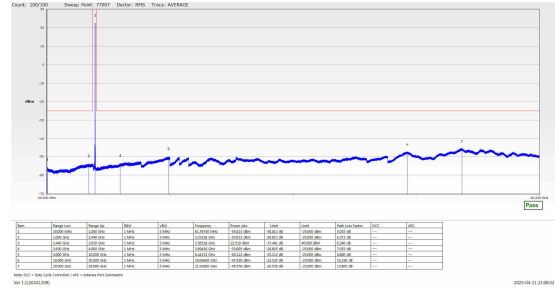

N7(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

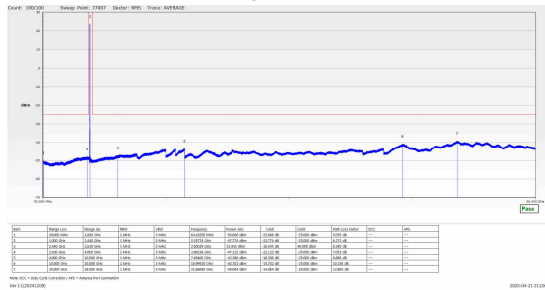


N7(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

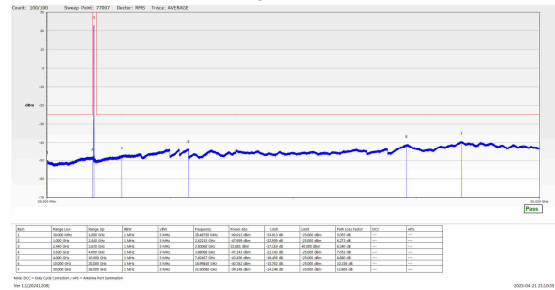





N7(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

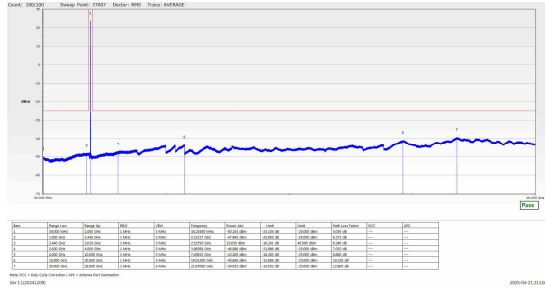


N7(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

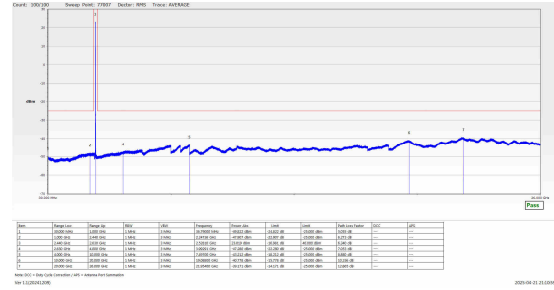

N7(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

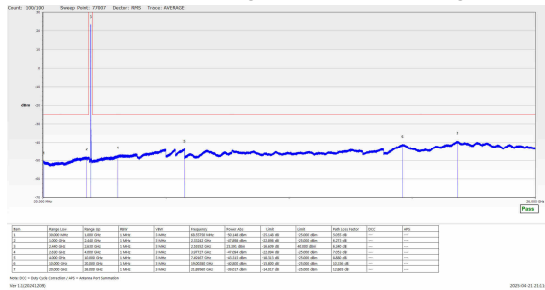


N7(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

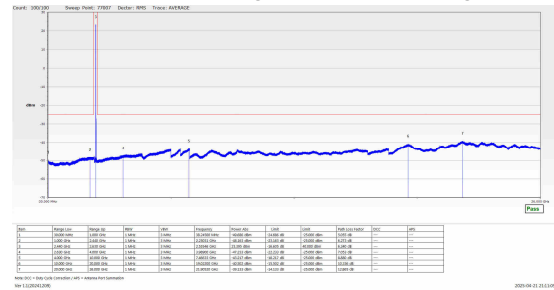




Report No. : FG4O2403N


N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

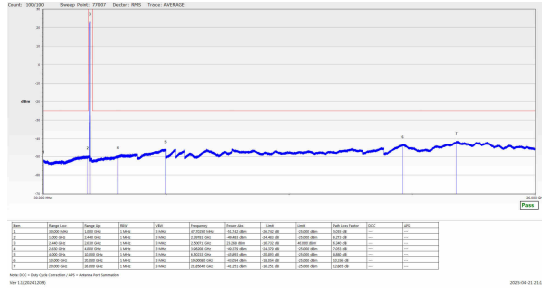


N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

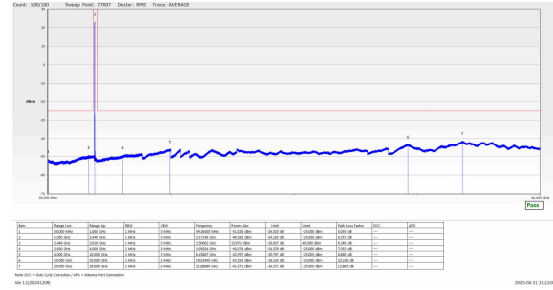

N7(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

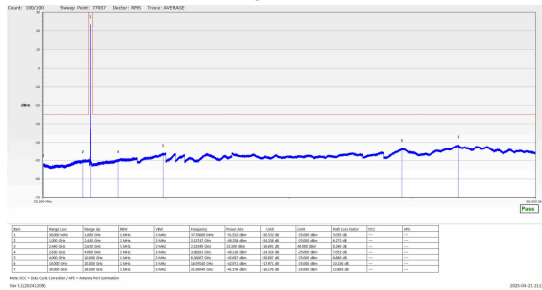


N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

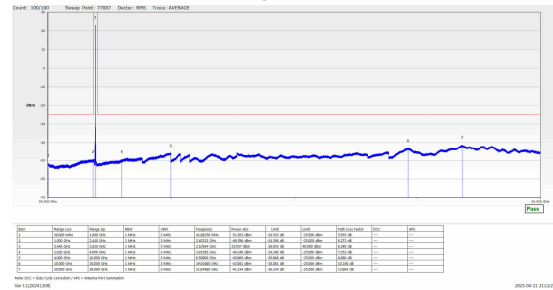



N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

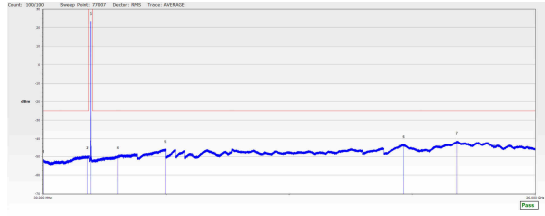


Item	Parameter	Value	Unit	Limit	Pass	Fail
1	Carrier Frequency	147.000	MHz	146.9995 - 147.0005	Pass	Fail
2	Carrier Power	20.00	dBm	19.50 - 20.50	Pass	Fail
3	Bandwidth	20.00	MHz	19.90 - 20.10	Pass	Fail
4	Spurious Emission	-100.00	dBm	-105.00 - -95.00	Pass	Fail
5	Modulation Error Rate	0.00	%	0.00 - 0.00	Pass	Fail
6	Bit Error Rate	0.00	%	0.00 - 0.00	Pass	Fail
7	Packet Error Rate	0.00	%	0.00 - 0.00	Pass	Fail
8	Frame Error Rate	0.00	%	0.00 - 0.00	Pass	Fail
9	Throughput	10.00	Mbps	9.50 - 10.50	Pass	Fail
10	Latency	10.00	ms	9.50 - 10.50	Pass	Fail
11	Jitter	10.00	ms	9.50 - 10.50	Pass	Fail
12	Packet Loss	0.00	%	0.00 - 0.00	Pass	Fail
13	Frame Loss	0.00	%	0.00 - 0.00	Pass	Fail
14	Throughput	10.00	Mbps	9.50 - 10.50	Pass	Fail
15	Latency	10.00	ms	9.50 - 10.50	Pass	Fail
16	Jitter	10.00	ms	9.50 - 10.50	Pass	Fail
17	Packet Loss	0.00	%	0.00 - 0.00	Pass	Fail
18	Frame Loss	0.00	%	0.00 - 0.00	Pass	Fail

Ver 1.0.0.0 (2024/03/26)

2024/03/26 11:11:10

N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

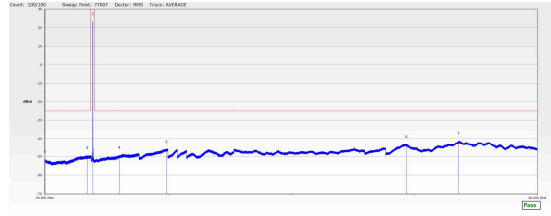

Item	Parameter	Value	Unit	Limit	Pass	Fail
1	Carrier Frequency	147.000	MHz	146.9995 - 147.0005	Pass	Fail
2	Carrier Power	20.00	dBm	19.50 - 20.50	Pass	Fail
3	Bandwidth	20.00	MHz	19.90 - 20.10	Pass	Fail
4	Spurious Emission	-100.00	dBm	-105.00 - -95.00	Pass	Fail
5	Modulation Error Rate	0.00	%	0.00 - 0.00	Pass	Fail
6	Bit Error Rate	0.00	%	0.00 - 0.00	Pass	Fail
7	Packet Error Rate	0.00	%	0.00 - 0.00	Pass	Fail
8	Frame Error Rate	0.00	%	0.00 - 0.00	Pass	Fail
9	Throughput	10.00	Mbps	9.50 - 10.50	Pass	Fail
10	Latency	10.00	ms	9.50 - 10.50	Pass	Fail
11	Jitter	10.00	ms	9.50 - 10.50	Pass	Fail
12	Packet Loss	0.00	%	0.00 - 0.00	Pass	Fail
13	Frame Loss	0.00	%	0.00 - 0.00	Pass	Fail
14	Throughput	10.00	Mbps	9.50 - 10.50	Pass	Fail
15	Latency	10.00	ms	9.50 - 10.50	Pass	Fail
16	Jitter	10.00	ms	9.50 - 10.50	Pass	Fail
17	Packet Loss	0.00	%	0.00 - 0.00	Pass	Fail
18	Frame Loss	0.00	%	0.00 - 0.00	Pass	Fail

Ver 1.0.0.0 (2024/03/26)

2024/03/26 11:11:10



Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	15	501500	2507.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	15	501500	2507.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	75@0	see graph	PASS
7	15	15	512500	2562.5	DFT-s-OFDM BPSK	1@78	see graph	PASS
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@78	see graph	PASS
7	15	15	512500	2562.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	75@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	100@0	see graph	PASS



SPORTON LAB.

FCC RF Test Report

Report No. : FG4O2403N

7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	100@0	see graph	PASS




N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH



N7(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

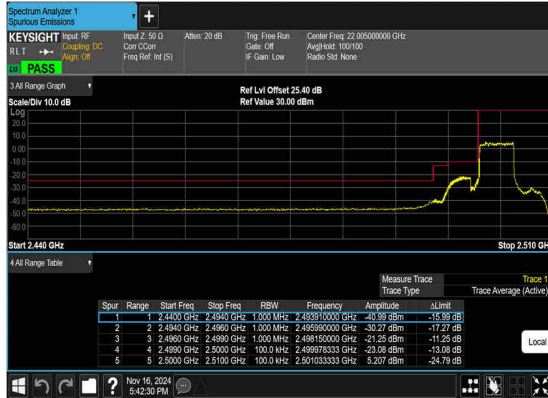


N7(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

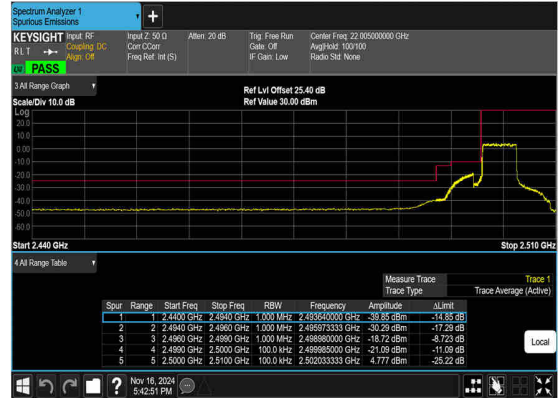





N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

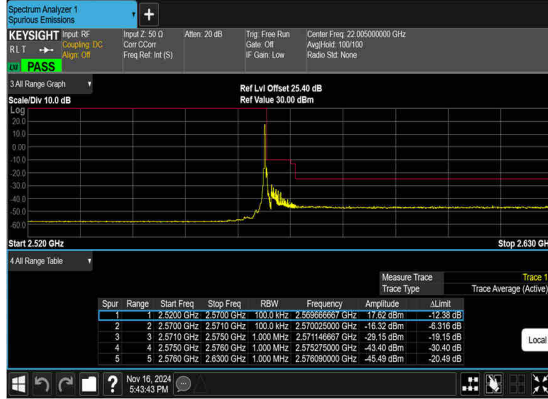


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

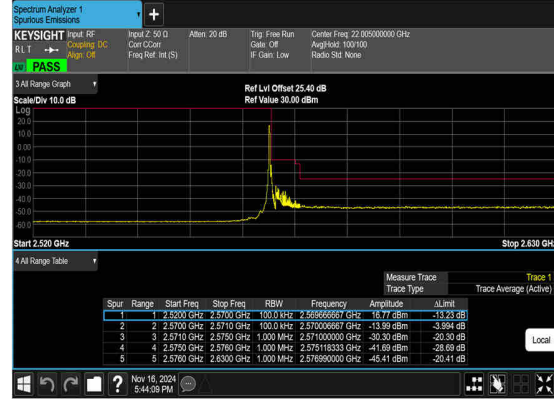

N7(5M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

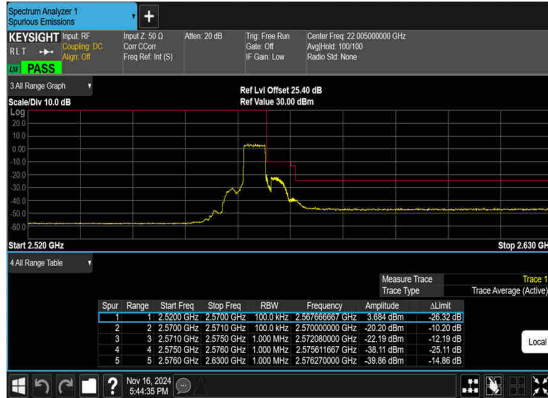


N7(5M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

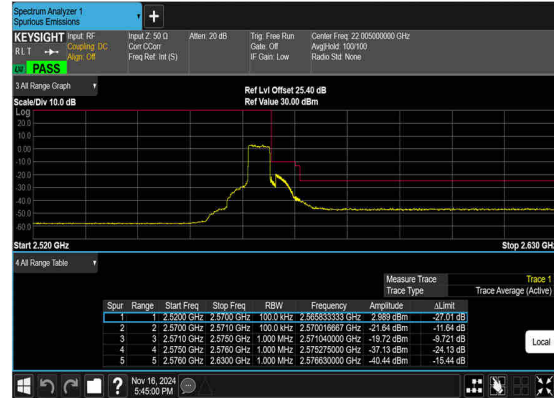





N7(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

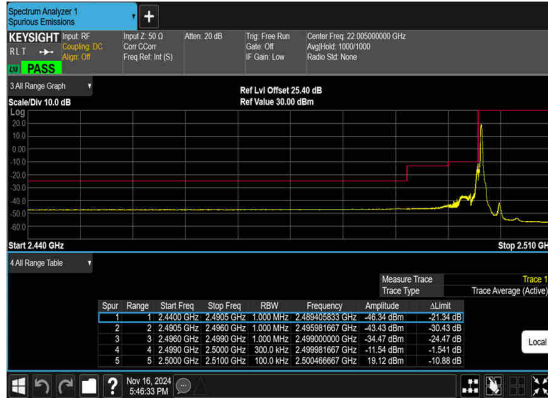


N7(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

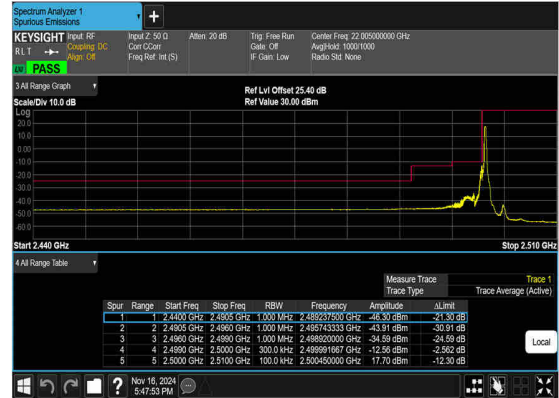

N7(15M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

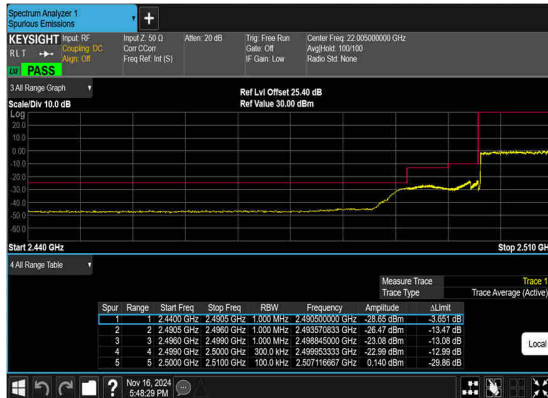


N7(15M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

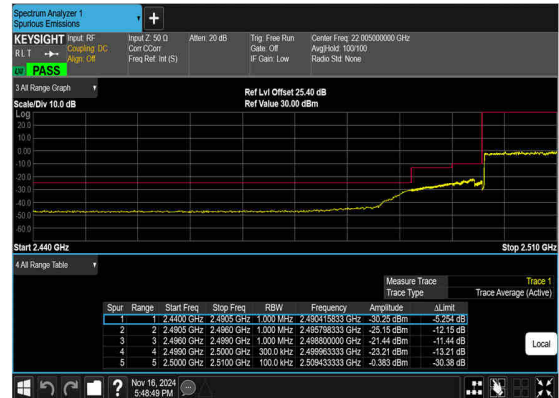





N7(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

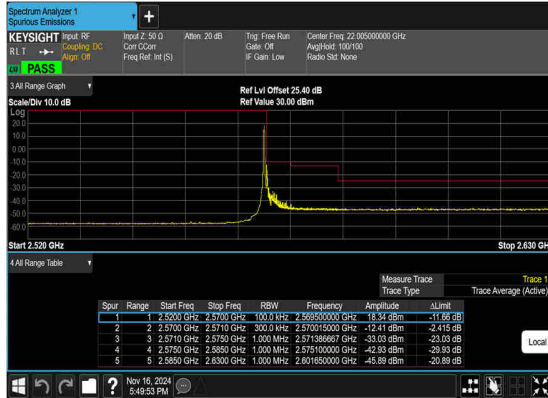


N7(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

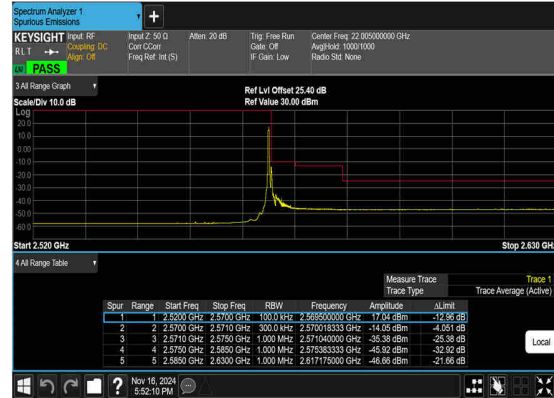

N7(15M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

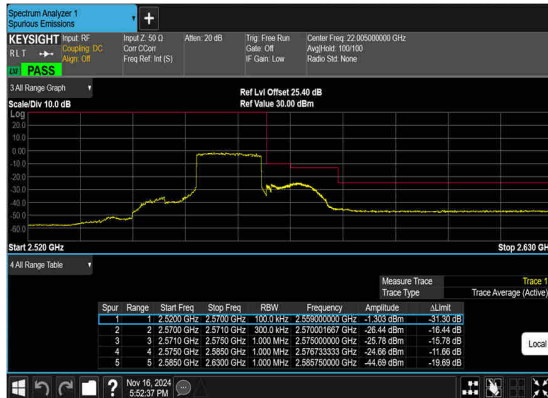


N7(15M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

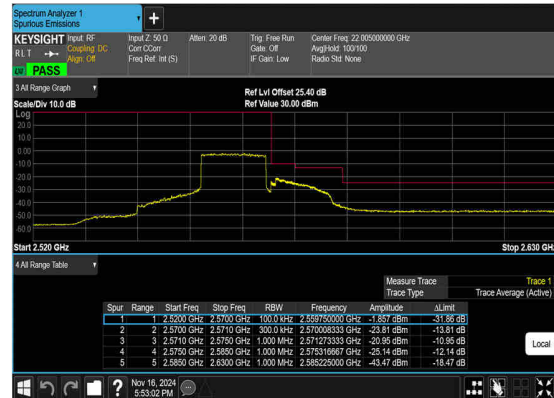





N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

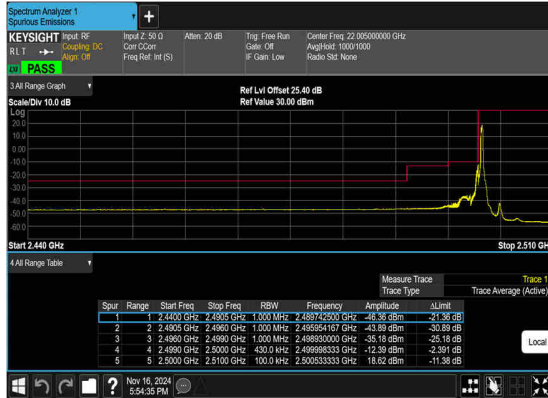


N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

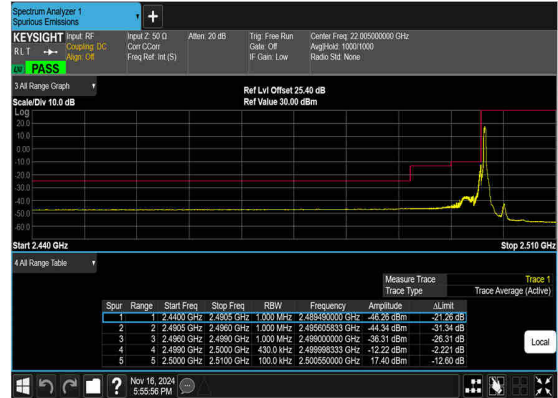

N7(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

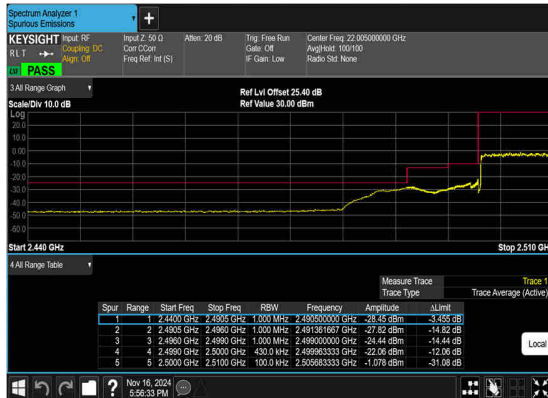


N7(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

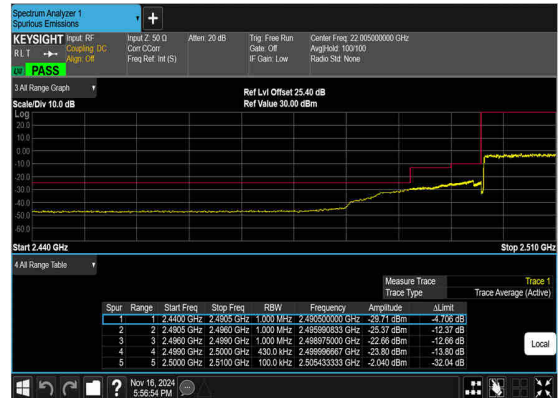





N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

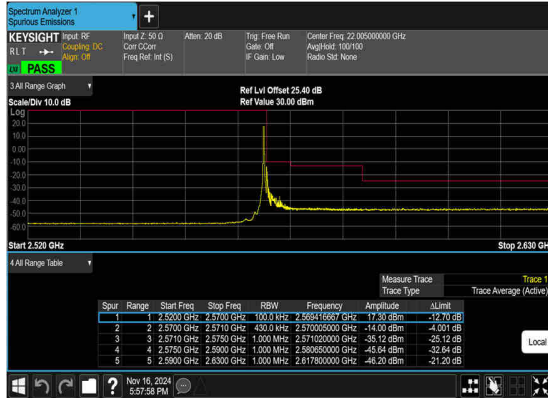


N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

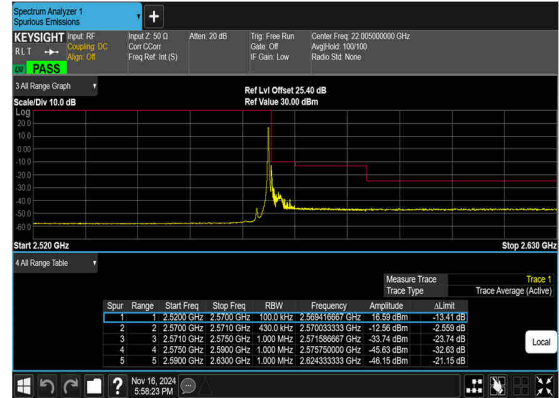

N7(20M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

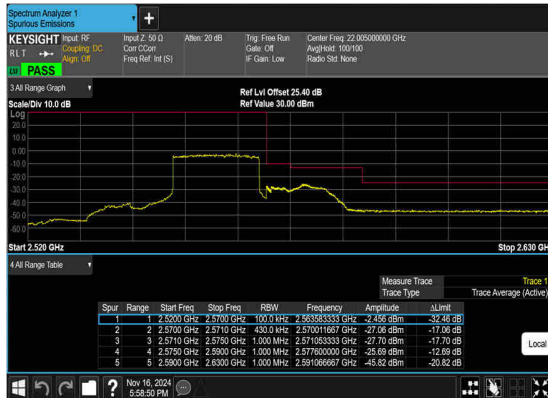

N7(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

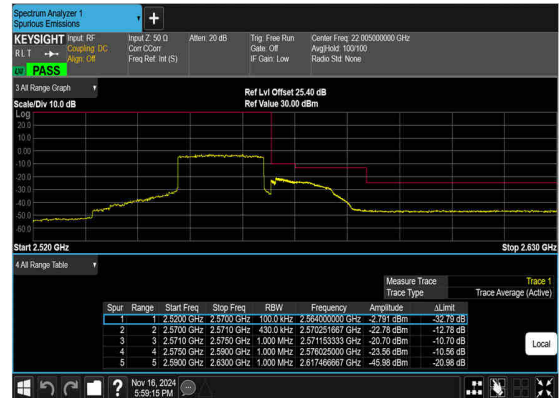



Software Version: 23.06.1602

FR1 N7 ANT2 (Other PA)

LTE Band: 2, LTE BW: 20M, LTE ARFCN: Mid

Transmitter Conducted Output Power And EIRP, (GT - LC)=-1.77dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	50@25	24.21	22.44	0.1754
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	1@1	23.96	22.19	0.1656
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	1@104	23.90	22.13	0.1633
7	15	20	502000	2510	DFT-s-OFDM QPSK	50@25	24.19	22.42	0.1746
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@1	24.17	22.40	0.1738
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@104	24.03	22.26	0.1683
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	50@25	23.24	21.47	0.1403
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@1	23.13	21.36	0.1368
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@104	23.18	21.41	0.1384
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	50@25	21.72	19.95	0.0989
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	1@1	21.82	20.05	0.1012
7	15	20	502000	2510	DFT-s-OFDM 64 QAM	1@104	21.89	20.12	0.1028
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	50@25	19.74	17.97	0.0627
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	1@1	19.67	17.90	0.0617
7	15	20	502000	2510	DFT-s-OFDM 256 QAM	1@104	19.75	17.98	0.0628
7	15	20	502000	2510	CP-OFDM QPSK	53@26	22.73	20.96	0.1247
7	15	20	502000	2510	CP-OFDM QPSK	1@1	22.66	20.89	0.1227
7	15	20	502000	2510	CP-OFDM QPSK	1@104	22.53	20.76	0.1191
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	50@25	24.21	22.44	0.1754
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	23.99	22.22	0.1667
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	1@104	24.22	22.45	0.1758
7	15	20	507000	2535	DFT-s-OFDM QPSK	50@25	24.26	22.49	0.1774
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@1	23.06	21.29	0.1346
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@104	24.24	22.47	0.1766
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	50@25	22.36	20.59	0.1146
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.27	20.50	0.1122
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@104	22.55	20.78	0.1197
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	50@25	18.84	17.07	0.0509
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	1@1	18.74	16.97	0.0498
7	15	20	507000	2535	DFT-s-OFDM 64 QAM	1@104	21.88	20.11	0.1026
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	50@25	19.72	17.95	0.0624
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.27	17.50	0.0562
7	15	20	507000	2535	DFT-s-OFDM 256 QAM	1@104	19.55	17.78	0.0600



NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
7	15	20	507000	2535	CP-OFDM QPSK	53@26	22.75	20.98	0.1253
7	15	20	507000	2535	CP-OFDM QPSK	1@1	22.65	20.88	0.1225
7	15	20	507000	2535	CP-OFDM QPSK	1@104	22.84	21.07	0.1279
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	50@25	24.39	22.62	0.1828
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	1@1	24.34	22.57	0.1807
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	1@104	24.15	22.38	0.1730
7	15	20	512000	2560	DFT-s-OFDM QPSK	50@25	24.36	22.59	0.1816
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@1	24.36	22.59	0.1816
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@104	24.07	22.30	0.1698
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	50@25	23.55	21.78	0.1507
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@1	23.47	21.70	0.1479
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@104	20.36	18.59	0.0723
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	50@25	21.66	19.89	0.0975
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	1@1	21.78	20.01	0.1002
7	15	20	512000	2560	DFT-s-OFDM 64 QAM	1@104	21.99	20.22	0.1052
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	50@25	19.95	18.18	0.0658
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	1@1	20.15	18.38	0.0689
7	15	20	512000	2560	DFT-s-OFDM 256 QAM	1@104	20.04	18.27	0.0671
7	15	20	512000	2560	CP-OFDM QPSK	53@26	22.96	21.19	0.1315
7	15	20	512000	2560	CP-OFDM QPSK	1@1	23.11	21.34	0.1361
7	15	20	512000	2560	CP-OFDM QPSK	1@104	20.27	18.50	0.0708
7	15	5	500500	2502.5	DFT-s-OFDM PI/2 BPSK	1@1	23.99	22.22	0.1667
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@1	21.09	19.32	0.0855
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	1@1	22.99	21.22	0.1324
7	15	5	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	23.89	22.12	0.1629
7	15	5	507000	2535	DFT-s-OFDM QPSK	1@1	24.07	22.30	0.1698
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.35	21.58	0.1439
7	15	5	513500	2567.5	DFT-s-OFDM PI/2 BPSK	1@1	23.99	22.22	0.1667
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@1	23.87	22.10	0.1622
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	1@1	23.21	21.44	0.1393
7	15	10	501000	2505	DFT-s-OFDM PI/2 BPSK	1@1	23.91	22.14	0.1637
7	15	10	501000	2505	DFT-s-OFDM QPSK	1@1	23.82	22.05	0.1603
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	1@1	22.90	21.13	0.1297
7	15	10	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	23.90	22.13	0.1633
7	15	10	507000	2535	DFT-s-OFDM QPSK	1@1	24.29	22.52	0.1786
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.21	21.44	0.1393
7	15	10	513000	2565	DFT-s-OFDM PI/2 BPSK	1@1	24.00	22.23	0.1671
7	15	10	513000	2565	DFT-s-OFDM QPSK	1@1	24.34	22.57	0.1807
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	1@1	20.15	18.38	0.0689
7	15	15	501500	2507.5	DFT-s-OFDM PI/2 BPSK	1@1	24.02	22.25	0.1679
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@1	24.08	22.31	0.1702
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	1@1	23.23	21.46	0.1400



SPORTON LAB.

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
7	15	15	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.02	22.25	0.1679
7	15	15	507000	2535	DFT-s-OFDM QPSK	1@1	24.13	22.36	0.1722
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	1@1	20.36	18.59	0.0723
7	15	15	512500	2562.5	DFT-s-OFDM PI/2 BPSK	1@1	24.31	22.54	0.1795
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@1	24.20	22.43	0.1750
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	1@1	23.36	21.59	0.1442



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0066	PASS	NV
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0092	PASS	LV
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0130	PASS	HV
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0000	PASS	-30°C
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0016	PASS	-20°C
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0106	PASS	-10°C
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0097	PASS	0°C
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0014	PASS	10°C
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0075	PASS	20°C
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0084	PASS	30°C
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0069	PASS	40°C
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	0.0024	PASS	50°C