

Appendix B

Detailed Test Results

GSM850 for Head, Body worn & Hotspot
GSM1900 for Head, Body worn & Hotspot
WCDMA Band II for Head, Body worn & Hotspot
WCDMA Band IV for Head, Body worn & Hotspot
LTE Band 2 for Head, Body worn&Hotspot & Product specific 10g SAR
LTE Band 7 for Head, Body worn&Hotspot & Product specific 10g SAR
LTE Band 66 for Head, Body worn & Hotspot
n41 for Head, Body worn&Hotspot & Product specific 10g SAR
n77 for Head, Body worn & Hotspot
WIFI 2.4G for Head, Body worn & Hotspot
WIFI 5G for Head, Body worn&Hotspot & Product specific 10g SAR

Test Laboratory: SGS-SAR Lab

X800 GSM850 GPRS 2TS 190CH Right cheek Ant1

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 40.184$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.03, 9.03, 9.03); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.62 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 32.05 V/m; Power Drift = -0.16 dB



Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.496 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 1.22 W/kg

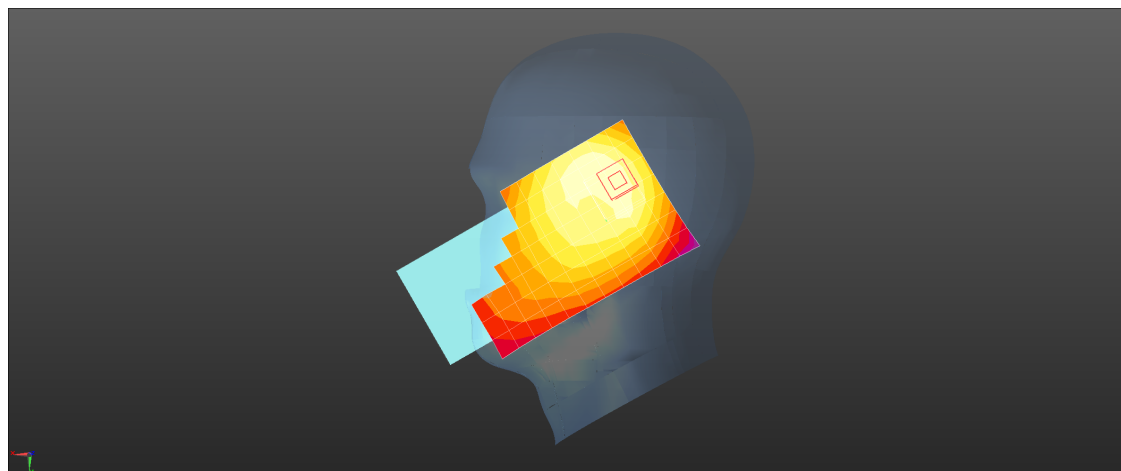

0 dB = 1.62 W/kg = 2.10 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 GSM1900 GPRS 4TS 661CH Top side 10mm Ant2

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz;Duty Cycle: 1:2.07491

Medium: HSL1900;Medium parameters used: $f = 1880\text{ MHz}$; $\sigma = 1.408\text{ S/m}$; $\epsilon_r = 40.493$; $\rho = 1000\text{ kg/m}^3$


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.69, 7.69, 7.69); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (5x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.844 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 21.08 V/m ; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.924 W/kg
SAR(1 g) = 0.576 W/kg ; SAR(10 g) = 0.347 W/kg
Smallest distance from peaks to all points 3 dB below = 12.9 mm
Ratio of SAR at M2 to SAR at M1 = 63.4%
Maximum value of SAR (measured) = 0.797 W/kg

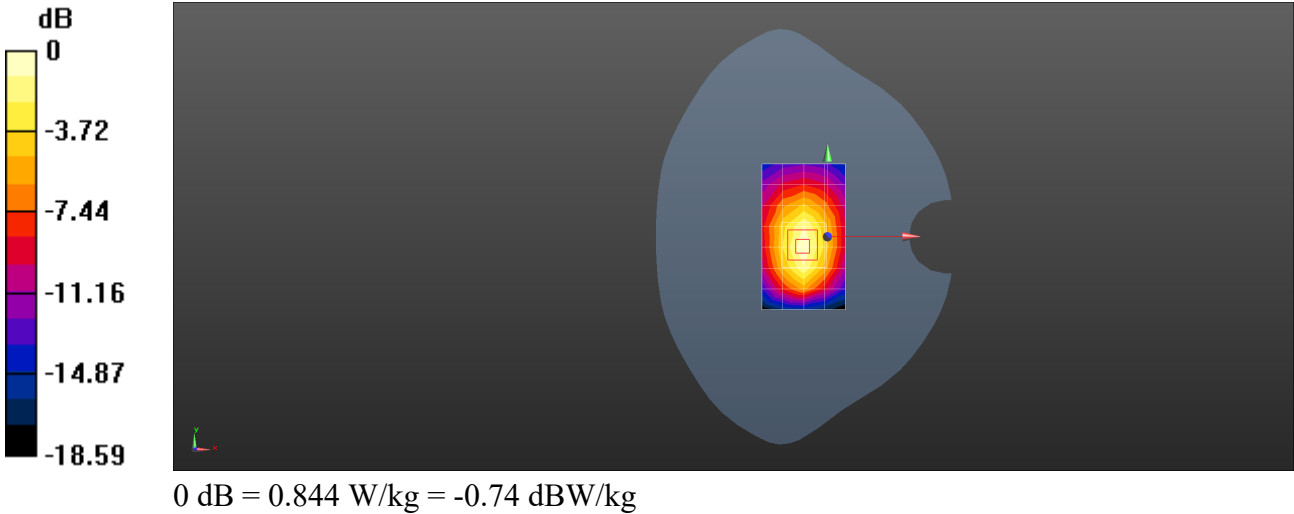

Test Laboratory: SGS-SAR Lab

X800 WCDMA Band II RMC 9262CH Top side 10mm Ant2

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used (interpolated): $f = 1852.4 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 40.507$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.69, 7.69, 7.69); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.815 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.26 V/m; Power Drift = -0.07 dB



Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.871 W/kg

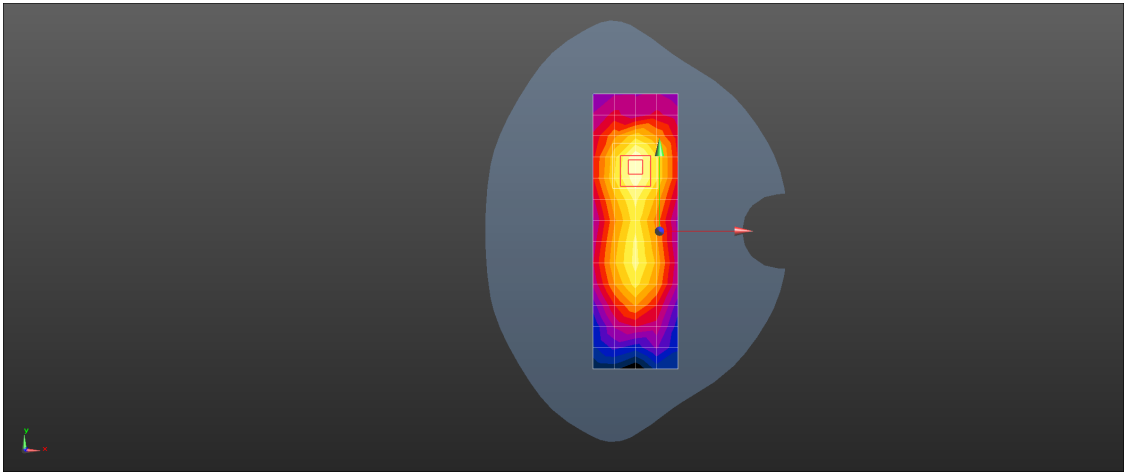

0 dB = 0.815 W/kg = -0.89 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 WCDMA Band IV RMC 1312CH Right cheek Ant2

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used (interpolated): $f = 1712.4 \text{ MHz}$; $\sigma = 1.316 \text{ S/m}$; $\epsilon_r = 40.761$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.02, 8.02, 8.02); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.05 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.11 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 62.7%

Maximum value of SAR (measured) = 1.03 W/kg

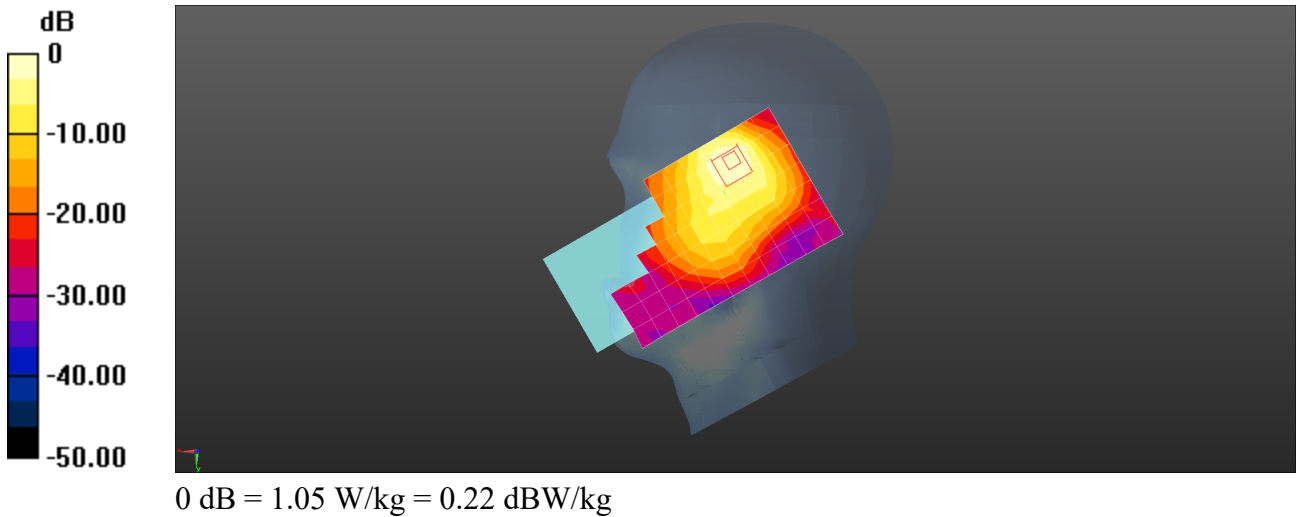

Test Laboratory: SGS-SAR Lab

X800 LTE Band 2 20M QPSK 1RB0 18900CH Left side 10mm Ant5

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.408 \text{ S/m}$; $\epsilon_r = 40.493$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.69, 7.69, 7.69); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.850 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.89 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.986 W/kg

SAR(1 g) = 0.620 W/kg; SAR(10 g) = 0.378 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 0.857 W/kg

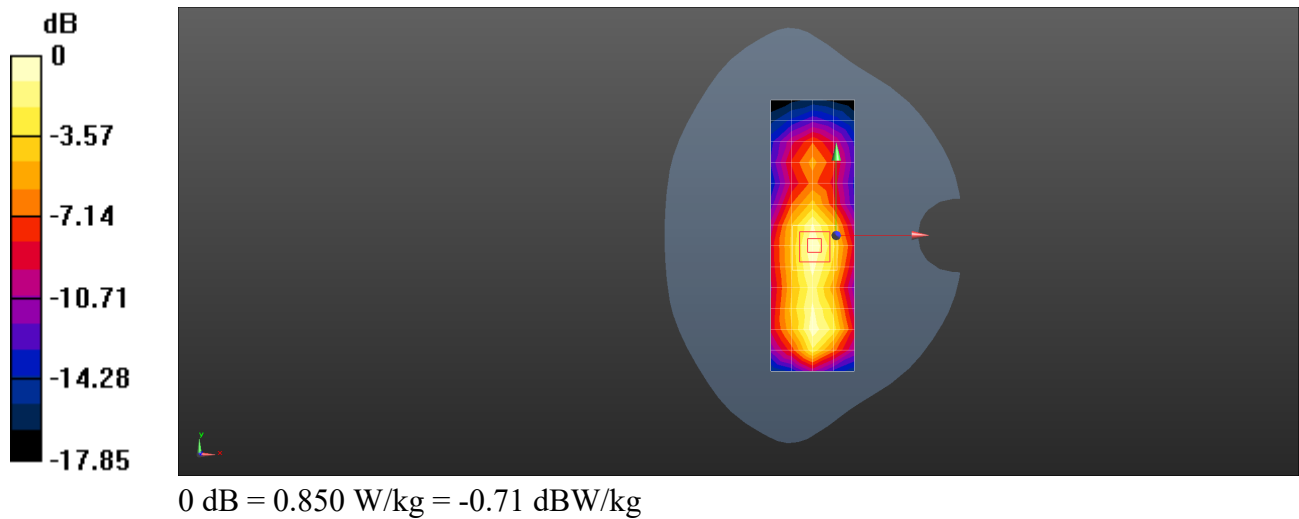

Test Laboratory: SGS-SAR Lab

X800 LTE Band 7 20M QPSK 100RB0 21350CH Left side 0mm Ant2

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used: $f = 2560 \text{ MHz}$; $\sigma = 1.872 \text{ S/m}$; $\epsilon_r = 38.38$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 8.60 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.047 V/m; Power Drift = -0.13 dB



Peak SAR (extrapolated) = 15.1 W/kg

SAR(1 g) = 5.33 W/kg; SAR(10 g) = 1.8 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 39%

Maximum value of SAR (measured) = 11.0 W/kg

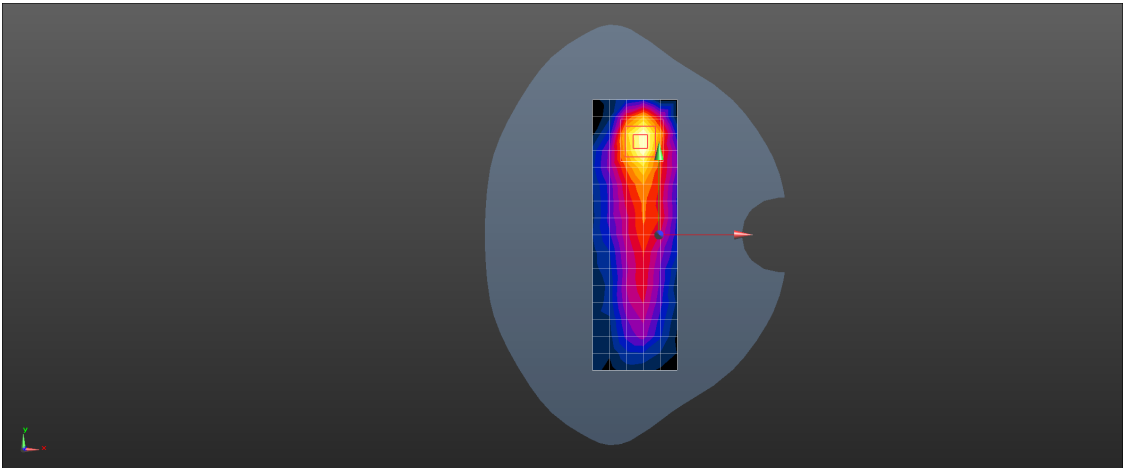

0 dB = 8.60 W/kg = 9.34 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 LTE Band 66 20M QPSK 50RB50 132572CH Right cheek Ant2

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1770 \text{ MHz}$; $\sigma = 1.368 \text{ S/m}$; $\epsilon_r = 40.696$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.02, 8.02, 8.02); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.01 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.68 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.437 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 1.06 W/kg

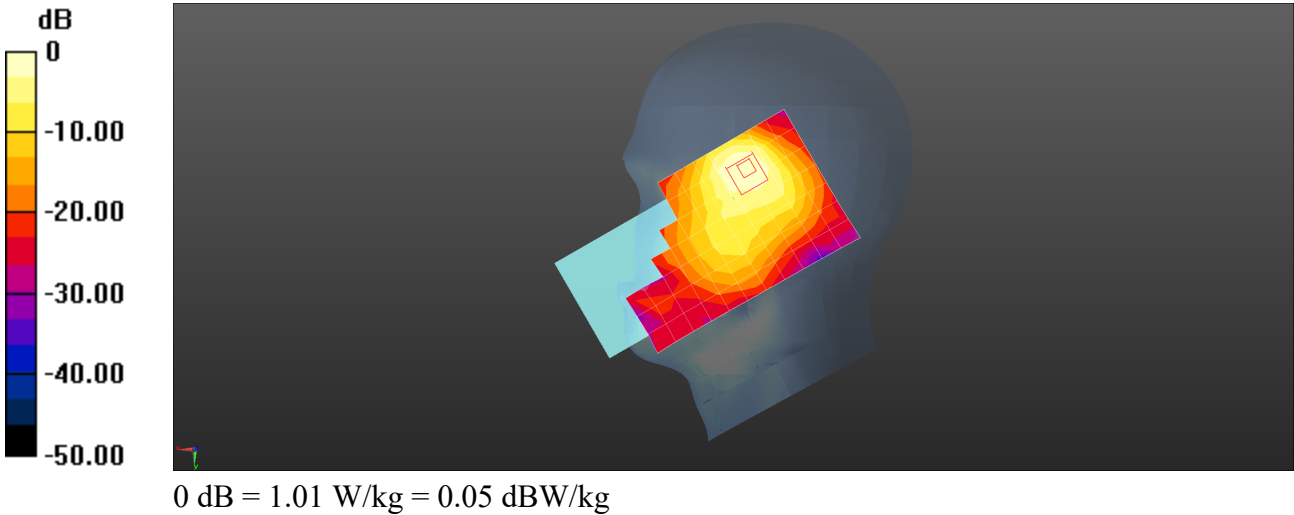

Test Laboratory: SGS-SAR Lab

X800 5G NR N41 100M QPSK 135RB69 523302CH Left side 0mm Ant1

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, NR (0); Frequency: 2616.51 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2617\text{ MHz}$; $\sigma = 1.903\text{ S/m}$; $\epsilon_r = 38.302$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 3.35 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.127 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 4.06 W/kg; SAR(10 g) = 1.42 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 43.6%

Maximum value of SAR (measured) = 7.84 W/kg

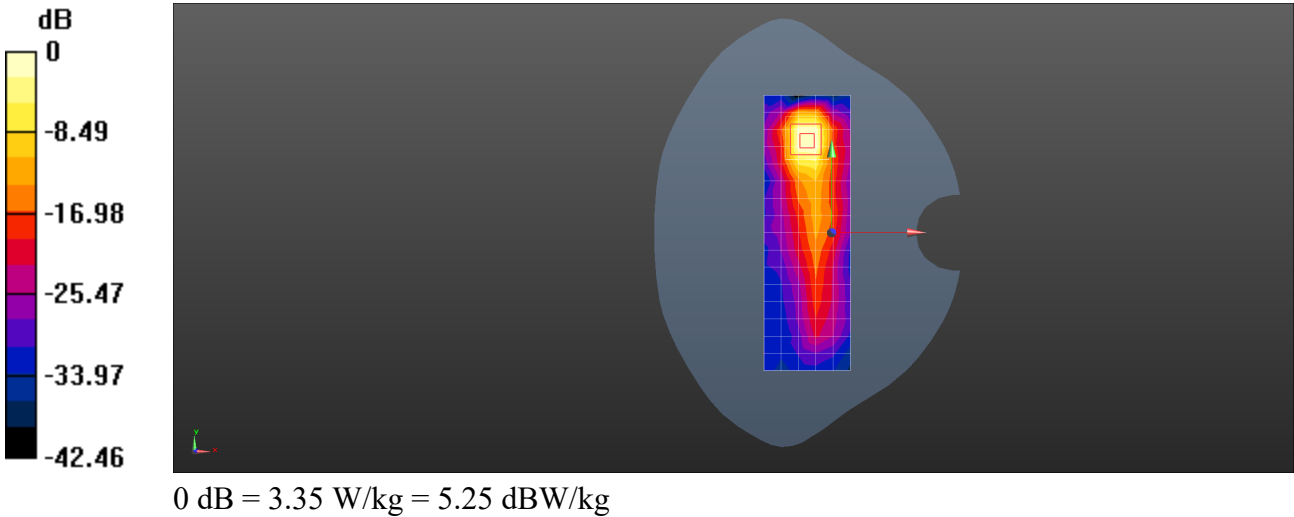

Test Laboratory: SGS-SAR Lab

X800 5G NR N77 100M QPSK 135RB69 652400CH Right cheek Ant1

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, NR (0); Frequency: 3786 MHz;Duty Cycle: 1:1

Medium: HSL3700;Medium parameters used: $f = 3786 \text{ MHz}$; $\sigma = 3.173 \text{ S/m}$; $\epsilon_r = 36.964$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.49, 6.49, 6.49); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.12 W/kg

Configuration/Body/Zoom Scan (6x6x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 5.608 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.342 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 1.18 W/kg

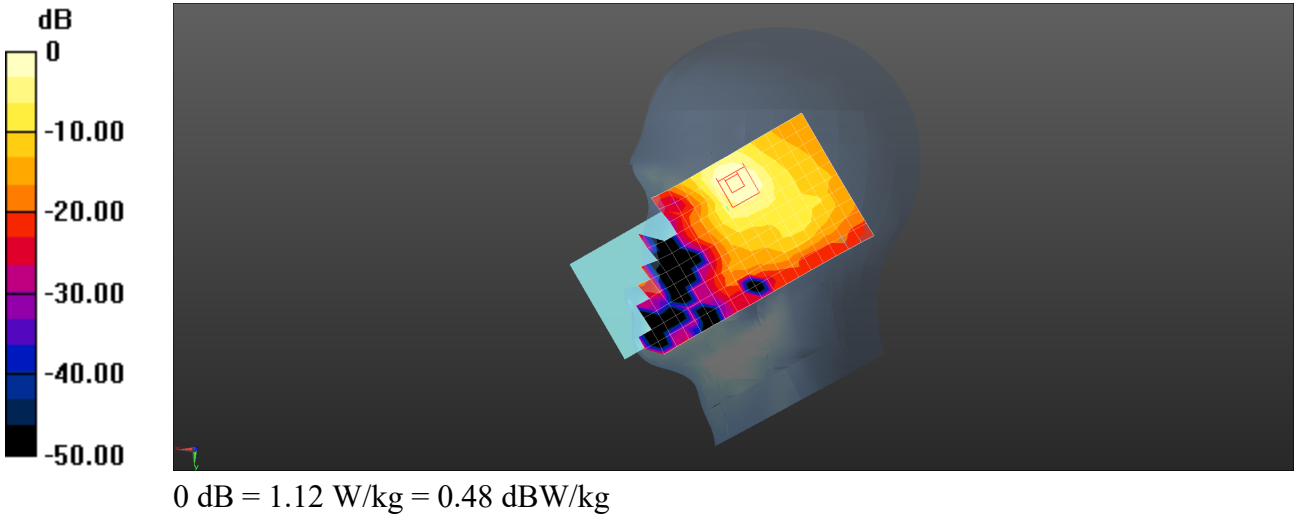

Test Laboratory: SGS-SAR Lab

X800 5G NR N77 100M QPSK 135RB69 659600CH Left side 10mm Ant1

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, NR (0); Frequency: 3894 MHz;Duty Cycle: 1:1

Medium: HSL3900;Medium parameters used: $f = 3894 \text{ MHz}$; $\sigma = 3.275 \text{ S/m}$; $\epsilon_r = 36.532$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.41, 6.41, 6.41); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.67 W/kg

Configuration/Body/Zoom Scan (6x6x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 10.62 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.991 W/kg; SAR(10 g) = 0.484 W/kg

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 1.65 W/kg

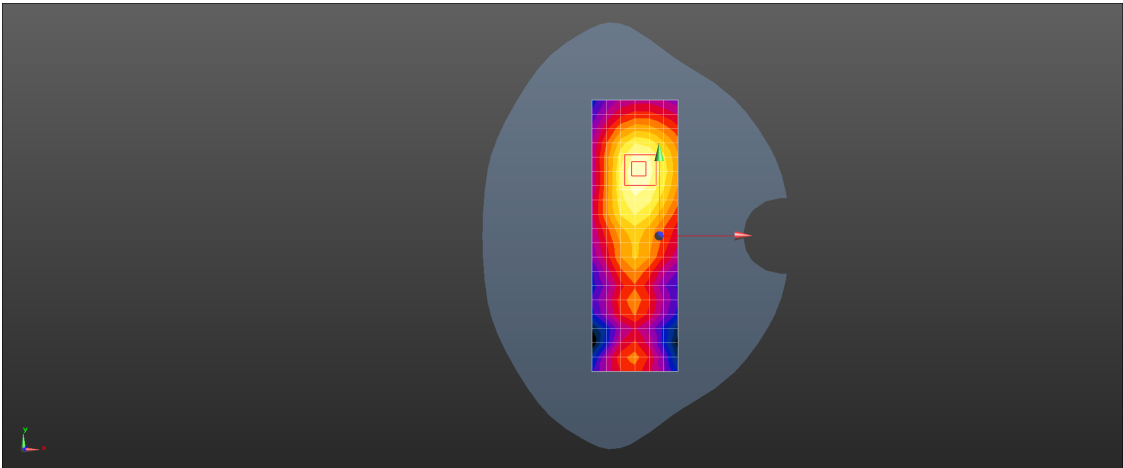

0 dB = 1.67 W/kg = 2.23 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 WIFI 2.4G 802.11b 20M 1CH Back side 10mm MIMO

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.018

Medium: HSL2450;Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.772 \text{ S/m}$; $\epsilon_r = 38.553$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.35, 7.35, 7.35); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.701 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.893 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 1.02 W/kg

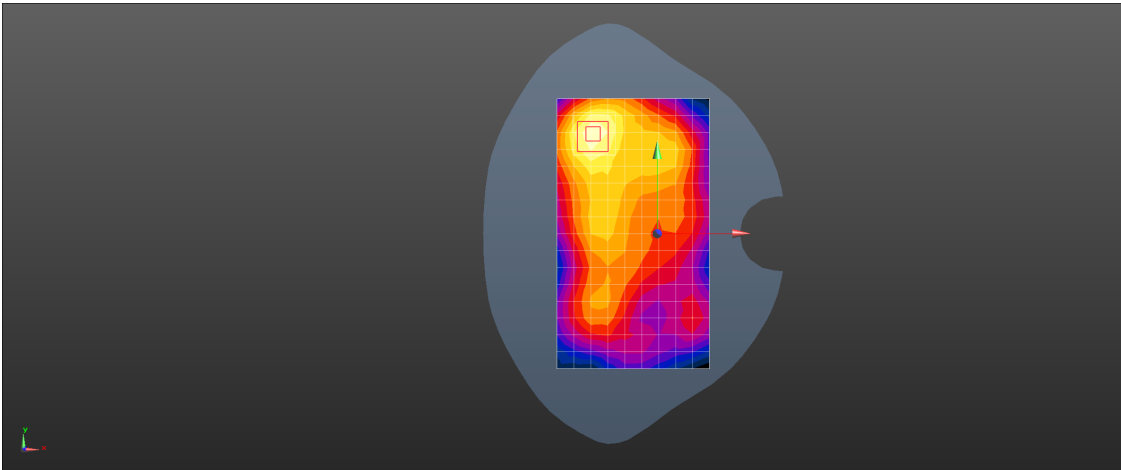

0 dB = 0.701 W/kg = -1.54 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 WIFI 5G 802.11n 40M 54CH Left cheek Ant9

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5270 MHz; Duty Cycle: 1:1.003

Medium: HSL5G; Medium parameters used: $f = 5270$ MHz; $\sigma = 4.89$ S/m; $\epsilon_r = 36.859$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(5.22, 5.22, 5.22); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.69 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.114 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 0.812 W/kg; SAR(10 g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 1.96 W/kg

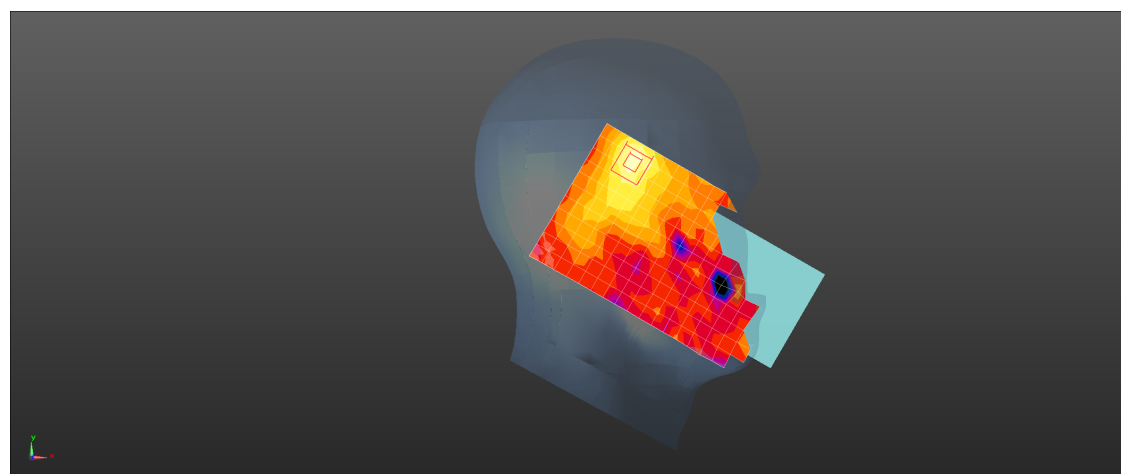

0 dB = 1.69 W/kg = 2.28 dBW/kg

Test Laboratory: SGS-SAR Lab

X800 WIFI 5G 802.11a 20M 56CH Back side 0mm Ant9

DUT: X800; Type: Mobile Phone; Serial: 351348280185842

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5280 MHz; Duty Cycle: 1:1.008

Medium: HSL5G; Medium parameters used: $f = 5280$ MHz; $\sigma = 4.897$ S/m; $\epsilon_r = 36.855$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(5.22, 5.22, 5.22); Calibrated: 2024/9/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.29 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 9.97 W/kg

SAR(1 g) = 2.6 W/kg; SAR(10 g) = 0.721 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 6.55 W/kg

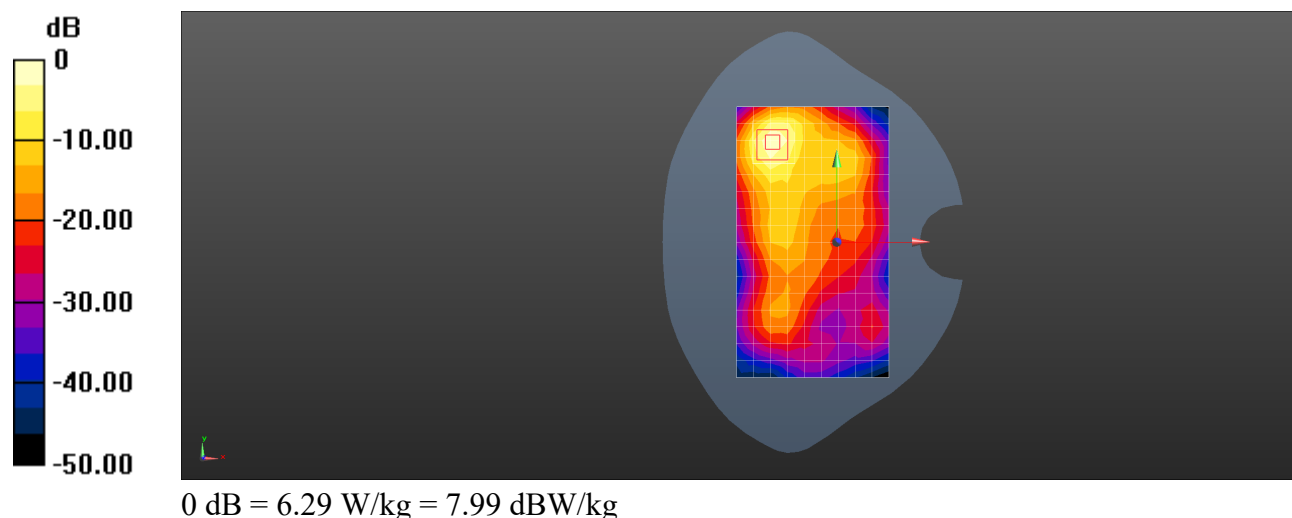

- End of the Appendix -