



Excellence in Compliance Testing

Certification Test Report

**FCC ID: WYU-CMX300CA
IC: 9530A-CMX300CA**

**FCC Rule Part: 15.247
IC Radio Standards Specification: RSS-210**

ACS Report Number: 11-0007.W04.12.A

Manufacturer: Orderite, Inc.

Model: CMX300CA

Test Begin Date: February 17, 2011
Test End Date: February 18, 2011

Report Issue Date: March 10, 2011



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



Reviewed by:

**Kirby Munroe
Director, Wireless Certifications
ACS, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 10 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	3
2	TEST FACILITIES.....	4
2.1	LOCATION	4
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	4
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	5
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	5
2.3.2	<i>Open Area Tests Site (OATS)</i>	6
3	APPLICABLE STANDARD REFERENCES.....	7
4	LIST OF TEST EQUIPMENT.....	7
5	SUPPORT EQUIPMENT	8
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	8
7	SUMMARY OF TESTS.....	9
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	9
7.2	RADIATED SPURIOUS EMISSIONS - FCC 15.205, 15.209; IC: RSS-210 2.2, 2.5	9
7.2.1	<i>Measurement Procedure.....</i>	9
7.2.2	<i>Measurement Results</i>	9
7.2.3	<i>Sample Calculation:</i>	10
8	CONCLUSION	10

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210 for a class II permissive change.

The purpose of this class II permissive change is the addition of a new antenna type.

1.2 Product description

The CMX300CA System-in-Package (SiP) is a complete IEEE 802.11b/g and Bluetooth™ radio solution. Unlike a typical module, the CMX300CA includes all radio components, clocking and regulation for a complete WLAN radio subsystem. Also included is coexistence for simultaneous operation of the 802.11 b/g and Bluetooth™ radios.

Antenna Information:

Walsin RFANT5220110A0T Chip Antenna

Frequency Range - 2.4 GHz ~ 2.5 GHz

Gain - 2 dBi

VSWR - 2 max.

Polarization - Linear

Azimuth Bandwidth - Omni-directional

Impedance - 50 Ω

Applicant Information:

Orderite, Inc.

296 N. Jackson St.

Athens, GA 30604

Test Sample Serial Number(s): NA

Test Sample Condition: Test samples were provided in working order with no visible defects.

1.3 Test Methodology and Considerations

The CMX300CA was evaluated in the Orderite, Inc. HAND002 handheld wireless device host. The HAND002 is included in the Orderite, Inc. TR2000 system which includes the HAND002 dock model DOCK002. The HAND002 device was evaluated for radiated emissions in the dock and standalone in multiple orientations. Data representing the worst case configuration and orientation is provided in this report.

The CMX300CA, as integrated into the Orderite, Inc model HAND002, is collocated with the Digi International, Inc. pre-approved module FCC ID: MCQ-XBEEXSC, IC: 1846A-XBEEXSC model XBEEXSC. The XBEEXSC is capable of simultaneous transmission with both the 802.11b/g and Bluetooth™ CMX300CA radios. Radiated inter-modulation products were evaluated for all simultaneous transmission configurations. Radiated inter-modulation products were compliant with the general radiated emission limits referenced in this report.

The CMX300CA is a composite including both 802.11b/g and Bluetooth™ radios, both operating under 47 CFR Part 15.247. This report address the operation of the Bluetooth™ radio with a separate report, 11-0007.W04.22.A, covering 802.11b/g.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 894540

Industry Canada Lab Code: IC 4175A-1

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

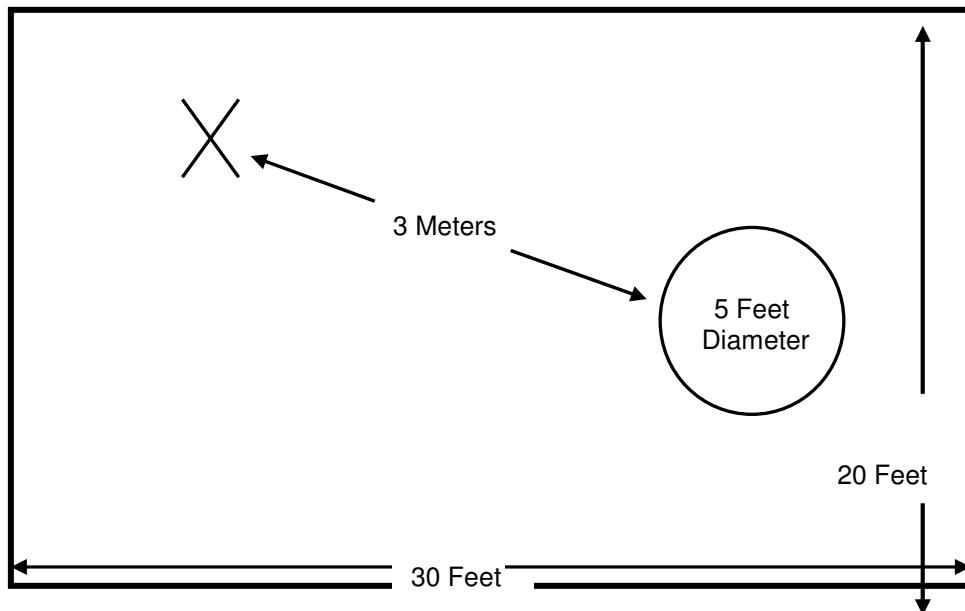


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

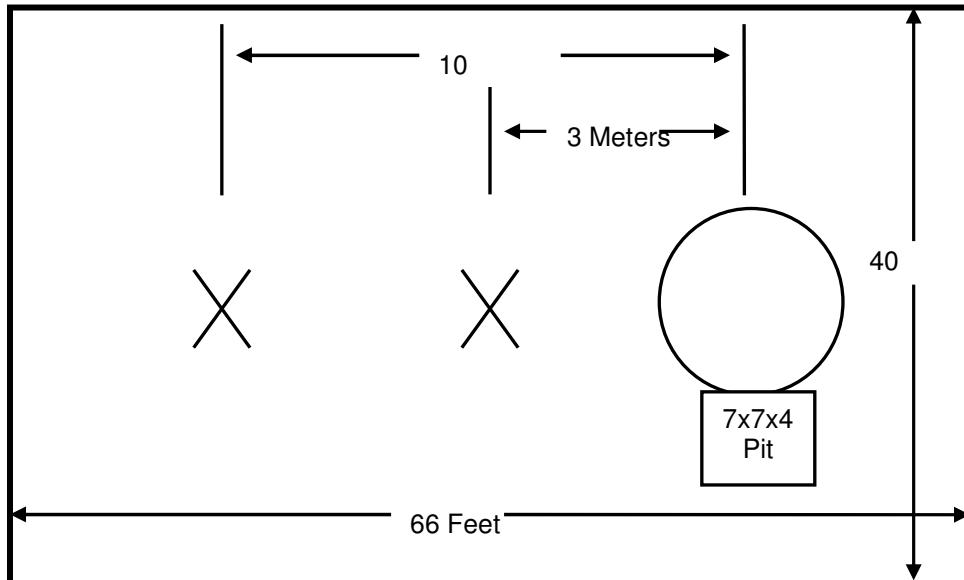


Figure 2.3-2: Open Area Test Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2010
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2010
- ❖ FCC DA 00-705 – Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems (47 CFR 15.247), March 30, 2000
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands):Category I Equipment, Issue 8 Dec 2010
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, Dec 2010.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment


AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESM - Display	Spectrum Analyzers	833771/007	9/23/2010	9/23/2012
2	Rohde & Schwarz	ESM-Receiver	Spectrum Analyzers	839587/003	9/23/2010	9/23/2012
25	Chase	CBL6111	Antennas	1043	9/13/2010	9/13/2012
30	Spectrum Technologies	DRH-0118	Antennas	970102	5/8/2009	5/8/2011
73	Agilent	8447D	Amplifiers	2727A05624	5/26/2010	5/26/2011
291	Florida RF Cables	SMRE-200W-12.0-SMRE	Cables	None	12/7/2010	12/7/2011
292	Florida RF Cables	SMR-290AW-480.0-SMR	Cables	None	12/7/2010	12/7/2011
338	Hewlett Packard	8449B	Amplifiers	3008A01111	10/29/2010	10/29/2011
422	Florida RF	SMS-200AW-72.0-SMR	Cables	805	12/29/2010	12/29/2011
432	Microwave Circuits	HBG020G4	Filters	264066	7/16/2010	7/16/2011

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	Handheld Host	Orderite, Inc.	HAND002	N/A
2	Host Dock	Orderite, Inc.	DOCK002	N/A
3	Power Supply	V-Infiniti	3A-182WP05	N/A
4	Ethernet Switch	Hawking Technology	HFS5T	HCMCFS5045300331
5	Power Supply	Hawking Technology	DV-0751AS	N/A

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

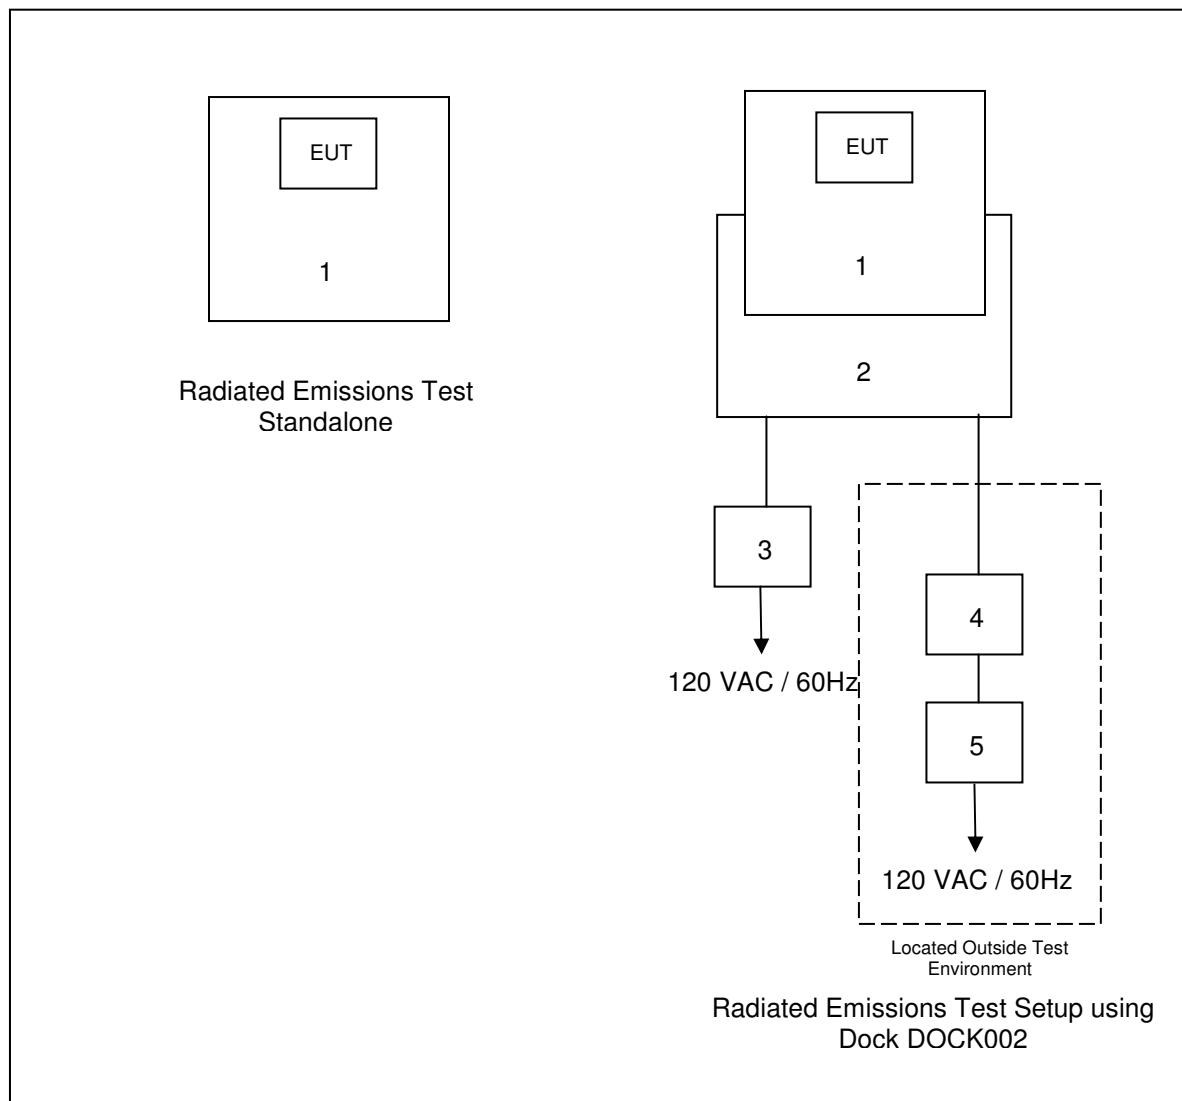

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The antenna is an integral chip antenna with 2 dBi gain and thus meets the antenna requirements in Section 15.203.

7.2 Radiated Spurious Emissions - FCC 15.205, 15.209; IC: RSS-210 2.2, 2.5

7.2.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 25GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band as defined by section 15.205 was compared to the radiated emission limits as defined in section 15.209.

Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was also evaluated.

7.2.2 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 25GHz are reported in the tables below.

Table 7.2.2-1: Radiated Spurious Emissions Tabulated Data – 2402MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
4804	56.13	41.76	H	1.89	58.02	43.65	74.0	54.0	16.0	10.4
4804	53.56	39.50	V	1.89	55.45	41.39	74.0	54.0	18.6	12.6

* Note: All emissions above 4804 MHz were attenuated below the permissible limit.

Table 7.2.2-2: Radiated Spurious Emissions Tabulated Data – 2441MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
4882	52.22	39.17	H	2.12	54.34	41.29	74.0	54.0	19.7	12.7
4882	50.11	37.21	V	2.12	52.23	39.33	74.0	54.0	21.8	14.7

* Note: All emissions above 4882 MHz were attenuated below the permissible limit.

Table 7.2.2-3: Radiated Spurious Emissions Tabulated Data – 2480MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2483.5	59.38	43.51	H	-4.85	54.53	38.66	74.0	54.0	19.50	15.30
2483.5	51.61	37.62	V	-4.85	46.76	32.77	74.0	54.0	27.20	21.20
4960	53.27	40.06	H	2.35	55.62	42.41	74.0	54.0	18.40	11.60
4960	49.35	37.06	V	2.35	51.70	39.41	74.0	54.0	22.30	14.60

* Note: All emissions above 4960 MHz were attenuated below the permissible limit.

7.2.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF _T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R _U	=	Uncorrected Reading
R _C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: 56.13 + 1.89 = 58.02dBuV/m

Margin: 74dBuV/m – 58.02dBuV/m = 16.0dB

Example Calculation: Average

Corrected Level: 41.76 + 1.89 – 0 = 43.65dBuV

Margin: 54dBuV – 43.65dBuV = 10.4dB

8 CONCLUSION

In the opinion of ACS, Inc. the CMX300CA, manufactured by Orderite, Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT