

ComplianceTesting.com

Previously Flom Test Lab

toll-free: (866)311-3268 fax: (480)926-3598 http://www.ComplanceTesting.com

info@ComplianceTesting.com

EMI, EMC, RF Testing Experts Since 1963

Date: December 11, 2008

Federal Communications Commission

Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: FLEET DATA SYSTEMS, LLC

Equipment: HHI-V3B

FCC ID: WZF-KL7-HHI-V3B

FCC Rules: 15.231

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

Hoosamuddin S. Bandukwala, Lab Director



List Of Exhibits

(FCC Certification (Transmitters) - Revised 9/28/98)

Applicant: FLEET DATA SYSTEMS, LLC

FCC ID: WZF-KL7-HHI-V3B

By Applicant:

- 1. Letter Of Authorization
- 2. Identification Drawings
 - _ Id Label
 - _ Location Info
 - __ Attestation Statement(S)
 - _ Location of Compliance Statement
- 3. Documentation: 2.1033(B)
 - (3) User Manual(S)
 - (4) Operational Description
 - (5) Block Diagram
 - (5) Schematic Diagram
 - (7) External Photographs Internal Photographs

Parts List Active Devices

By Compliance Testing:

- A. Testimonial & Statement of Certification
- B. Statement of Qualifications



ComplianceTesting.com

Previously Flom Test Lab

toll-free: (866) 311-3268 fax: (480) 926-3598

http://www.ComplianceTesting.com info@ComplianceTesting.com

EMI, EMC, RF Testing Experts Since 1963

Test Report

for

FCC ID: WZF-KL7-HHI-V3B

Model: HHI-V3B

to

Federal Communications Commission

Rule Part(s)15.231

Date Of Report: December 11, 2008

On the Behalf of the Applicant: FLEET DATA SYSTEMS, LLC

652 Bair Island Road

Suite 207

Redwood City, CA 94063

Attention of: Raymond Cheung

Ph: 650-799-4167 Fax: 509-352-8989

E-Mail: rcheung@fleetdatasys.com

Supervised By:

Hoosamuddin S. Bandukwala, Lab Director



Test Report Revision History

Revision	Date	Revised By	Reason for revision
1.0	December 11, 2008	J Erhard	Original Document
2.0	October 12, 2009	J. Erhard	Edit report to include additional information clarifying test setup for radiated testing
3.0	October 25, 2009	J. Erhard	Add test measuring Transmissions Time



The applicant has been cautioned as to the following:

15.21 Information to User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



Testimonial And Statement Of Certification

This is to certify that:

- 1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
- 2. **That** the technical data supplied with the application was taken under my direction and supervision.
- 3. **That** the data was obtained on representative units, randomly selected.
- 4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:

Hoosamuddin S. Bandukwala, Lab Director



Table Of Contents

Rule	Description	Page
	Test Report	1
2.1033(c)	General Information Required	2
	Standard Test Conditions and Engineering Practices	4
	Test Results Summary	5
15.231(b)(1)	Fundamental Field Strength	6
15.231(b)(3)	Radiated Spurious Emissions	7
15.231(c)	Occupied Bandwidth	8
15.231(a)(1)	Transmissions Time	9
RSS 210 99%	Occupied Bandwidth	10
	Test Equipment Utilized	11



Required information per ISO 17025-2005, paragraph 5.10.2: a) Test Report

b) Laboratory: Compliance Testing

(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107

(Canada: IC 2044A-1) Chandler, AZ 85225

c) Report Number: d08c0011

d) Client: FLEET DATA SYSTEMS, LLC

e) Identification: HHI-V3B

FCC ID: WZF-KL7-HHI-V3B

Description: Hand Held 434 MHz Transmitter

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: December 11, 2008

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

Uncertainty: In accordance with Compliance Testing internal quality manual.

m) Supervised by:

Hoosamuddin S. Bandukwala, Lab Director

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission

from this laboratory.



List Of General Information Required For Certification

In Accordance with FCC Rules and Regulations, Volume II, Part 2 and to 15.231

Sub-Pa (c)(1):	art 2.1033					
Name a	and Address of Applicant:	FLEET DATA SYSTEMS, LLC				
(c)(2):	FCC ID:	WZF-KL7-HHI-V3B				
	Model Number:	HHI-V3B				
(c)(3):	Instruction Manual(s):					
	Please See Att	tached Exhibits				
(c)(4):	Type of Emission:	FSK				
(c)(5):	FREQUENCY RANGE, MHz:	434 MHz				
(c)(6):	Power Rating, W: Switchable	0.000631 mW Variable X N/A				
(c)(7):	Maximum Power Rating, W:	0.002512 mW				
15.203:	Antenna Requirement:	The antenna is permanently attached to the EUT The antenna uses a unique coupling The EUT must be professionally installed The antenna requirement does not apply				



Subpart 2.1033 (continued)

	(c)(8):	Circuit	Diagram/	/Circuit	Descri	ption
١	(0)(0).	Oncuit	Diagrain	Oncar	Descri	puoi

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please See Attached Exhibits

(c)(9): Label Information:

Please See Attached Exhibits

(c)(10): Photographs:

Please See Attached Exhibits

(c)(11): Digital Modulation Description:

___ Attached Exhibits x N/A

(c)(12): Test And Measurement Data:

Follows



Sub-part 2.1033(b):

Test And Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2 and the following individual Parts, 15.231.

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-2003 unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

A2LA

"A2LA has accredited Compliance Testing in Chandler, AZ for technical competence in the field of Electrical testing. The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO 17025:2005 'General Requirements for the Competence of Testing and Calibration Laboratories' and any additional program requirements in the identified field of testing."

Please refer to www.a2la.org for current scope of accreditation.

Certificate number: 2152.01

ACCREDITED
TESTING CERT#2152.01

FCC OATS Reg. #933597

IC Reg. # 2044A-1



Test Results Summary

Specification	Test Name	Pass, Fail, N/A	Comments
15.231(b)(1)	Fundamental Field Strength	Pass	
15.231(b)(3)	Out of Band Spurious Emissions	Pass	
15.231(c)	Occupied Bandwidth	Pass	
15.231(a)(1)	Transmission time	Pass	
RSS-210	99% Occupied Bandwidth	Pass	



Name of Test: Fundamental Field Strength

Specification:15.231(b)(1)Engineer: J ErhardTest Equipment Utilizedi00033, i00089Test Date: 12/8/2008

Test Procedure

The UUT was tested on an Open Area Test Site (OATS) at a distance of 3 meters from the receiving antenna. A spectrum analyzer was used to verify that the UUT met the requirements for Fundamental Field Strength. The limit was calculated using the standard linerization formula; Limit = L1 + [(Fo-F1)(L2-L1)/(F2-F1)] where Fo is the frequency under test. The UUT was tested by rotating it 360° with the antennas in both the vertical and horizontal orientation and raised from 1 to 4 meters to ensure the TX signal levels were maximized in the X, Y, and Z-Axis.

Test Setup



Fundamental Field Strength

Tuned Freq	Measured Level	Correction Factor	Corrected Level	Detector	Limit	Result
(MHz)	(dBuV/m)	(dB)	(dBuV/m)		(dBuV/m)	
434	56.0	18.8	74.8	Peak	101.0	Pass
434	55.6	18.8	74.4	Average	81.0	Pass



Name of Test: Radiated Spurious Emissions

UUT

 Specification:
 15.231(b)(3), 15.209
 Engineer: J Erhard

 Test Equipment Utilized
 i00033, i00088, i00089, i00103, i00331
 Test Date: 12/10/2008

Test Procedure

The UUT was tested on an Open Area Test Site (OATS) at a distance of 3 meters from the receiving antenna. A spectrum analyzer was used to verify that the UUT met the requirements for Radiated Emissions. The spectrum for each tuned frequency was examined to the 10th harmonic. The UUT was tested by rotating it 360° with the antennas in both the vertical and horizontal orientation and raised from 1 to 4 meters to ensure the TX signal levels were maximized

Antenna Spectrum Analyzer

Radiated Emissions

Emission Freq (MHz)	Measured Level (dBuV/m)	Correction Factor (dB)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
69.582	18.4	9.8	28.2	40.0	-11.8
156.966	14.9	15.0	29.9	40.0	-10.1
279.129	14.4	16.2	30.6	47.0	-16.4
341.564	14.4	17.5	31.9	47.0	-15.2
529.556	16.2	20.9	37.1	47.0	-9.9
719.682	14.9	24.8	39.7	47.0	-7.3

No other emissions were detectable. All signals to the 10th harmonic were examined.




Name of Test: Occupied Bandwidth

Specification:15.231(c)Engineer: J ErhardTest Equipment Utilizedi00033, i00089Test Date: 12/10/2008

Test Procedure

The UUT was tested on an Open Area Test Site (OATS) at a distance of 3 meter from the receiving antenna. The Span was set wide enough to capture the entire transmit spectrum and the resolution bandwidth was set to at least 1% of the span. The analyzer was set to max hold the -20 dB bandwidth was measured.


Test Setup



Occupied Bandwidth Summary

Frequency MHz	Recorded Measurement	Result
434 MHz	141.192 kHz	Pass

Occupied Bandwidth Plot

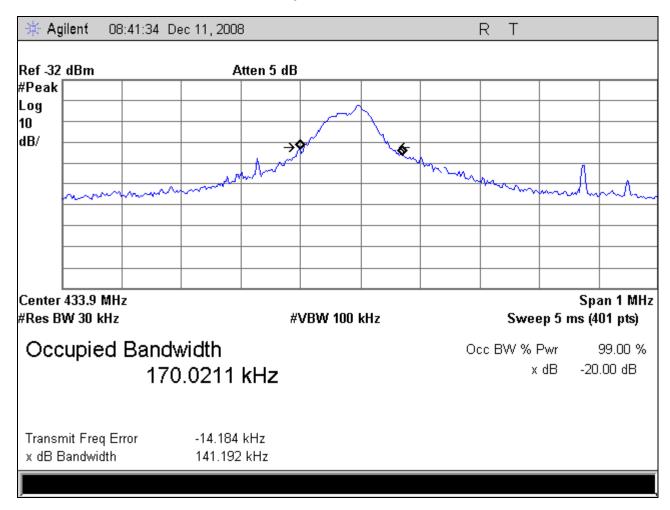




Name of Test: Transmissions Time


Specification:15.231(a)(a)Engineer: J ErhardTest Equipment Utilizedi00330Test Date:10/25/2009

Test Procedure

The UUT was tested on an Open Area Test Site (OATS) at a distance of 3 meter from the receiving antenna. The Zero span mode was used, as it measures time, to capture a single transmission. The marker delta method was used to record the time of transmission at 14.9 mSec.

Test Setup



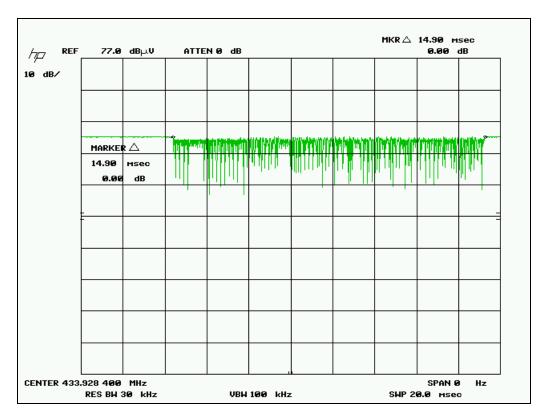



Name of Test:99% Occupied BandwidthSpecification:RSS 210 Industry Canada Only


Test Equipment Utilized i00033, i00089

Engineer: J Erhard Test Date: 12/10/2008

Test Procedure

The UUT was tested on an Open Area Test Site (OATS) at a distance of 3 meter from the receiving antenna. The Span was set wide enough to capture the entire transmit spectrum and the resolution bandwidth was set to at least 1% of the span. The analyzer was set to max hold the 99% bandwidth was measured.


Test Setup



Occupied Bandwidth Summary

Frequency MHz	Recorded Measurement	Result
434	170.0211 kHz	Pass

99% Occupied Bandwidth Plot

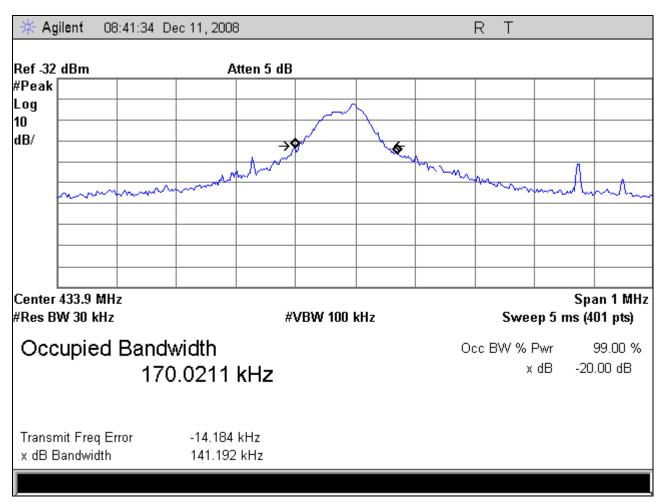



Test Equipment Utilized

Description	MFG	Model Number	FTL Asset Number	Last Cal Date	Cal Due Date
Spectrum Analyzer	HP	85462A	i00033	10/14//08	10/14//09
Bi-conical Antenna	EMCO	3109B	i00088	10/16/07	10/16/09
Log Periodic Antenna	Aprel	2001	i00089	10/22/07	10/22/09
Horn Antenna	EMCO	3115	i00103	11/25/08	11/25/10
Spectrum Analyzer	Agilent	8566	i00330	6/9/09	6/9/10
Spectrum Analyzer	Agilent	E4407B	i00331	11/03/08	11/03/09

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT