



# Radio Test Report

## FCC ID: X23-JAO-ARIE-1

This report concerns (check one) :  Original Grant  Class II Change

**Issued Date** : Apr. 08, 2010

**Project No.** : R1001005

**Equipment** : Panel PC

**Model Name** : ARIE

**Applicant** : JAOtech Limited

Perrywood Business Park Honeycrock  
Lane Redhill Surrey RH1 5DZ

**Tested by:**

Neutron Engineering Inc. EMC Laboratory

**Date of Test:**

Feb. 04, 2010 ~ Mar. 03, 2010

**Testing Engineer:**

Rush Kao

(Rush Kao)

**Technical Manager:**

Jeff Yang

(Jeff Yang)

**Authorized Signatory:**

Andy Chiu

(Andy Chiu)

### Neutron Engineering Inc.

B1, No. 37, Lane 365, YangGuang St.

NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299

FAX: +886-2-2657-3331





## Declaration

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**Neutron**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron**'s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

**Neutron**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
<b>1 . CERTIFICATION</b>	<b>4</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>2.1 TEST FACILITY</b>	<b>6</b>
<b>2.2 MEASUREMENT UNCERTAINTY</b>	<b>6</b>
<b>3 . GENERAL INFORMATION</b>	<b>7</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>7</b>
<b>3.2 DESCRIPTION OF TEST MODES</b>	<b>8</b>
<b>3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>9</b>
<b>3.4 DESCRIPTION OF SUPPORT UNITS</b>	<b>10</b>
<b>4 . EMC EMISSION TEST</b>	<b>11</b>
<b>4.1 CONDUCTED EMISSION MEASUREMENT</b>	<b>11</b>
<b>4.1.1 POWER LINE CONDUCTED EMISSION</b>	<b>11</b>
<b>4.1.2 MEASUREMENT INSTRUMENTS LIST</b>	<b>11</b>
<b>4.1.3 TEST PROCEDURE</b>	<b>12</b>
<b>4.1.4 DEVIATION FROM TEST STANDARD</b>	<b>12</b>
<b>4.1.5 TEST SETUP</b>	<b>12</b>
<b>4.1.6 EUT OPERATING CONDITIONS</b>	<b>12</b>
<b>4.1.7 TEST RESULTS</b>	<b>13</b>
<b>4.2 RADIATED EMISSION MEASUREMENT</b>	<b>15</b>
<b>4.2.1 RADIATED EMISSION LIMITS</b>	<b>15</b>
<b>4.2.2 MEASUREMENT INSTRUMENTS LIST</b>	<b>16</b>
<b>4.2.3 TEST PROCEDURE</b>	<b>16</b>
<b>4.2.4 DEVIATION FROM TEST STANDARD</b>	<b>16</b>
<b>4.2.5 TEST SETUP</b>	<b>17</b>
<b>4.2.6 EUT OPERATING CONDITIONS</b>	<b>17</b>
<b>4.2.7 TEST RESULTS- FCC PART 15.209</b>	<b>18</b>
<b>4.2.8 TEST RESULTS- FCC PART 15.225</b>	<b>20</b>
<b>4.3 FREQUENCY STABILITY MEASUREMENT</b>	<b>22</b>
<b>4.3.1 FREQUENCY STABILITY LIMITS</b>	<b>22</b>
<b>4.3.2 MEASUREMENT INSTRUMENTS LIST</b>	<b>22</b>
<b>4.3.3 TEST PROCEDURE</b>	<b>22</b>
<b>4.3.4 DEVIATION FROM TEST STANDARD</b>	<b>22</b>
<b>4.3.5 EUT OPERATING CONDITIONS</b>	<b>22</b>
<b>4.3.6 TEST RESULTS</b>	<b>23</b>
<b>5 . EUT TEST PHOTO</b>	<b>24</b>



## **1. CERTIFICATION**

Equipment: Panel PC  
Brand Name: JAOTECH  
Model Name: ARIE  
Applicant: JAOTech Limited  
Data of Test: Feb. 04, 2010 ~ Mar. 03, 2010  
Standards: FCC Part15, Subpart C  
ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-R1001005) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



## **2. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards: (Antenna to EUT distance is 3 m)

<b>FCC Part15, Subpart C</b>		
<b>Standard</b>	<b>Test Item</b>	<b>Remark</b>
15.207	Conducted Emission	PASS
15.35 / 15.205 / 15.209 / 15.225	Radiated Emission	PASS
15.225(e)	Frequency Stability	PASS
15.203	Antenna Requirement	PASS

**NOTE:**

(1) " N/A" denotes test is not applicable in this Test Report.



## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **C01 & CB08 (FCC R.N.: 614388)** at the location of No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan. & 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%** .

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	$U$ , (dB)
C01	ANSI	150 KHz ~ 30MHz	1.94

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U$ , (dB)
OS-02	ANSI	30MHz ~ 200MHz	V	2.48
		30MHz ~ 200MHz	H	2.16
		200MHz ~ 1,000MHz	V	2.50
		200MHz ~ 1,000MHz	H	2.66
CB08	ANSI	30MHz ~ 200MHz	V	3.22
		30MHz ~ 200MHz	H	3.35
		200MHz ~ 1,000MHz	V	3.24
		200MHz ~ 1,000MHz	H	3.11
		1000MHz ~ 1800MHz	V	4.05
		1000MHz ~ 1800MHz	H	3.97
		18000MHz ~ 40000MHz	V	4.04
		18000MHz ~ 40000MHz	H	4.01



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Panel PC												
Brand Name	JAOTECH												
Model Name	ARIE												
OEM Brand/Model Name	N/A												
Model Difference	N/A												
Product Description	<p>The EUT is a Panel PC.</p> <table border="1"><tr><td>Operation Frequency:</td><td>13.56MHz</td></tr><tr><td>Product Class:</td><td>1</td></tr><tr><td>Receiver Class:</td><td>3</td></tr><tr><td>Modulation Type:</td><td>ASK</td></tr><tr><td>Number Of Channel</td><td>1CH (13.56MHz )</td></tr><tr><td>Antenna Designation:</td><td>Loop</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	13.56MHz	Product Class:	1	Receiver Class:	3	Modulation Type:	ASK	Number Of Channel	1CH (13.56MHz )	Antenna Designation:	Loop
Operation Frequency:	13.56MHz												
Product Class:	1												
Receiver Class:	3												
Modulation Type:	ASK												
Number Of Channel	1CH (13.56MHz )												
Antenna Designation:	Loop												
Power Source	DC Voltage supplied from AC/DC adapter.												
Power Rating	I/P: AC 100-240V, 1.6A, 50-60Hz, / O/P: DC 19V, 4.74A (90W MAX)												
Connecting I/O Port(s)	Please refer to the User's Manual												
Products Covered	CPU: Intel / 1.06G/1M/533 RAM: Kingston / 512/DDR2/667 HDD: Fujitsu / 160GB MHZ2160BH AC/DC adapter: FSP090-1ADC21												
EUT Modification(s)	N/A												

**Note:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



### **3.2 DESCRIPTION OF TEST MODES**


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX

<b>For Conducted / Radiated Test</b>	
Final Test Mode	Description
Mode 1	TX



**3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

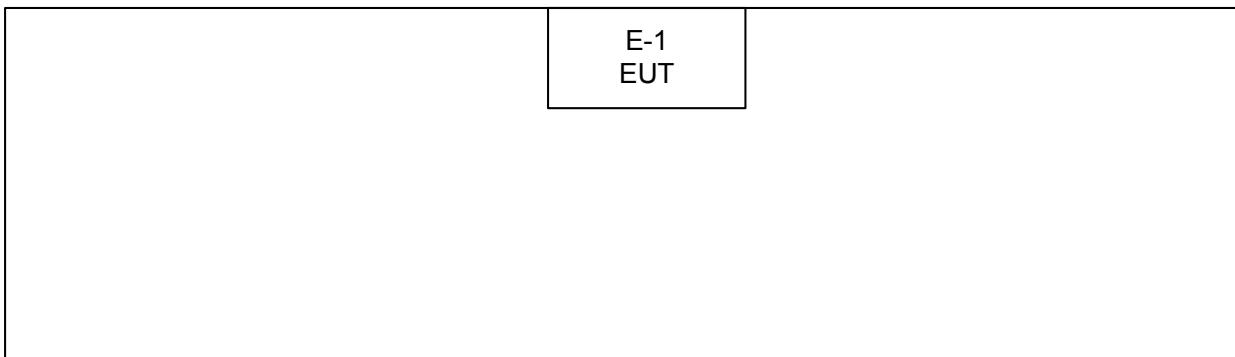



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Panel PC	JAOTECH	ARIE	X23-JAO-ARIE-1	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
	N/A	N/A	N/A	

Note:

- (1) The support equipment was authorized by Declaration of Conformity.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

### 4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Cable	N/A	SR03_C_01&02	N/A	Aug. 19, 2010
2	Pulse Limiter	Electro-Metrics	EM-7600	112644	Dec. 27, 2010
3	50Ω BNC TYPE Terminator	N/A	N/A	01	May 25, 2011
4	50Ω BNC TYPE Terminator	N/A	N/A	03	May 25, 2011
5	EMI Test Receiver	R&S	ESCI	100082	Mar. 17, 2010
6	LISN	EMCO	4825/2	00028234	Jul. 13, 2010

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.




### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

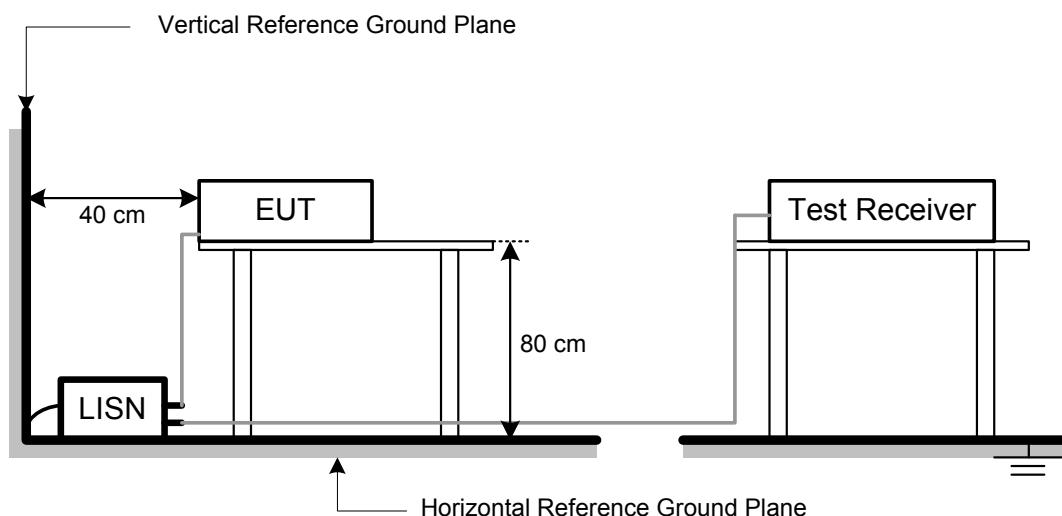

### 4.1.6 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

The EUT has been programmed to continuously transmit during test.


**4.1.7 TEST RESULTS**

E.U.T :	Panel PC	Model Name :	ARIE
Temperature :	26 °C	Relative Humidity :	42%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.15	Line	36.95	*	66.00	56.00	-29.05	(QP)
0.20	Line	35.30	*	63.48	53.48	-28.18	(QP)
0.42	Line	29.42	*	57.39	47.39	-27.97	(QP)
3.60	Line	30.51	*	56.00	46.00	-25.49	(QP)
7.15	Line	32.64	*	60.00	50.00	-27.36	(QP)
24.15	Line	38.12	*	60.00	50.00	-21.88	(QP)

**Remark**

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.2 sec./MHz . Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.2 sec./MHz .
- (2) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform . In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured .
- (3) Measuring frequency range from 150KHz to 30MHz .

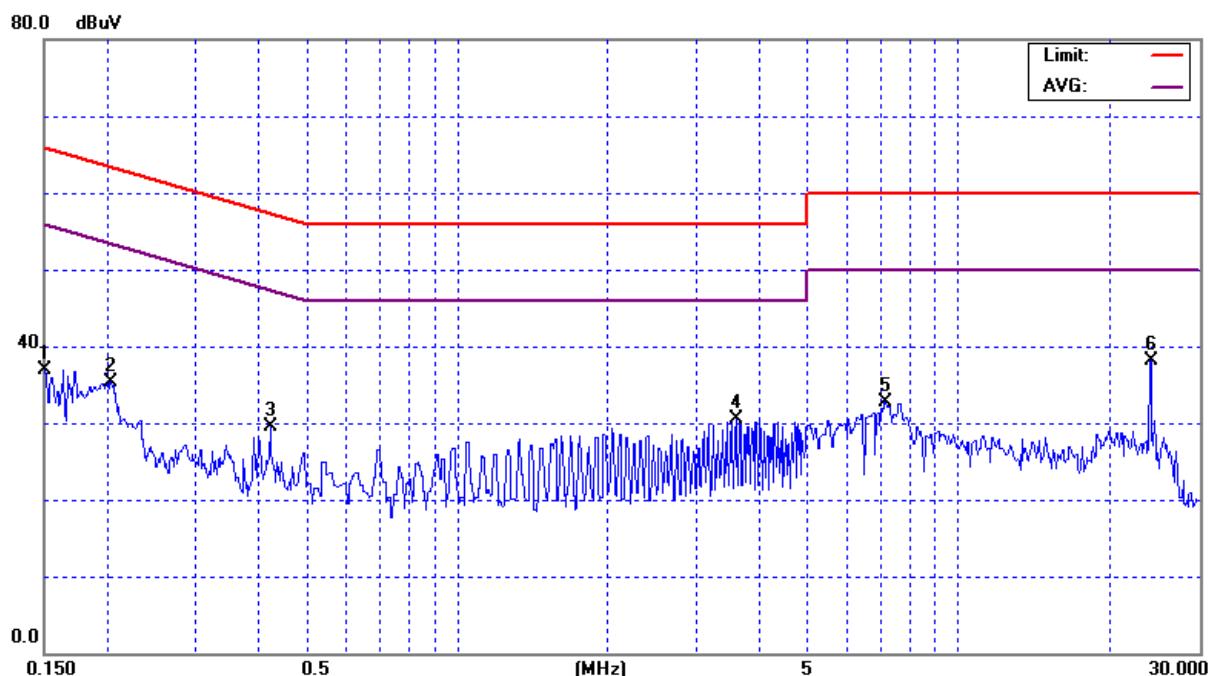




E.U.T :	Panel PC	Model Name :	ARIE
Temperature :	26 °C	Relative Humidity :	42%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX		

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Margin (dB)	Note
		QP-Mode	AV-Mode	QP-Mode	AV-Mode		
0.23	Neutral	36.29	*	62.53	52.53	-26.24	(QP)
0.63	Neutral	33.19	*	56.00	46.00	-22.81	(QP)
2.05	Neutral	34.14	*	56.00	46.00	-21.86	(QP)
2.82	Neutral	34.94	*	56.00	46.00	-21.06	(QP)
7.05	Neutral	34.51	*	60.00	50.00	-25.49	(QP)
24.15	Neutral	36.86	*	60.00	50.00	-23.14	(QP)

**Remark**

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz ; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.2 sec./MHz . Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.2 sec./MHz .
- (2) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform . In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured .
- (3) Measuring frequency range from 150KHz to 30MHz .

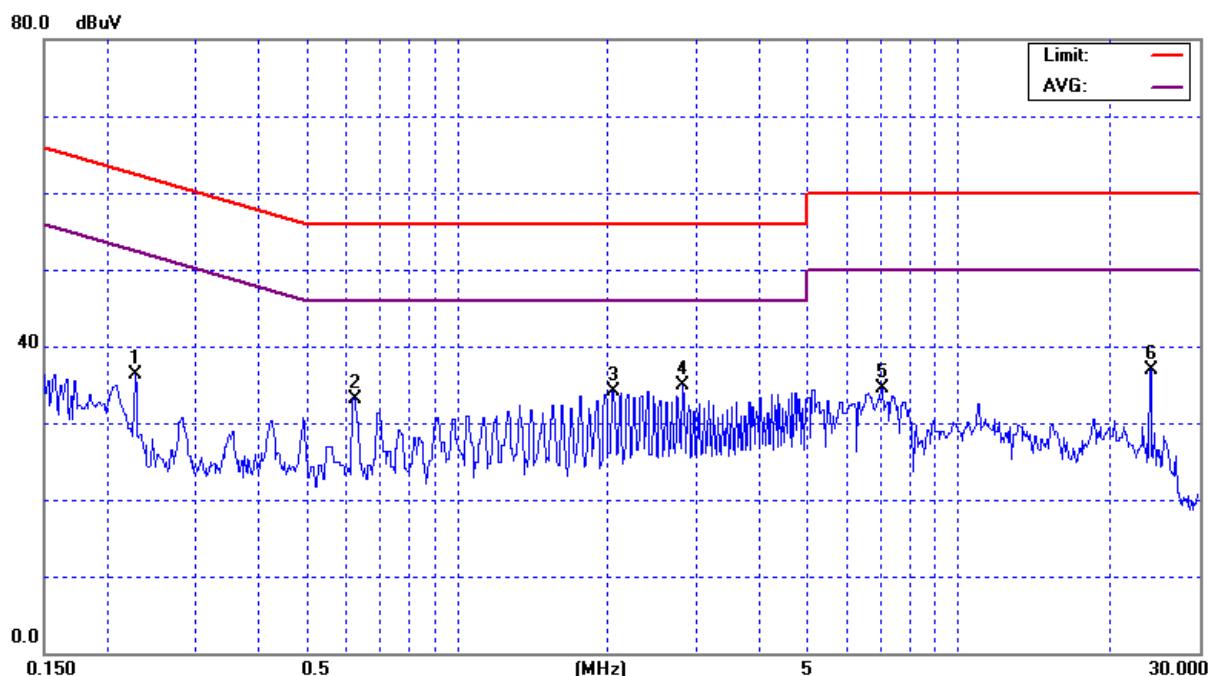

**4.2 RADIATED EMISSION MEASUREMENT****4.2.1 RADIATED EMISSION LIMITS (Frequency Range 30MHz-1000MHz)**

<b>FCC Part 15.209</b>				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

<b>FCC Part 15.225(a)/(b)/(c)</b>				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
13.553 – 13.567	15,848	30 m	15,848*100	124
13.567 – 13.710	334	30 m	334*100	90.5
13.110 – 13.410	106	30 m	106*100	80.5
13.710 – 14.010				

**Notes:**

- (1) The tighter limit shall apply at the boundary between two frequency range.
- (2) Limitation expressed in dBuV/m is calculated by 20log Emission Level (uV/m).
- (3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $L_{d1} = L_{d2} * (d_2/d_1)^2$ .

**Example:**

F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as  $L_{d1} = L_1 = 30uV/m * (10)^2 = 100 * 30 uV/m$

**4.2.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Sep. 10, 2010
2	Microflex Cable	N/A	N/A	1m	May. 20, 2010
3	Test Cable	N/A	LMR-400	966_12m	Jun. 18, 2010
4	Test Cable	N/A	LMR-400	966_3m	Jun. 18, 2010
5	Pre-Amplifier	EMC	EMC-330	980001	Jun. 04, 2010
6	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 17, 2010
7	Loop Ant.	EMCO	6502	00042960	Jan. 12, 2011

Remark: " N/A" denotes No Model Name / Serial No. and No Calibration specified.

**4.2.3 TEST PROCEDURE**

- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


**4.2.4 DEVIATION FROM TEST STANDARD**

No deviation




#### 4.2.5 TEST SETUP

**Radiated Emission Test Set-Up Frequency 30 - 1000MHz**

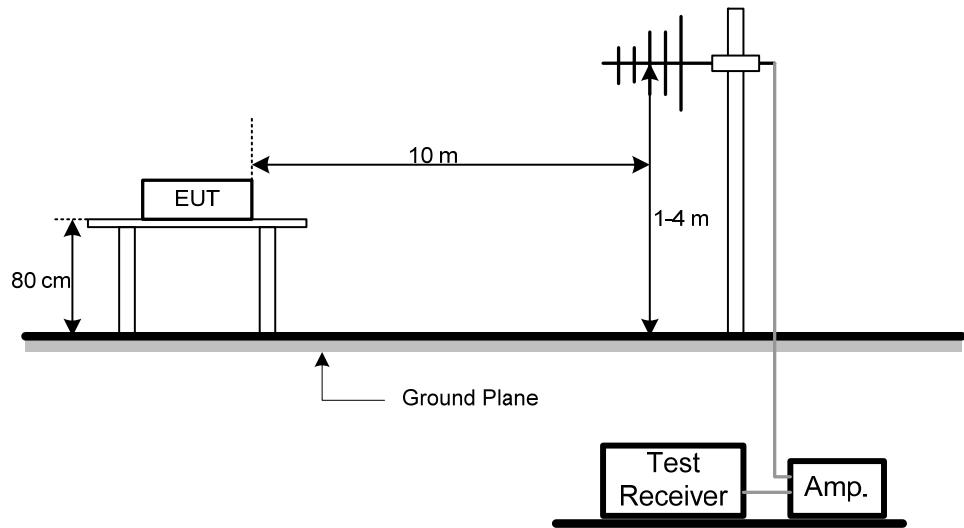

**Radiated Emission Test Set-Up Frequency Above 1 GHz**

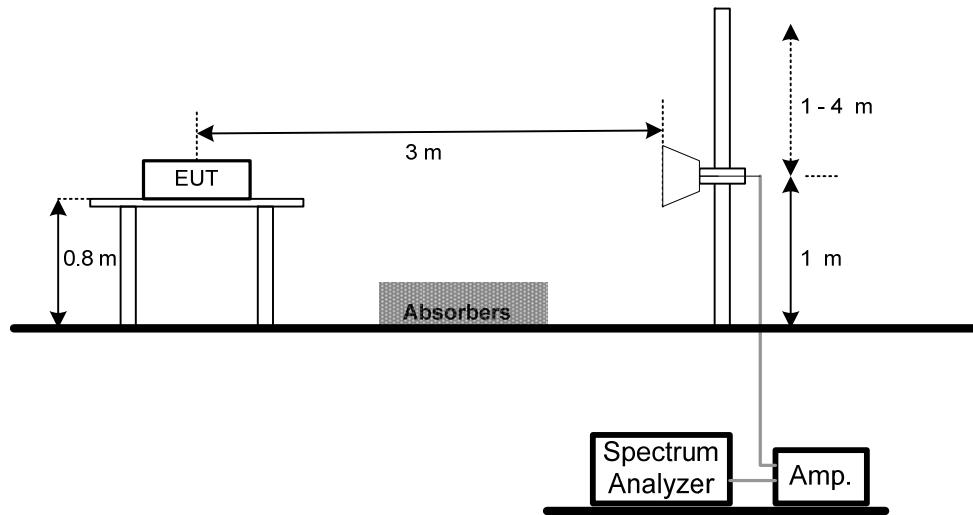

#### 4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**4.2.7 TEST RESULTS- FCC PART 15.209**

E.U.T :	Panel PC	Model Name :	ARIE
Temperature :	22 °C	Relative Humidity :	42%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX		

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
35.82	V	Peak	53.90	- 28.83	25.07	40.00	- 14.93	
237.58	V	Peak	54.72	- 24.68	30.04	46.00	- 15.96	
295.78	V	Peak	58.60	- 28.07	30.53	46.00	- 15.47	
454.86	V	Peak	52.95	- 22.71	30.24	46.00	- 15.76	
592.60	V	Peak	50.55	- 17.88	32.67	46.00	- 13.33	
623.64	V	Peak	44.76	- 16.03	28.73	46.00	- 17.27	

**Remark :**

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table .

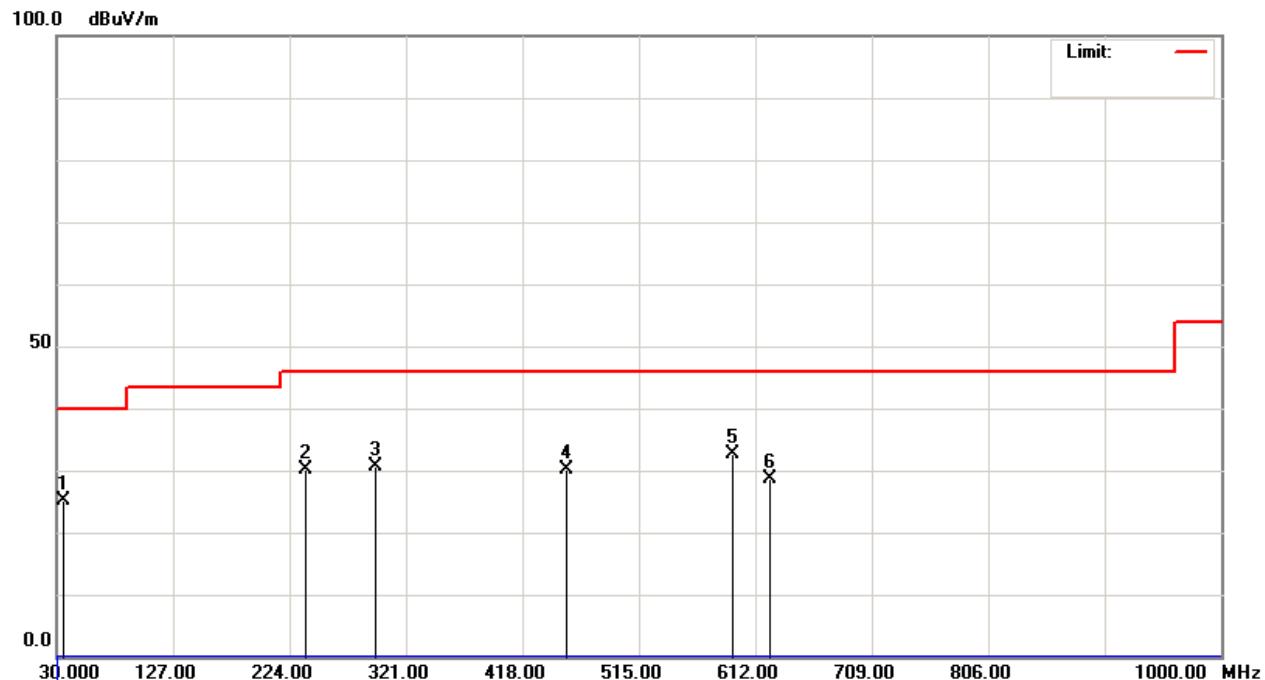




E.U.T :	Panel PC	Model Name :	ARIE
Temperature :	22°C	Relative Humidity :	42%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX		

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
239.52	H	Peak	64.71	- 33.41	31.30	46.00	- 14.70	
579.02	H	Peak	50.97	- 19.10	31.87	46.00	- 14.13	
592.60	H	Peak	57.93	- 17.10	40.83	46.00	- 5.17	
646.92	H	Peak	48.24	- 16.62	31.62	46.00	- 14.38	
800.18	H	Peak	45.71	- 14.87	30.84	46.00	- 15.16	
949.56	H	Peak	39.51	- 11.44	28.07	46.00	- 17.93	

## Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table .

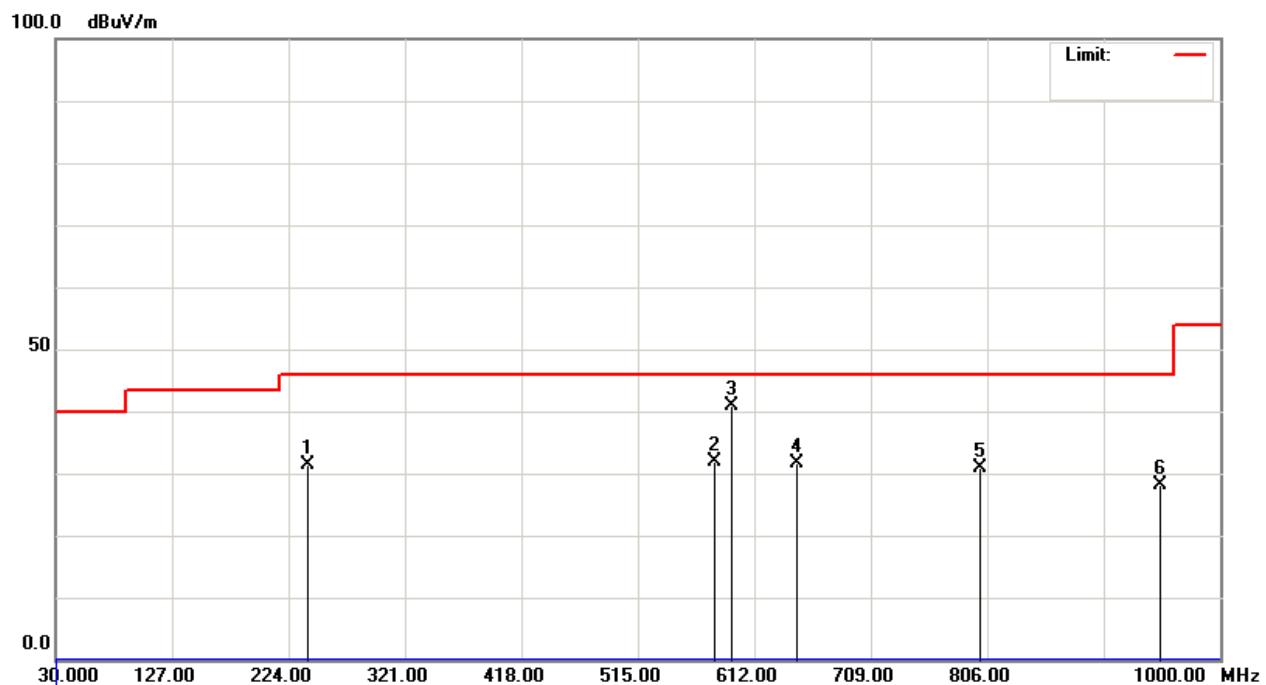

**4.2.8 TEST RESULTS- FCC PART 15.225**

E.U.T :	Panel PC	Model Name :	ARIE
Temperature :	30 °C	Relative Humidity :	54%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX		



Freq. (MHz)	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit-3m (dBuV/m)	Safe Margins (dBuV/m)	Note
13.56	Peak	67.77	10.92	78.69	120.00	- 41.31	
27.16	Peak	3.12	9.27	12.39	69.54	- 57.15	

Remark :

- (1) Spectrum Setting:  
9 KHz – 150 KHz, RBW= 1 KHz, VBW=1 KHz, Sweep time = 200 ms.  
150 K Hz – 30 MHz, RBW= 9 KHz, VBW=9 KHz, Sweep time = 200 ms.  
30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) The Log-Bicon Antenna will use to test frequency range from 30MHz to 1000MHz and the Loop Antenna will use to test frequency below 30MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not how in table .



**Neutron Engineering Inc.**

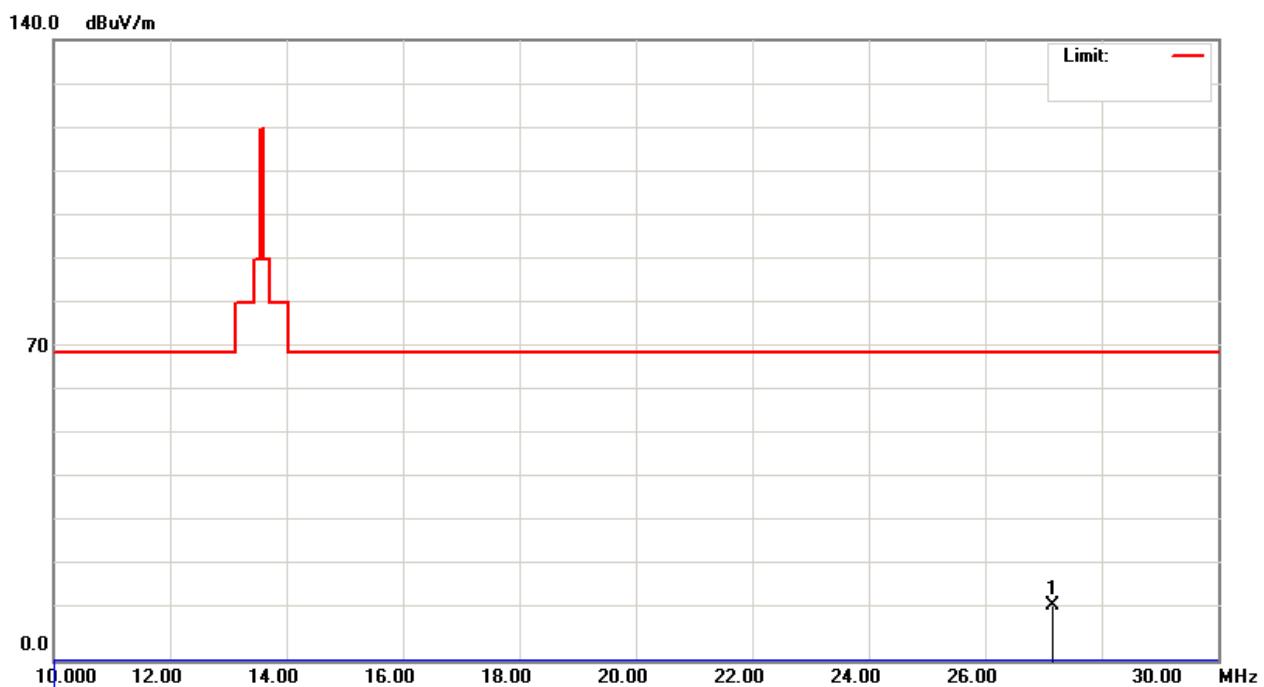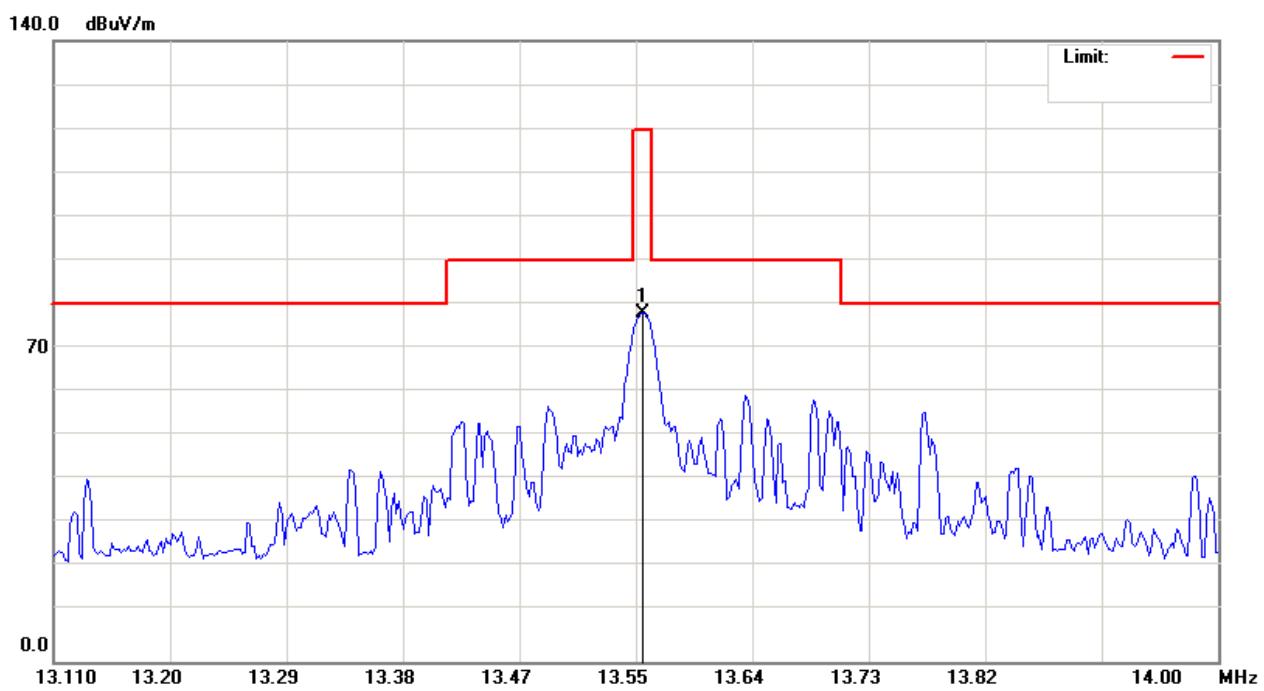



## 4.3 FREQUENCY STABILITY MEASUREMENT

### 4.3.1 FREQUENCY STABILITY LIMITS

#### FCC Part 15.225(e)

the frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 4.3.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSL-6	100257	Jul. 06, 2010

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.

### 4.3.3 TEST PROCEDURE

- a. The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber.  
After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.
- b. At room temperature ( $25\pm 5^{\circ}\text{C}$ ), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.
- c. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.3.6 TEST RESULTS**

E.U.T :	Panel PC	Model Name :	ARIE
Temperature :	26 °C	Relative Humidity :	60%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX		

**Frequency Stability Versus Environmental Temperature**

	Temperature (°C)	Voltage (Vac)	Frequency (MHz)	Freq Error (KHz)	Limit (KHz)	Results
	20	120V	13.55944			
0 min	50	120V	13.55965	0.210	+/- 1.356	PASS
	-20	120V	13.55911	-0.330	+/- 1.356	PASS
2 min	50	120V	13.55962	0.180	+/- 1.356	PASS
	-20	120V	13.55921	-0.230	+/- 1.356	PASS
5 min	50	120V	13.55956	0.120	+/- 1.356	PASS
	-20	120V	13.55921	-0.230	+/- 1.356	PASS
10 min	50	120V	13.55954	0.100	+/- 1.356	PASS
	-20	120V	13.55924	-0.200	+/- 1.356	PASS

**Frequency Stability Versus Input Voltage**

Temperature (°C)	Voltage (Vac)		Frequency (MHz)	Freq Error (KHz)	Limit (KHz)	Results
20	V-nom		120	13.55944		
20	V-min		102	13.55944	0	+/- 1.356
20	V-max		138	13.55945	0.01	+/- 1.356