

Appendix B: Test results. Proximity (2M)

Approved by (name / position & signature)	José Manuel Gómez Galván EMC Consumer & RF Lab. Manager
---	---

INDEX

TEST CONDITIONS86

TEST CASES DETAILS87

99dBw Occupied Channel Bandwidth 99%87

RSS-247 5.2 (a) / FCC 15.247 (a) (2) [6dBw] 6 dB Bandwidth91

RSS-247 5.4 / FCC 15.247 (b) [Pkcp] Maximum Peak Conducted Output Power95

RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)99

RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)105

[Psd] Power Spectral Density117

TEST CONDITIONS

(*): Data provided by the client.

POWER SUPPLY (*):

Vnominal: 3.7 Vdc
Type of Power Supply: Battery

ANTENNA (*):

Type of Antenna: Internal
Maximum Declared Antenna Gain: -8.3 dBi

TEST FREQUENCIES (*):

Modulation	Data rates	Low Channel:	Middle Channel	High Channel
PROXIMITY	2M 2 Mbit/s	2402 MHz	2440 MHz	2480 MHz

During transmitter test the EUT was controlled by a SW tool provided by the client to operate in a continuous transmit mode on the modulation schemes and test channels as required.

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



TEST CASES DETAILS

99dBw Occupied Channel Bandwidth 99%

Limits

RSS-Gen 6.7 / FCC 2.1049 - Occupied Channel Bandwidth 99%

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

Modulation: Proximity

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Occ Ch BW (MHz)
[2400, 2483.5]	Digital Transmission System (DTS)	2402.00000	1	1.690
		2440.00000		1.690
		2480.00000		1.690



Verdict

Pass

Attachments



Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2402.00000 Active Port = 1
Modulation = Proximity

Images:

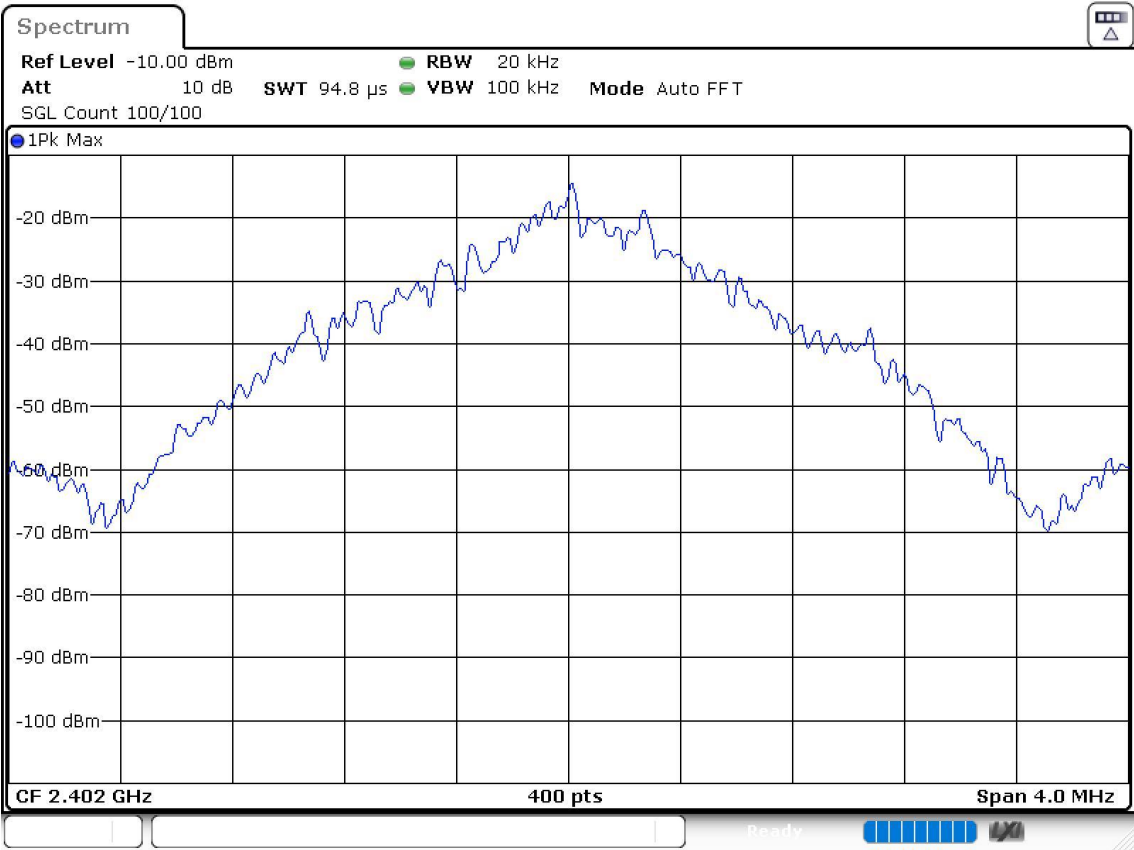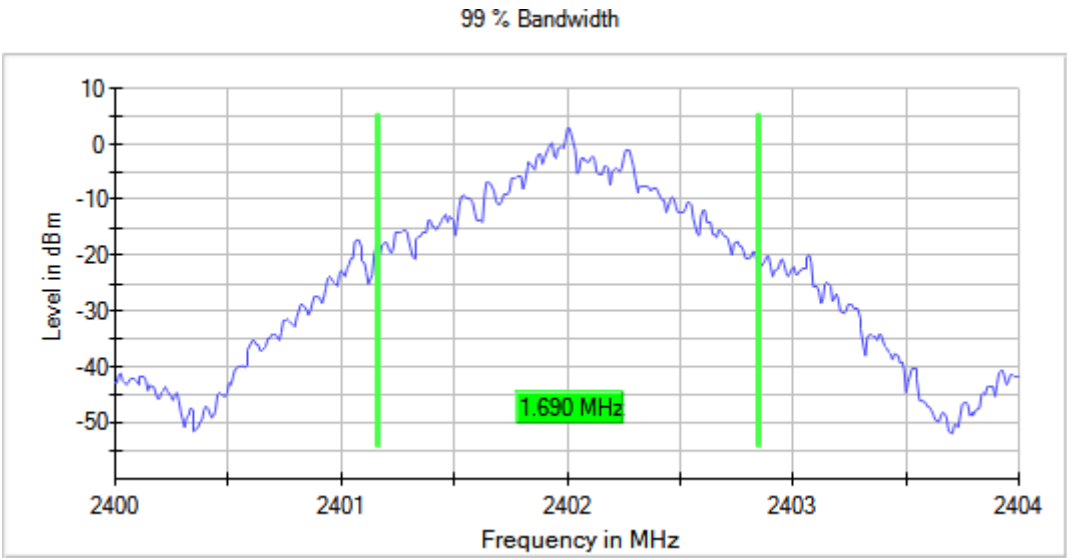



Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2440.00000 Active Port = 1
Modulation = Proximity

Images:

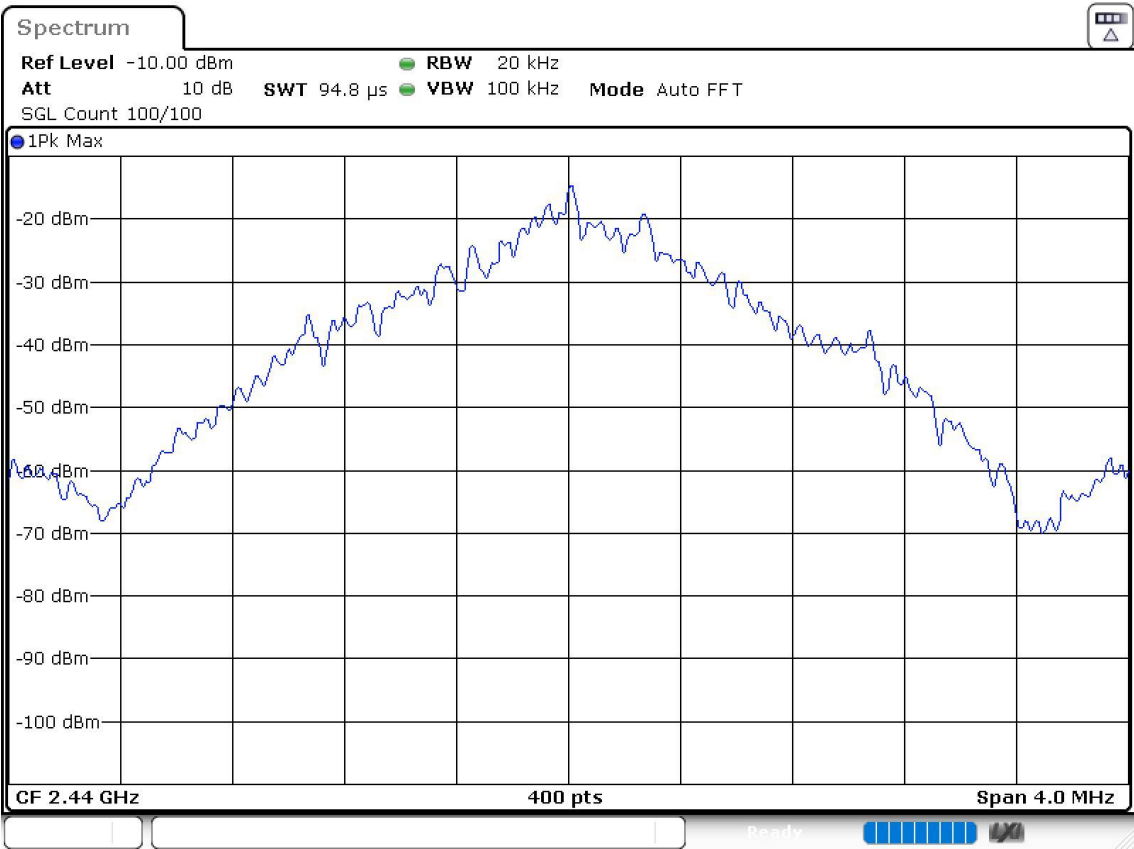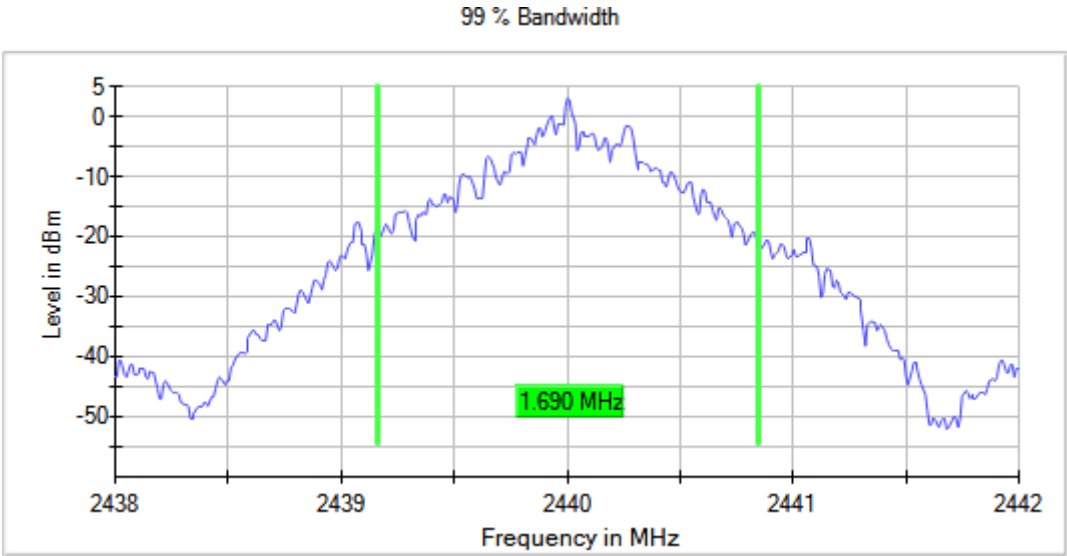

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2480.00000 Active Port = 1
Modulation = Proximity

Images:

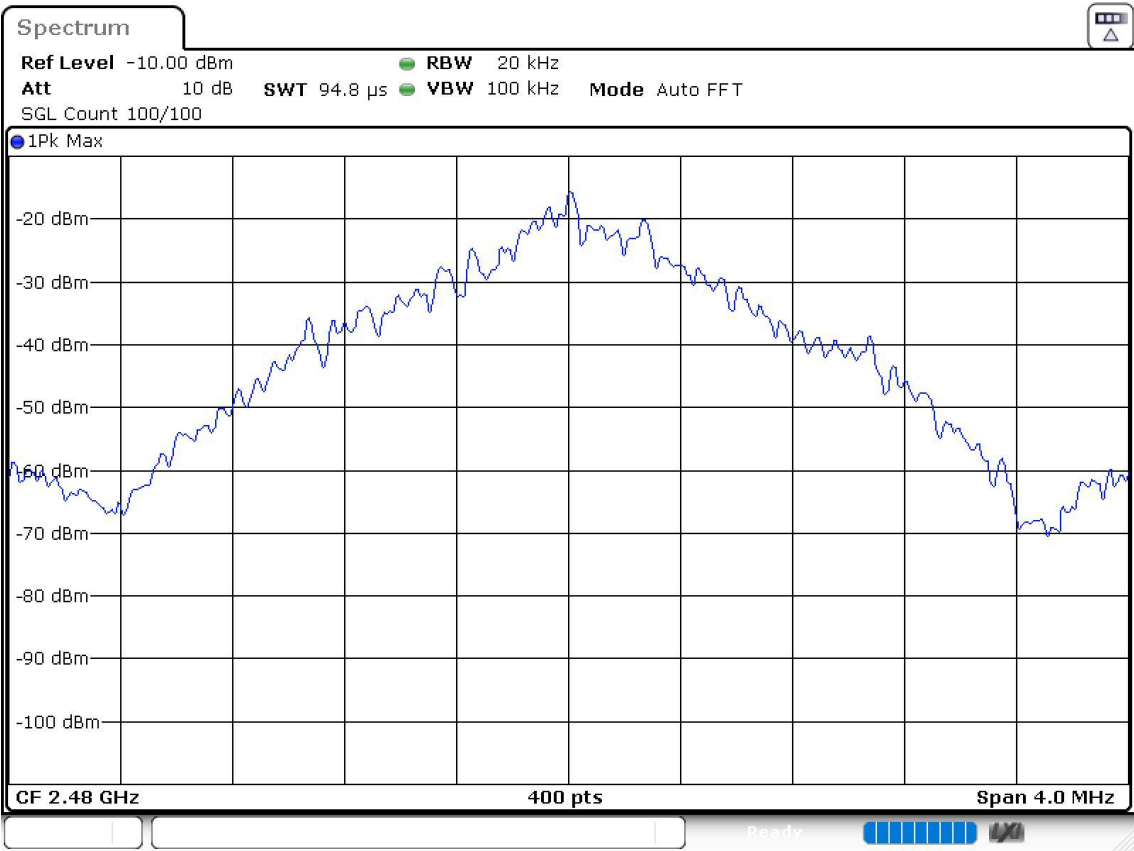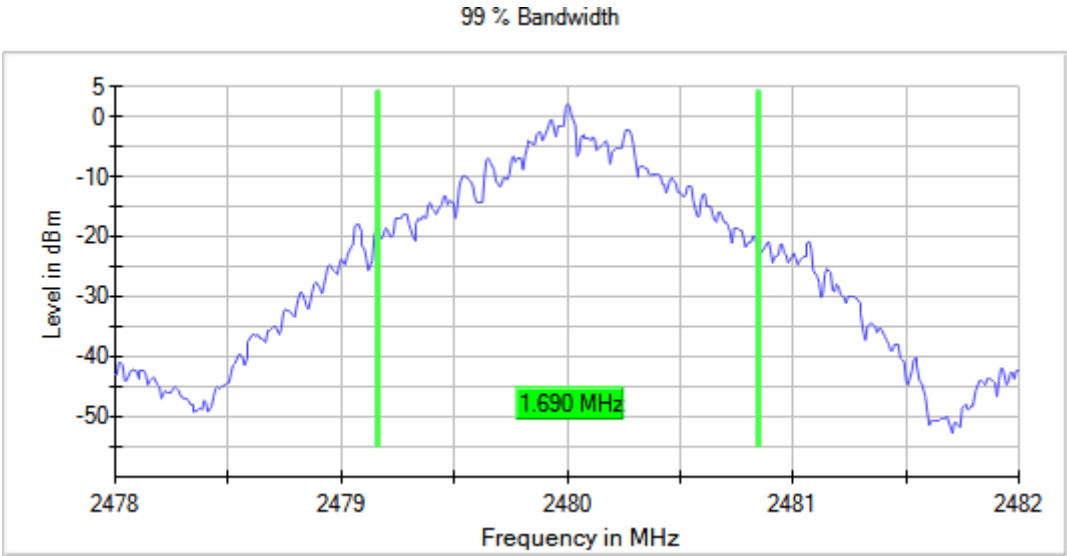

RSS-247 5.2 (a) / FCC 15.247 (a) (2) [6dBw] 6 dB Bandwidth

Limits

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Modulation: Proximity

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Ebw (MHz)
[2400, 2483.5]	Digital Transmission System (DTS)	2402.00000	1	0.713
		2440.00000		0.713
		2480.00000		0.752


Verdict

Pass

Attachments


Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2402.00000 Active Port = 1
Modulation = Proximity

Images:

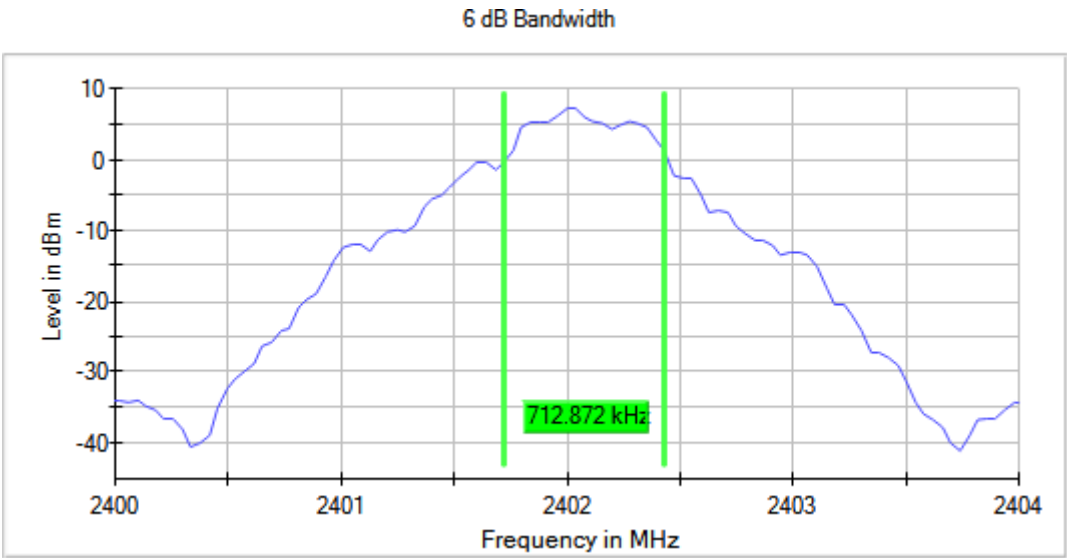


Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2440.00000 Active Port = 1
Modulation = Proximity

Images:

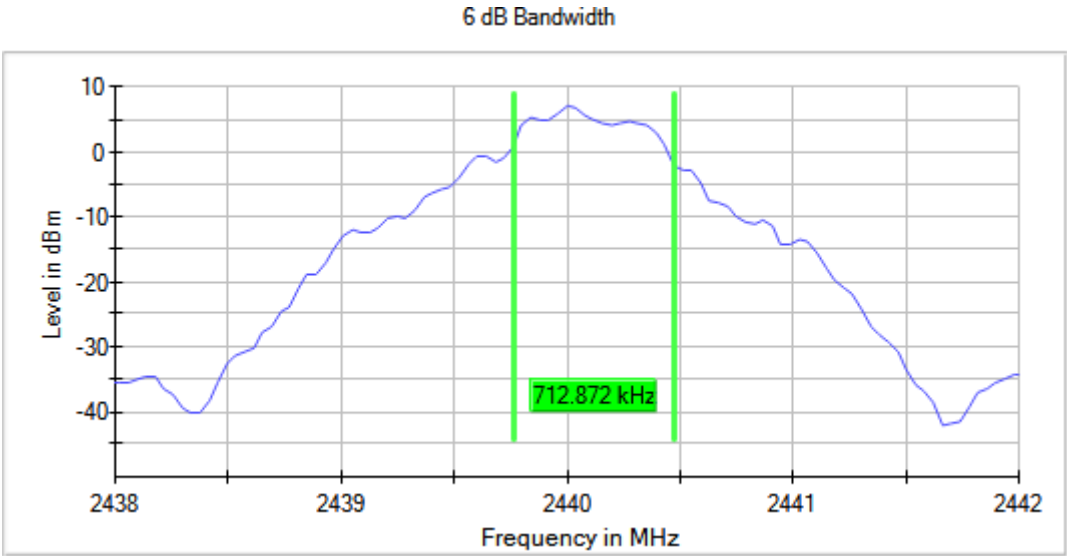

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2480.00000 Active Port = 1
Modulation = Proximity

Images:

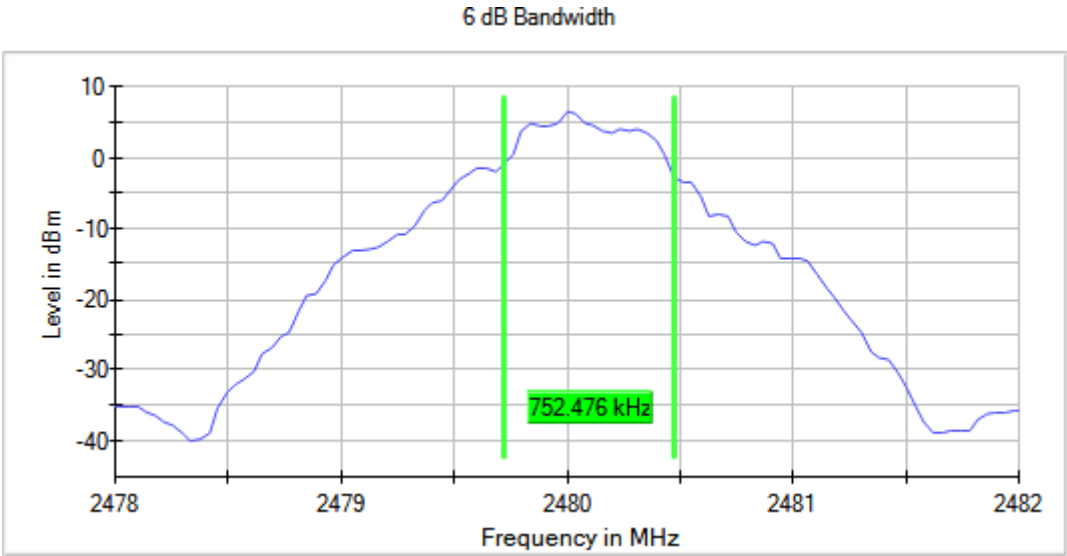

RSS-247 5.4 / FCC 15.247 (b) [Pkcp] Maximum Peak Conducted Output Power

Limits

FCC 15.247 (b) (3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

RSS 5.4 (d)

For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Modulation: Proximity

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Peak Power (dBm)	E.I.R.P. (dBm)
[2400, 2483.5]	Digital Transmission System (DTS)	2402.00000	1	7.3040	-0.960
		2440.00000		7.0200	-1.280
		2480.00000		6.4640	-1.836


Verdict

Pass

Attachments



Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2402.00000 Active Port = 1
Modulation = Proximity

Images:

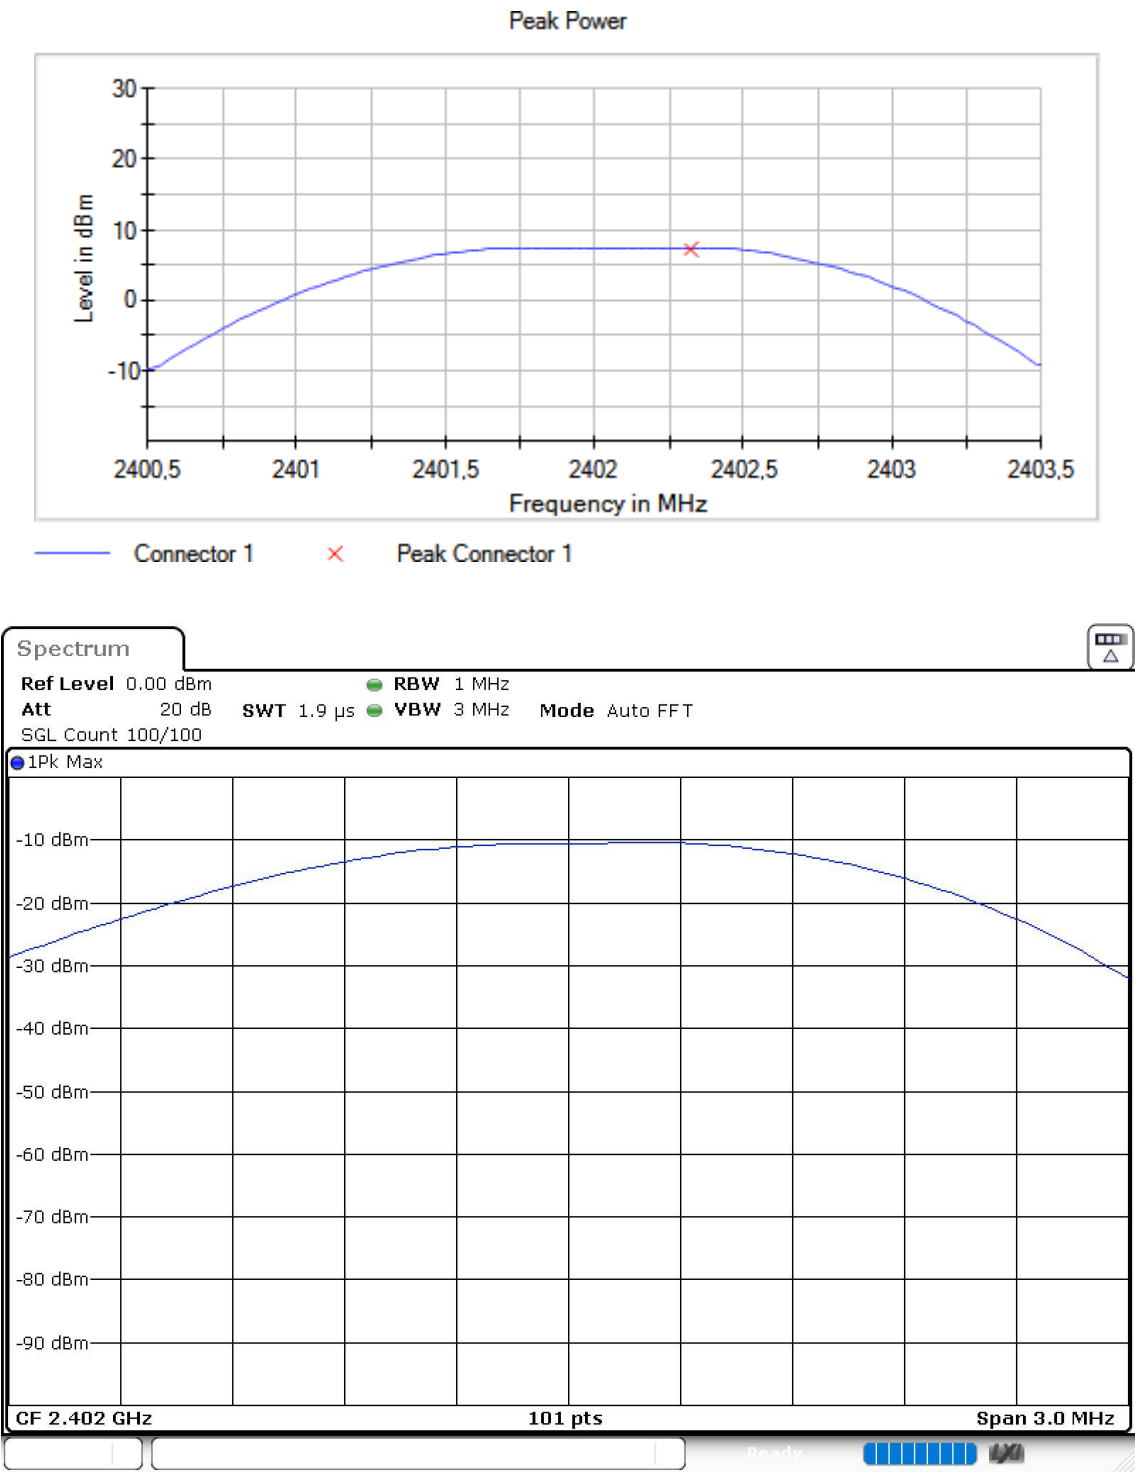



Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2440.00000 Active Port = 1
Modulation = Proximity

Images:

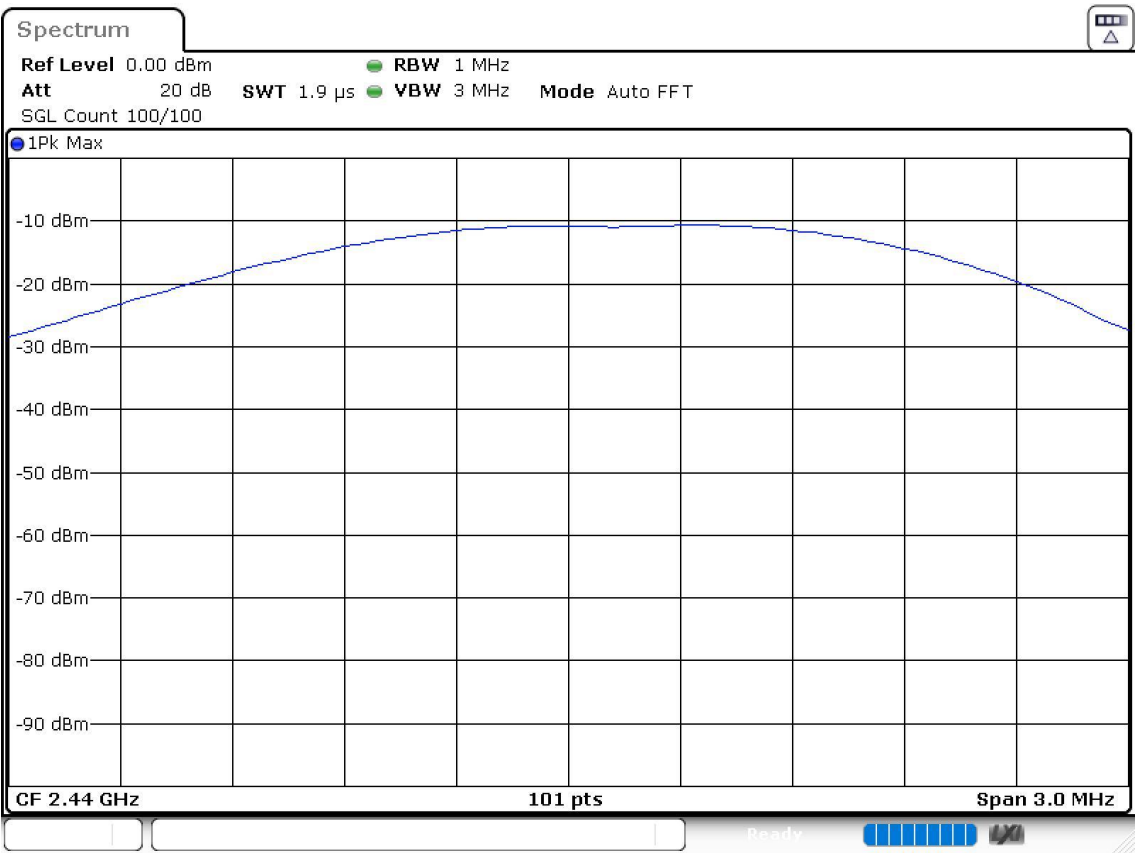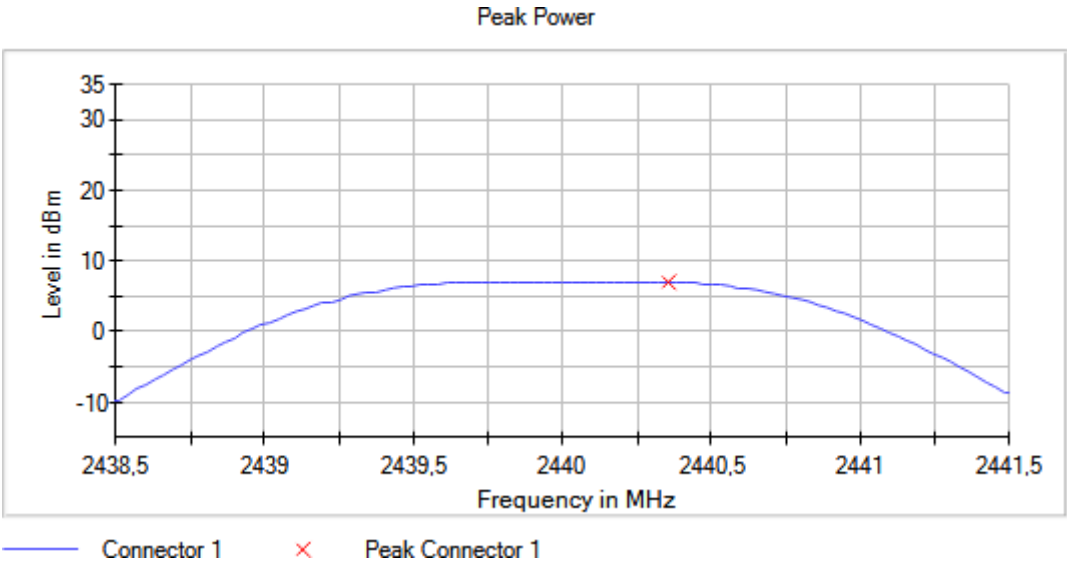

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2480.00000 Active Port = 1
Modulation = Proximity

Images:

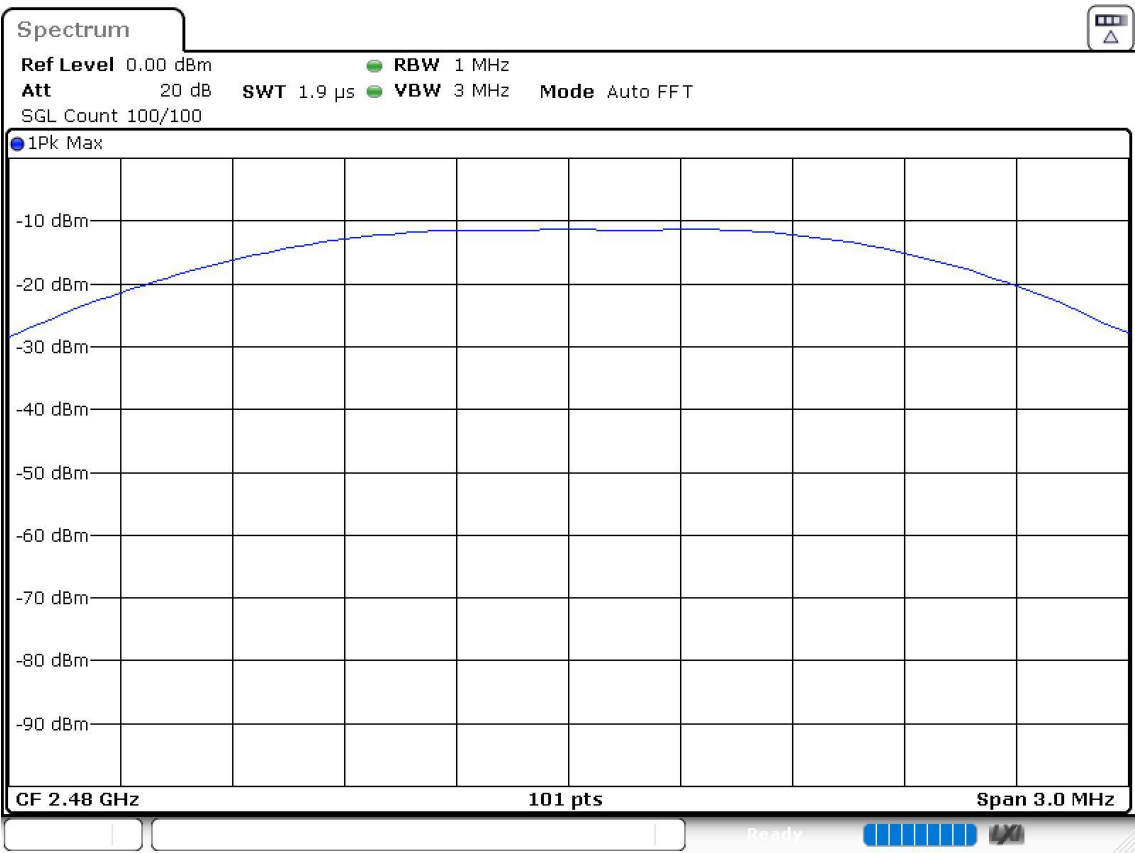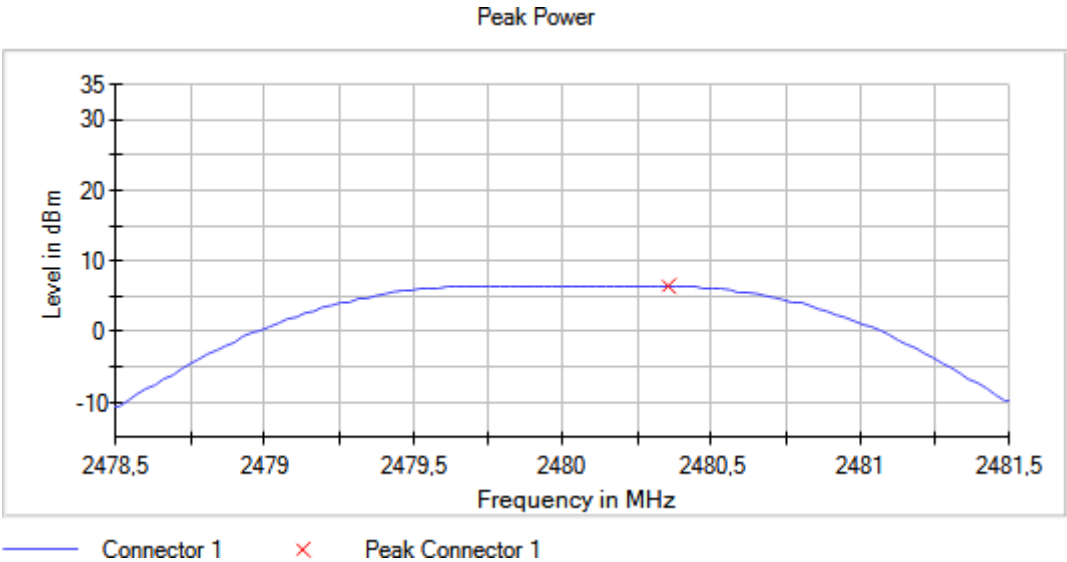

RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Modulation: Proximity

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Freq (MHz)	Lvl (dBm)
[2400, 2483.5]	Digital Transmission System (DTS)	2402.00000	1	2399.975000	-44.3
				2399.925000	-45.5
				2399.875000	-47.0
				2399.775000	-50.5
				2399.725000	-50.6
				2399.825000	-50.9
				2399.525000	-52.7
				2399.575000	-52.8
				2399.675000	-53.2
				2399.275000	-54.5
				2399.325000	-54.7
				2399.475000	-54.8
				2399.625000	-55.5
				2399.075000	-55.7
				2399.125000	-55.9
		2480.00000		2484.025000	-52.2
				2483.975000	-52.4
				2484.075000	-53.6
				2485.475000	-53.9
				2485.425000	-54.1
				2485.075000	-55.2
				2484.425000	-55.2
				2483.575000	-55.3
				2484.375000	-55.3
				2483.925000	-55.3
				2485.125000	-55.4
				2483.625000	-55.4

Operation Band (MHz)	Equipment	Freq (MHz)	Port	Freq (MHz)	Lvl (dBm)
				2483.525000	-55.6
				2485.525000	-55.6
				2484.225000	-55.6


Verdict

Pass

Attachments

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2402.00000 Active Port = 1
Modulation = Proximity

Images:

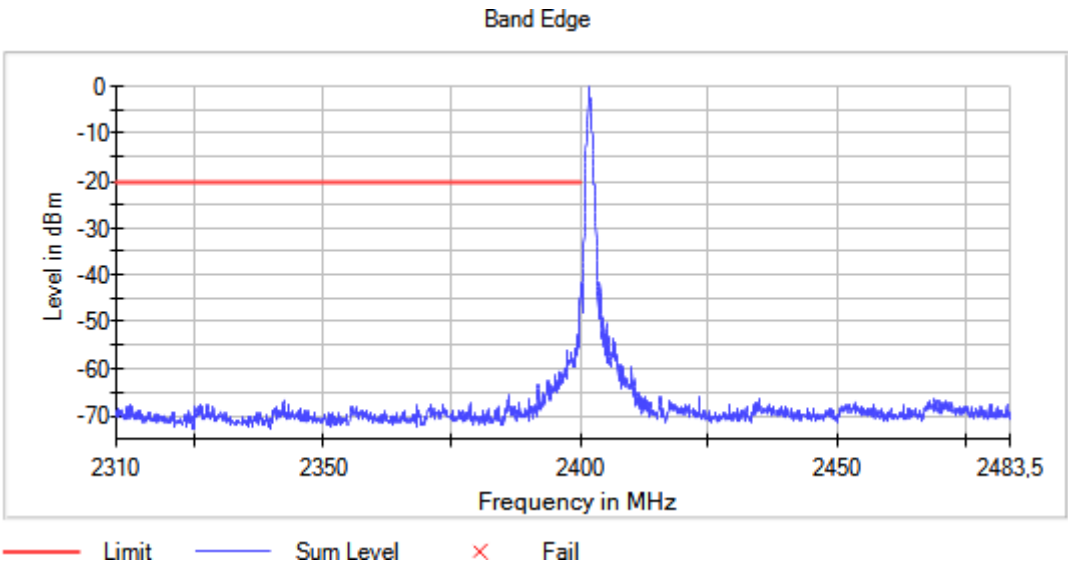

Tables:

Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2480.00000 Active Port = 1
Modulation = Proximity

Images:

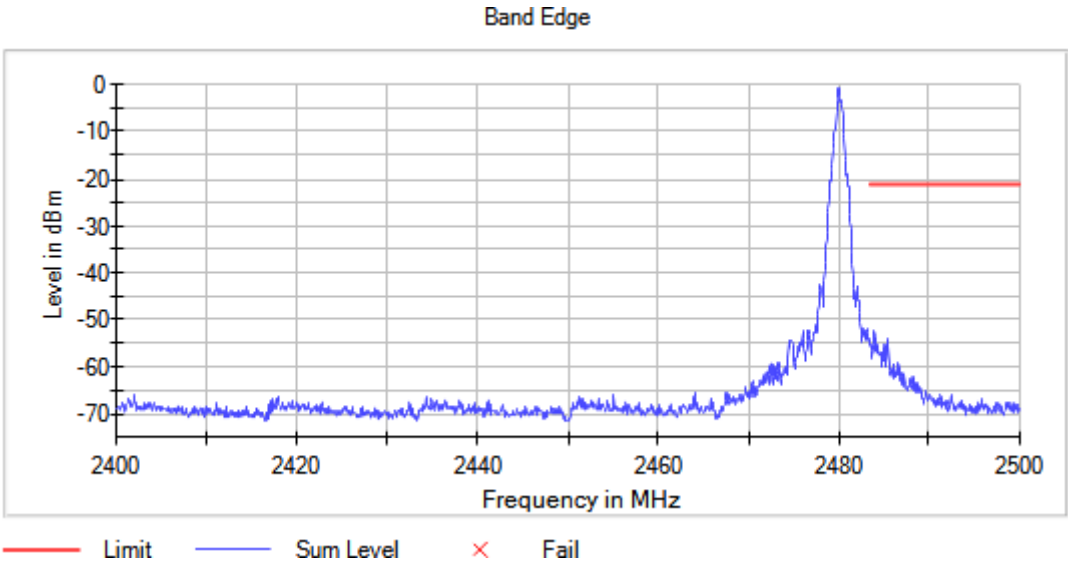

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)

Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

Frequency range tested for Radiated emissions:

Start frequency: no radiofrequency signal generated in the device found below 10th sub-harmonic, no further investigation required.

Stop frequency: it has been performed the radiated spurious emissions until 10th harmonic.

Modulation: Proximity

Results

The spurious frequencies do not depend on the operating channel or the modulation mode.

No spurious frequencies detected at less than 10dB below the limit.

Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1]

Operation Band MHz = [2400, 2483.5]

Equipment Type = Digital Transmission System (DTS)


Frequency MHz = 2402.00000

Active Port = 1

Modulation = Proximity

Resource Unit Tone/Index = -

Images:

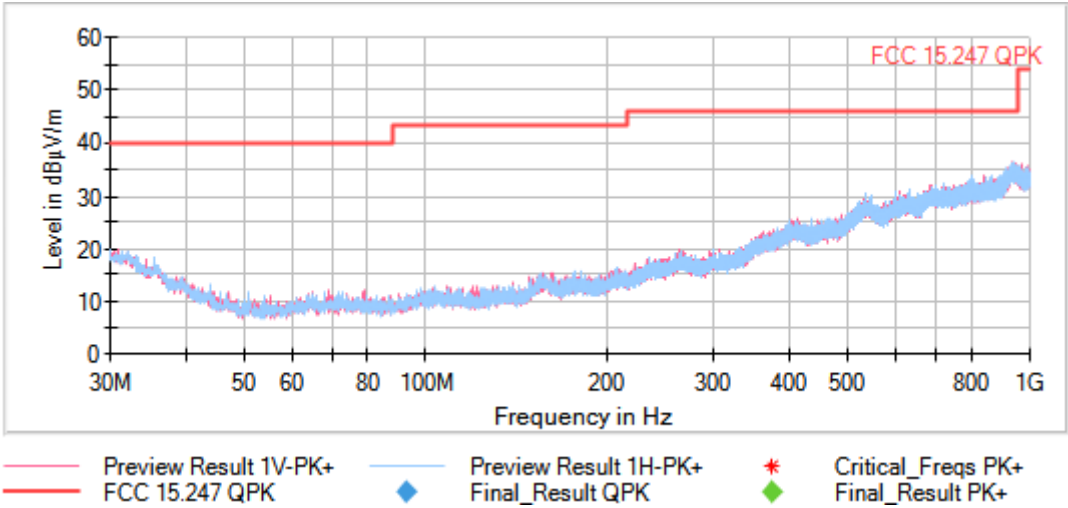

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	20 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]


Equipment Type = Digital Transmission System (DTS) Frequency MHz = 2402.00000

Active Port = 1


Modulation = Proximity

Resource Unit Tone/Index = -

Images:

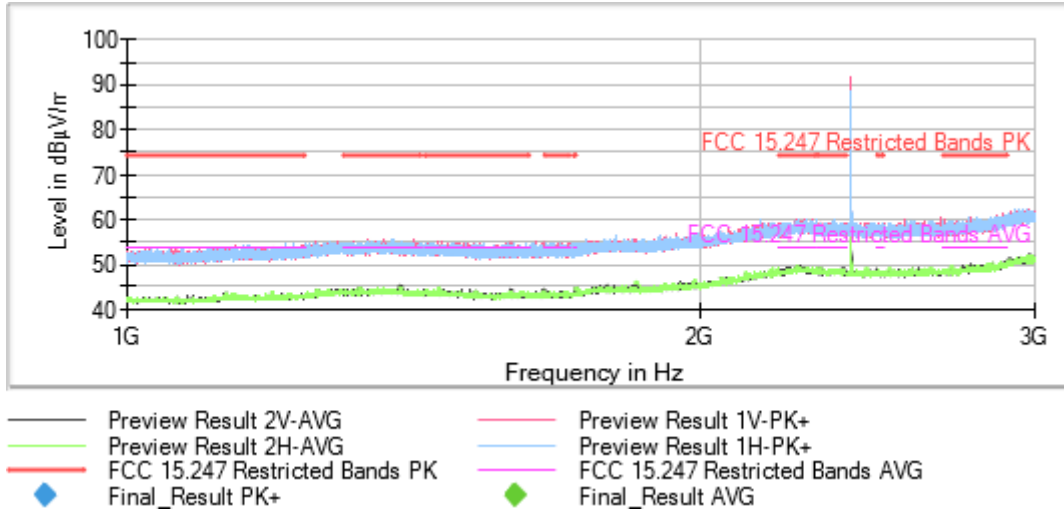

Full Spectrum

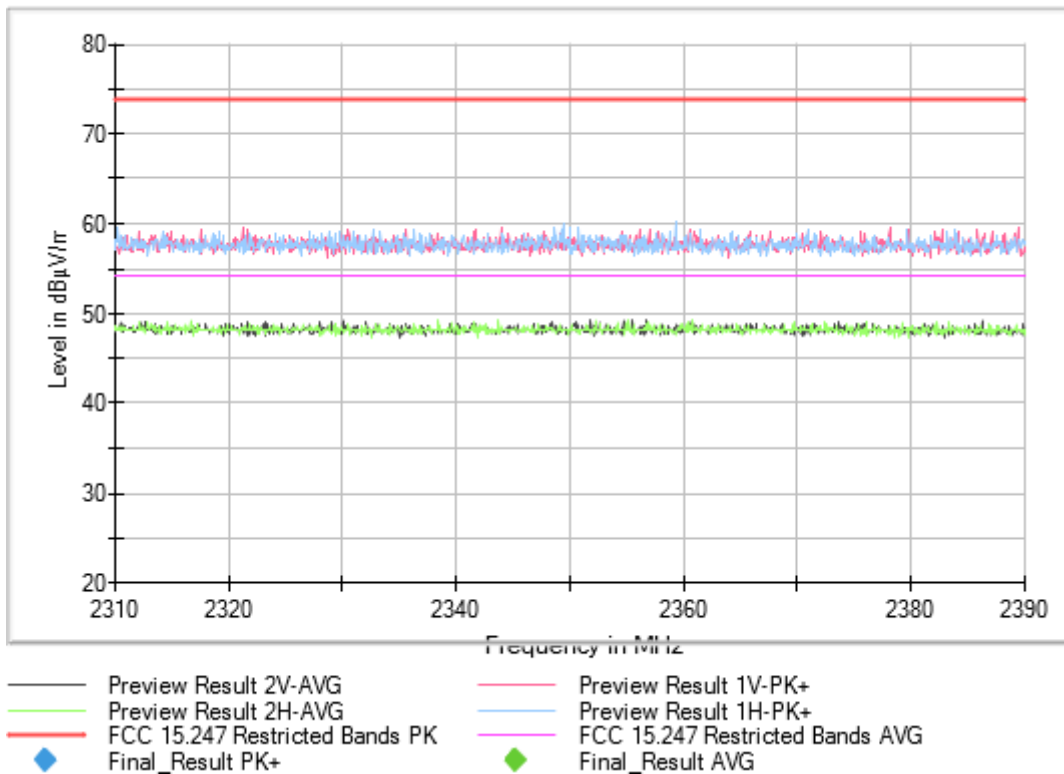



Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]

Equipment Type = Digital Transmission System (DTS)


Frequency MHz = 2440.00000

Active Port = 1


Modulation = Proximity

Resource Unit Tone/Index = -

Images:

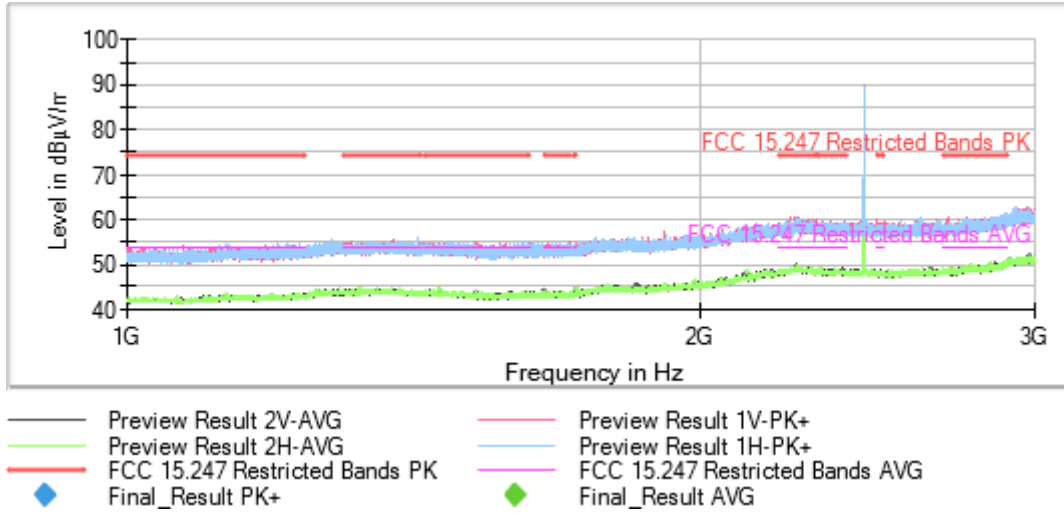

Full Spectrum

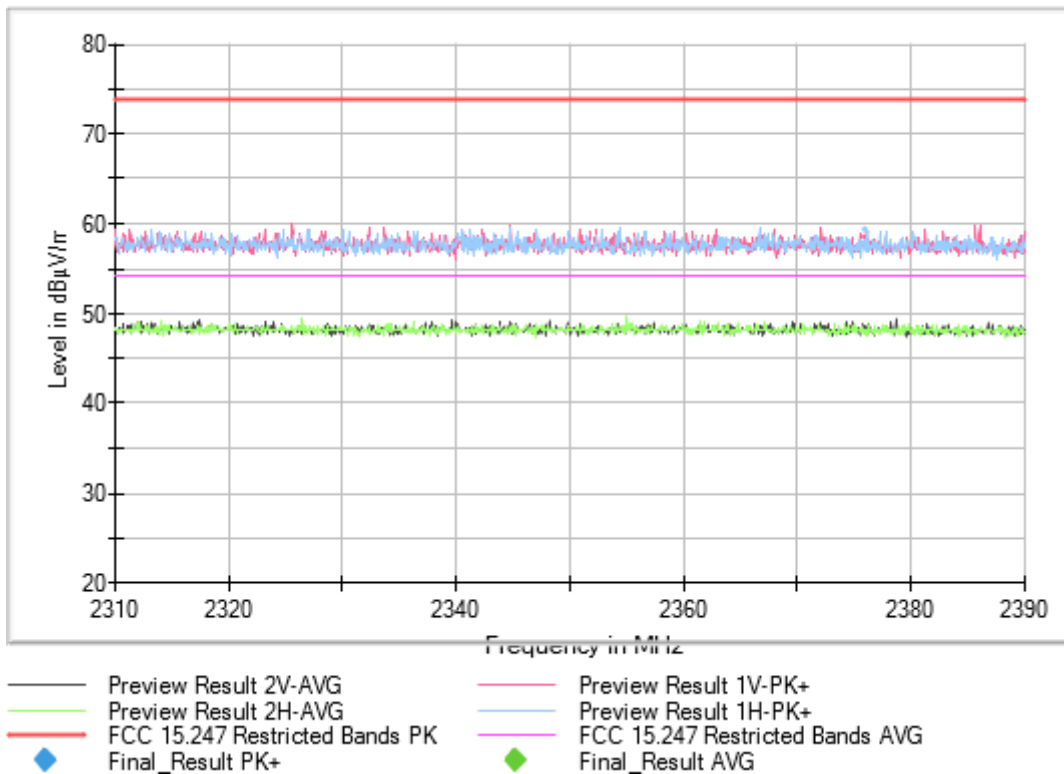



Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [1, 3]

Operation Band MHz = [2400, 2483.5]

Equipment Type = Digital Transmission System (DTS)


Frequency MHz = 2480.00000

Active Port = 1


Modulation = Proximity


Resource Unit Tone/Index = -

Images:

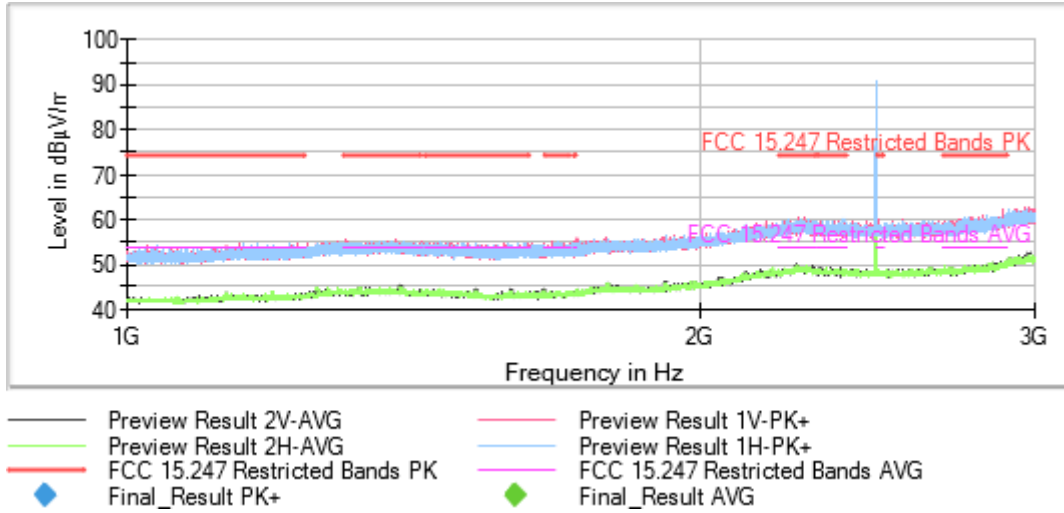

Full Spectrum

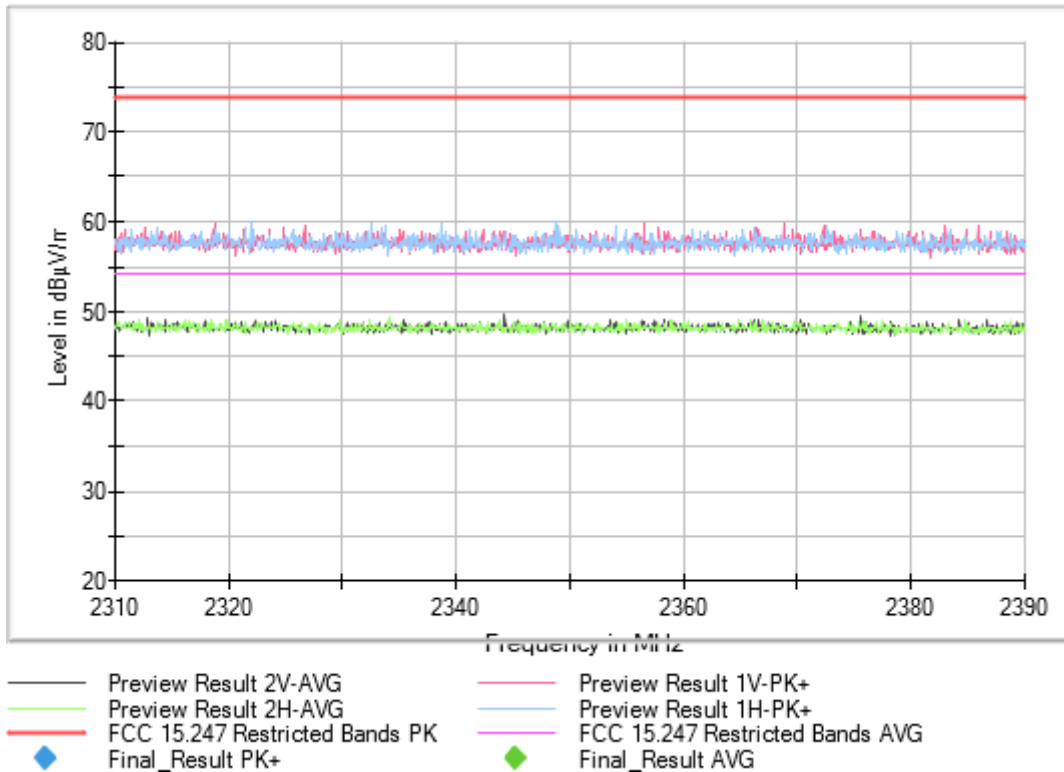

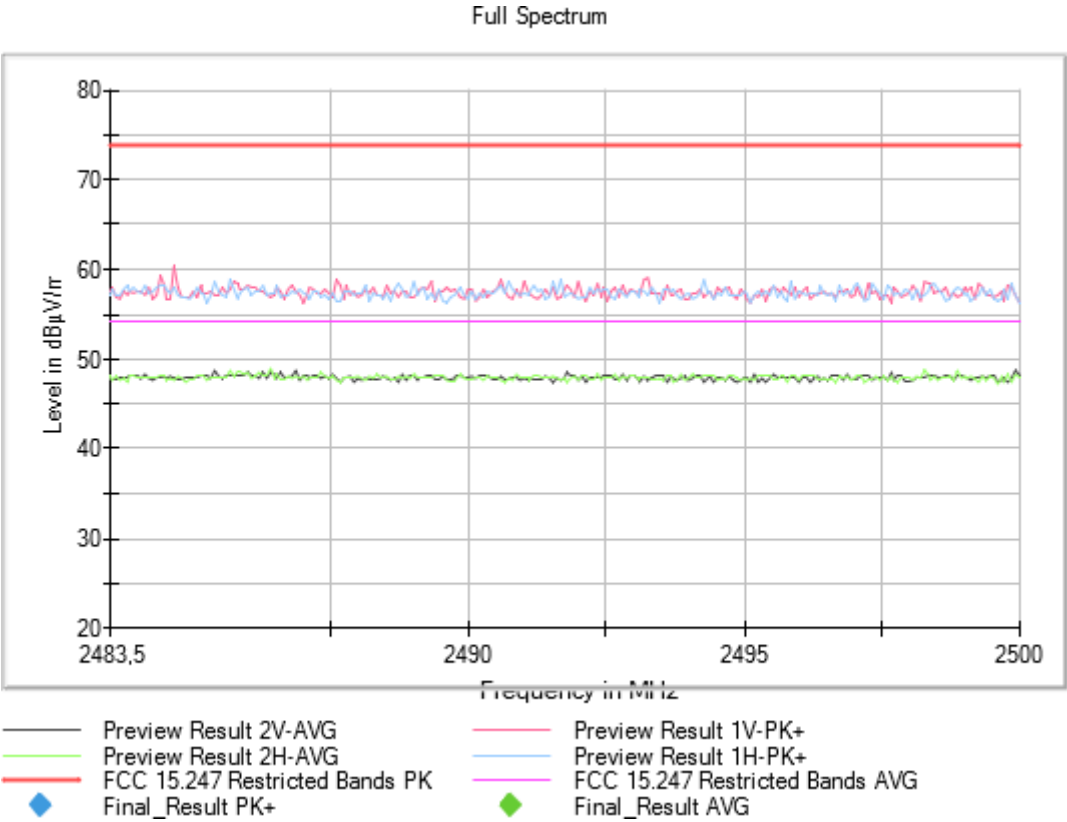

Tables:
Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Equipment Type = Digital Transmission System (DTS)

Active Port = 1


Resource Unit Tone/Index = -

Operation Band MHz = [2400, 2483.5]

Frequency MHz = 2402.00000

Modulation = Proximity

Images:

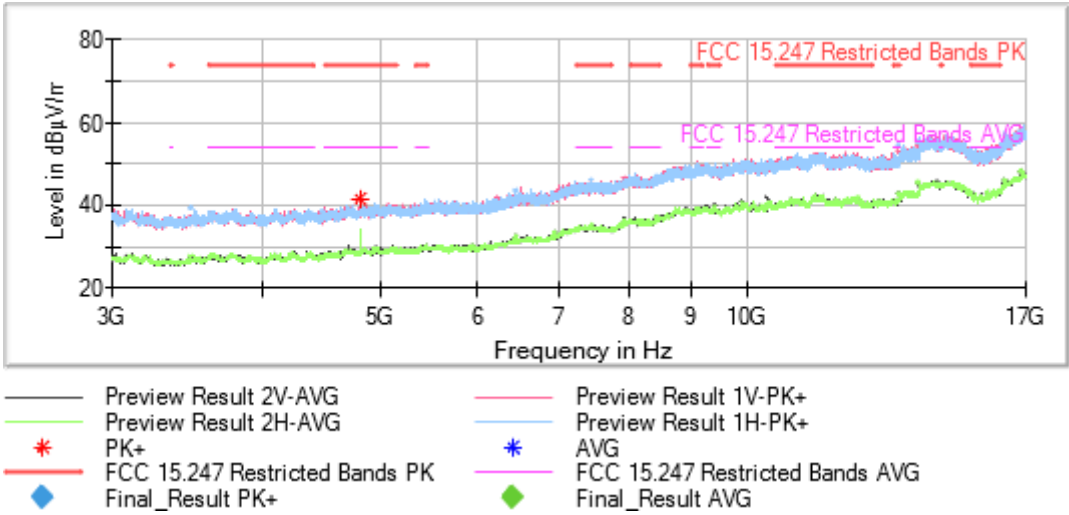

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]

Equipment Type = Digital Transmission System (DTS)


Frequency MHz = 2440.00000

Active Port = 1

Modulation = Proximity

Resource Unit Tone/Index = -

Images:

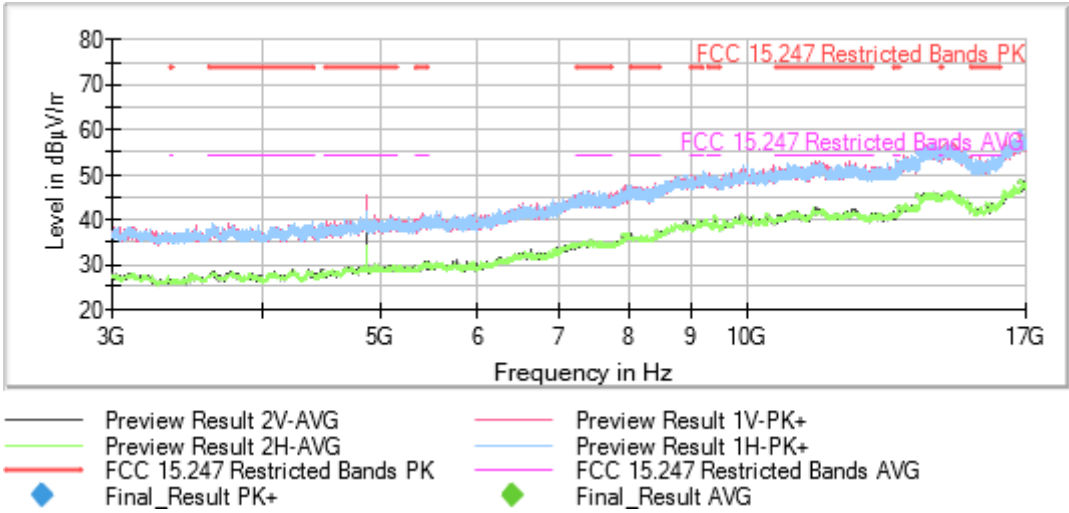

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [3, 17]

Operation Band MHz = [2400, 2483.5]

Equipment Type = Digital Transmission System (DTS)


Frequency MHz = 2480.00000

Active Port = 1

Modulation = Proximity

Resource Unit Tone/Index = -

Images:

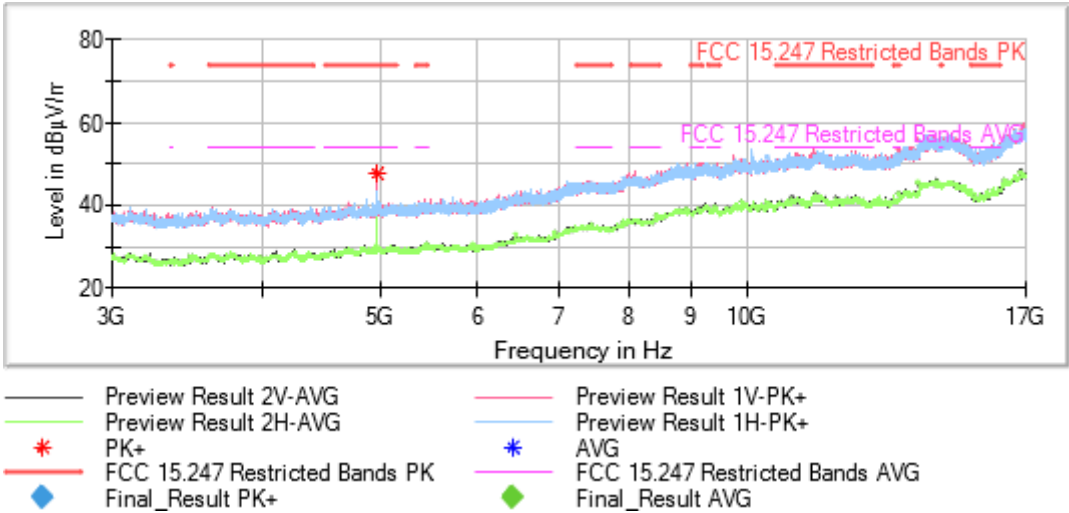

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

Frequency Range GHz = [17, 26]

Operation Band MHz = [2400, 2483.5]

Equipment Type = Digital Transmission System (DTS)


Frequency MHz = 2404.00000

Active Port = 1

Modulation = Proximity

Resource Unit Tone/Index = -

Images:

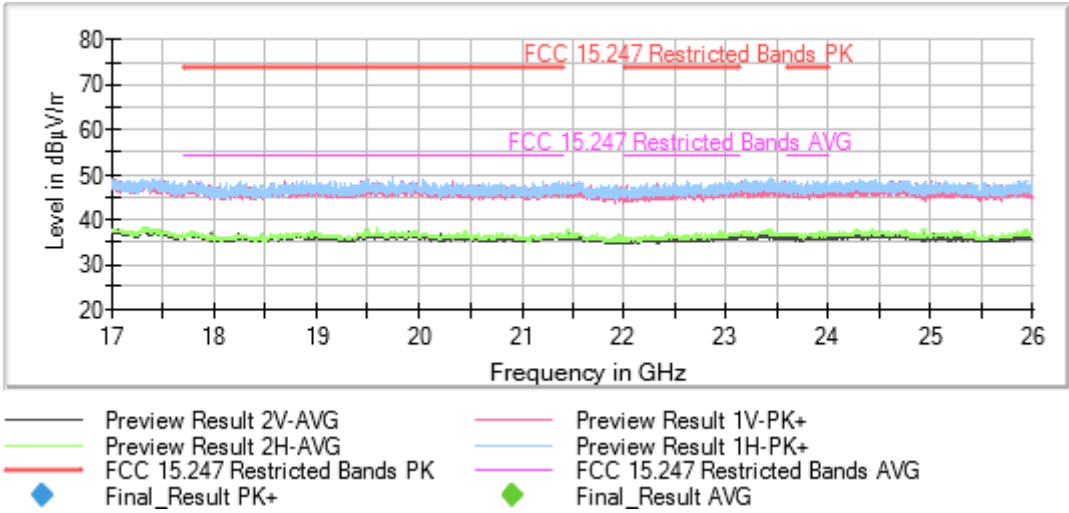

Tables:

Spectrum Analyzer Parameters

	Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
	Receiver: [ESW 44]					
	17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

[Psd] Power Spectral Density

Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Modulation: Proximity

Results

Operation Band (MHz)	Equipment	Freq (MHz)	Port	PSD (dBm)
[2400, 2483.5]	Digital Transmission System (DTS)	2402.00000	1	-0.97
		2440.00000		-1.38
		2480.00000		-2.52


Verdict

Pass

Attachments


Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2402.00000 Active Port = 1
Modulation = Proximity

Images:

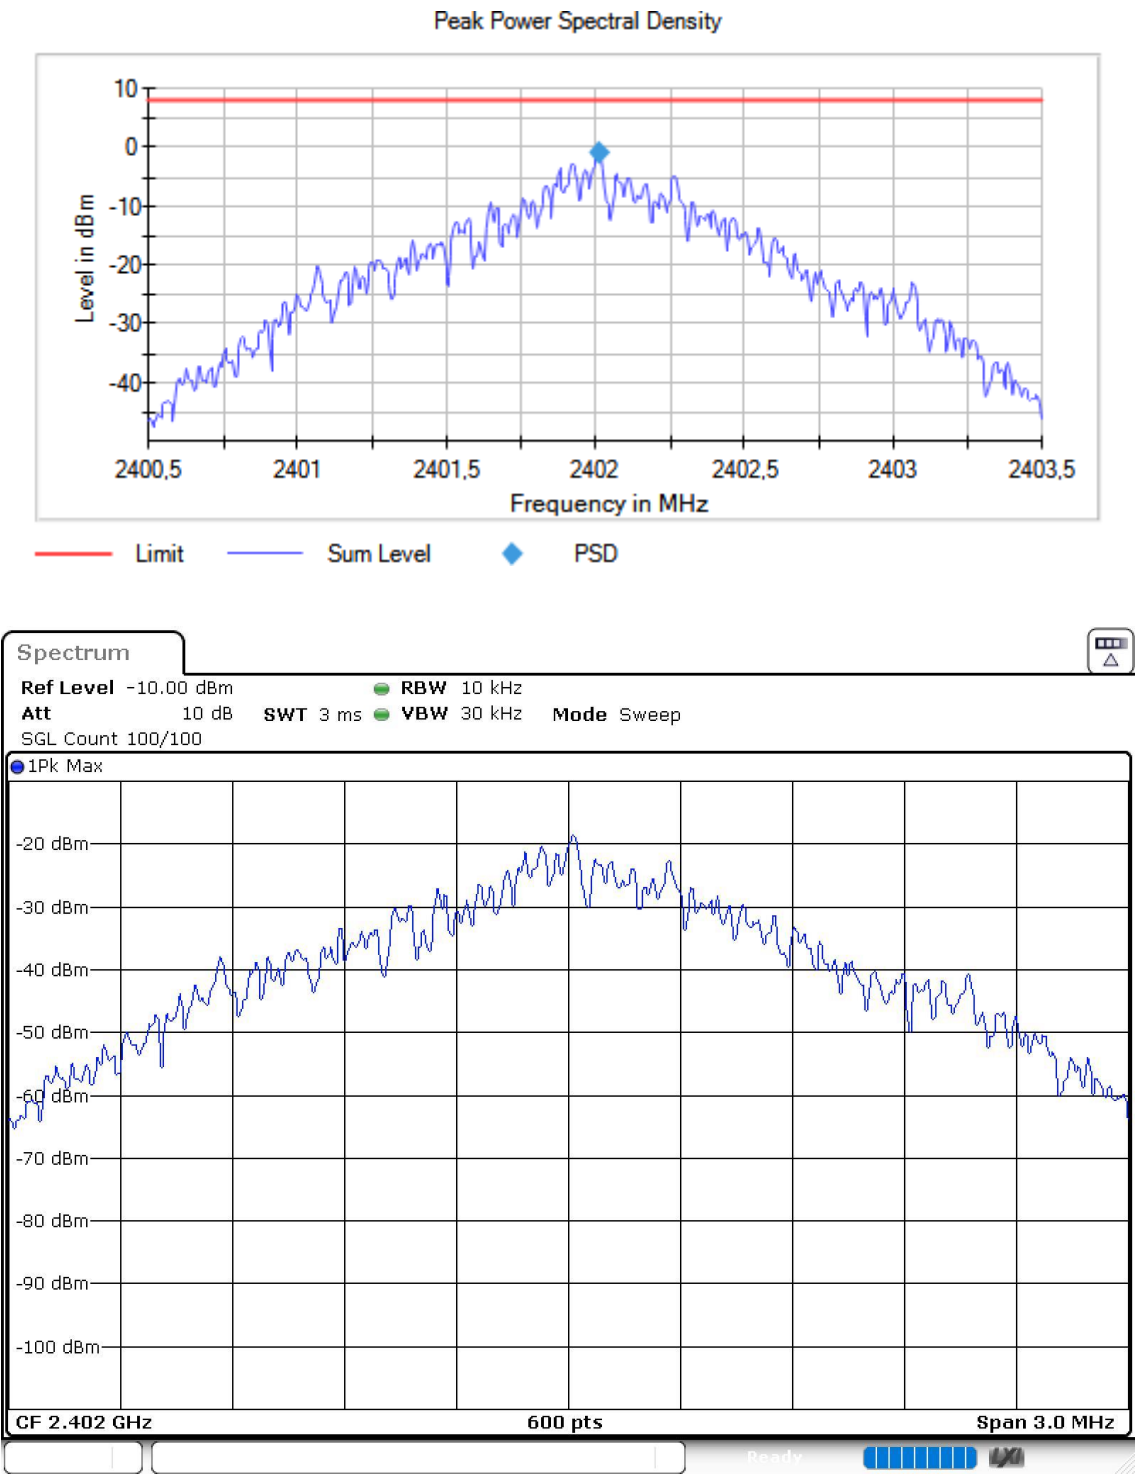

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2440.00000 Active Port = 1
Modulation = Proximity

Images:

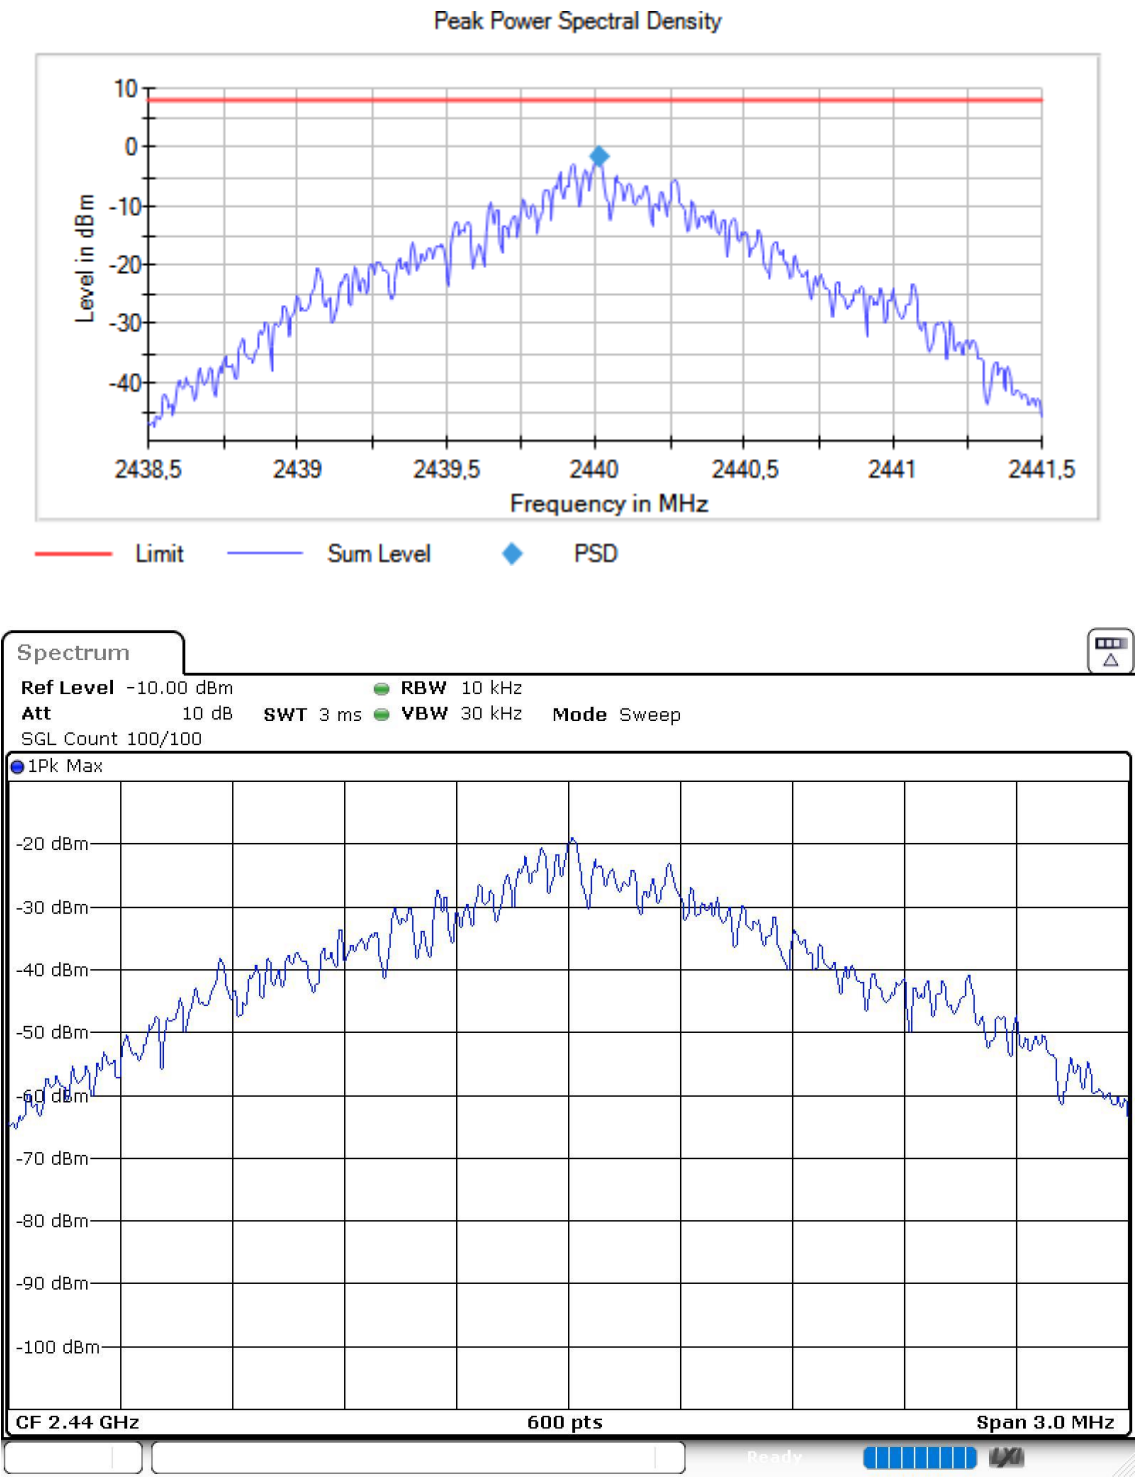

Operation Band MHz = [2400, 2483.5] Equipment Type = Digital Transmission System (DTS)
Frequency MHz = 2480.00000 Active Port = 1
Modulation = Proximity

Images:

