

# TEST REPORT


## 1. Applicant

Name : AEPEL INC.  
Address : 445-13, Geumsung-ri, Tanhyeon-myeon,  
              : Paju-City,  
              : Gyeonggi-do, Korea(#413-843)

## 2. Products

Name : Wireless MicroPhone  
Model/Type : FC-730M  
Manufacturer : AEPEL INC.  
3. Test Standard : FCC CFR 47 Part 15.247 Sulpart C  
4. Test Method : ANSI C63.4-2009  
5. Test Result : Positive  
6. Date of Application : December 15, 2009  
7. Date of Issue : January 27, 2010


Tested by



Young- Ryul, Jo

Test Engineer:

Approved by

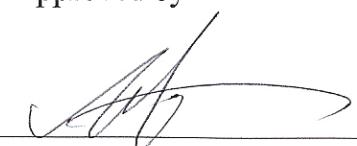

Sung Bum, Hong

Compliance Engineer:

*This report may not be reproduced without the full written consent of Korea Standard Quality Laboratories.*

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION.....</b>	3
1.1. Applicant(client).....	3
1.2. Equipment(EUT).....	3
1.3. Testing Laboratory .....	4
<b>2. SUMMARY OF TEST RESULTS.....</b>	5
<b>3. MEASUREMENT &amp; RESULT.....</b>	6
<b>3.1. ANTENNA REQUIREMENT.....</b>	6
<b>3.2. 20dB BANDWIDTH.....</b>	7
<b>3.3. MAXIMUM PEAK OUTPUT POWER.....</b>	10
<b>3.4. CARRIER FREQUENCY SEPARATION.....</b>	13
<b>3.5. NUMBER OF HOPPING CHANNELS.....</b>	15
<b>3.6. DWELL TIME.....</b>	17
<b>3.7. SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS.....</b>	20
<b>3.8. RECEIVER SPURIOUS EMISSIONS.....</b>	31
<b>3.9. RF EXPOSURE.....</b>	33
<b>4. TEST EQUIPMENTS.....</b>	34
** APPENDIXS	
1. EUT photo	

## 1. GENERAL INFORMATION

### 1.1. Applicant (Client)

<b>Name</b>	AEPEL INC.
<b>Address</b>	445-13, Geumsung-ri, Tanhyeon-myeon, Paju-City, Gyeonggi-do, Korea
<b>Contact Person</b>	Sung-ho, Yoo
<b>Telephone No.</b>	+82-31-945-5830
<b>Facsimile No.</b>	+82-31-945-5832
<b>E-mail address</b>	aepel@hanmail.net

### 1.2. Equipment (EUT)

<b>Type of equipment</b>	Wireless MicroPhone
<b>Model Name</b>	FC-730M
<b>FCC ID</b>	X2LAEPEL-1
<b>Frequency Band</b>	2402 ~ 2480 MHz
<b>Type of Modulation</b>	GFSK
<b>Number of Channels</b>	79 channels
<b>Antenna Gain</b>	2 dBi
<b>Function Type</b>	Transceiver
<b>Power Source</b>	Input DC 9V (Adapter) Output DC 4.2V (Li-Ion battery)
<b>Manufacturer Name</b>	AEPEL INC.
<b>Manufacturer Address</b>	445-13, Geumsung-ri, Tanhyeon-myeon, Paju-City, Gyeonggi-do, Korea

### 1.3. Testing Laboratory

<b>Testing Place</b>	Korea Standard Quality Laboratories
<b>Test Engineer</b>	Young Ryul, Jo
<b>Telephone number</b>	+82-31-356-7333
<b>Facsimile number</b>	+82-31-356-7303
<b>E-mail address</b>	archerj@hanmail.net

## 2. SUMMARY OF TEST RESULTS

**2.1. Testing performed for :** Wireless MicroPhone

**2.2. Equipment Under Test :** FC-730M

**2.3. Receipt of Test Sample :** November 30, 2009

**2.4. Test Start Date :** December 01, 2009

**2.5. Test End Date :** December 02, 2009

The following table represents the list of measurements required under the FCC CFR47 Part 15.207, 15.247, 15.209

Requirement	CFR 47 Section	Report Section	Test Result
Antenna Requirement	15.203, 15.247(b)(4)	3.1	PASS
20dB Bandwidth	15.247(a)(1)	3.2	PASS
Maximum Peak Output Power	15.247(b)(1), (4)	3.3	PASS
Carrier Frequency Separation	15.247(a)(1)	3.4	PASS
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	3.5	PASS
Dwell Time	15.247(a)(iii)	3.6	PASS
Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.205(a), 15.209(a)	3.7	PASS
Receiver Spurious Emissions	-	3.8	PASS
RF Exposure	15.247(i), 1.1307(b)(1)	3.9	PASS

Note 1 : Test results reported in this document relate only to the items tested

Note 2 : The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3 : Test results apply only to the item(s) tested

\* Modifications required for compliance

No modifications were implemented by KSQ.

All results in this report pertain to the un-modified sample provided to KSQ.

### 3. Measurement & Results

#### 3.1 ANTENNA REQUIREMENT

##### 3.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### 3.1.2 Result : PASS

The transmitter has an integral Chip antenna. The directional gain of the antenna is 2.0 dBi.

### 3. 2. 20dB BANDWIDTH

#### 3.2.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### 3.2.2. Test Setup Layout



#### 3.2.3. Test Condition

- Set RBW of Spectrum analyzer to 10 kHz, Span=3MHz, Sweep=auto
- The 20dB bandwidth is defined as the frequency range where the power is higher than the peak power minus 20dB . Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater


#### 3.2.4. Test result : PASS

**Table 1 : Measured values of the 20dB Bandwidth**


Channels	Frequency (MHz)	Result (kHz)	Verdict
0	2402	791	Pass
39	2441	785	Pass
78	2480	802	Pass

### 3.2.4.1. Measurement graph


- Frequency 2402 CH 0 -

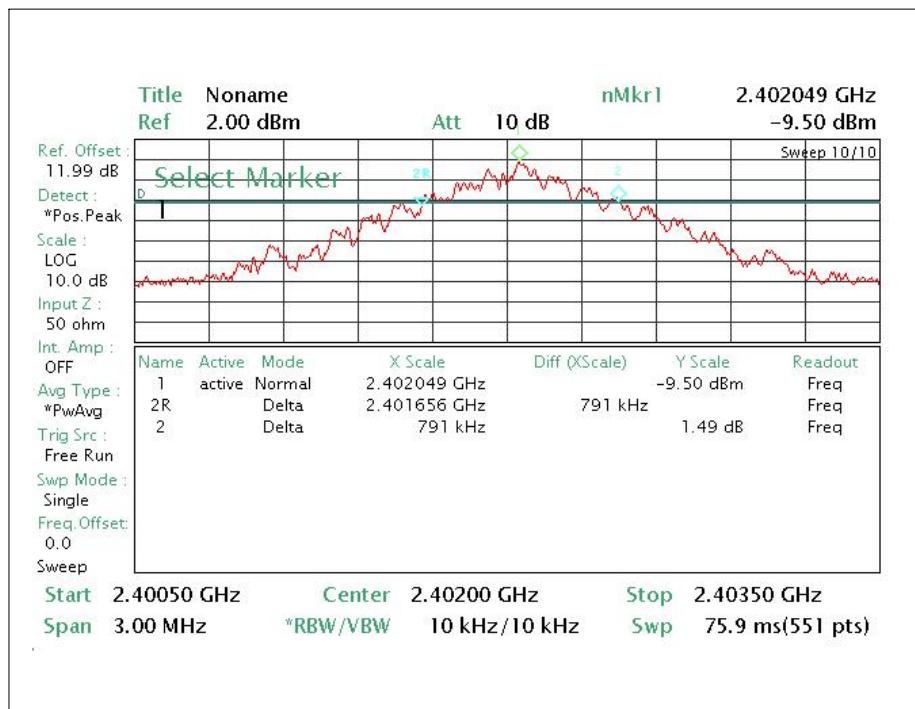

- Frequency 2441 CH 39 -

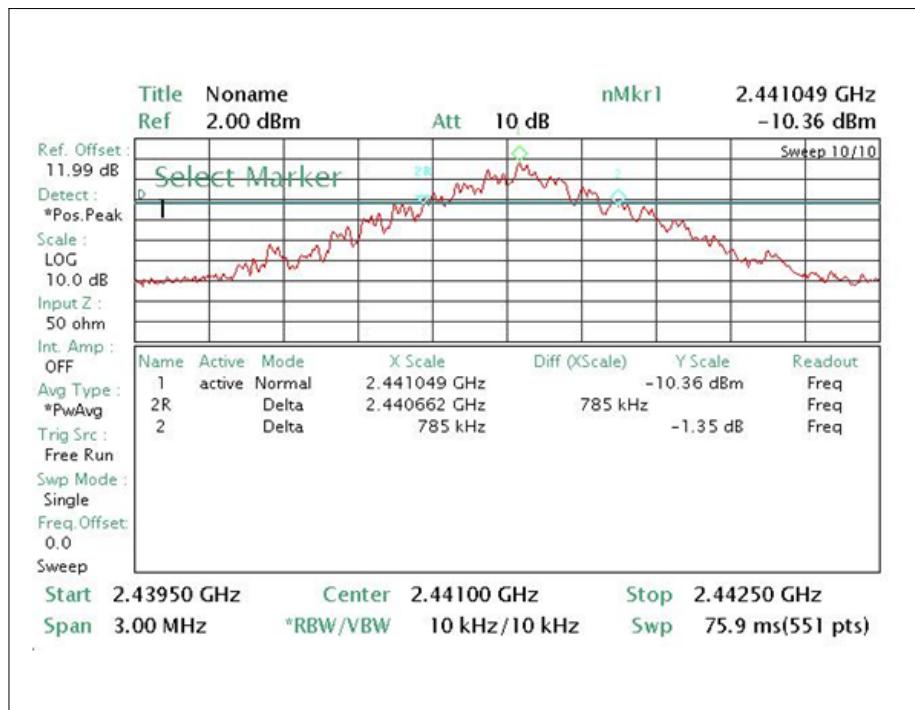

- Frequency 2480 CH 78 -

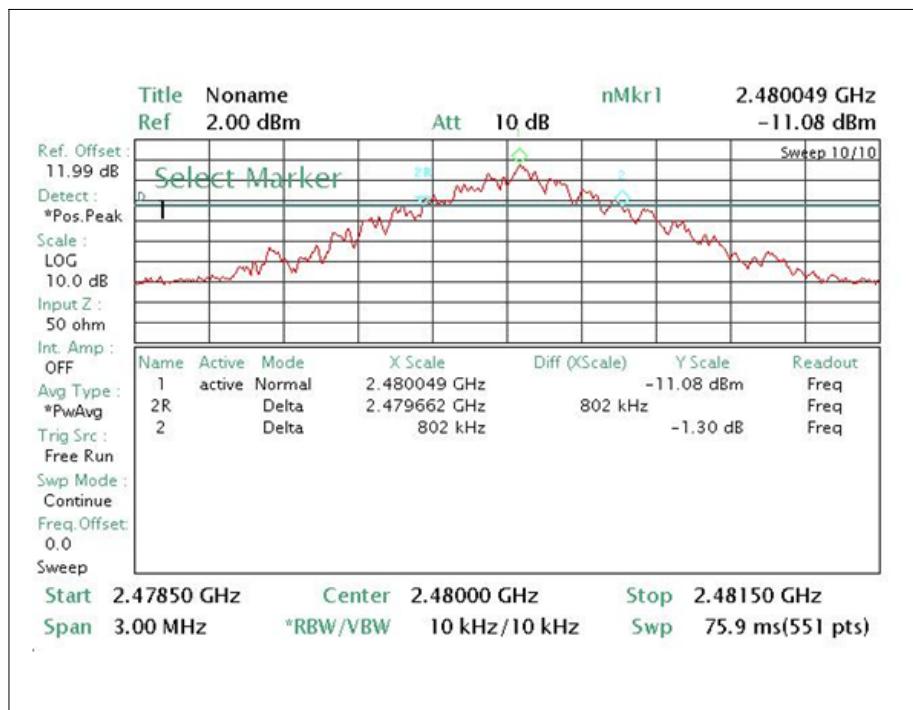


### 3.3. MAXIMUM PEAK POWER

#### 3.3.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2. Test Setup Layout

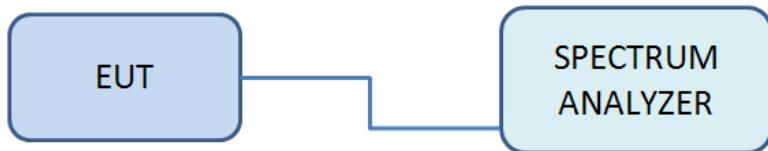

#### 3.3.3. Test Condition

- Set RBW of Spectrum analyzer to 1 MHz
- The Maximum Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.


#### 3.3.4. Test result : PASS

**Table 2 : Measured values of the Maximum Peak Output Power**


Channels	Frequency (MHz)	Reading Power (dBm)	Output Power (W)	Limit (W)	Verdict
0	2402	-4.25	0.00038	1	Pass
39	2441	-5.48	0.00028	1	Pass
78	2480	-5.89	0.00026	1	Pass

### 3.3.4.1. Measurement graph


- Frequency 2402 CH 0 -

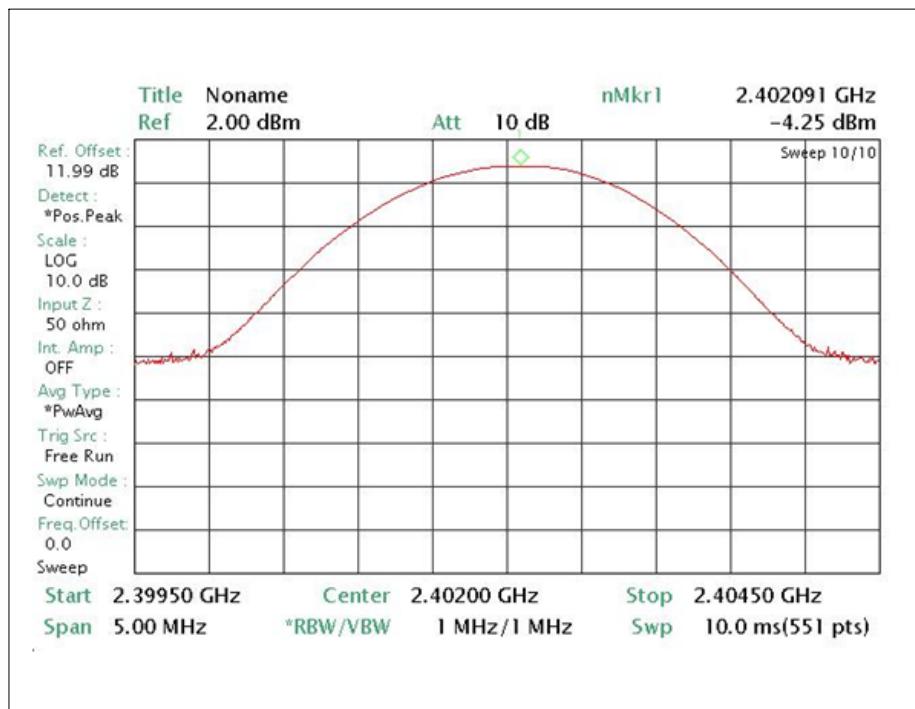

- Frequency 2441 CH 39 -

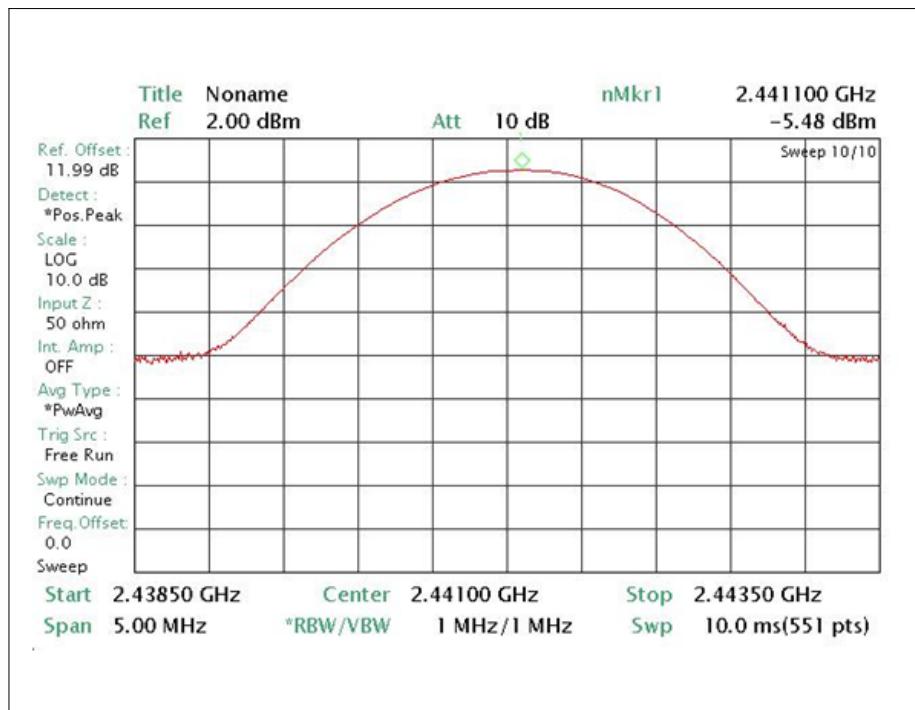

- Frequency 2480 CH 78 -

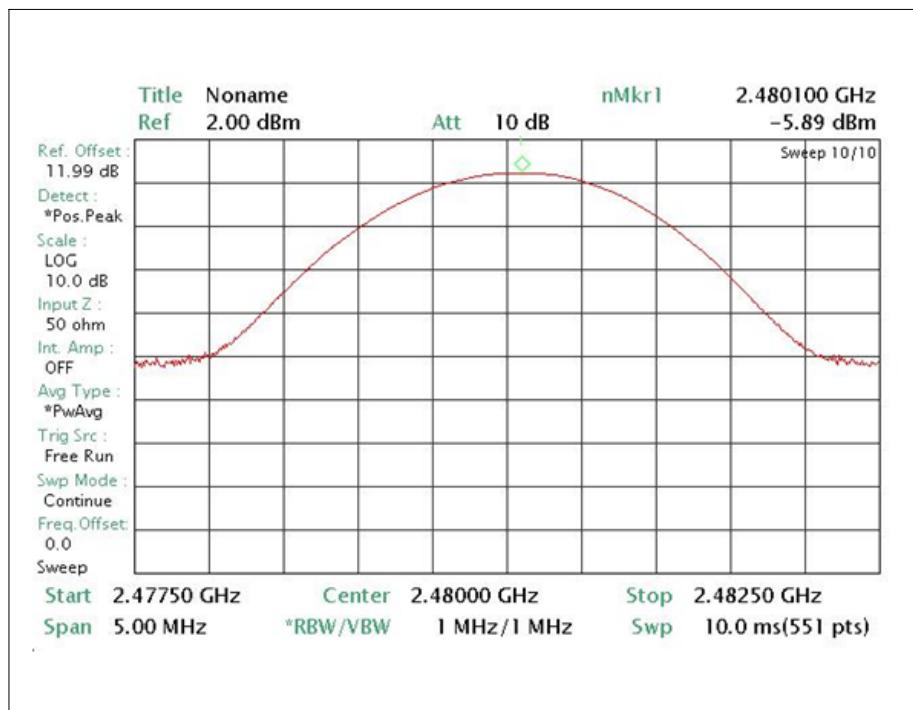

### 3.4. CARRIER FREQUENCY SEPARATION

#### 3.4.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### 3.4.2. Test Setup Layout



#### 3.4.3. Test Condition

- Set RBW of Spectrum analyzer to 30 kHz, Span=3MHz, Sweep=auto
- Frequency hopping system shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater.


#### 3.4.4. Test result : PASS

**Table 3 : Measured values of the Carrier Frequency Separation**

Operating frequency (MHz)	frequency separation (kHz)	20 dB bandwidth (kHz)	Limit (frequency separation)	Verdict
2441	1004	785	$\geq 25$ kHz or 20 dB bandwidth	Pass

**3.4.4.1. Measurement graph**

- Frequency 2441 CH 39 -

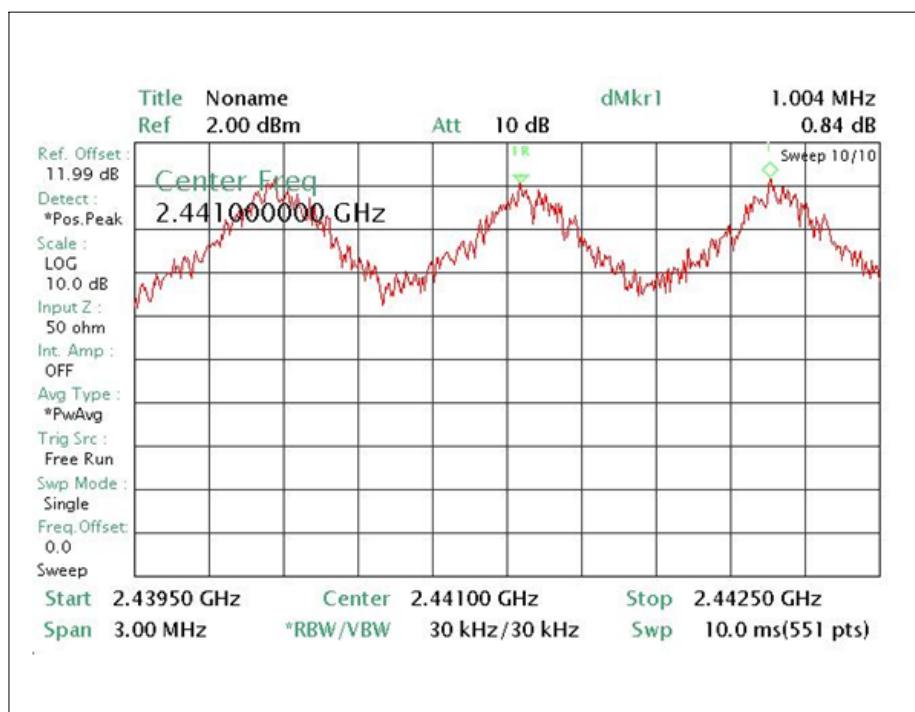

### 3.5. NUMBER OF HOPPING CHANNELS

#### 3.5.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### 3.5.2. Test Setup Layout



#### 3.5.3. Test Condition

- Set RBW of Spectrum analyzer to 100 kHz
- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


#### 3.5.4. Test result : PASS

**Table 4 : Measured values of the Number of Hopping Channels**


Mode	Result (channel)	Limit (channel)	Verdict
Hopping mode	79	15	Pass

### 3.5.4.1. Measurement graph

- Frequency 2441 CH 39 -

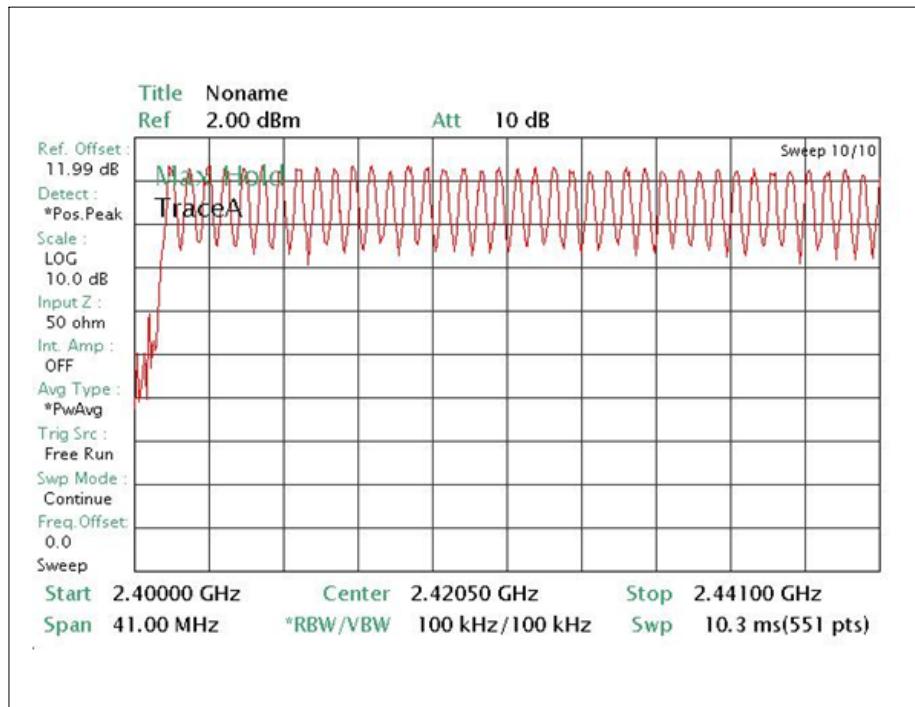

- Frequency 2441 CH 39 -

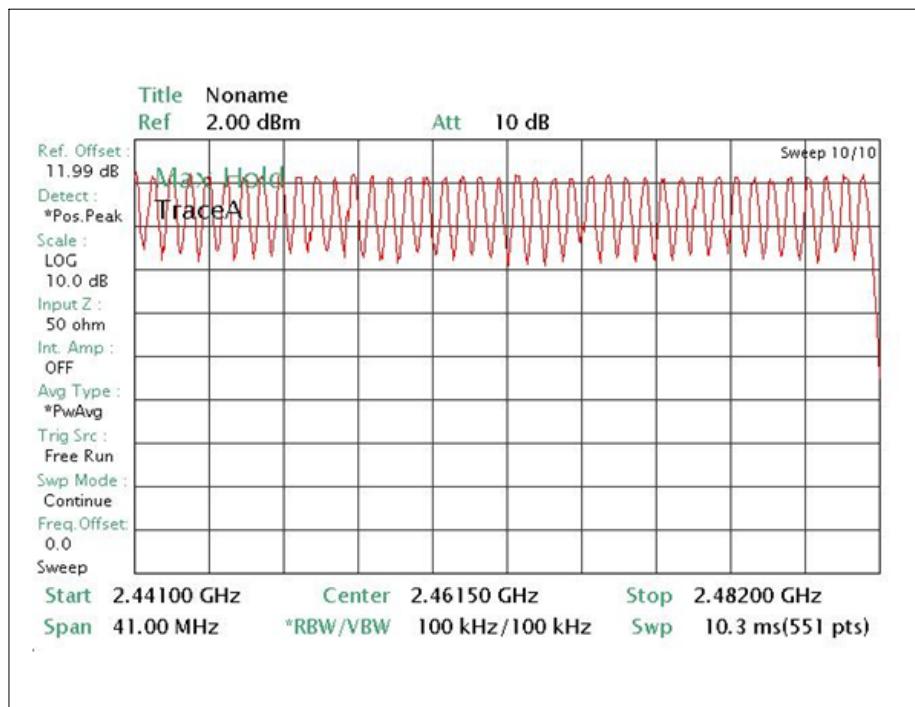

### 3.6. DWELL TIME

#### 3.6.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 3.6.2. Test Setup Layout



#### 3.6.3. Test Condition

- Set RBW of Spectrum analyzer to 3 MHz, sweep time is 2.0 ms
- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

The dwell time is calculated by:

Dwell time = time slot length \* hop rate \* 31.6/ number of hopping channels with:

- hop rate=1600/5 \* 1/s for DH5 packets =320
- number of hopping channels=79
- 31.6 s=0.4 seconds multiplied by the number of hopping channels=0.4s \* 79


#### 3.6.4. Test result : PASS

**Table 5 : Measured values of the Dwell Time**


Channels	Type slot length(ms)	Dwell time (ms)	Limits (msec)	Packet type	Verdict
0 (2402MHz)	1.829	234.1	$\leq 400$	DH5	Pass
39 (2441MHz)	1.829	234.1	$\leq 400$	DH5	Pass
78 (2480MHz)	1.825	233.6	$\leq 400$	DH5	Pass

### 3.6.4.1. Measurement graph


- Frequency 2402 CH 0 -

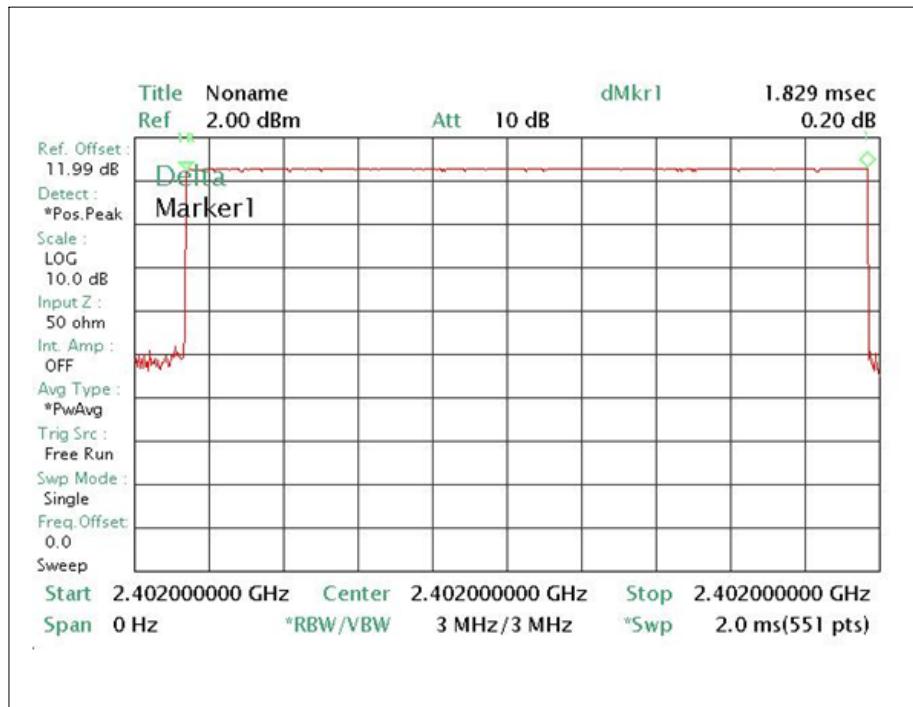

- Frequency 2441 CH 39 -

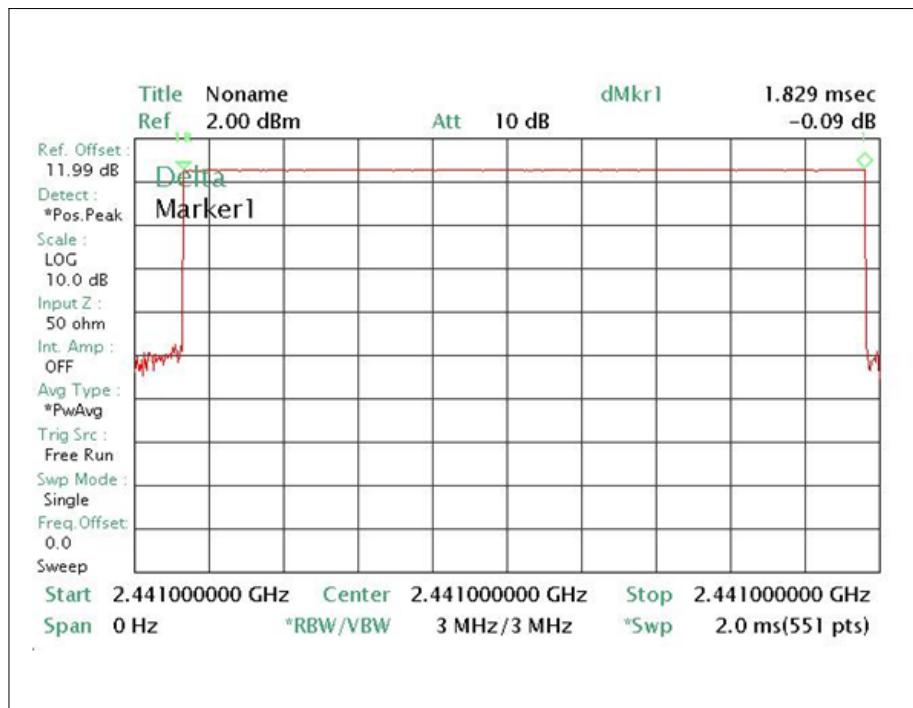

- Frequency 2480 CH 78 -

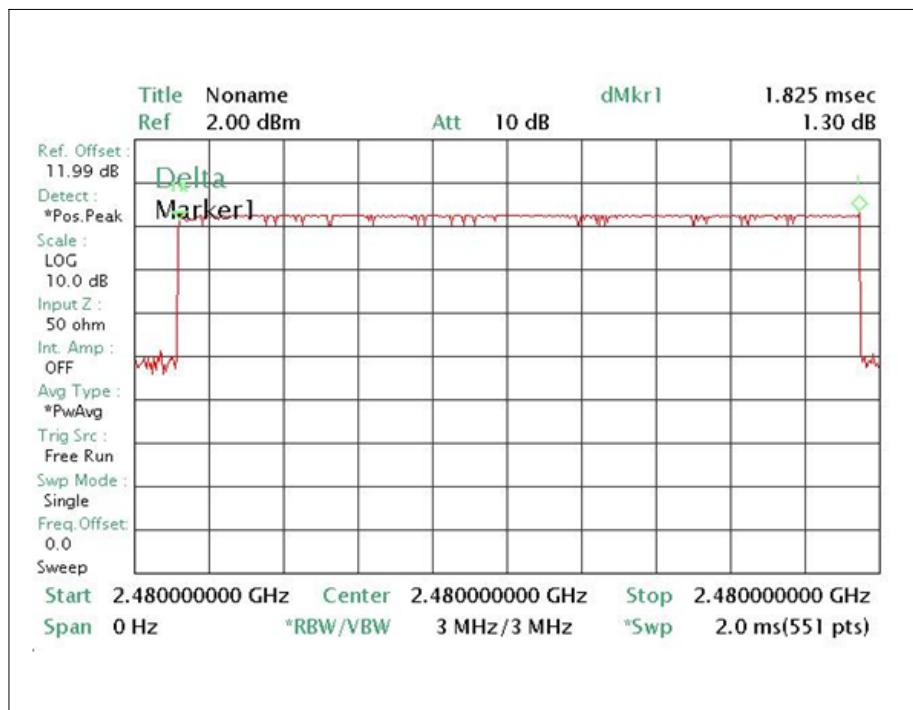

### 3.7. SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS

#### 3.7.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency (MHz)	Field strength ( $\mu$ V/m @ 3m)	Field strength (dB $\mu$ V/m @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the above table.


\*\* The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector and above 1000 MHz are based on the average value of measured emissions.

### 3.7.2. Test Setup Layout

#### 3.7.2.1 Radiated Emission Test Set-Up, Frequency Below 1000MHz

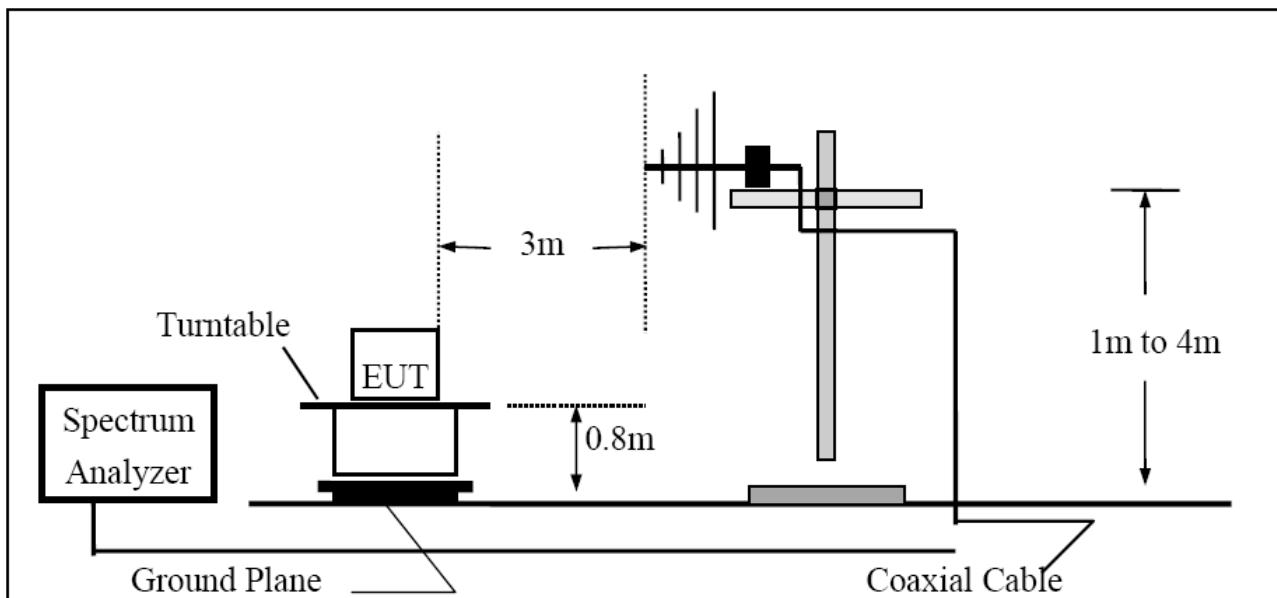

#### 3.7.2.2 Radiated Emission Test Set-UP Frequency Over 1000MHz

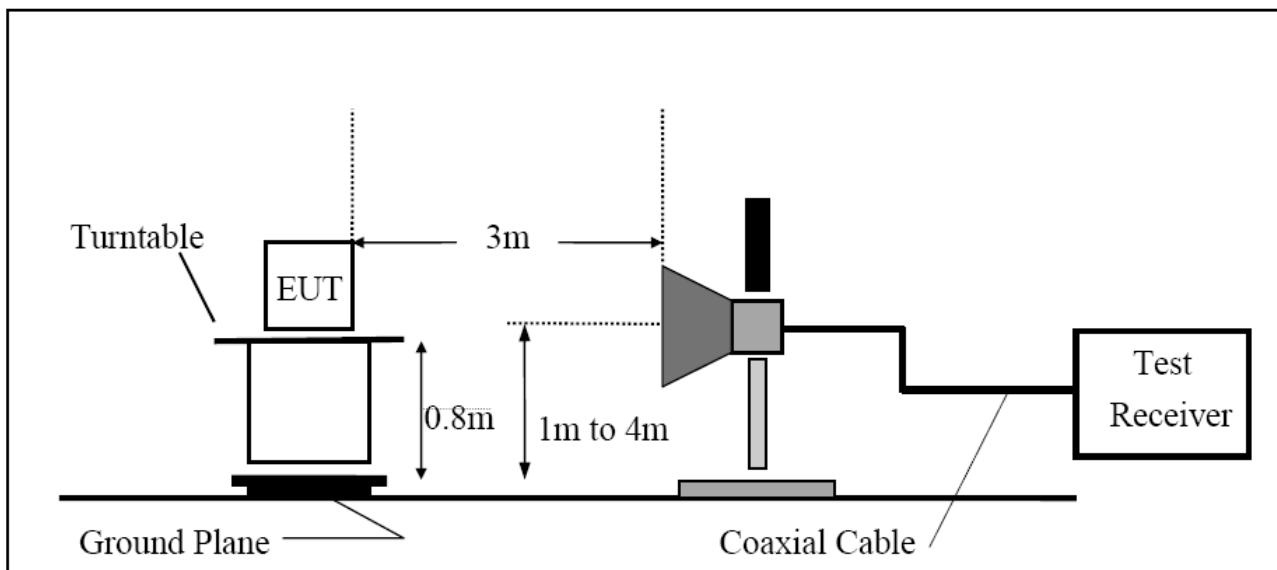

### 3.7.3 Test Procedure

#### 1) Band-edge Compliance of RF Conducted Emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

#### 2) Spurious RF Conducted Emissions:

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

#### 3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters for above 30 MHz, and at 1 meter distance for below 30 MHz.

2. The EUT was placed on the top of the 0.8-meter height, 1  $\times$  1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.

3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, from 30 to 1000 MHz using the Trilog broadband antenna, and from 1 GHz to tenth harmonic of the highest fundamental frequency using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a  $4 \times 4$  meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The EUT is situated in three orthogonal planes (if appropriate)
7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
8. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative “marker-delta” method may be employed.

**4) Marker-Delta Method at the edge of the authorized band of operation:**

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the above Spurious Radiated Emissions test procedure.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two "standard" bandwidths must be measured as the above Spurious Radiated Emissions test procedure.

### 3.7.4 Test Results: PASS

Band-edge compliance of RF conducted/radiated emissions was shown in the 3.7.4.1.1 and 3.7.4.1.2.

NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

Spurious RF conducted emissions were shown in the 3.7.4.1.3.

NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.

**Table 6 : Measured values of the Field strength of spurious emission (Transmit mode)**

Frequency (MHz)	Detect Mode	Polarization (V/H)	Turn Table (degree)	Measured Value (dB $\mu$ V)	Antenna Factor + Cable Loss (dB/m)	Amplifier Gain (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	
Average/Peak/Quasi-peak data, emissions below 30 MHz										
No Spurious Radiated Emissions Found										
Quasi-peak data, emissions below 1000 MHz										
No Spurious Radiated Emissions Found										
Peak/Average data, emissions above 1000 MHz										
CH 0 (2402MHz)	4804	Peak	V	212	23.52	40.3	-23.2	40.62	74	33.38
	4804	Average	V	212	19.69	40.3	-23.2	36.79	54	17.21
	4804	Peak	H	56	22.64	40.3	-23.2	39.74	74	34.26
	4804	Average	H	56	18.74	40.3	-23.2	35.84	54	18.16
CH 39 (2441MHz)	4882	Peak	V	209	23.36	40.7	-23.2	40.86	74	33.14
	4882	Average	V	209	19.64	40.7	-23.2	37.14	54	16.86
	4882	Peak	H	48	22.18	40.7	-23.2	39.68	74	34.32
	4882	Average	H	48	18.67	40.7	-23.2	36.17	54	17.83
CH 78 (2480MHz)	4960	Peak	V	305	24.35	41.2	-23.2	42.35	74	31.65
	4960	Average	V	305	20.34	41.2	-23.2	38.34	54	15.66
	4960	Peak	H	181	23.69	41.2	-23.2	41.69	74	32.31
	4960	Average	H	181	19.54	41.2	-23.2	37.54	54	16.46


1. Margin (dB) = Limit – Emission Level

2. H = Horizontal, V = Vertical Polarization


### 3.7.4.1. Measurement graph

#### 3.7.4.1.1. Band Edge (Conducted)

- Frequency 2402 CH 0 -

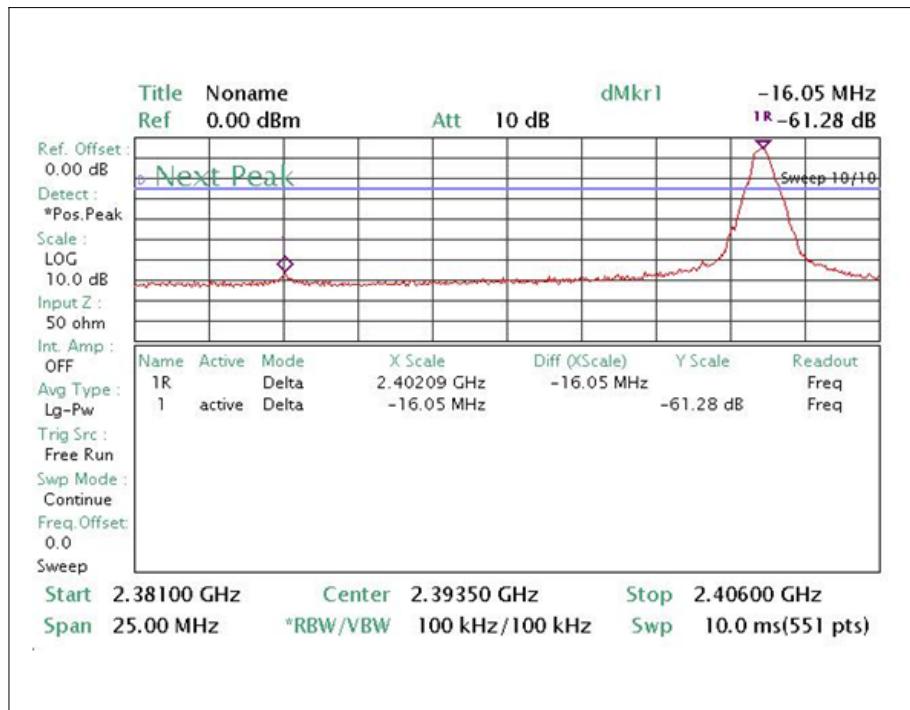


- Frequency 2480 CH 39 -

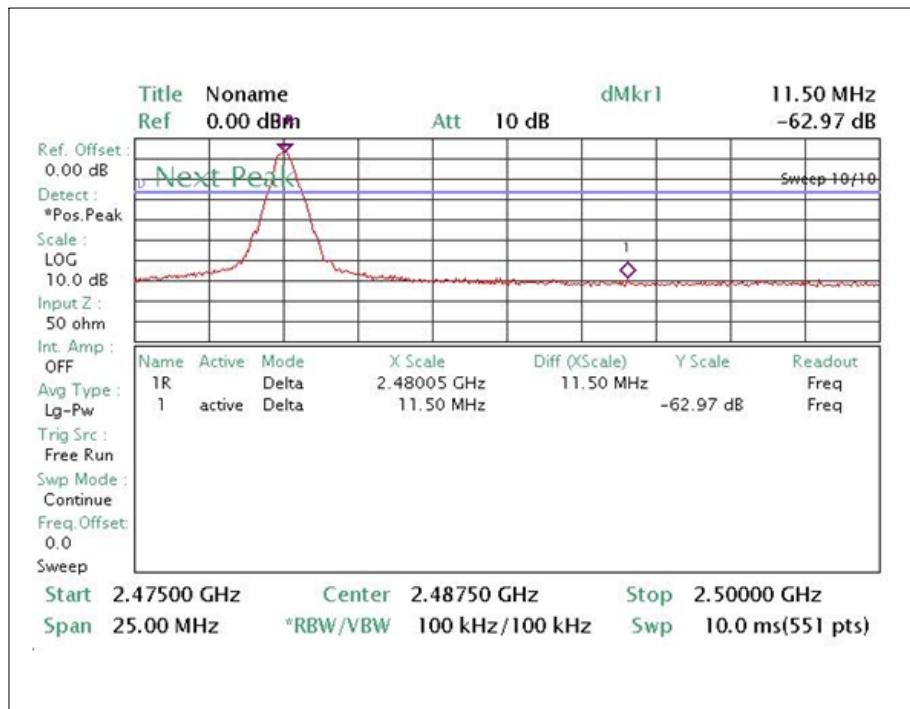


### 3.7.4.1.2. Band Edge (Radiated)


- Frequency 2402 CH 0 (PEAK) -

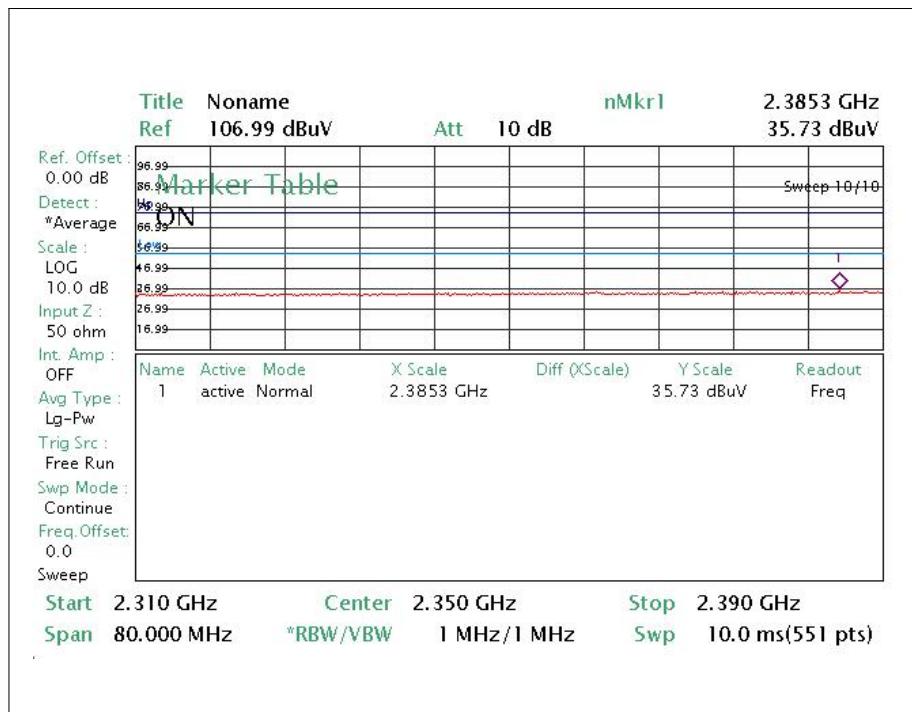


- Frequency 2402 CH 0 (AVERAGE) -

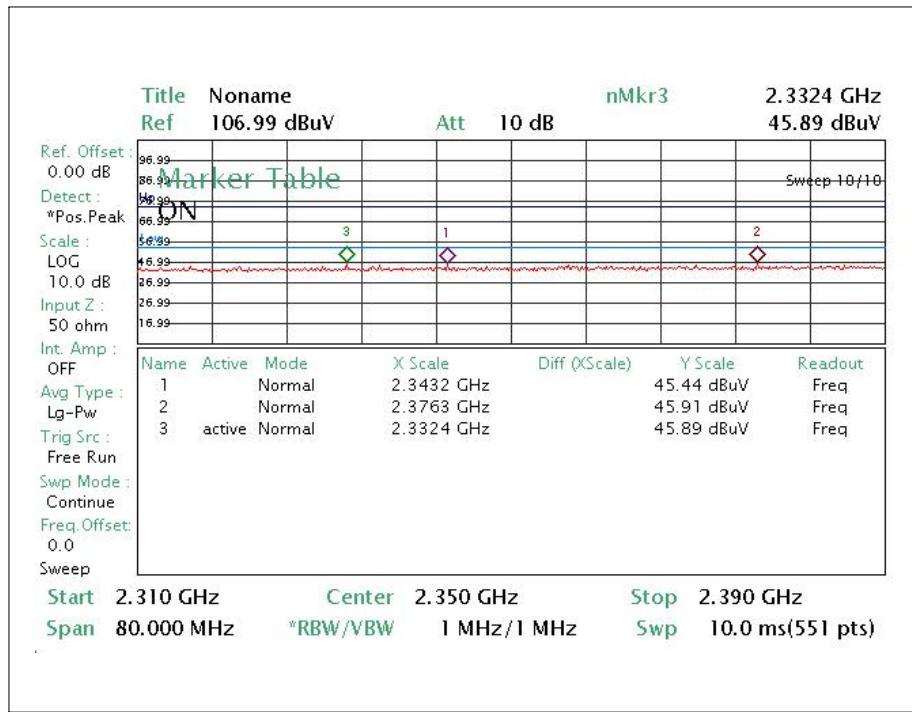

## - Frequency 2480 CH 79 (PEAK) -

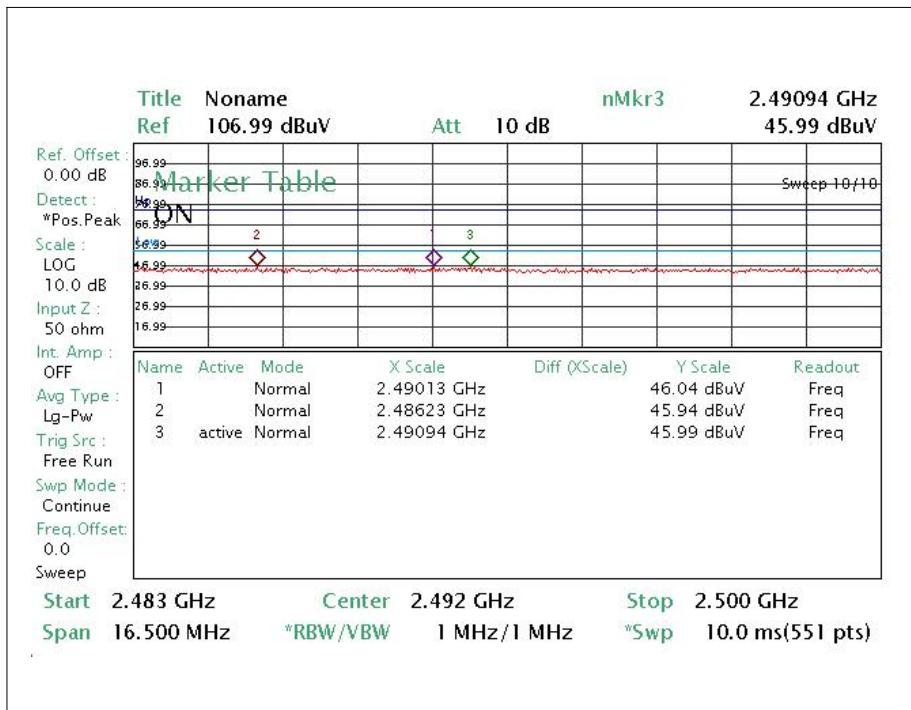


## - Frequency 2480 CH 39 (AVERAGE) -

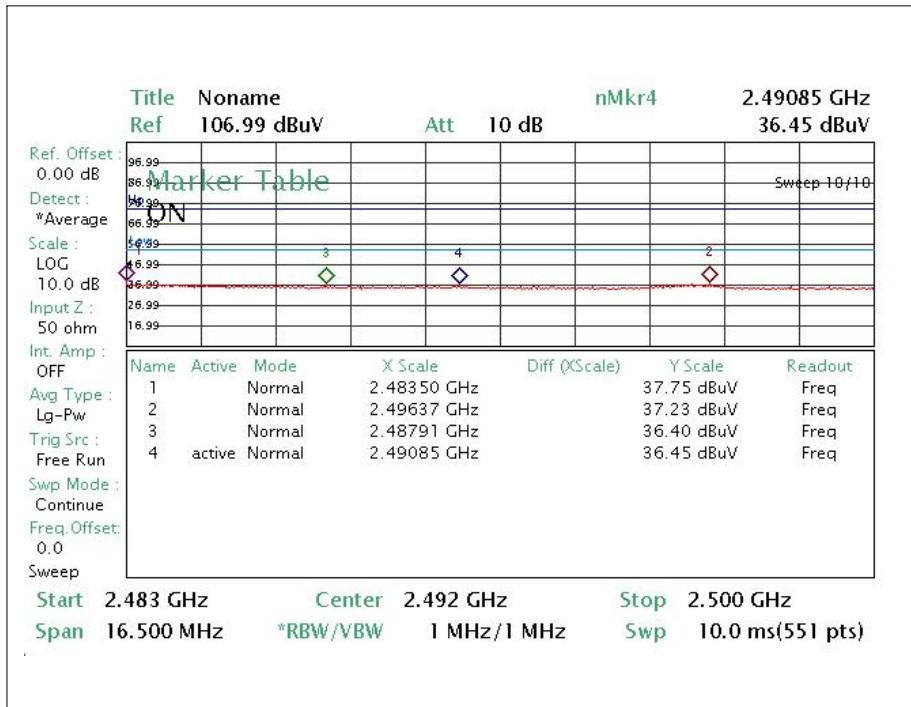


### 3.7.4.1.3. Spurious RF conducted emissions


- Frequency 2402 CH 0 (30MHz ~ 3GHz) -

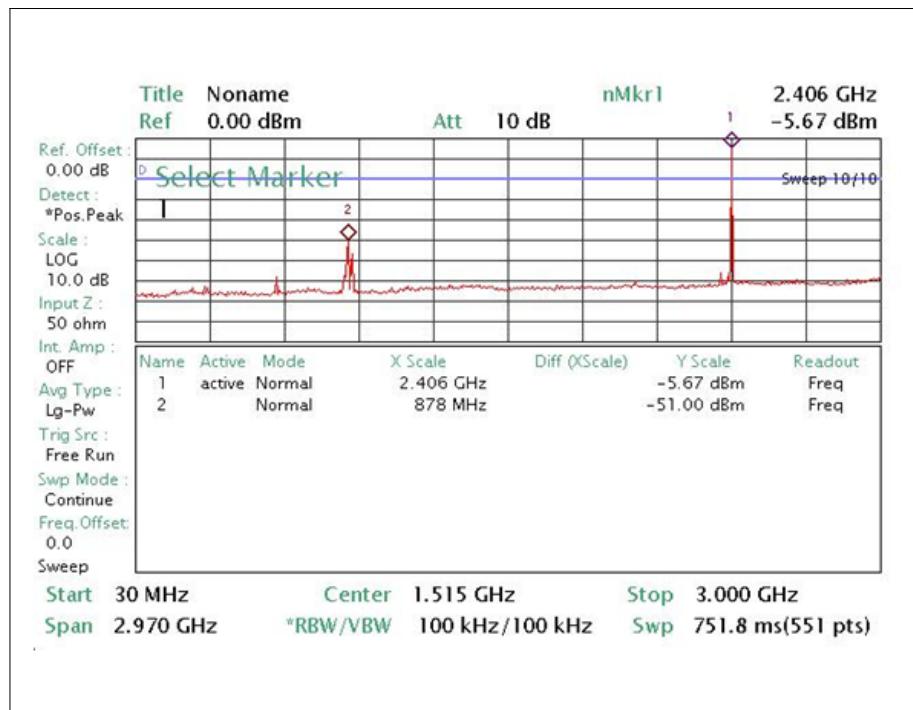


- Frequency 2402 CH 0 (3GHz ~ 26.5GHz) -

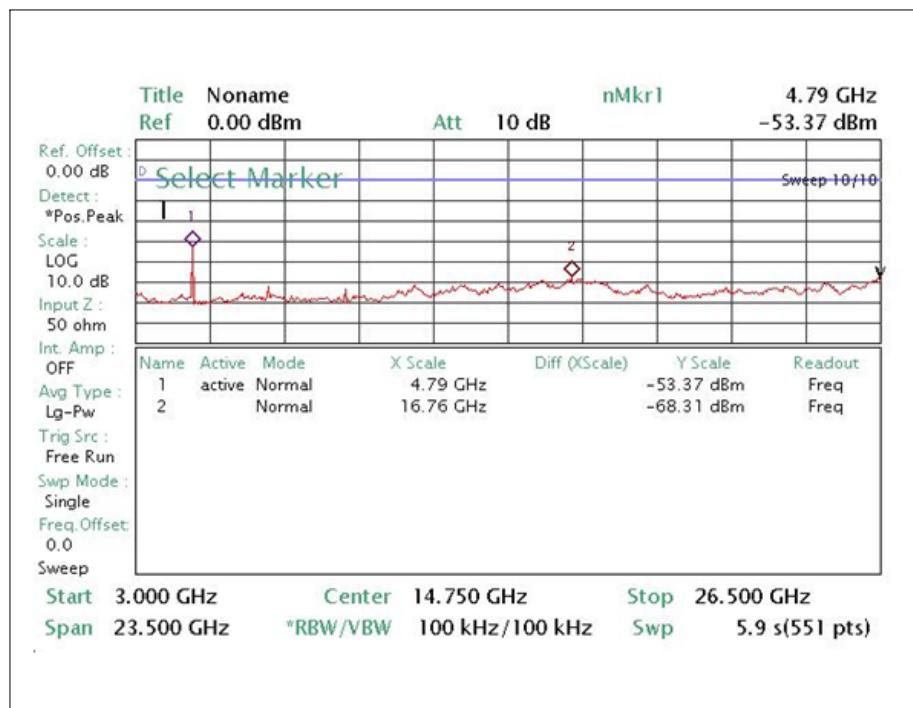


## - Frequency 2441 CH 39 (30MHz ~ 3GHz) -

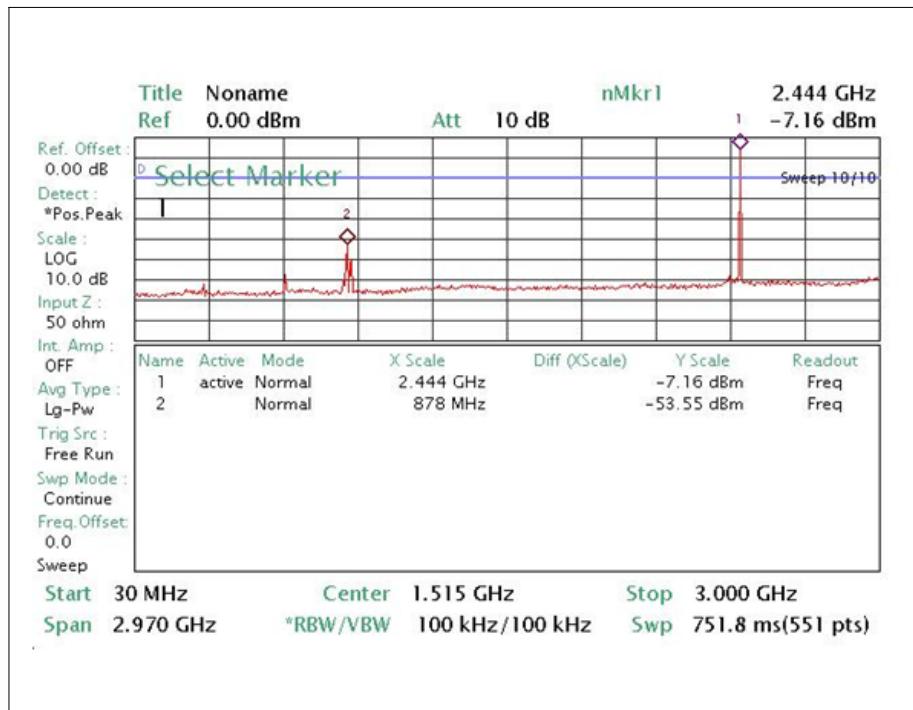


## - Frequency 2441 CH 39 (3GHz ~ 26.5GHz) -

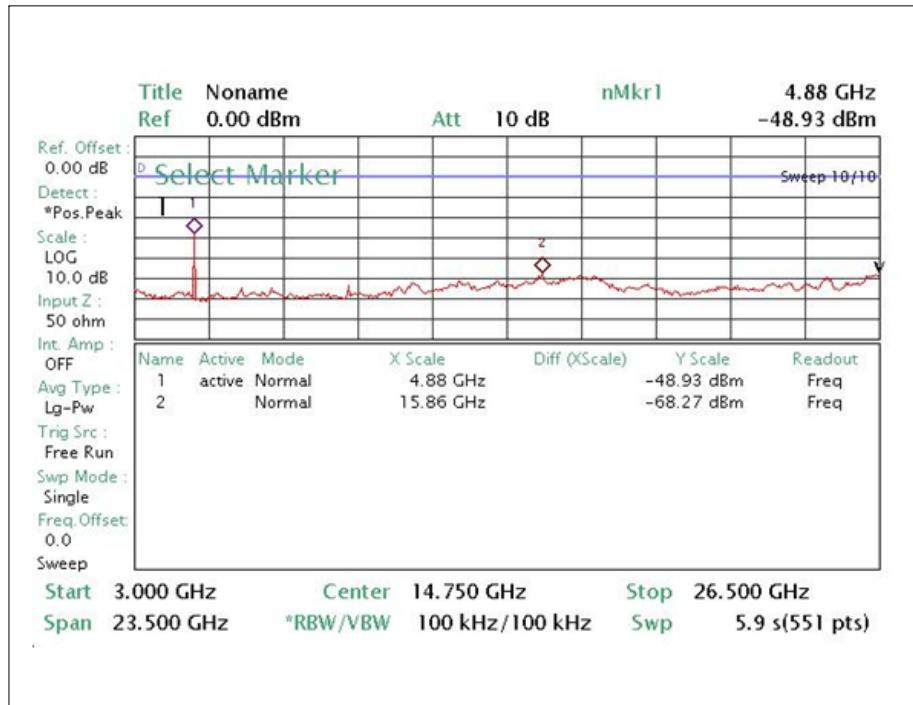

- Frequency 2480 CH 78 (30MHz ~ 3GHz) -

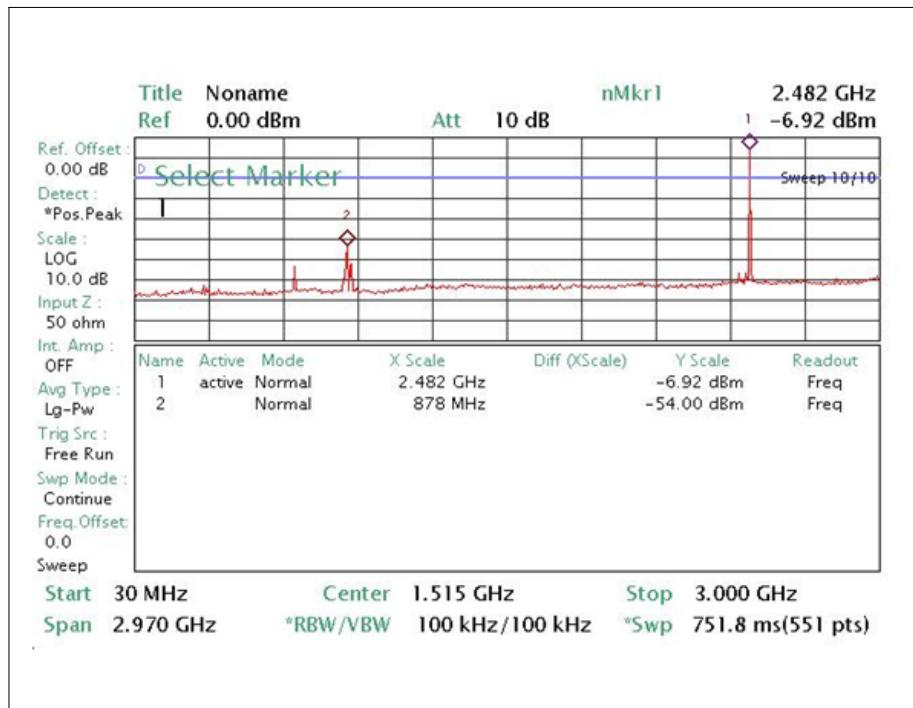

- Frequency 2480 CH 78 (3GHz ~ 26.5GHz) -

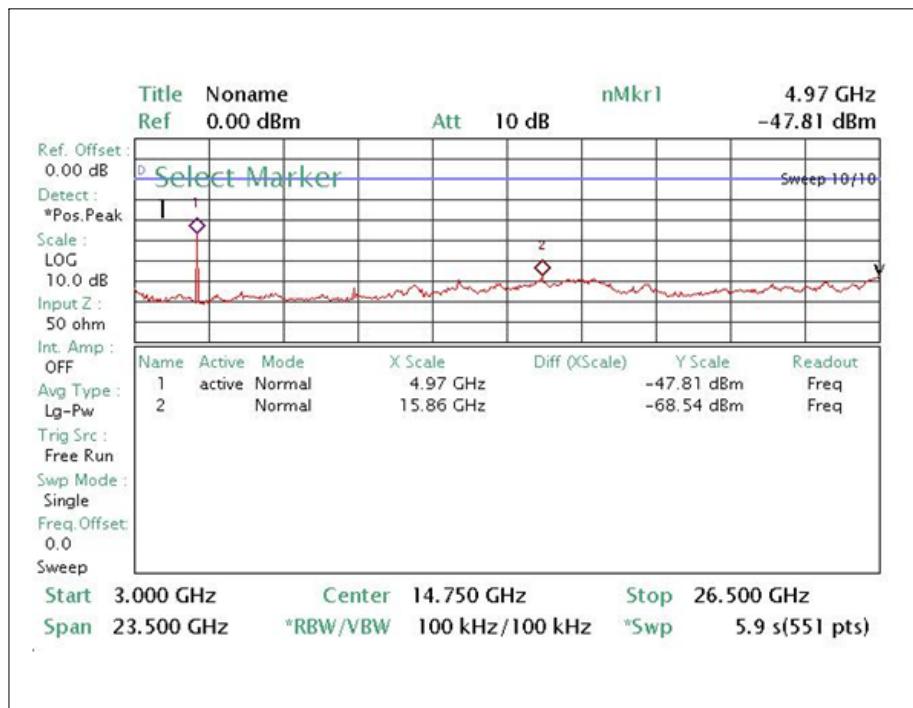

### 3.8 RECEIVER SPURIOUS EMISSIONS

#### 3.8.1 Regulation

The following receiver spurious emission limits shall be complied with:

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz, and 1.0 MHz for measurements above 1.0 GHz.

#### Spurious Emission Limit for Receivers

Frequency (MHz)	Field strength ( $\mu$ V/m @ 3m)	Field strength (dB $\mu$ V/m @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

\* Use quasi-peak below 1000 MHz and averaging meter above 1000 MHz.

**3.8.2 Test Results: PASS**
**Table 6 : Measured values of the Receiver Spurious Emissions**

Frequency (MHz)	Detect Mode	Polarization (V/H)	Turn Table (degree)	Measured Value (dB $\mu$ V)	Antenna Factor + Cable Loss (dB/m)	Amplifier Gain (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	
Quasi-peak data, emissions below 1000 MHz										
				No Spurious Radiated Emissions Found						
Peak/Average data, emissions above 1000 MHz										
CH 0 (2402MHz)	2403.5	Peak	V	324	34.54	40.3	-23.2	51.64	74	22.36
	2403.5	Average	V	324	23.19	40.3	-23.2	40.29	54	13.71
	2403.5	Peak	H	41	33.32	40.3	-23.2	50.42	74	23.58
	2403.5	Average	H	41	25.07	40.3	-23.2	42.17	54	11.83
CH 39 (2441MHz)	2442.5	Peak	V	162	33.87	40.7	-23.2	51.37	74	22.63
	2442.5	Average	V	162	24.96	40.7	-23.2	42.46	54	11.54
	2442.5	Peak	H	50	33.43	40.7	-23.2	50.93	74	23.07
	2442.5	Average	H	50	24.88	40.7	-23.2	42.38	54	11.62
CH 78 (2480MHz)	2481.5	Peak	V	48	34.61	41.2	-23.2	52.61	74	21.39
	2481.5	Average	V	48	25.31	41.2	-23.2	43.31	54	10.69
	2481.5	Peak	H	0	33.84	41.2	-23.2	51.84	74	22.16
	2481.5	Average	H	0	25.04	41.2	-23.2	43.04	54	10.96

1. Margin (dB) = Limit – Emission Level

2. H = Horizontal, V = Vertical Polarization

### 3.9 RF EXPOSURE

#### 3.9.1 Regulation

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limits for Maximum Permissive Exposure: RF exposure is calculated.

Frequency Range	Electric Field Strength [V/m]	Magnetic Field Strength [A/m]	Power Density [mW/cm <sup>2</sup> ]	Averaging Time [minute]
Limits for General Population/Uncontrolled Exposure				
0.3 ~ 1.34	614	1.63	*(100)	30
1.34 ~ 30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30 ~ 300	27.5	0.073	0.2	30
300 ~ 1500	/	/	f/1500	30
1500 ~ 15000	/	/	1.0	30

f = frequency in MHz, \* = Plane-wave equivalent power density

#### MPE (Maximum Permissive Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = power density [mW/cm<sup>2</sup>]

P = power input to antenna [mW]

( $\Rightarrow R = \sqrt{PG/4\pi S}$ ) G = power gain of the antenna in the direction of interest  
relative to an isotropic radiator

R = distance to the center of radiation of the antenna [cm]

EUT: Maximum peak output power=0.216 [mW](=-6.66 dBm)& Antenna gain=1.585 [mW](= 2.0 [dBi])	
100 mW, at 20 cm from an antenna 6 [dBi]	$S = PG/4\pi R^2 = 100 \times 3.98 / (4 \times \pi \times 400)$ $= 0.0792 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
0.25 mW, at 20 cm from the antenna 2.0 [dBi]	$S = PG/4\pi R^2 = 0.0001 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
0.25 mW, at 2.5 cm from the antenna 2.0 [dBi]	$S = PG/4\pi R^2 = 0.0050 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$

#### 3.9.2 RF Exposure Compliance Issue

The EUT is categorically excluded from routine environmental because it operates at very low power level. The equipment is deemed to comply with the SAR or MPE limits without testing due to this very low power level. SAR data was not submitted because the output power of the EUT was below the low thresholds in the July 02 TCB Exclusion List: for portable transmitters,

Low threshold [ $(60/f_{GHz} \approx 25)$  mW,  $d < 2.5$  cm,  $(120/f_{GHz} \approx 50)$  mW,  $d \geq 2.5$  cm], and

High threshold [ $(900/f_{GHz} \approx 370)$  mW,  $d < 20$  cm], where  $f_{GHz}$ : 2.44, d: distance to a person's body

## APPENDIX

### TEST EQUIPMENT USED FOR TESTS

No.	Description	Manufacturer	Model No.	Specifications	Nent Cal. Data	Used equipment
1	Spectrum Analyzer	LIG Nex1	LSA-265	3Hz~26.5GHz	10.12.18	<input checked="" type="checkbox"/>
2	Dipole ANT	ElectroMetrics	TDA-30/1-4	30~1GHz	10.02.18	<input type="checkbox"/>
3	Biconical ANT	ElectroMetrics	BIA-30S	30~300MHz	10.04.03	<input checked="" type="checkbox"/>
4	Log periodic ANT	ElectroMetrics	LPA-30	0.2~1GHz	10.01.18	<input checked="" type="checkbox"/>
5	Bilog Antenna	Schaffner-Chase EMC Ltd.	CBL6140A	50V, 5A	10.05.02	<input type="checkbox"/>
6	Turn Table	KEI	KEI-TURN	1500×1000×800	N/A	<input type="checkbox"/>
7	Turn Table	KEI	KEI-TURN	1500×1000×800	N/A	<input checked="" type="checkbox"/>
8	Loop ANT.	Com-Power	AL-130	9kHz~30MHz	10.03.24	<input checked="" type="checkbox"/>
9	Spectrum Analyzer	LIG Nex1	ISA-265	1kHz~26.5GHz	10.05.18	<input checked="" type="checkbox"/>
10	Function Generator	Agilent	33120A	15MHz sine&square	10.06.16	<input type="checkbox"/>
11	Frequency Counter	HP	5350B	10Hz~20GHz	10.06.18	<input type="checkbox"/>
12	Modulation Analyzer	Agilent	8901B	10MHz~1.3GHz	10.06.16	<input type="checkbox"/>
13	Audio Analyaer	Agilent	8903B	20Hz~100kHz	10.06.15	<input type="checkbox"/>
14	Attenuator	Agilent	8494B	0~11dB, 18GHz	10.06.17	<input type="checkbox"/>
15	Attenuator	Agilent	8496B	0~110dB, 18GHz	10.06.17	<input type="checkbox"/>
16	Attenuator	Agilent	8495B	0~70dB, 18GHz	10.06.17	<input type="checkbox"/>
17	Attenuator	–	SMA-1	TAE SUNG	10.09.03	<input type="checkbox"/>
18	Attenuator	–	SMA-2	TAE SUNG	10.09.03	<input type="checkbox"/>
19	Power Meter	Agilent	E4418B	100kHz~110GHz, 0.0001uW~25100mW	10.06.30	<input type="checkbox"/>
20	Power Sensor	HP	8485A	50MHz~26.5GHz	10.06.30	<input type="checkbox"/>
21	Vibration Tester	Gana	GNV-400	10~60Hz, 0~4mm	10.09.11	<input type="checkbox"/>
22	RF Cable	Gigalane	SMS-LL280-S MS-1.5M	1.5m	N/A	<input checked="" type="checkbox"/>
23	Temp & Humidity Chamber	Seoksan Tech	SE-CT-02	-40~150°C, 30~98%	10.07.07	<input type="checkbox"/>
24	Signal Generator	Leader Electronics	3220	100kHz~1.3GHz	10.07.17	<input type="checkbox"/>
25	Oscilloscope	Tektronix	TDS-350	200MHz	10.10.09	<input type="checkbox"/>
26	Drop Tester	Self-made	KSQ-01	150cm	N/A	<input type="checkbox"/>
27	Pre Amplifier	GTC	GA-1825A	0.1~18GHz	10.08.27	<input checked="" type="checkbox"/>
28	Continuous operation tester	GTC	CT-100	Local Control	N/A	<input type="checkbox"/>
29	CW Generator	HP	83711B	1~20GHz	10.07.27	<input checked="" type="checkbox"/>
30	POWER DIVIDER	Agilent	11636B	26.5GHz	10.07.30	<input type="checkbox"/>
31	Power Sensor	Agilent	8482B	100kHz ~ 4.2GHz	10.08.14	<input type="checkbox"/>
32	Attenuator	Winswell	53-30-33	dc~2.5GHz, 500W	10.08.13	<input type="checkbox"/>
33	DC Power Supply	Hanil	HPS-505A	50V, 5A	10.10.09	<input checked="" type="checkbox"/>
34	Slidacs	Hanchang	5KV	5kW, 300V	10.10.09	<input type="checkbox"/>
35	TERMINATION	KWANG YEOK	KYTE-NJ-150W	150W	10.09.11	<input type="checkbox"/>
36	Band-limited filter	MITECH	KSQ-02	600Ω	10.09.14	<input type="checkbox"/>
37	Signal Generator	WILTRON	6759B	10MHz ~ 26.5GHz	10.09.10	<input type="checkbox"/>
38	Digital Multimeter	DONG HWA	DM-300A	AC/DC 500V Max,320mA Max	10.09.10	<input checked="" type="checkbox"/>
39	Horn ANT.	A.H. Systems, inc.	SAS-571	700MHz ~ 18GHz	10.03.17	<input checked="" type="checkbox"/>

## APPENDIX

### 1. EUT photo

