



NVLAP LAB CODE 200707-0



## FCC PART 15.247

### MEASUREMENT AND TEST REPORT


For

**Shengtai Industry Co., Ltd.**

Room 201, 2/F, Golden Gate Commercial Building,

136-138 Austin Road, Kowloon, Hong Kong

**FCC ID: X2QK818**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Mobile Phone
<b>Test Engineer:</b> <u>Sula Huang</u> 	
<b>Report Number:</b> <u>RSZ09121508-247</u>	
<b>Report Date:</b> <u>2010-01-11</u>	
<b>Reviewed By:</b> <u>Merry Zhao</u> 	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “\*” (Rev.2)

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	6
CONFIGURATION OF TEST SETUP .....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>CFR47 §15.247 (i) and §2.1093 - RF EXPOSURE .....</b>	<b>9</b>
STANDARD APPLICABLE .....	9
RESULT: .....	10
<b>CFR47 §15.203 - ANTENNA REQUIREMENT.....</b>	<b>11</b>
STANDARD APPLICABLE .....	11
ANTENNA CONNECTOR CONSTRUCTION .....	11
<b>CFR47 §15.207 (a) - CONDUCTED EMISSIONS .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
MEASUREMENT UNCERTAINTY .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST PROCEDURE .....	13
TEST RESULTS SUMMARY .....	13
TEST DATA .....	14
<b>CFR47 §15.205, §15.209 &amp; §15.247 - RADIATED EMISSIONS .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
MEASUREMENT UNCERTAINTY .....	16
EUT SETUP .....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST PROCEDURE .....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
TEST RESULTS SUMMARY .....	18
TEST DATA .....	18
<b>CFR47 §15.247(a) (1) - CHANNEL SEPARATION TEST .....</b>	<b>21</b>
APPLICABLE STANDARD .....	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE .....	21
TEST DATA .....	21
<b>CFR47 §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....</b>	<b>24</b>
APPLICABLE STANDARD .....	24

TEST EQUIPMENT LIST AND DETAILS.....	24
TEST PROCEDURE .....	24
TEST DATA .....	24
<b>CFR47 §15.247(a)(1)(iii) - QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST PROCEDURE .....	27
TEST DATA .....	27
<b>CFR47 §15.247(a)(1)(iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>CFR47 §15.247(b)(1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>36</b>
APPLICABLE STANDARD .....	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST PROCEDURE .....	36
TEST DATA .....	36
<b>CFR47 §15.247(d) - BAND EDGES TESTING .....</b>	<b>39</b>
APPLICABLE STANDARD .....	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST PROCEDURE .....	39
TEST DATA .....	40

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *Shengtai Industry Co.,Ltd*'s product, model number: *K818 (FCC ID: X2QK818)* or the "EUT" as referred to in this report is a *Mobile Phone*, which measures approximately: 10.5 cm L x 5.5 cm W x 1.6 cm H, rated input voltage: DC 3.7V battery.

Frequency Range:

Cellular Band: 824-849 MHz (TX), 869-894 MHz (RX)  
PCS Band: 1850-1910 MHz (TX), 1930-1990 MHz (RX)  
Bluetooth: 2400-2483.5 MHz (TX/RX)

Modulation Mode: GMSK (GSM/PCS), GFSK (Bluetooth)

Transmitter Output Power:

Cellular Band: 33±2 dBm  
PCS Band: 30±2 dBm  
Bluetooth: -6~4 dBm

\* All measurement and test data in this report was gathered from production sample serial number: IMEI: 354300008238749 (Assigned by the applicant). The EUT was received on 2009-12-15.

### Objective

This Type approval report is prepared on behalf of *Shengtai Industry Co.,Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

This measurement and test report only pertains to the Bluetooth portion of the EUT; for measurement and test results to the GSM850 and PCS1900 function please refer to report RSZ09121508-2224 issued by Shenzhen BACL.

### Related Submittal(s)/Grant(s)

FCC Part 22H and 24E submission with FCC ID: X2QK818.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

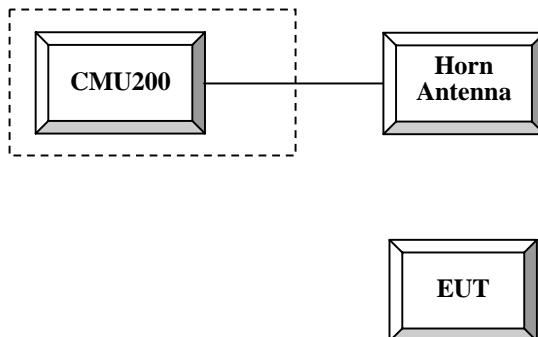
### Equipment Modifications

No modification was made to the unit tested.

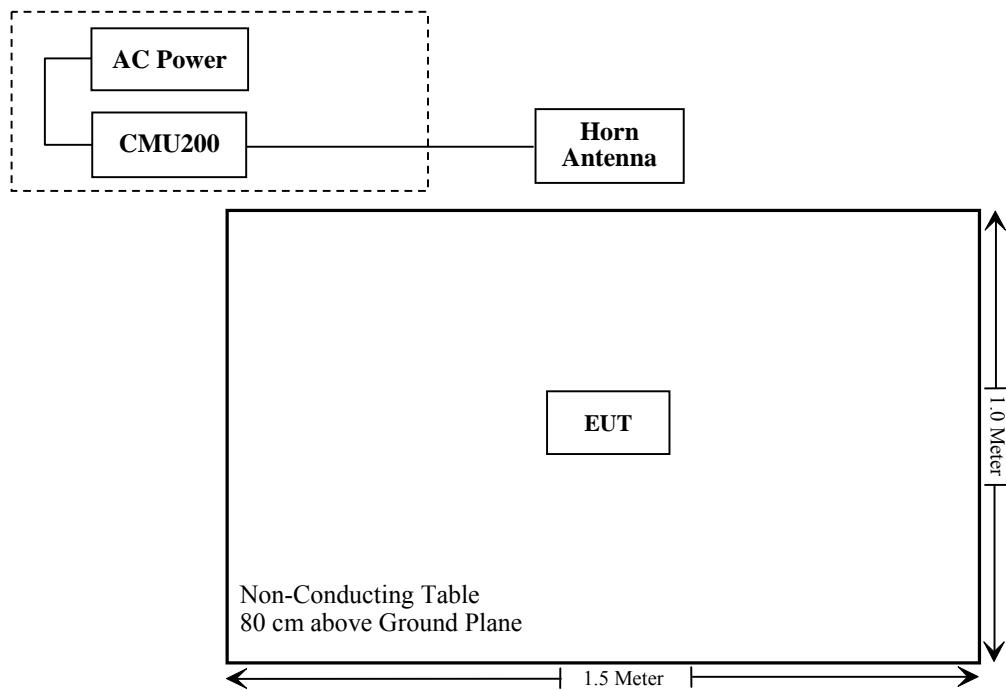
### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
R & S	Universal Radio commutation tester	CMU200	1100.0008.02	DoC

### Configuration of Test Setup



### Block Diagram of Test Setup



## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Compliant
§15.205, §15.209, §15.109, §15.247(d)	Radiated Emissions	Compliant
§15.247 (a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

## CFR47 §15.247 (i) and §2.1093 - RF EXPOSURE

### Standard Applicable

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

**Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters**

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	<u>SAR not required:</u> <u>Unlicensed only</u> <ul style="list-style-type: none"> <li>○ when stand-alone 1-g SAR is not required and antenna is <math>\geq 5</math> cm from other antennas</li> </ul> <u>Licensed &amp; Unlicensed</u> <ul style="list-style-type: none"> <li>○ when the sum of the 1-g SAR is <math>&lt; 1.6</math> W/kg for all simultaneous transmitting antennas</li> <li>○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is <math>&lt; 0.3</math></li> </ul> <u>SAR required:</u> <u>Licensed &amp; Unlicensed</u> antenna pairs with SAR to peak location separation ratio $\geq 0.3$ ; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition <b>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</b>
Jaw, Mouth and Nose	<u>Flat phantom SAR required</u> <ul style="list-style-type: none"> <li>○ when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues</li> <li>○ position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations</li> </ul>	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

**Result:**

Two antennas are available for the EUT, one is GSM/PCS antenna and the other is Bluetooth antenna, the distance between them is less 2.5 cm, according to FCC KDB 648474 D01 SAR Handsets Multi Xmitter and ant. V01r05 released on September 2008, the Max peak output power is  $1.122 \text{ mW} < P_{\text{Ref}}(12 \text{ mw})$ , stand-alone SAR is not required for Bluetooth antenna.

The SAR measurement is exempt.

## **CFR47 §15.203 - ANTENNA REQUIREMENT**

### **Standard Applicable**

According to CFR47 § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has 2 antennae: one is for Bluetooth, the gain is 0 dBi; the other one is for GSM/PCS, the gain of PCS is 1.0 dBi and that of GSM is -1.0 dBi. All antennae are permanently attached.

**Result:** Compliant.

## CFR47 §15.207 (a) - CONDUCTED EMISSIONS

### Applicable Standard

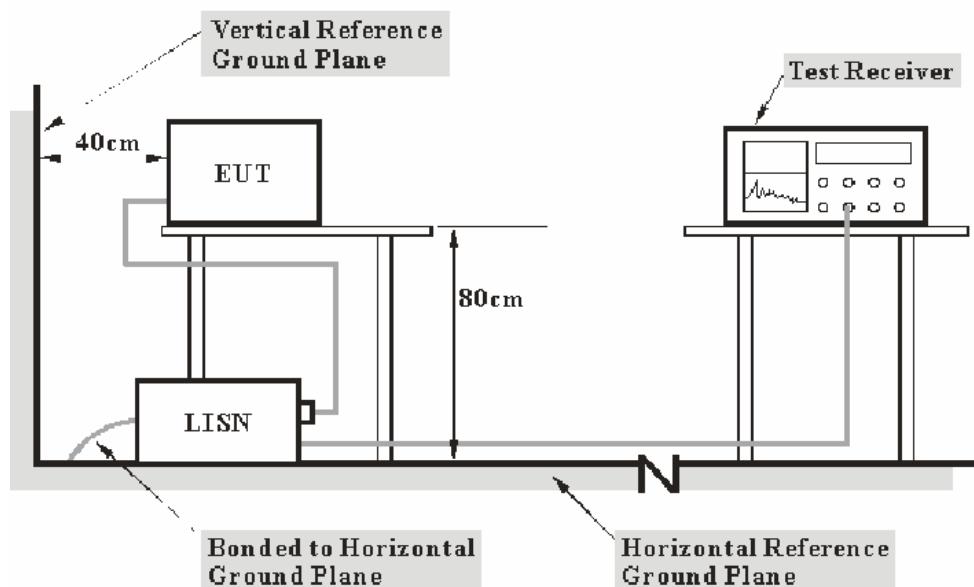
CFR47 §15.207

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is  $\pm 2.4$  dB.

### EUT Setup



**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<b><i>Frequency Range</i></b>	<b><i>IF B/W</i></b>
150 kHz – 30 MHz	9 kHz

### Test Equipment List and Details

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2009-04-28	2010-04-27
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2009-04-28	2010-04-27

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.207](#), with the worst margin reading of:

**18.32 dB at 0.670 MHz** in the **Line** conductor mode  
**16.04 dB at 0.660 MHz** in the **Neutral** conductor mode

## Test Data

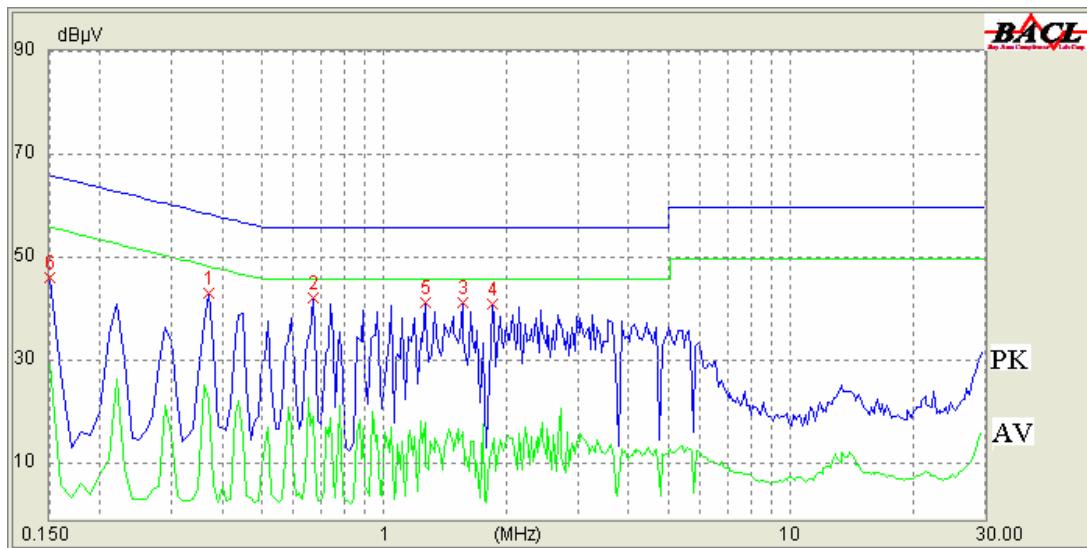
### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	48 %
<b>TM Pressure:</b>	100.0 kPa

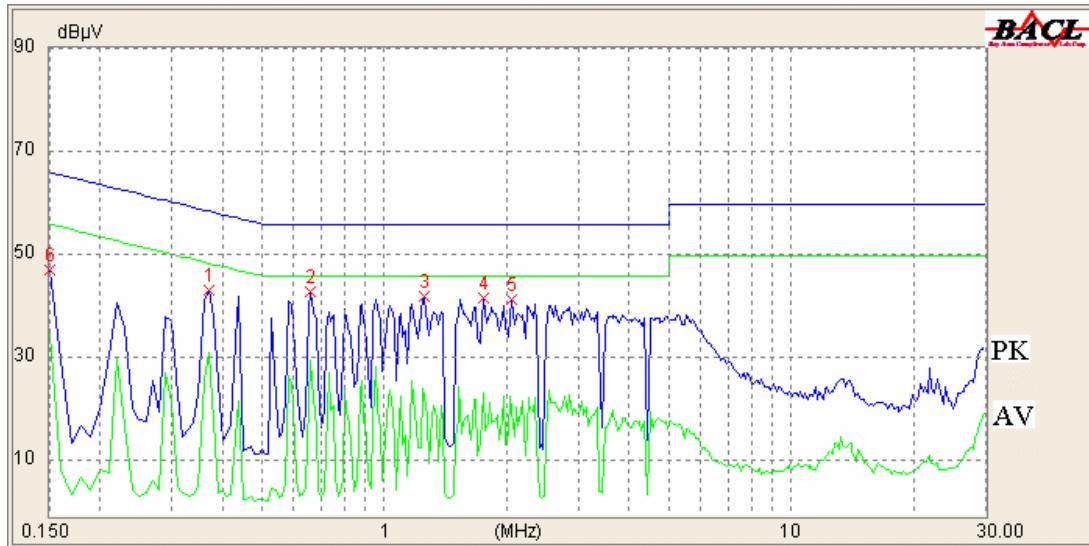
The testing was performed by Sula Huang on 2009-12-31.

Test Mode: Charging & Transmitting

**120 V, 60 Hz, Line:**



Frequency (MHz)	Correct Factor (dB)	Cord. Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.670	10.10	37.68	56.00	18.32	QP
0.370	10.10	38.43	58.52	20.09	QP
1.260	10.10	35.78	56.00	20.22	QP
1.560	10.10	35.59	56.00	20.41	QP
0.150	10.10	44.13	66.00	21.87	QP
1.850	10.10	31.14	56.00	24.86	QP
0.370	10.10	23.10	48.52	25.42	AV
0.150	10.10	30.04	56.00	25.96	AV
0.670	10.10	19.65	46.00	26.35	AV
1.260	10.10	18.48	46.00	27.52	AV
1.560	10.10	16.60	46.00	29.40	AV
1.850	10.10	13.66	46.00	32.34	AV

**120 V, 60 Hz, Neutral:**

Frequency (MHz)	Correct Factor (dB)	Cord. Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.660	10.10	29.96	46.00	16.04	AV
0.370	10.10	31.27	48.52	17.25	AV
0.660	10.10	36.32	56.00	19.68	QP
0.370	10.10	38.39	58.52	20.13	QP
0.150	10.10	34.88	56.00	21.12	AV
0.150	10.10	44.23	66.00	21.77	QP
1.750	10.10	23.61	46.00	22.39	AV
2.040	10.10	23.07	46.00	22.93	AV
1.250	10.10	33.06	56.00	22.94	QP
1.250	10.10	22.83	46.00	23.17	AV
1.760	10.10	31.06	56.00	24.94	QP
2.050	10.10	30.68	56.00	25.32	QP

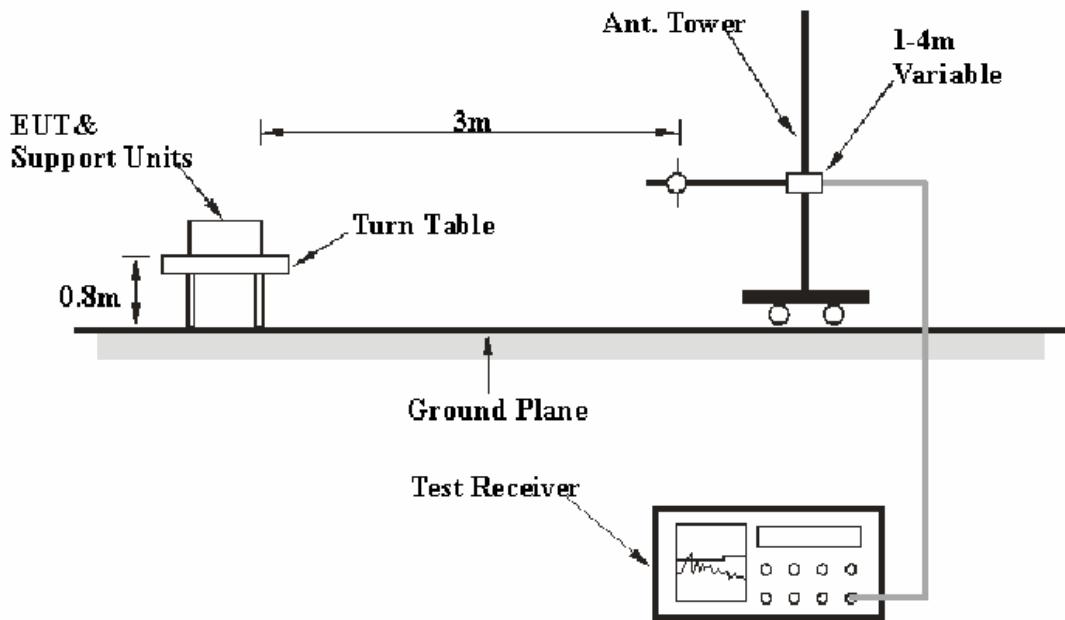
**CFR47 §15.205, §15.209 & §15.247 - RADIATED EMISSIONS****Applicable Standard**

CFR47 §15.205; §15.209; §15.247 (d)

**Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is  $\pm 4.0$  dB.

**EUT Setup**

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<b>Frequency Range</b>	<b>RBW</b>	<b>Video B/W</b>
30MHz – 1000 MHz	100 kHz	300 kHz
1000 MHz – 25 GHz	1 MHz	3 MHz

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2009-08-02	2010-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-23
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	2010-03-11
HP	Amplifier	8449B	3008A00277	2009-09-12	2010-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2009-05-05	2010-05-04
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-06-11	2010-06-10
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2009-07-08	2010-07-07

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

### Transmitting mode (Below 1 GHz):

**9.9 dB at 33.359000 MHz** in the **Vertical** polarization

### Transmitting mode (Above 1 GHz):

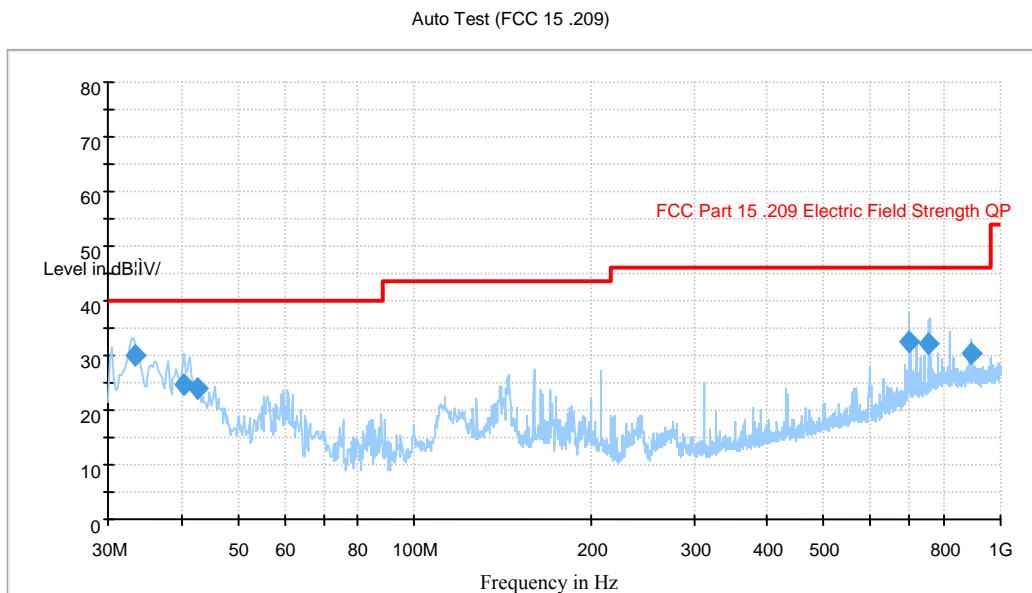
**12.82 dB at 4804 MHz** in the **Horizontal** polarization (Low Channel)  
**13.33 dB at 4882 MHz** in the **Horizontal** polarization (Middle Channel)  
**13.10 dB at 4960 MHz** in the **Horizontal** polarization (High Channel)

## Test Data

### Environmental Conditions

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.9 kPa

\* The testing was performed by Sula Huang on 2010-01-05.

**Below 1 GHz:***Test Mode: Transmitting (worse-case)*

Frequency (MHz)	Corrected Amp. (dB $\mu$ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dB $\mu$ V/m)	Margin (dB)
33.359000	30.1	100.0	V	258.0	-8.6	40.0	9.9
698.384000	32.4	101.0	V	277.0	-4.7	46.0	13.6
755.903000	32.3	188.0	V	112.0	-2.7	46.0	13.7
40.504250	24.8	101.0	V	91.0	-13.6	40.0	15.2
893.999000	30.2	227.0	H	223.0	-0.3	46.0	15.8
42.556750	23.8	132.0	V	113.0	-14.9	40.0	16.2

**Above 1 GHz:***Test Mode: Transmitting*

Freq. (MHz)	S.A. Reading (dB $\mu$ V/m)	Detector PK/QP/AV	Direction Degree	Antenna			Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	Remarks
<b>Low Channel (2402 MHz)</b>												
4804	32.29	AV	345	2.00	H	33.8	8.79	33.7	41.18	54	12.82	harmonic
4804	32.06	AV	135	2.16	V	33.5	8.79	33.7	40.65	54	13.35	harmonic
4804	46.09	PK	350	2.00	H	33.8	8.79	33.7	54.98	74	19.02	harmonic
4804	46.22	PK	132	2.16	V	33.5	8.79	33.7	54.81	74	19.19	harmonic
<b>Middle Channel (2441 MHz)</b>												
4882	31.78	AV	90	1.05	H	33.8	8.79	33.7	40.67	54	13.33	harmonic
4882	31.69	AV	190	1.0	V	33.5	8.79	33.7	40.28	54	13.72	harmonic
1385.9	38.13	AV	100	1.3	V	25.5	4.25	31.27	36.61	54	17.39	spurious
1385.9	35.94	AV	190	1.0	H	25.3	4.25	31.27	34.22	54	19.78	spurious
4882	44.77	PK	86	1.05	H	33.8	8.79	33.7	53.66	74	20.34	harmonic
4882	44.82	PK	185	1.0	V	33.5	8.79	33.7	53.41	74	20.59	harmonic
1385.9	50.41	PK	100	1.10	V	25.5	4.25	31.27	48.89	74	25.11	spurious
1385.9	48.51	PK	210	1.0	H	25.3	4.25	31.27	46.79	74	27.21	spurious
<b>High Channel (2480 MHz)</b>												
4960	31.84	AV	49	1.15	H	33.8	8.96	33.7	40.90	54	13.10	harmonic
4960	31.76	AV	25	1.22	V	33.5	8.96	33.7	40.52	54	13.48	harmonic
4960	45.67	PK	50	1.15	H	33.8	8.96	33.7	54.73	74	19.27	harmonic
4960	45.02	PK	22	1.22	V	33.5	8.96	33.7	53.78	74	20.22	harmonic

Spurious emission in restricted band:

Freq. (MHz)	S.A. Reading (dB $\mu$ V/m)	Detector PK/QP/AV	Direction Degree	Antenna			Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	Remarks
2329.55	34.66	AV	5	1.52	H	28.9	5.69	31.83	37.42	54	16.58	spurious
2319.13	34.36	AV	260	1.6	V	29.1	5.69	31.83	37.32	54	16.68	spurious
2319.13	47.73	PK	145	1.6	V	29.1	5.69	31.83	50.69	74	23.31	spurious
2329.55	47.29	PK	0	1.50	H	28.9	5.69	31.83	50.05	74	23.95	spurious
2483.8	34.36	AV	275	1.0	V	29.1	6.00	30.58	38.88	54	15.12	spurious
2483.8	34.34	AV	360	1.2	H	28.9	6.00	30.58	38.66	54	15.34	spurious
2483.8	53.45	PK	280	1.0	V	29.1	6.00	30.58	57.97	74	16.03	spurious
2483.8	47.37	PK	360	1.2	H	28.9	6.00	30.58	51.69	74	22.31	spurious

**CFR47 §15.247(a) (1) - CHANNEL SEPARATION TEST****Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-06-11	2010-06-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Procedure**

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

**Test Data****Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

\* The testing was performed by Sula Huang on 2010-01-01.

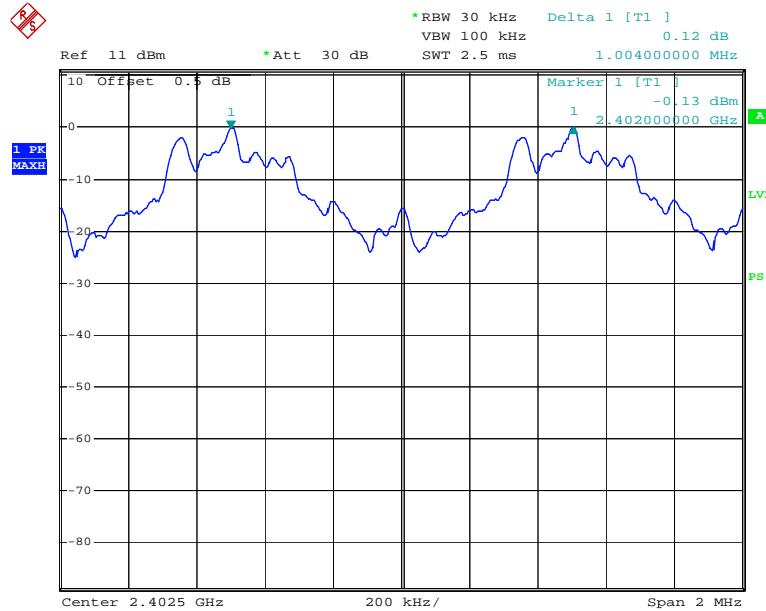
**Test Result:** Compliant.

Please refer to following tables and plots

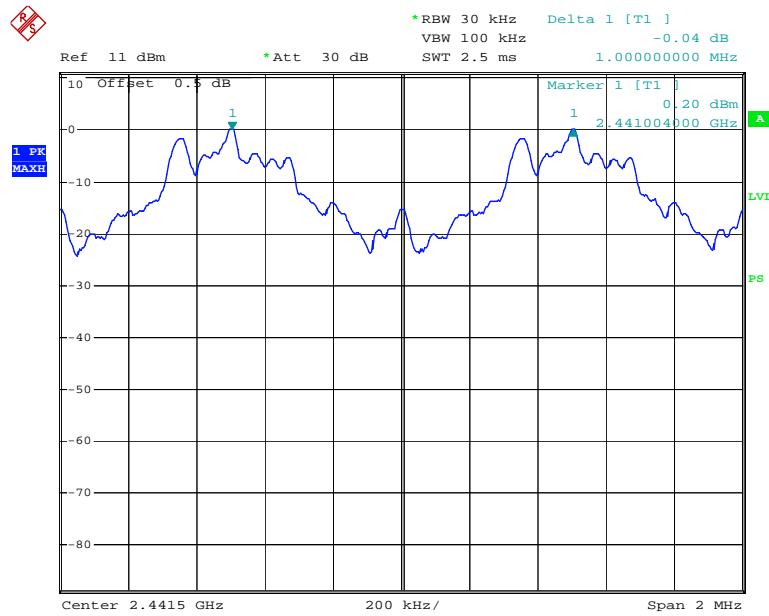
*Test Mode: Transmitting*

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.004	0.700	Pass
Adjacent Channel	2403			
Mid Channel	2441	1.000	0.700	Pass
Adjacent Channel	2442			
High Channel	2480	1.000	0.700	Pass
Adjacent Channel	2479			

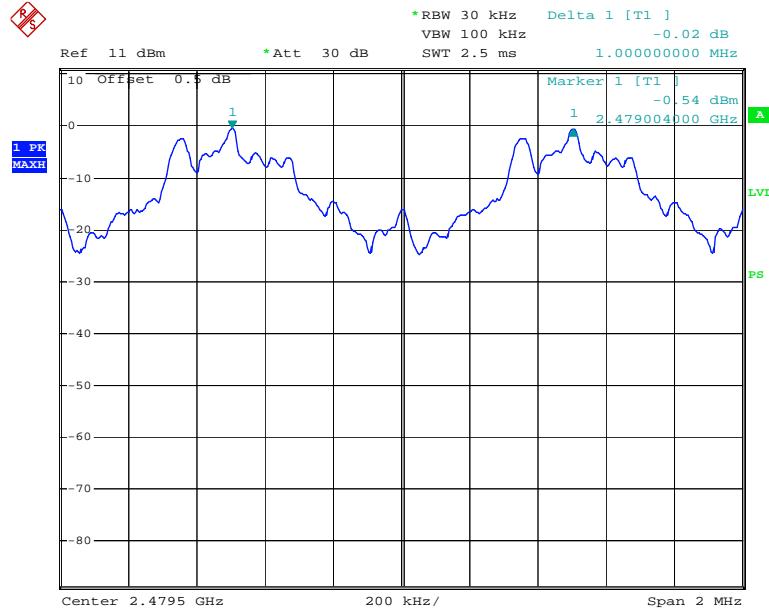
Please refer to the following plots.

**Low Channel**

Date: 1.JAN.2010 22:10:53

**Middle Channel**

Date: 1.JAN.2010 22:13:20

**High Channel**

Date: 1.JAN.2010 22:17:29

## CFR47 §15.247(a) (1) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-06-11	2010-06-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Data

#### Environmental Conditions

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

\* The testing was performed by Sula Huang on 2009-01-01.

**Test Result:** Compliant.

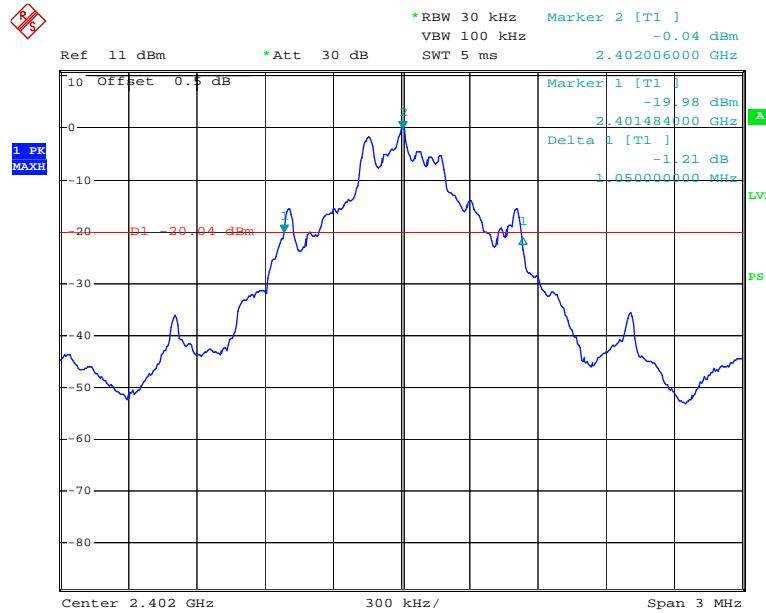
Please refer to following tables and plots

*Test Mode: Transmitting*

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.05
Middle	2441	1.05
High	2480	1.05

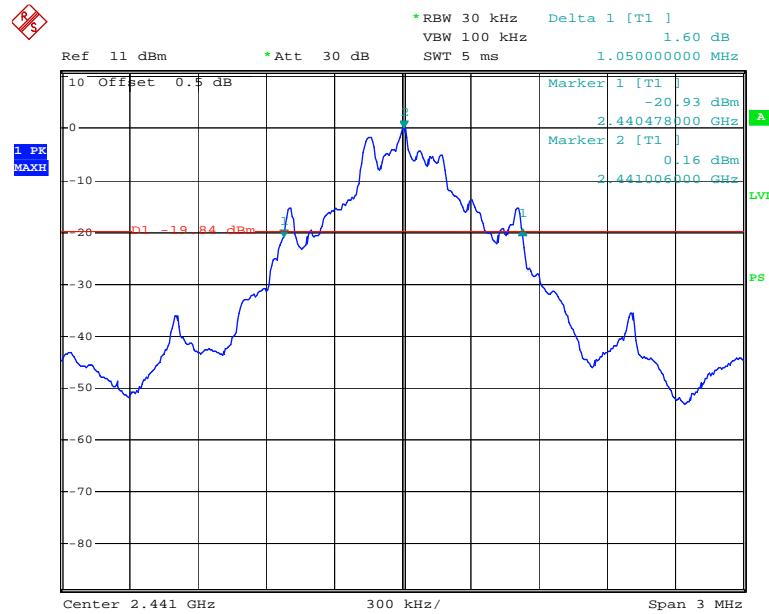
Please refer to the following plots.

### Low Channel



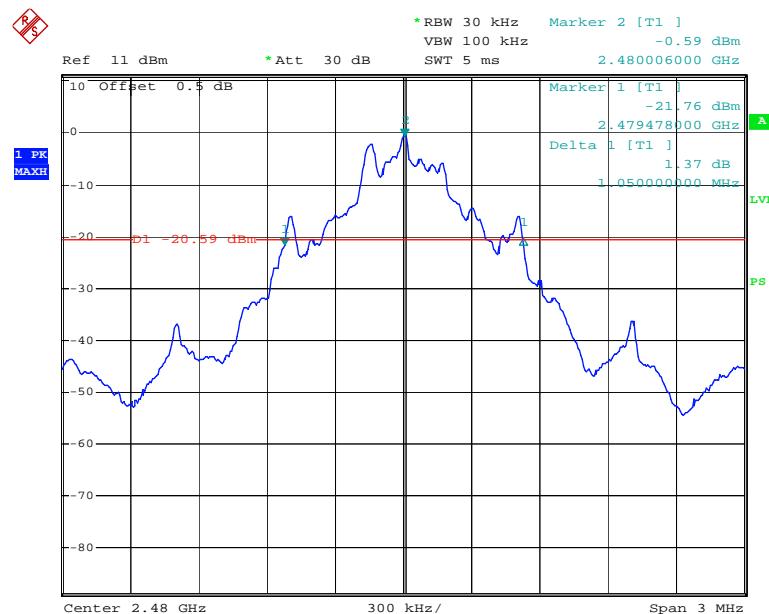
Date: 1.JAN.2010 21:56:33

### Middle Channel



Date: 1.JAN.2010 22:00:53

### High Channel



Date: 1.JAN.2010 22:06:53

**CFR47 §15.247(a)(1)(iii) - QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-24	2010-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-06-11	2010-06-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

**Test Data****Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Sula Huang on 2010-01-01.

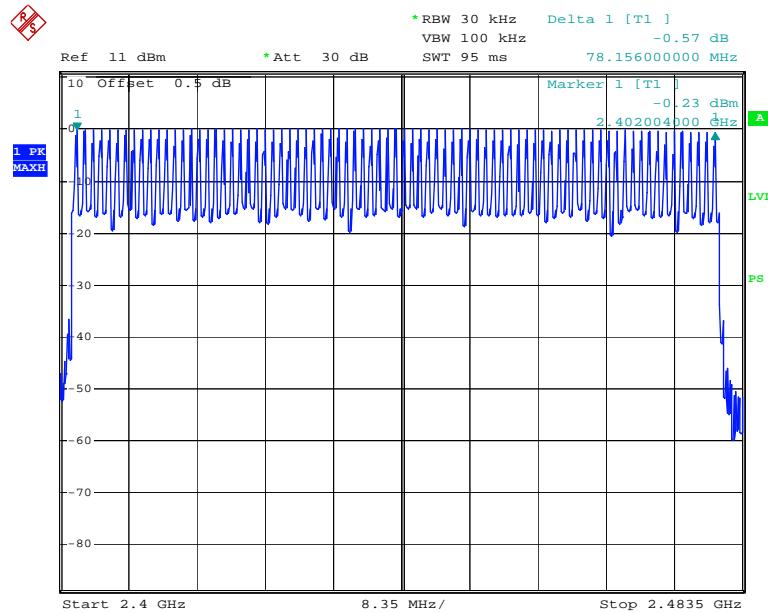
**Test Result:** Compliant.

Please refer to following tables and plots

*Test Mode: Transmitting*

Frequency Range (MHz)	Number of Hopping Channel	Limit
2402-2480	79	$\geq 15$

### Number of Hopping Channels



Date: 1.JAN.2010 22:29:15

**CFR47 §15.247(a)(1)(iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2009-11-24	2010-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-06-11	2010-06-10

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length \* hope rate/ number of hopping channels \* 31.6s  
Hop rate=1600/s

**Test Data****Environmental Conditions**

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.9 kPa

*The testing was performed by Sula Huang on 2010-01-01.*

**Test Result:** Compliant.

Please refer to following tables and plots

*Test Mode: Transmitting*

**DH 1 Mode:**

Channel	Pulse Width (ms)	Dwell Time (Sec)	Limit (Sec)	Result
Low	0.485	0.155	0.4	Pass
Middle	0.490	0.157	0.4	Pass
High	0.485	0.155	0.4	Pass

*Note:* Dwell time=Pulse width (ms)  $\times$  (1600  $\div$  2  $\div$  79)  $\times$ 31.6 Second

**DH 3 Mode:**

Channel	Pulse Width (ms)	Dwell Time (Sec)	Limit (Sec)	Result
Low	1.780	0.285	0.4	Pass
Middle	1.780	0.285	0.4	Pass
High	1.760	0.282	0.4	Pass

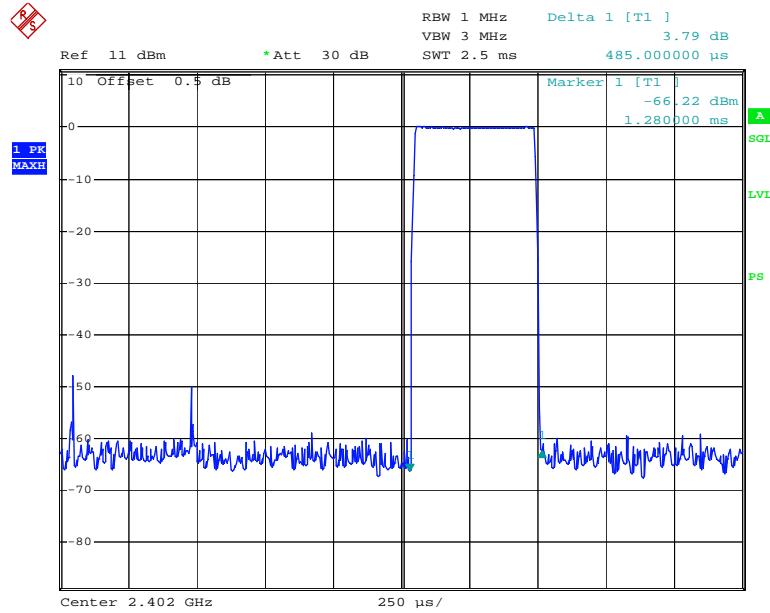
*Note:* Dwell time=Pulse width (ms)  $\times$  (1600  $\div$  4  $\div$  79)  $\times$ 31.6 Second

**DH 5 Mode:**

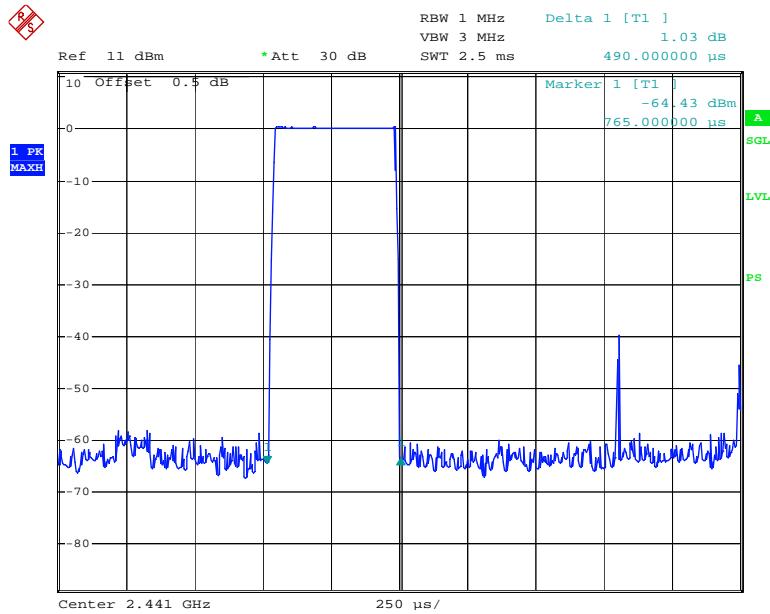
Channel	Pulse Width (ms)	Dwell Time (Sec)	Limit (Sec)	Result
Low	3.02	0.323	0.4	Pass
Middle	3.02	0.323	0.4	Pass
High	3.10	0.331	0.4	Pass

*Note:* Dwell time=Pulse width (ms)  $\times$  (1600  $\div$  6  $\div$  79)  $\times$ 31.6 Second

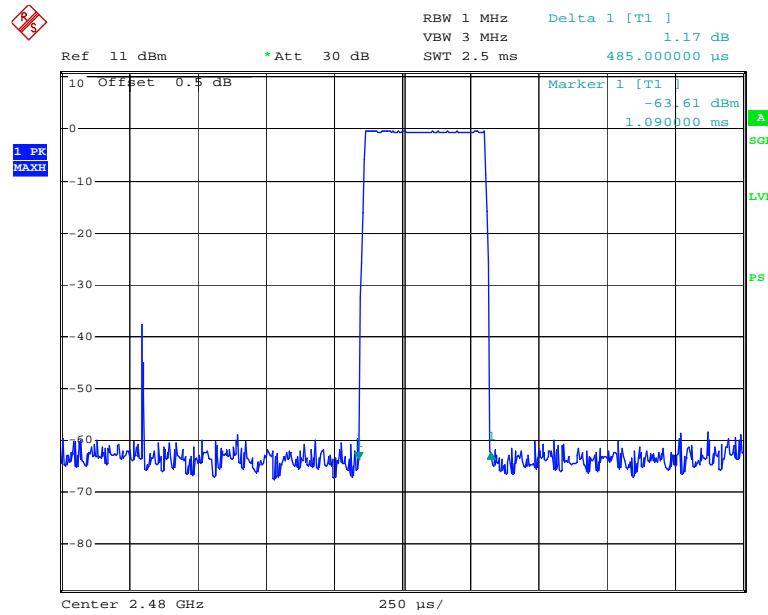
Please refer to the following plots.

**Low Channel for DH1**

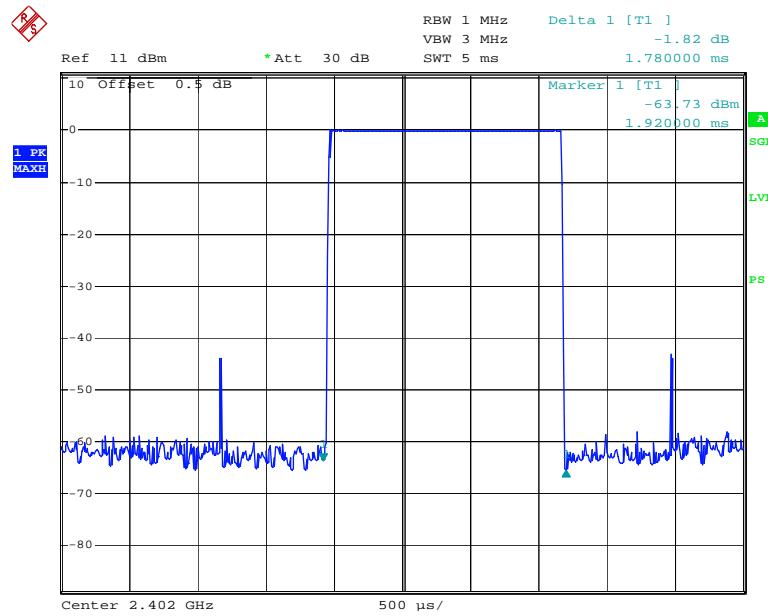
Date: 1.JAN.2010 23:15:33

**Middle Channel for DH1**

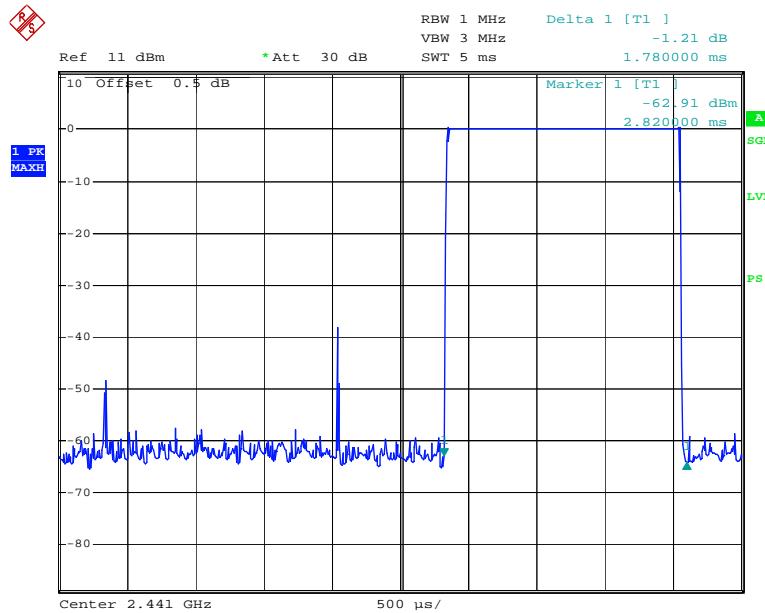
Date: 1.JAN.2010 23:18:30

**High Channel for DH1**

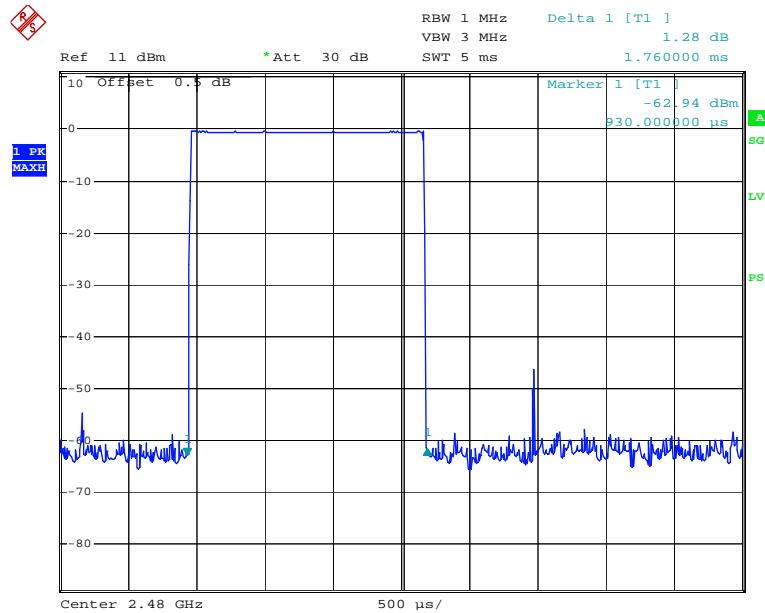
Date: 1.JAN.2010 23:32:03

**Low Channel for DH3**

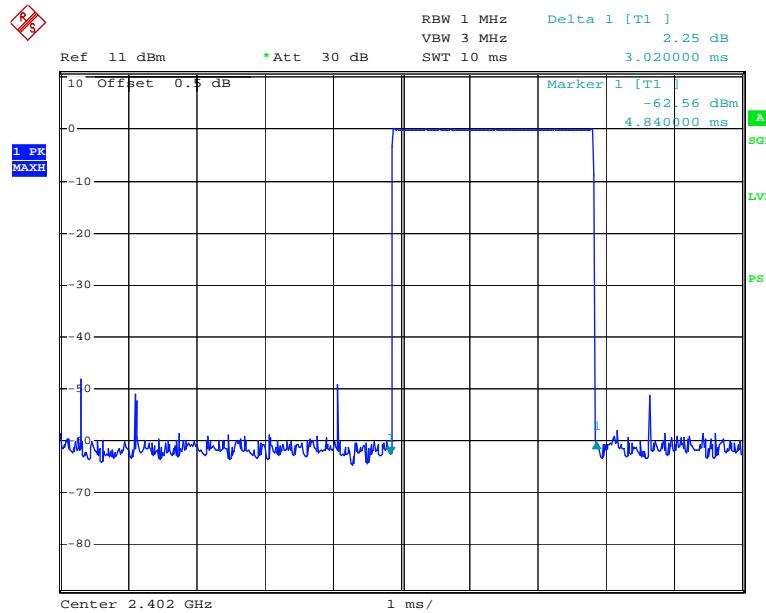
Date: 1.JAN.2010 23:13:31

**Middle Channel for DH3**

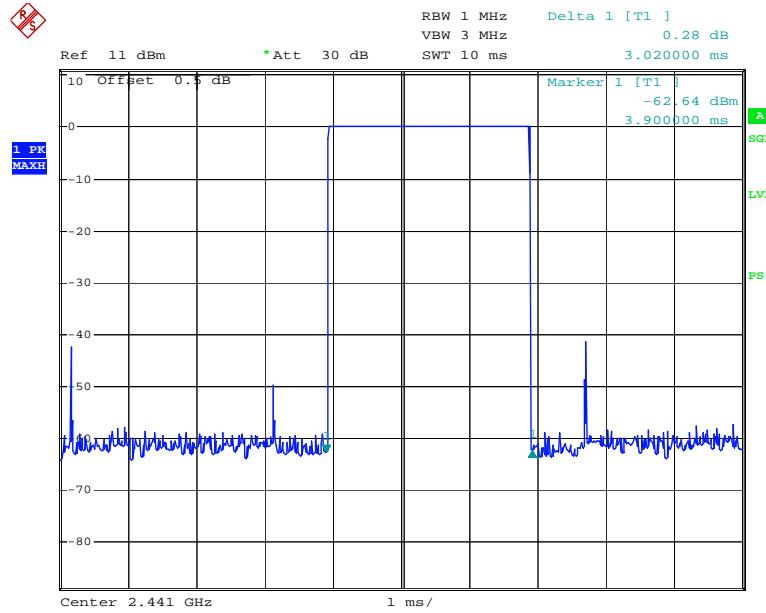
Date: 1.JAN.2010 23:20:04

**High Channel for DH3**

Date: 1.JAN.2010 23:30:30

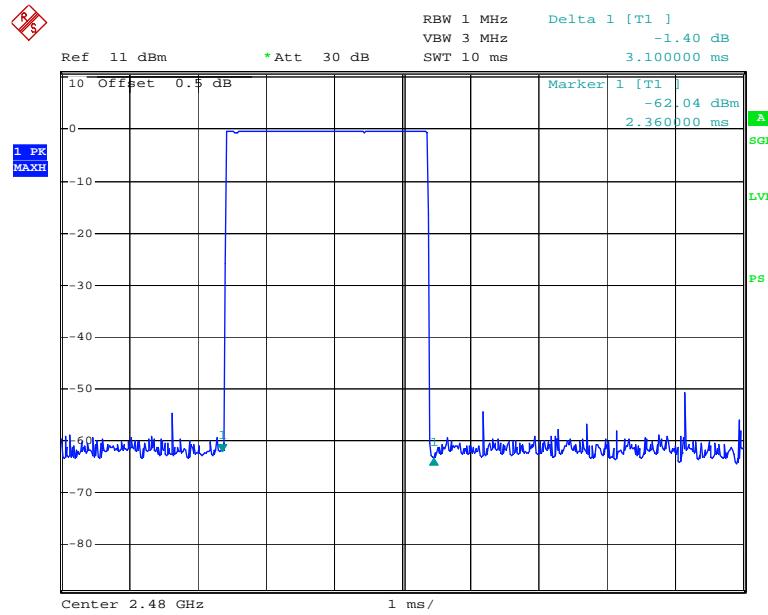
**Low Channel for DH5**

Date: 1.JAN.2010 23:10:21

**Middle Channel for DH5**

Date: 1.JAN.2010 23:24:23

## High Channel for DH5



Date: 1.JAN.2010 23:26:48

**CFR47 §15.247(b)(1) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400 - 2483.5 MHz band: 0.125 watts.


**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-06-11	2010-06-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

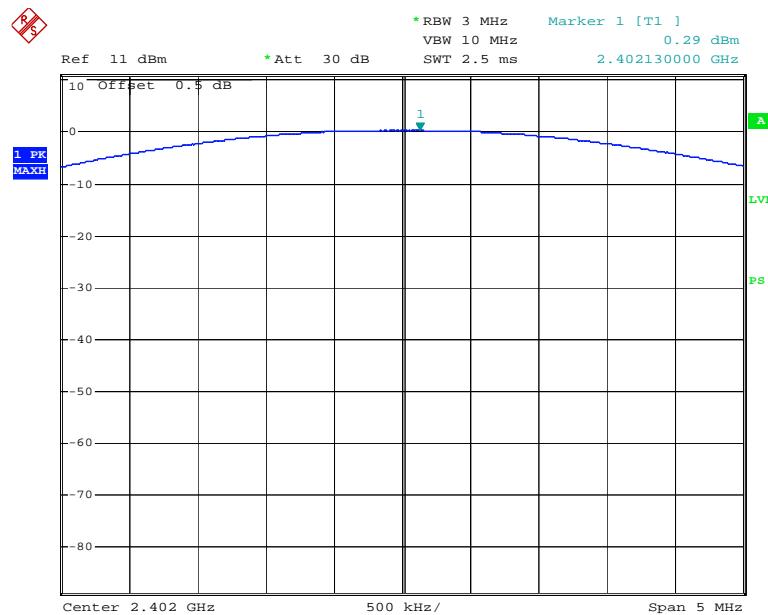
*The testing was performed by Sula Huang on 2010-01-01.*

**Test Result:** Compliant.

*Test Mode: Transmitting*

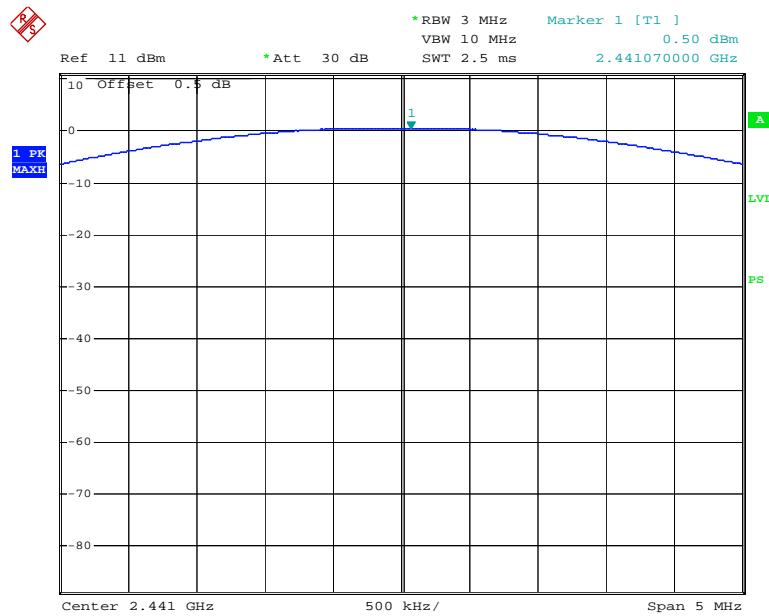
Channel	Frequency (MHz)	Conducted Output Power		Limit (mw)
		(dBm)	(mw)	
Low	2402	0.29	1.069	125
Middle	2441	0.50	1.122	125
High	2480	-0.14	0.968	125

### Low Channel



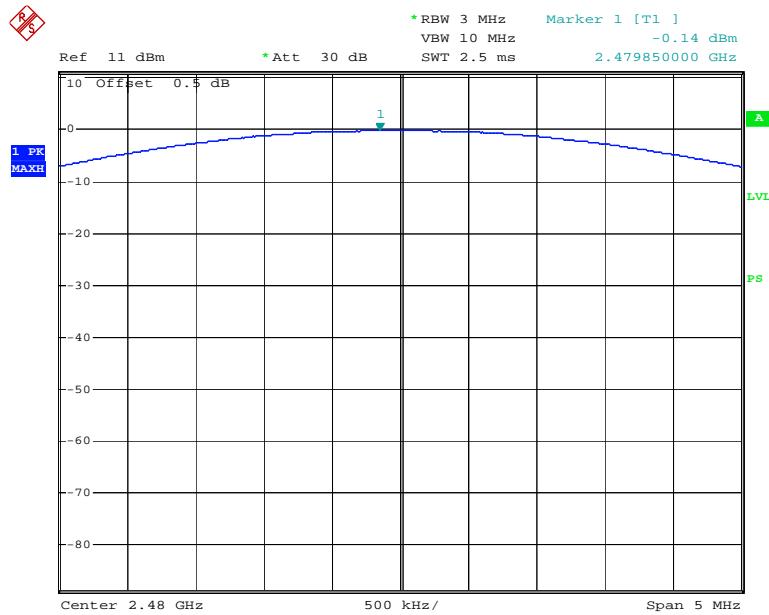
Date: 1.JAN.2010 22:31:36

### Middle Channel



Date: 1.JAN.2010 22:32:37

### High Chanel



Date: 1.JAN.2010 22:34:03

## CFR47 §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-23
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	109038	2009-06-11	2010-06-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1 MHz, VBW=3 MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	27 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.9 kPa

The testing was performed by Sula Huang on 2010-01-01.

### Test Result: Compliant

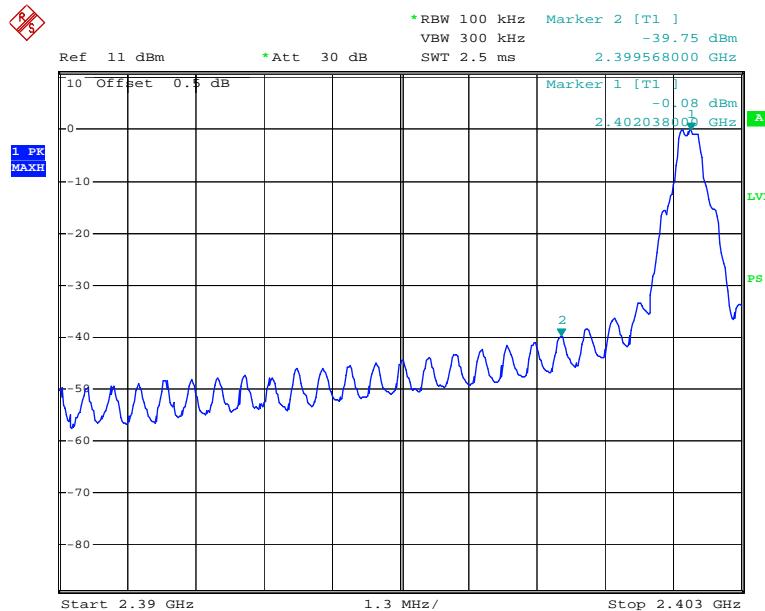
Please refer to the following table and plots.

Test Mode: Transmitting

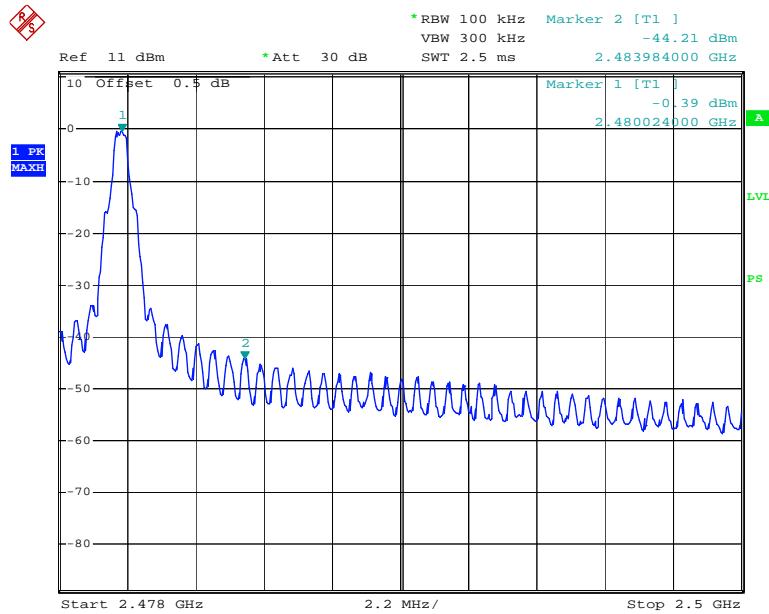
Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
2399.568	39.67	20
2483.984	43.82	20

Note: The point fall into the stricted band was in FCC 15.209, please refer to the restrict band testing.

### Band Edge: Left Side



Date: 1.JAN.2010 22:39:35

**Band Edge: Right Side**

Date: 1.JAN.2010 22:43:39

**\*\*\*\*\* END OF REPORT \*\*\*\*\***