

Certification Test Report

FCC ID: X32-ARX11B2 IC: 8797A-ARX11B2

FCC Rule Part: 15.231
ISED Canada Radio Standards Specification: RSS-210

ACS Report Number: 16-3048.W06.1A

Manufacturer: iKeyless, LLC

Model: 300-0388

Test Begin Date: June 27, 2016 Test End Date: June 28, 2016

Report Issue Date: June 30, 2016



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code AT-1921

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

Prepared by:

Reviewed by:

Randle Sherian EMC Technician

Advanced Compliance Solutions, Inc.

adl. fin

Ryan McGann

Wireless Program Manager

Advanced Compliance Solutions, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 17 pages

TABLE OF CONTENTS

1	1 GENERAL	3
	1.1 Purpose	3
	1.2 Product description	
	1.3 TEST METHODOLOGY AND CONSIDERATIONS	
2	2 TEST FACILITIES	4
	2.1 LOCATION	4
	2.2 LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	4
	2.3 RADIATED EMISSIONS TEST SITE DESCRIPTION	
	2.3.1 Semi-Anechoic Chamber Test Site	5
	2.4 CONDUCTED EMISSIONS TEST SITE DESCRIPTION	6
3	3 APPLICABLE STANDARD REFERENCES	7
4	4 LIST OF TEST EQUIPMENT	7
7	This of the Equilibrium	
5	5 SUPPORT EQUIPMENT	8
6	6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	8
7	7 SUMMARY OF TESTS	9
	7.1 Antenna Requirement – FCC: CFR 47 Part 15.203	9
	7.2 AC POWER LINE CONDUCTED EMISSIONS – FCC: CFR 47 PART 15.207/	ISED CANADA: RSS-
	GEN 8.8	9
	7.2.1 Measurement Procedure	
	7.3 Periodic Operation – FCC: CFR 47 15.231(a) / ISED CANADA: RSS	
	7.3.1 Test Methodology	
	7.3.2 Test Results	
	7.4 OCCUPIED BANDWIDTH – FCC: CFR 47 15.231(c)(1) / ISED CANADA:	
	7.4.1 Test Methodology	
	7.4.2 Test Results	
	7.5 RADIATED EMISSIONS – FCC: CFR 47 13.231(B)/ ISED CANADA: RSS 7.5.1 Test Methodology	
	7.5.1 Test Methodology	
	7.5.3 Test Results	
	7.5.4 Sample Calculation:	
	7.3.7 Sampic Calculation,	1 /

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science, and Economic Development Canada's Radio Standards Specification RSS-210.

1.2 Product description

Remote product 300-0388 is an aftermarket replacement keyless entry remote for automobiles. The remote is designed such that it can emulate the functionality of a wide range of existing OEM remotes operating at 433.92MHz with ASK modulation. The emulated remote is configured from a predetermined list of car remotes by the user. The remote features a microcontroller/transmitter, 7 micro-switch dome buttons, and a user LED. The remote electronics are contained inside an ABS plastic shell with a labeled silicon rubber pad over the buttons. The device is powered by a single CR2032 coin cell battery.

Operating Voltage: 3 VDC (CR2032 Battery) Antenna Type / Gain: Loop / -12.0 dBi

Manufacturer Information: iKeyless, LLC 828 E Market St Louisville, KY 40206

Test Sample Serial Number(s): ACS 1 for Radiated Measurements and ACS 2 for Duty Cycle and Bandwidth Measurements

Test Sample Condition: The test sample was provided in working order with no visible defects.

1.3 Test Methodology and Considerations

The EUT is a stand-alone handheld device and was tested in (3) orientations which represent normal intended operation.

The EUT is a battery powered device; therefore AC power line conducted emissions was not performed.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions 2320 Presidential Drive, Suite 101 Durham, NC 27703 Phone: (919) 381-4235

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1921 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

FCC Registered Test Site Number: 637011 ISED Test Site Registration Number: 20446

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a $2' \times 6' \times 1.5'$ deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4'' PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

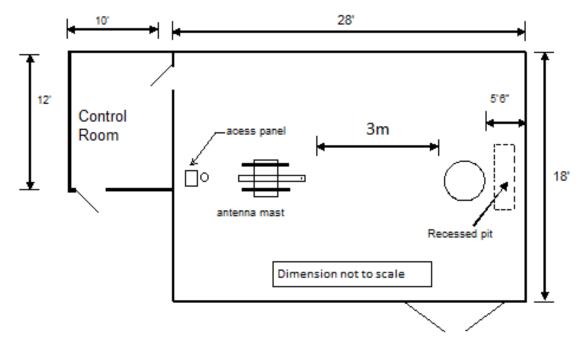


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 10' sheet galvanized steel horizontal ground reference plane (GRP) bonded every 6" to an 8' X 8' aluminum vertical ground plane.

A diagram of the room is shown below in figure 2.4-1:

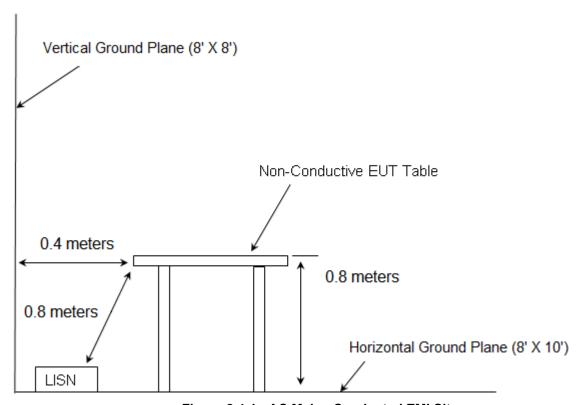


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio-Noise Emissions from low-voltage electrical and electronic equipment in the range of 9kHz to 40 GHz.
- ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2014
- US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2014
- ❖ ISED Canada Radio Standards Specification: RSS-210 Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment, Issue 8, December 2010
- ISED Canada Radio Standards Specification: RSS-GEN General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

1									
AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date			
277	Emco	93146	Antennas	9904-5199	9/2/2014	9/2/2016			
626	EMCO	3110B	Antennas	9411-1945	2/29/2016	2/28/2017			
3002	Rohde & Schwarz	ESU40	Receiver	100346	1/8/2016	1/8/2017			
3006	Rohde & Schwarz	TS-PR18	Amplifiers	122006	6/29/2015	6/29/2016			
3012	Rohde & Schwarz	EMC32-EB	Software	100731	2/2/2016	8/2/2016			
	Fei Teng Wireless								
3016	Technology	HA-07M18G-NF	Antennas	2013120203	1/26/2016	1/26/2018			
		NMSE-290AW-							
3038	Florida RF Labs	60.0-NMSE	Cable Set	1448	12/22/2015	12/22/2016			
		NMSE-290AW-							
3039	Florida RF Labs	396.0-NMSE	Cable Set	1447	12/22/2015	12/22/2016			
3055	Rohde & Schwarz	3005	Cables	3055	12/30/2015	12/30/2016			

NCR = No Calibration Required Firmware Version: ESU40 is 4.73 SP1 Software Version: EMC32-B is 9.15

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item #	Manufacturer	Equipment Type	Model Number	Serial Number			
	The EUT operates standalone therefore no support equipment was utilized.						

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

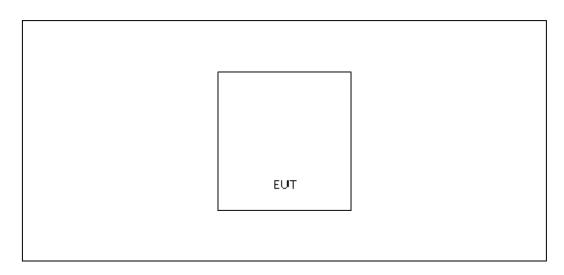


Figure 6-1: EUT Test Setup

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: CFR 47 Part 15.203

The antenna is a loop antenna that is implemented as a copper trace on the PCB, thus satisfying Part 15.203 requirements. The antenna gain is -12.0 dBi.

7.2 AC Power Line Conducted Emissions – FCC: CFR 47 Part 15.207/ISED CANADA: RSS-GEN 8.8

7.2.1 Measurement Procedure

The EUT is battery operated therefore power line conducted emissions is not applicable.

7.3 Periodic Operation – FCC: CFR 47 15.231(a) / ISED CANADA: RSS-210 A1.1.1

7.3.1 Test Methodology


A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

The transmitter was activated manually and was evaluated using a spectrum analyzer at zero span.

7.3.2 Test Results

The transmitter ceased operation after the next whole packet was sent after being manually activated and deactivated. The results are shown in Figure 7.3.2-1.

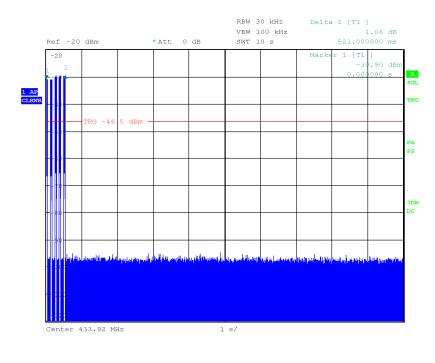

Date: 27.JUN.2016 14:41:39

Figure 7.3.2-1: TX Hold Time

7.4 Occupied Bandwidth - FCC: CFR 47 15.231(c)(1) / ISED CANADA: RSS-210 A1.1.3

7.4.1 Test Methodology

The span of the spectrum analyzer display was set between two times and five times the occupied bandwidth (OBW) of the emission. The RBW of the spectrum analyzer was set to approximately 1 % to 5 % of the OBW. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.


The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth. A peak detector was used.

7.4.2 Test Results

0.25% of the 433.92 MHz center frequency is equivalent to 1084.8 kHz. Therefore the 20 dB and 99% bandwidths of the emissions are less than 0.25% of the center frequency. The results are shown in Table 7.4.2-1 and Figures 7.4.2-1 and 7.4.2-2.


Table 7.4.2-1: 20dB / 99% Bandwidth

Modulation	Frequency	20dB Bandwidth	99% Bandwidth		
	[MHz]	[kHz]	[kHz]		
ASK	433.92	24.21	33.35		

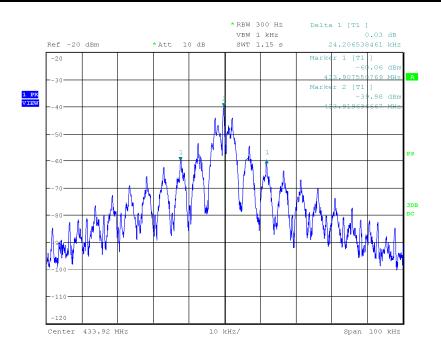

Date: 27.JUN.2016 16:36:54

Figure 7.4.2-1: 20 dB Bandwidth

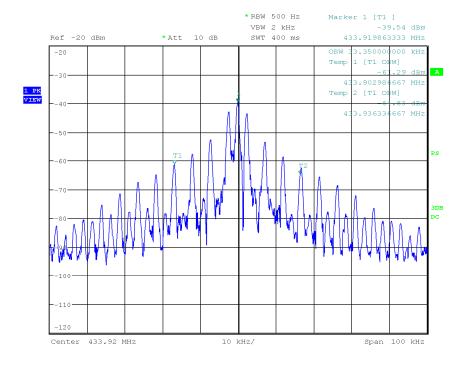

Date: 27.JUN.2016 16:42:35

Figure 7.4.2-2: 99% Occupied Bandwidth

7.5 Radiated Emissions – FCC: CFR 47 15.231(b) / ISED CANADA: RSS-210 A1.1.2

7.5.1 Test Methodology

Radiated emissions measurements were made over the frequency range of 9 kHz or the lowest frequency generated to 4.3392GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies between 9 kHz and 150 kHz, measurements were made using a resolution bandwidth (RBW) of 300 Hz and a video bandwidth of 1 kHz. For frequencies between 150 kHz and 30 MHz, measurements were made using a resolution bandwidth (RBW) of 150 kHz and a video bandwidth of 30 kHz. For frequencies between 30 MHz and 1000 MHz, measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz. For frequencies above 1000MHz, measurements were made with RBW of 1 MHz and a VBW of 3 MHz.

Further, compliance with the provisions of 15.205 was demonstrated using the measurement instrumentation specified in that section where applicable.

For ASK modulation the EUT utilized pulsed modulation therefore peak measurements where corrected by the duty cycle for comparison to the average limits.


7.5.2 Duty Cycle Correction

For average radiated measurements, the measured level was reduced by a factor 13.55 dB to account for the duty cycle of the EUT with ASK modulation.

The worst case duty cycle was determined to be 21%. The duty cycle correction factor is determined using the formula: 20log (21/100) = -13.55 dB. Determination of the duty cycle correction is included in the plots and justification below.


ASK Duty Cycle Determination:

Period (T) = 122ms (100ms was used for the duty cycle calculations) Number Pulses (N1) = 112 Pulse Width (T1) = 0.190ms(N1*T1)/T = (112*0.190)/100 = 0.2120*Log(0.21) = -13.55 dB Average Correction Factor (from plots below)

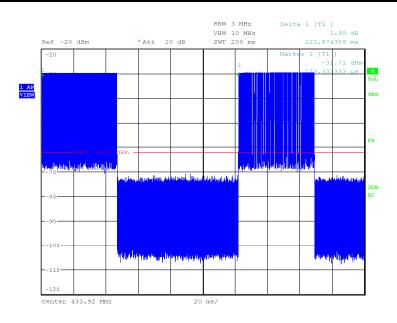


Date: 27.JUN.2016 14:54:58

Figure 7.5.2-1: Duty Cycle

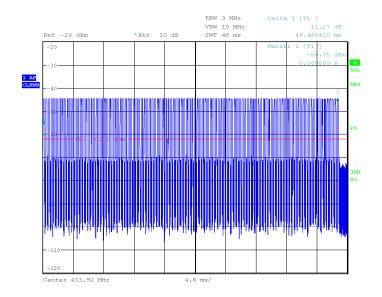

Date: 27.JUN.2016 15:01:40

Figure 7.5.2-2: Duty Cycle

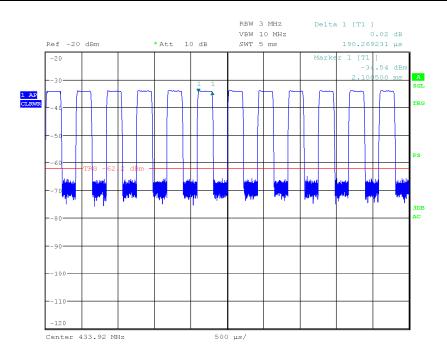

Date: 27.JUN.2016 15:07:39

Figure 7.5.2-3: Duty Cycle -Pulse Width (T1)

7.5.3 Test Results

X, Y and Z positions were pre-scanned and Z position was determined to be the worst case. The final measurements are reported in Table 7.5.3-1.

Table 7.5.3-1: Radiated Emissions

Table Held II Madiated Elification										
Frequency (MHz)		Level (dBuV)		Correction Factors	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
(11112)	pk	pk	(H/V)	(dB)	pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Fundamental Emission										
433.92	65.00	65.00	Н	17.48	82.48	68.93	100.8	80.8	18.3	11.9
433.92	72.90	72.90	V	17.48	90.38	76.83	100.8	80.8	10.4	4.0
	Spurious Emissions									
867.84	18.80	18.80	Н	24.34	43.14	29.59	80.8	60.8	37.7	31.2
867.84	25.60	25.60	V	24.34	49.94	36.39	80.8	60.8	30.9	24.4
1301.76	46.80	46.80	Н	-5.22	41.58	28.03	74.0	54.0	32.4	26.0
1301.76	61.90	61.90	V	-5.22	56.68	43.13	74.0	54.0	17.3	10.9
2603.52	52.60	52.60	Н	-1.07	51.53	37.98	80.8	60.8	29.3	22.8
2603.52	62.10	62.10	V	-1.07	61.03	47.48	80.8	60.8	19.8	13.3
3037.44	49.30	49.30	Н	0.87	50.17	36.61	80.8	60.8	30.6	24.2
3037.44	56.20	56.20	V	0.87	57.07	43.51	80.8	60.8	23.7	17.3
3905.28	57.10	57.10	Н	4.54	61.64	48.09	74.0	54.0	12.4	5.9
3905.28	59.80	59.80	V	4.54	64.34	50.79	74.0	54.0	9.7	3.2
4339.2	54.10	54.10	Н	5.71	59.81	46.26	74.0	54.0	14.2	7.7
4339.2	56.50	56.50	V	5.71	62.21	48.66	74.0	54.0	11.8	5.3

7.5.4 Sample Calculation:

 $R_C = R_U + CF_T$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R_U = Uncorrected Reading
R_C = Corrected Level
AF = Antenna Factor
CA = Cable Attenuation
AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Fundamental Frequency (X Orientation)

PEAK:

Corrected Level: 18.80 + 24.34 = 43.14dBuV Margin: 80.8dBuV - 43.14dBuV = 37.7dB

AVERAGE:

Corrected Level: 18.80 + 24.34 - 13.55 = 29.59dBuV

Margin: 60.80dBuV - 29.59dBuV = 31.2dB

8 CONCLUSION

In the opinion of ACS, Inc. the 300-0388 manufactured by iKeyless, LLC meets the requirements of FCC Part 15 subpart C and Innovation, Science, and Economic Development Canada's Radio Standards Specification RSS-210.

END REPORT