



RF TEST REPORT



Report No.: 16020758-FCC-R1

Supersede Report No.: N/A

Applicant	Shanghai Smarfid Security Equipment Co.,Ltd	
Product Name	Magic Series Desfire Reader	
Main Model	MD322-8K	
Serial Model	MD322-8N	
Test Standard	FCC Part 15.225: 2016, ANSI C63.10: 2013	
Test Date	October 19 to October 20, 2016	
Issue Date	October 21, 2016	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
 Louise Tu Test Engineer		 Miro Bao Checked By
 This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China

Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	16020758-FCC-R1
Page	3 of 37

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 ANTENNA REQUIREMENT	8
6.2 CONDUCTED EMISSIONS VOLTAGE.....	9
6.3 FUNDAMENTAL FIELD STRENGTH TEST RESULT	13
6.4 RADIATED SPURIOUS EMISSIONS.....	15
6.5 FREQUENCY STABILITY	20
6.6 20DB OCCUPIED BANDWIDTH.....	22
ANNEX A. TEST INSTRUMENT	24
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	25
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	33
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	36
ANNEX E. DECLARATION OF SIMILARITY	37

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16020758-FCC-R1	NONE	Original	October 21, 2016

2. Customer information

Applicant Name	Shanghai Smarfid Security Equipment Co.,Ltd
Applicant Address	Room 301,4th Bldg., No.4 TongLi Road, SongJiang District,Shanghai 201615,China
Manufacturer Name	Shanghai Smarfid Security Equipment Co.,Ltd
Manufacturer Address	Room 301,4th Bldg., No.4 TongLi Road, SongJiang District,Shanghai 201615,China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	EZ_EMU

4. Equipment Under Test (EUT) Information

Description of EUT: Magic Series Desfire Reader

Main Model: MD322-8K

Serial Model: MD322-8N

Date EUT received: September 18, 2016

Test Date(s): October 19 to October 20, 2016

Antenna Gain: 13.56MHz: 6 dBi

Type of Modulation: ASK

RF Operating Frequency (ies): 13.56MHz

Number of Channels: 1 CH

Input Power: DC 12V

Trade Name : N/A

FCC ID: X3A-MD3221356M

Note: the difference between the two models please refers to Annex E. DECLARATION OF SIMILARITY.

5. Test Summary

The product was tested in accordance with the following specifications.
 All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conducted Emissions Voltage	Compliance
§15.225(a)	Fundamental Field Strength	Compliance
§15.225(b)	Fundamental Field Strength	Compliance
§15.225(c)	Fundamental Field Strength	Compliance
§15.225(d),15.209	Radiated Emissions	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	Occupied Bandwidth	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Conducted Emissions & Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	1.634dB / 3.952dB

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
- b) Antenna must use a unique type of connector to attach to the device.
- c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The antenna is permanently attached to the device which meets the requirement.


Result: Compliance.

6.2 Conducted Emissions Voltage

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 19, 2016
Tested By :	Louise Tu

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dB μ V)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

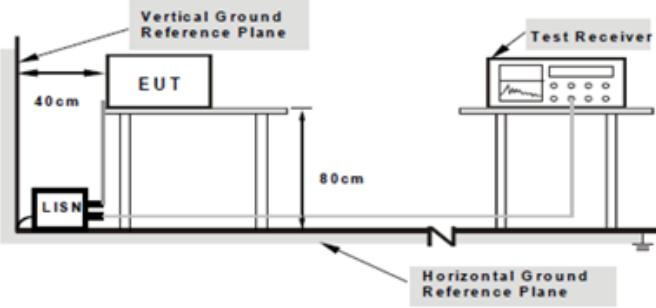Spec	Item	Requirement	Applicable
47CFR§15.20 7, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ]H/50 Ω line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>		
Procedure	<ul style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. The power supply for the EUT was fed through a 50Ω /50μH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. All other supporting equipment were powered separately from another main supply. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Report No.	16020758-FCC-R1
Page	10 of 37

Test Data Yes N/A

Test Plot Yes (See below) N/A

Data sample

No.	Frequency (MHz)	Reading (dB μ V)	Detector	Lisn/Isn (dB)	Ps_Lmt (dB)	Cab_L (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)

Frequency (MHz) = Emission frequency in MHz

Reading (dB μ V) = Receiver Reading Value

Detector=Quasi Peak Detector or Average Detector

Lisn/ISN= Insertion loss of LISN

Ps_Lmt= Insertion loss of transient limiter (The transient limiter included 10dB attenuation)


Cab_L= cable loss

Result (dB μ V) = Reading Value + Corrected Value

Limit (dB μ V) = Limit stated in standard


Calculation Formula:

Margin (dB) = Result (dB μ V) – limit (dB μ V)

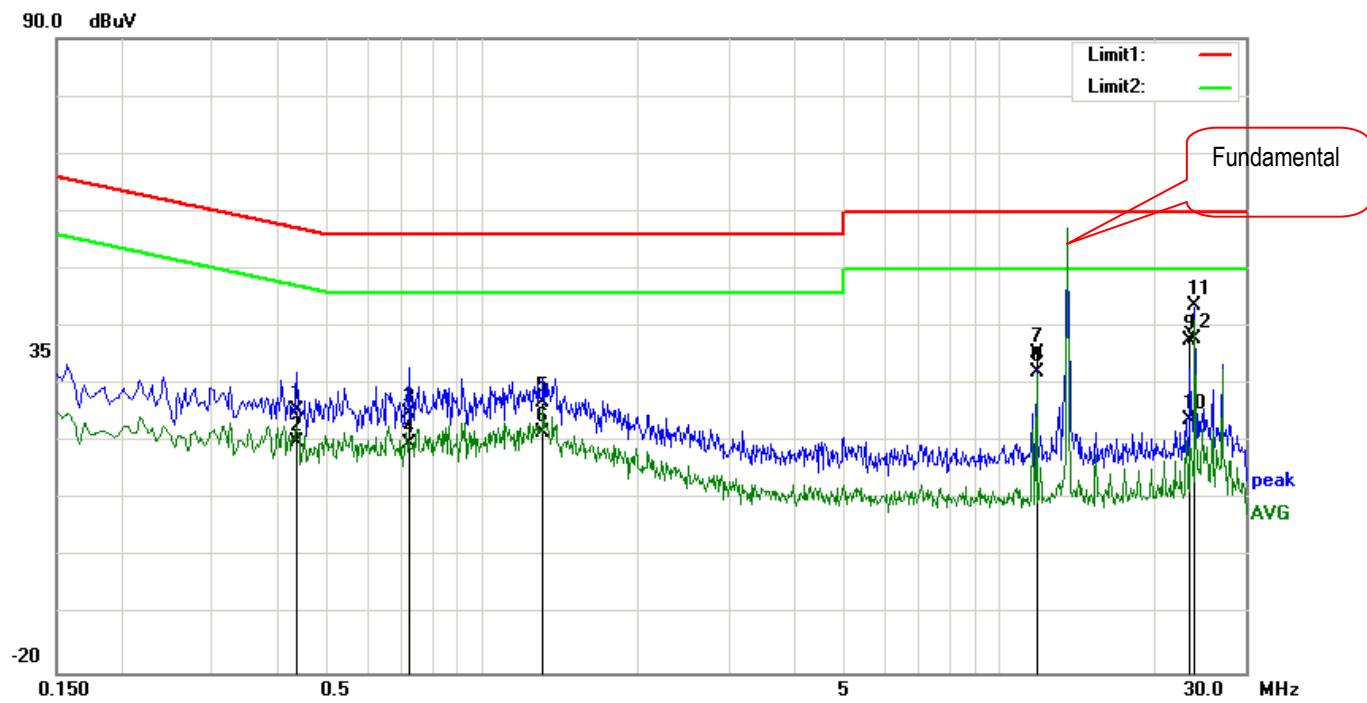Test Mode:
Transmitting Mode

Test Data
Phase Line Plot at 120Vac, 60Hz

No.	Frequency (MHz)	Reading (dB μ V)	Detector	Lisn/Isn (dB)	Ps_Lmt (dB)	Cab_L (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	0.4380	15.12	QP	0.12	-10.00	0.21	25.45	57.10	-31.65
2	0.4380	9.67	AVG	0.12	-10.00	0.21	20.00	47.10	-27.10
3	0.7220	14.56	QP	0.13	-10.00	0.20	24.89	56.00	-31.11
4	0.7220	9.32	AVG	0.13	-10.00	0.20	19.65	46.00	-26.35
5	1.3140	16.48	QP	0.15	-10.00	0.21	26.84	56.00	-29.16
6	1.3140	11.21	AVG	0.15	-10.00	0.21	21.57	46.00	-24.43
7	11.8260	24.34	QP	0.63	-10.00	0.48	35.45	60.00	-24.55
8	11.8260	21.14	AVG	0.63	-10.00	0.48	32.25	50.00	-17.75
9	23.4940	25.79	QP	1.23	-10.00	0.67	37.69	60.00	-22.31
10	23.4940	11.89	AVG	1.23	-10.00	0.67	23.79	50.00	-26.21
11	24.0100	31.67	QP	1.25	-10.00	0.65	43.57	60.00	-16.43
12	24.0100	25.94	AVG	1.25	-10.00	0.65	37.84	50.00	-12.16

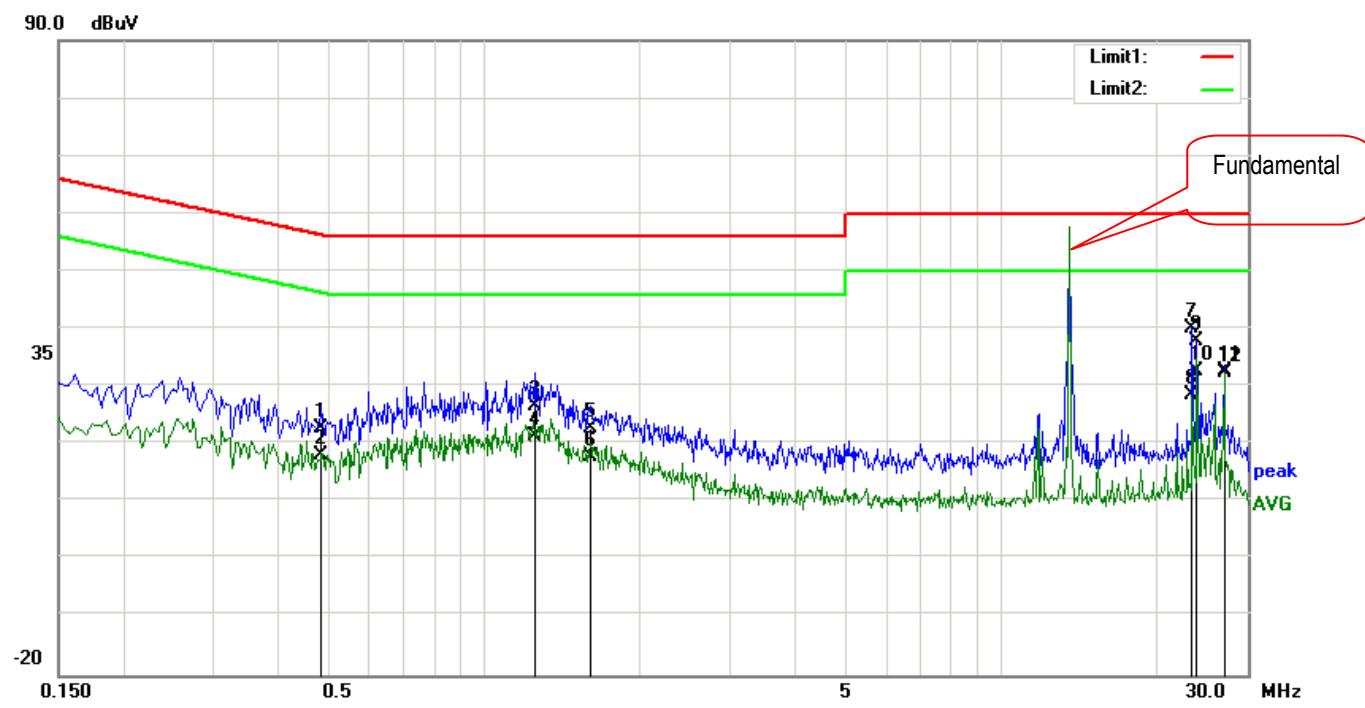Test Mode:	Transmitting Mode
------------	-------------------



Test Data


Phase Neutral Plot at 120Vac, 60Hz

No.	Frequency (MHz)	Reading (dBuV)	Detector	Lisn/lsn (dB)	Ps_Lmt (dB)	Cab_L (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.4860	15.51	QP	0.11	-10.00	0.21	22.83	56.24	-33.41
2	0.4860	10.84	AVG	0.11	-10.00	0.21	18.16	46.24	-28.08
3	1.2620	16.21	QP	0.14	-10.00	0.21	26.56	56.00	-29.44
4	1.2620	11.01	AVG	0.14	-10.00	0.21	21.36	46.00	-24.64
5	1.6060	12.40	QP	0.15	-10.00	0.20	22.75	56.00	-33.25
6	1.6060	7.50	AVG	0.15	-10.00	0.20	17.85	46.00	-28.15
7	23.4940	28.14	QP	1.35	-10.00	0.67	40.16	60.00	-19.84
8	23.4940	16.56	AVG	1.35	-10.00	0.67	28.58	50.00	-21.42
9	24.0060	25.94	QP	1.38	-10.00	0.65	37.97	60.00	-22.03
10	24.0060	20.53	AVG	1.38	-10.00	0.65	32.56	50.00	-17.44
11	27.1220	20.65	QP	1.41	-10.00	0.67	32.73	60.00	-27.27
12	27.1220	20.39	AVG	1.41	-10.00	0.67	32.47	50.00	-17.53

6.3 Fundamental Field Strength Test Result

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 20, 2016
Tested By :	Louise Tu



Requirement(s):

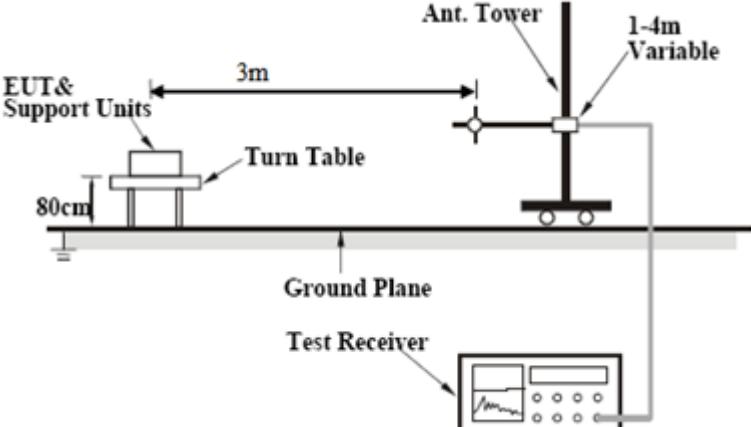Spec	Item	Requirement	Applicable
§15.225(a) §15.225(b) §15.225(c)	a)	The field strength of any emissions within the band 13.553 –13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.	<input checked="" type="checkbox"/>
	b)	The bands 13.410 –13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.	<input type="checkbox"/>
	c)	The bands 13.110 –13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.	<input type="checkbox"/>
Test Setup			
Test Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. A peak measurement was then made for that frequency point. 3. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail	

Test Data	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A

Test Plots


Fundamental Field Strength Measurement Result:

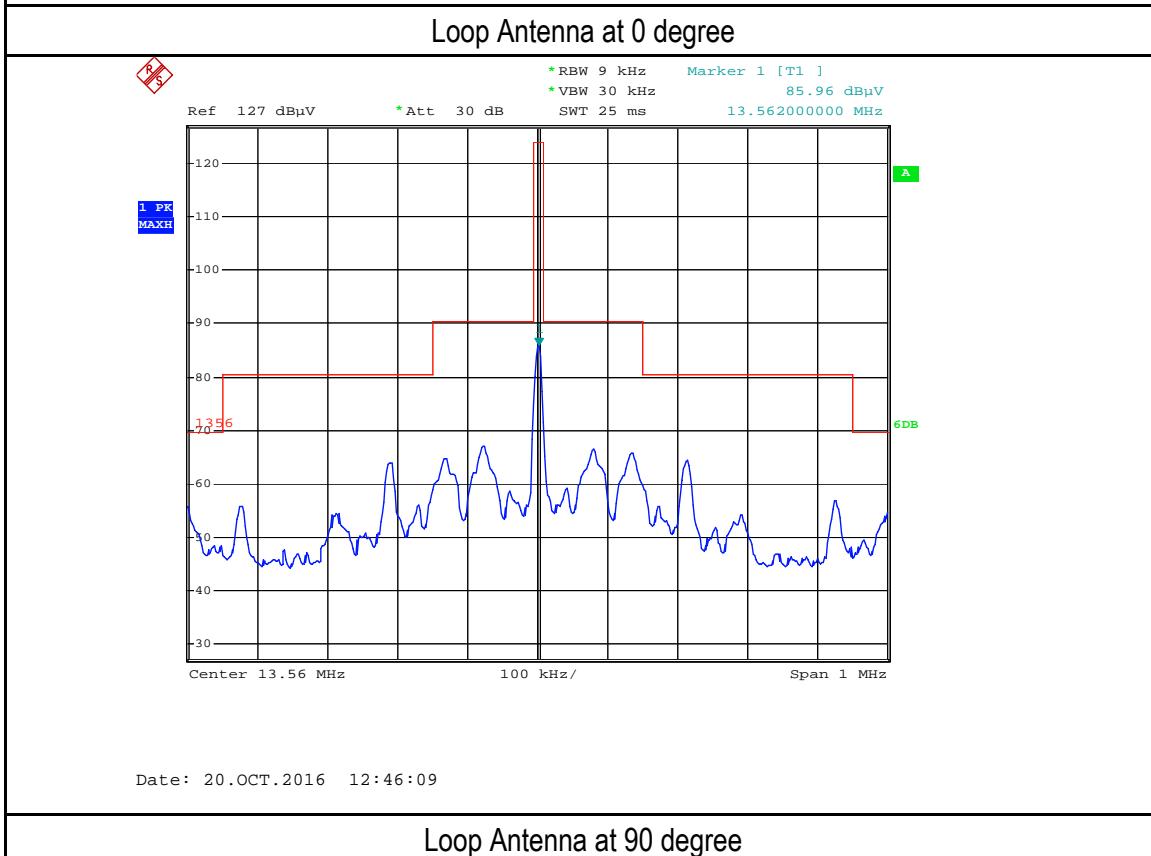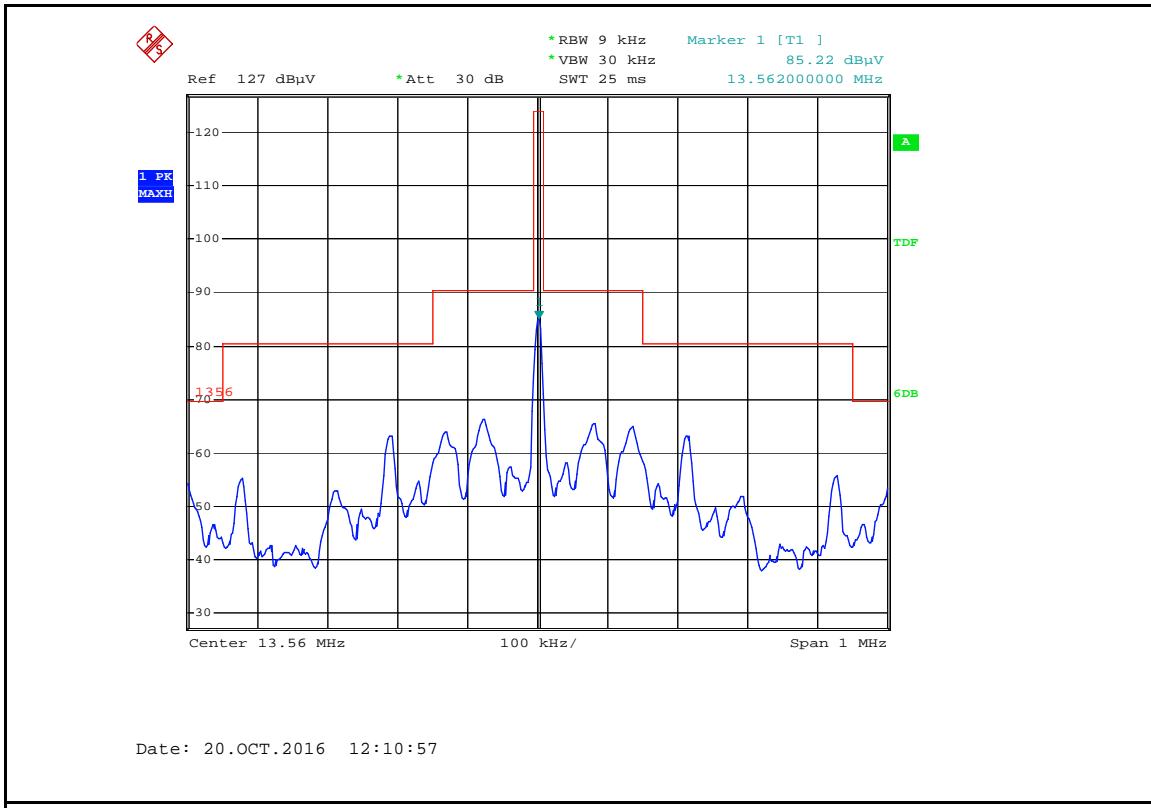

6.4 Radiated Spurious Emissions

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 19, 2016
Tested By :	Louise Tu

Requirement(s):

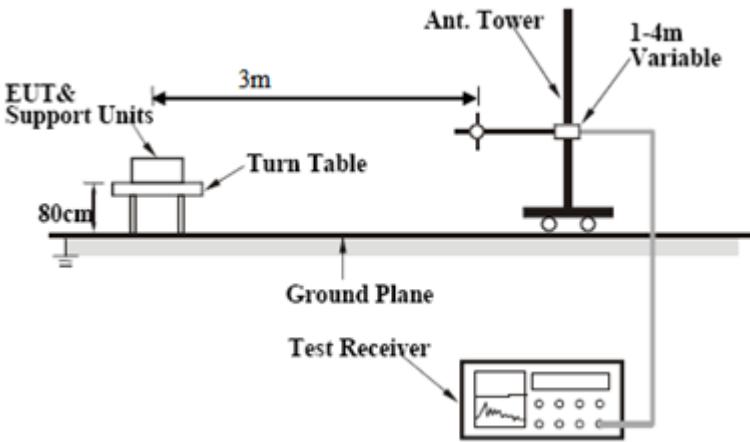Spec	Item	Requirement	Applicable																								
§15.225(d)	a)	<p>The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.</p> <table border="1"> <thead> <tr> <th>Fundamental frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88-246</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54.72 MHz, 76.88 MHz, 174.216 MHz or 470.806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.</p>	Fundamental frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-246	150**	3	216-960	200**	3	Above 960	500	3	<input checked="" type="checkbox"/>
Fundamental frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																									
0.009-0.490	2400/F(kHz)	300																									
0.490-1.705	24000/F(kHz)	30																									
1.705-30.0	30	30																									
30-88	100**	3																									
88-246	150**	3																									
216-960	200**	3																									
Above 960	500	3																									
Test Setup	 <p>The diagram illustrates the test setup for radiated spurious emissions. A 'Turn Table' is positioned on a 'Ground Plane'. A 'EUT & Support Units' is mounted on the turn table at a height of 80cm. A 'Ant. Tower' is mounted on the turn table at a distance of 3m from the EUT. The antenna height is adjustable, indicated as '1-4m Variable'. A 'Test Receiver' is connected to the antenna tower to measure the emissions.</p>																										
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. A Quasi-peak measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 																										

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Data sample

No.	Frequency (MHz)	Reading (dB μ V/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)

Frequency (MHz) = Emission frequency in MHz

Reading (dB μ V/m) = Receiver Reading Value

Detector= Peak Detector or Quasi Peak Detector

Ant_F=Antenna Factor

PA_G=Pre-Amplifier Gain

Cab_L=Cable Loss

Result (dB μ V/m) = Read ing Value + Corrected Value

Limit (dB μ V/m) = Limit stated in standard

Height (cm) = Height of Receiver antenna

Degree = Turn table degree

Calculation Formula:

Margin (dB) = Result (dB μ V/m) – limit (dB μ V/m)

Test Mode:	Transmitting
------------	--------------

Loop Antenna at 0 degree:

@ 3M

Frequency (MHz)	Peak (Corrected) (dB μ V/m)	Factor (dB)	Height (cm)	Azimuth (deg)	Limits @ 3m (dB μ V/m)	Margin (dB)
0.81	51.01	56.2	120	177	70.68	-19.67
27.12	54.41	36.4	109	179	69.54	-15.13
16.56	48.68	36.1	100	178	69.54	-20.86


Loop Antenna at 90 degree:

@ 3M

Frequency (MHz)	Peak (Corrected) (dB μ V/m)	Factor (dB)	Height (cm)	Azimuth (deg)	Limits @ 3m (dB μ V/m)	Margin (dB)
27.16	51.54	36.1	100	178	69.54	-18.00
16.49	49.58	36.3	109	179	69.54	-19.96
21.59	48.59	36.5	120	177	69.54	-20.95

Test Mode:	Transmitting Mode
------------	-------------------

Below 1GHz

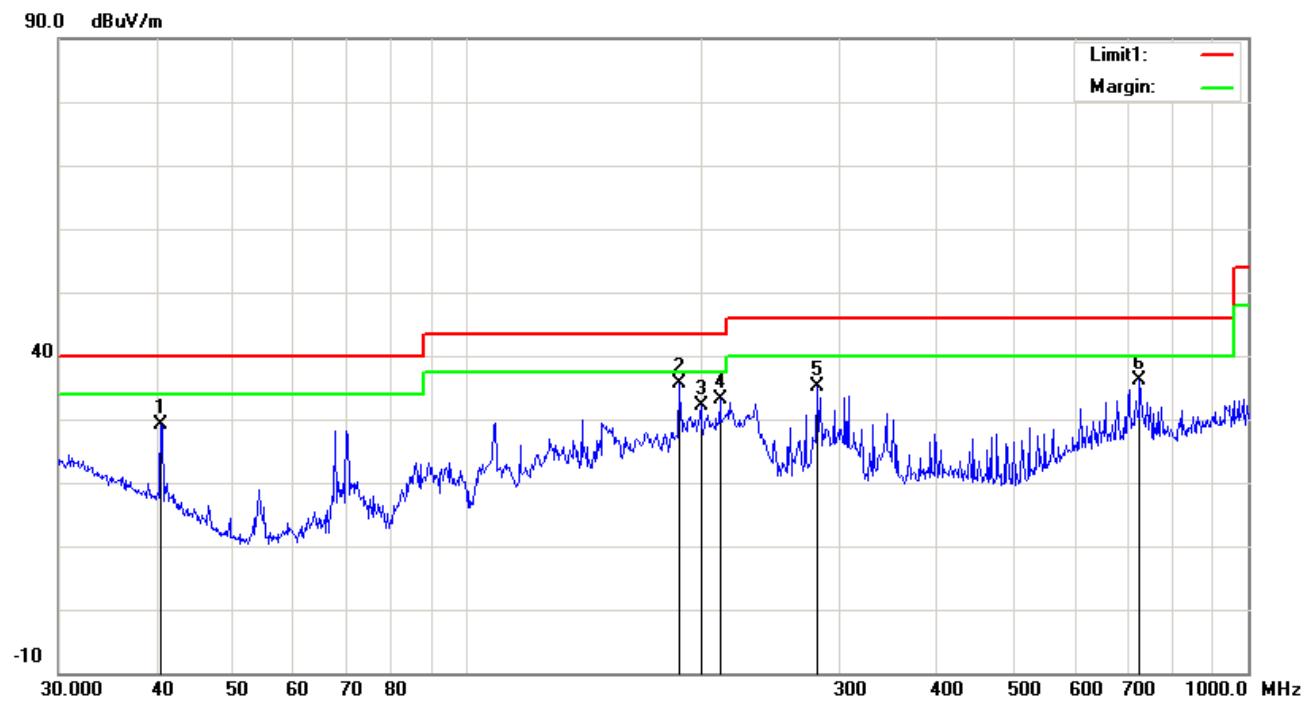


Test Data

Vertical Polarity Plot at 3m

No.	Frequency (MHz)	Reading (dB μ V/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)
1	40.5591	58.33	peak	13.06	45.73	1.06	29.06	40.00	-10.94	100	273
2	187.0958	67.71	peak	11.47	46.59	2.20	35.73	43.50	-7.77	109	360
3	199.2855	62.57	peak	13.06	47.29	2.26	32.21	43.50	-11.29	100	353
4	210.7860	63.56	peak	13.33	47.60	2.31	33.13	43.50	-10.37	100	13
5	281.0075	65.86	peak	14.17	48.45	2.67	35.01	46.00	-10.99	100	18
6	726.8052	55.12	peak	21.72	45.55	4.33	36.21	46.00	-9.79	100	120

Test Mode:	Transmitting Mode
------------	-------------------

Below 1GHz

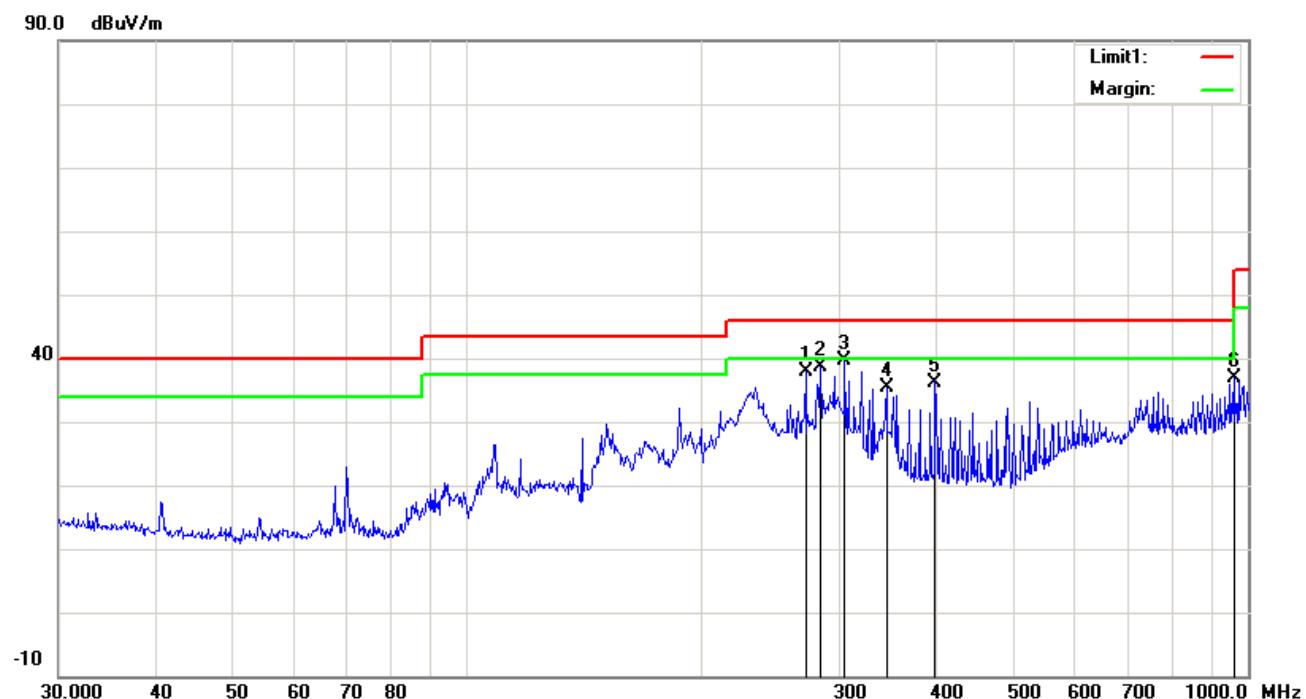

Horizontal Polarity Plot at 3m


No.	Frequency (MHz)	Reading (dB μ V/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)
1	271.3246	67.76	peak	14.06	48.32	2.63	37.97	46.00	-8.03	100	360
2	283.9792	67.91	peak	14.21	48.42	2.69	38.52	46.00	-7.48	100	182
3	304.6100	68.41	peak	14.54	48.36	2.79	39.70	46.00	-6.30	100	69
4	344.3855	64.85	peak	15.73	48.87	2.98	35.46	46.00	-10.54	100	43
5	397.6334	65.92	peak	17.33	48.91	3.22	36.25	46.00	-9.75	100	360
6	958.7943	53.96	peak	23.44	46.23	4.98	36.83	46.00	-9.17	100	119

Note: The highest frequency of the internal sources of the EUT is less than 108MHz, so the measurement shall only be made up to 1GHz.

6.5 Frequency Stability

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 20, 2016
Tested By :	Louise Tu

Requirement(s):

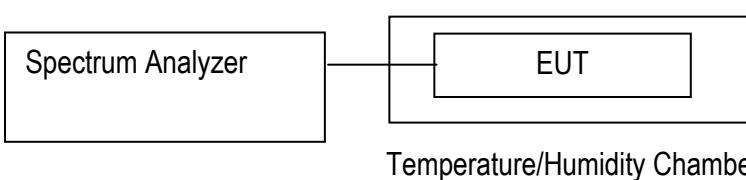Spec	Item	Requirement	Applicable
§15.225(e)	a)	The Frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20°C to +50°C at normal supply voltage.	<input checked="" type="checkbox"/>
	b)	The frequency of the transmitter was measured at 85% and at 115% of the rated power supply voltage at 20°C environmental temperature.	<input checked="" type="checkbox"/>
Test Setup	 Spectrum Analyzer ————— EUT ————— Temperature/Humidity Chamber		
Test Procedure	<ol style="list-style-type: none"> 1> Place the de-energized EUT in an environmental temperature test chamber. Supply the EUT with nominal ac voltage, or install a new or fully charged battery in the EUT. An antenna should be connected to the antenna output connector of the EUT if possible. Use of a dummy load could affect the output frequency of the EUT. If the EUT is equipped with or uses an adjustable-length antenna, it should be fully extended. 2> Turn the EUT on, and couple its output to a frequency counter or other frequency-measuring device of sufficient accuracy, considering the frequency tolerance with which the EUT shall comply. 3> Turn the EUT off, and place it inside an environmental chamber set to the highest temperature specified by the procuring or regulatory agency. For devices that are normally operated continuously, the EUT may be energized while inside the test chamber. For devices that have oscillator heaters, energize only the heater circuit while the EUT is inside the chamber. 4> Allow sufficient time (approximately 30 minutes) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and measure the EUT operating frequency at startup, and two, five, and ten minutes after startup. Four measurements in total are made. 5> If 13.1.1 requires measurements on only one operating frequency, proceed to step f); otherwise, successively tune the EUT to each of the additional operating frequencies specified in 13.1.1 and repeat step d). 6> Repeat step d) and step e) with the temperature chamber set to the lowest temperature specified by the procuring or regulatory agency. Be sure to allow the environmental chamber temperature to stabilize before performing these measurements. 		

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes N/A

Carrier Frequency: 13.56MHz at -20°C to +50°C, DC12V

Temperature (°C)	Measured Freq. (MHz)	Freq. Drift (Hz)	Freq. Deviation (Limit: 0.01%)	Pass/Fail
50	13.5611	1100	< 0.01	Pass
40	13.5610	1000	< 0.01	Pass
30	13.5611	1100	< 0.01	Pass
20	Reference			
10	13.5610	1000	< 0.01	Pass
0	13.5611	1100	< 0.01	Pass
-10	13.5610	1000	< 0.01	Pass
-20	13.5611	1100	< 0.01	Pass

Carrier Frequency: 13.56MHz at 20°C at DC12V

Measured Voltage ±15% of nominal	Measured Freq. (MHz)	Freq. Drift (Hz)	Freq. Deviation (Limit: 0.01%)	Pass/Fail
10.2	13.56101	1010	<0.01	Pass
13.8	13.5612	1200	<0.01	Pass

6.6 20dB Occupied Bandwidth

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	October 20, 2016
Tested By :	Louise Tu

Requirement(s):

Spec	Item	Requirement	Applicable
§15.215(c)	a)	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.	<input checked="" type="checkbox"/>
Test Setup		<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 5px; text-align: center;">Spectrum Analyzer</div> <div style="border: 1px solid black; padding: 5px; text-align: center;">EUT</div> </div>	
Test Procedure		<p><u>20dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> - Set RBW = 300 Hz. - Set the video bandwidth (VBW) $\geq 3' RBW$. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. <p>Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.</p>	
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A

20dB Bandwidth measurement result

Frequency (MHz)	20dB BW (kHz)	Frequency range (MHz) F Low	Frequency range (MHz) F High	Test Result
13.56101	0.8	13.56061	13.56141	PASS

Test Plots

20dB Bandwidth measurement result

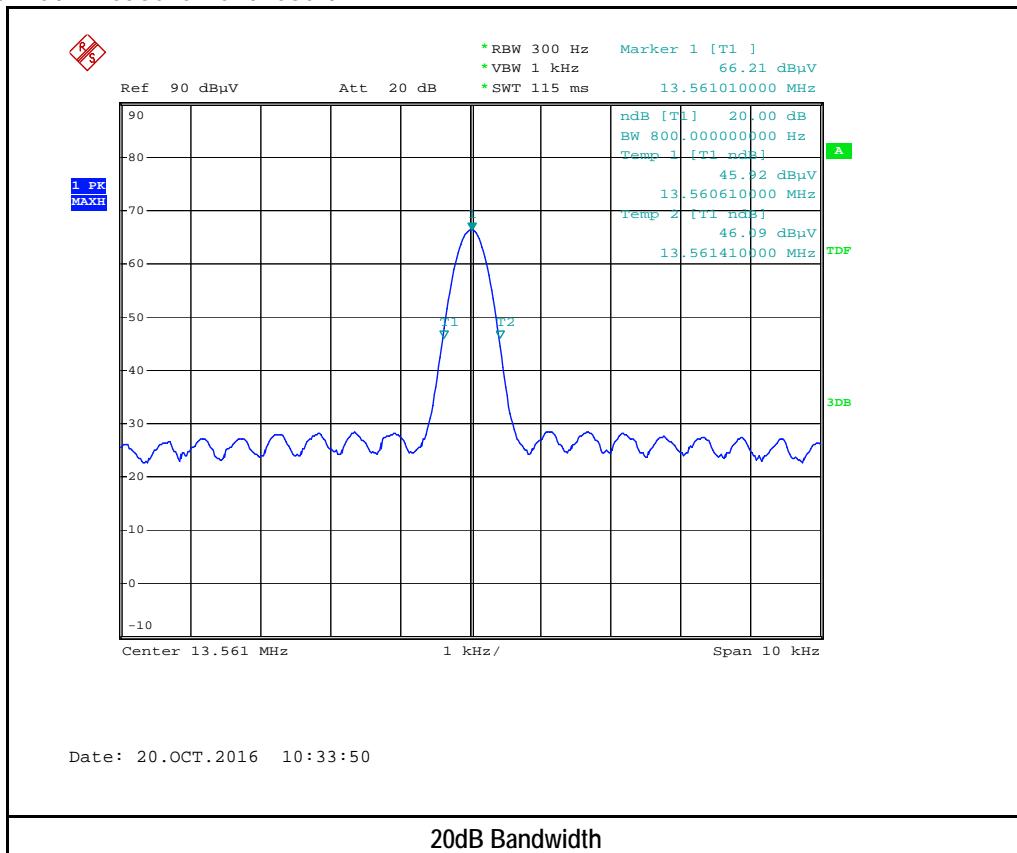


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
Conducted Test					
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	02/02/2016	02/01/2017	<input checked="" type="checkbox"/>
Agilent Technologies Spectrum Analyzer	N9010A	MY47191130	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
Temperature/Humidity Chamber	1007H	N/A	01/07/2016	01/06/2017	<input checked="" type="checkbox"/>
SIEMIC EZ_EMC Conducted Emissions software	Ver.ICP-03A1	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Radiated Emissions					
Agilent Technologies Spectrum Analyzer	N9010A	MY47191130	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	<input checked="" type="checkbox"/>
Antenna (30MHz~6GHz)	JB6	A121411	10/31/2015	10/31/2016	<input checked="" type="checkbox"/>
EMCO Passive Loop Antenna	6509	9909-1469	10/09/2016	10/08/2017	<input checked="" type="checkbox"/>
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2015	10/26/2016	<input checked="" type="checkbox"/>
SIEMIC EZ_EMC Radiated Emissions software	Ver.ICP-03A1	N/A	N/A	N/A	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs


Annex B.i. Photograph EUT External Photo

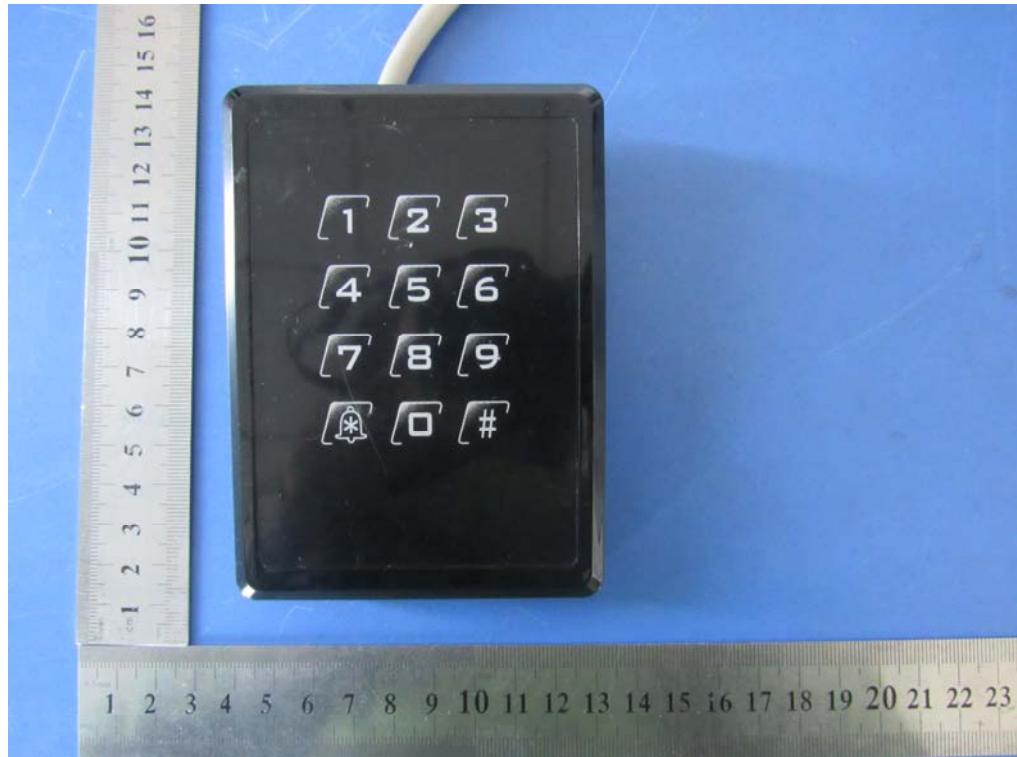

Front View of EUT



Rear View of EUT

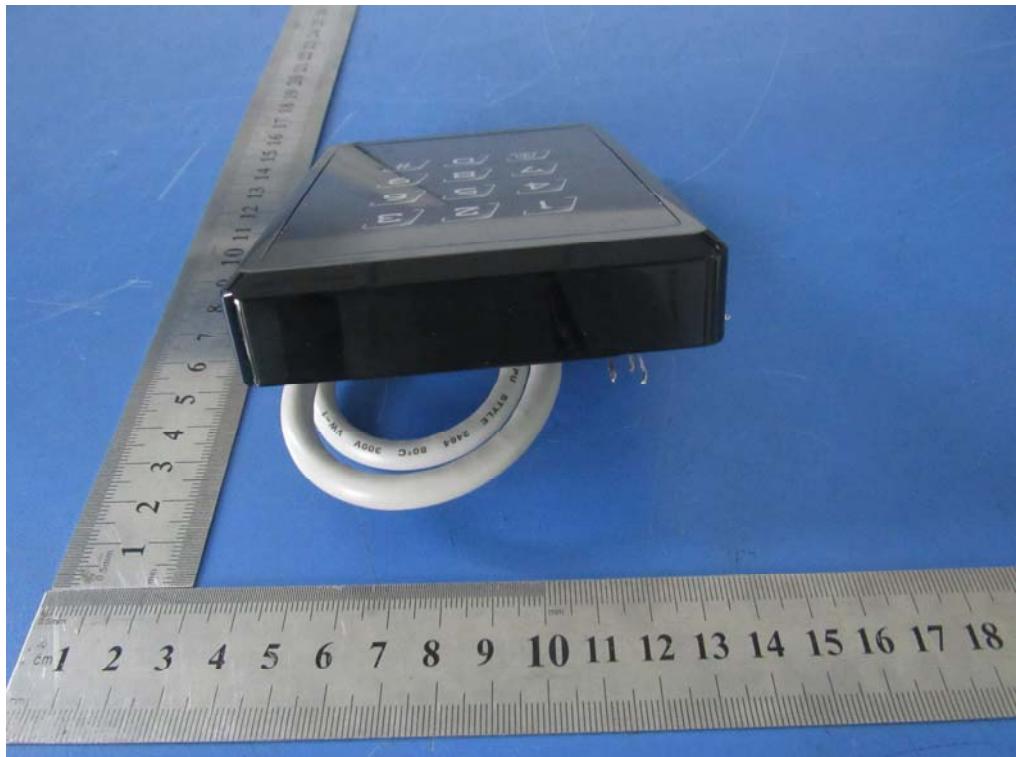

Top View of EUT



Bottom View of EUT




Left View of EUT




Right View of EUT


Annex B.ii. Photograph EUT Internal Photo

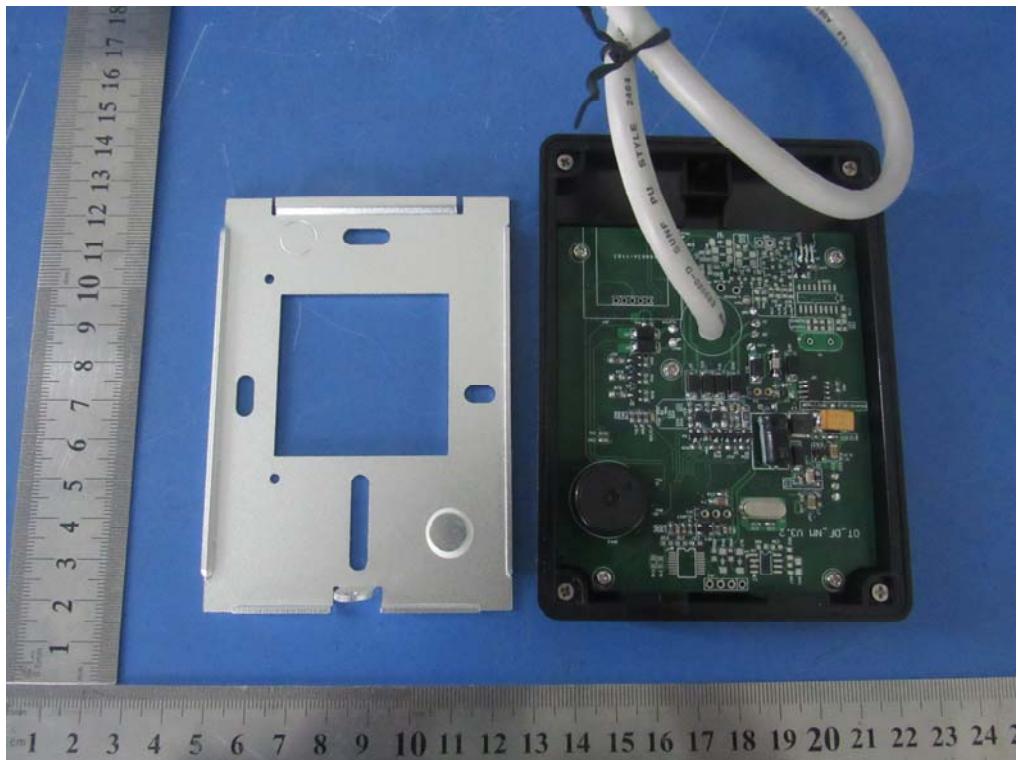

Uncover- Front View

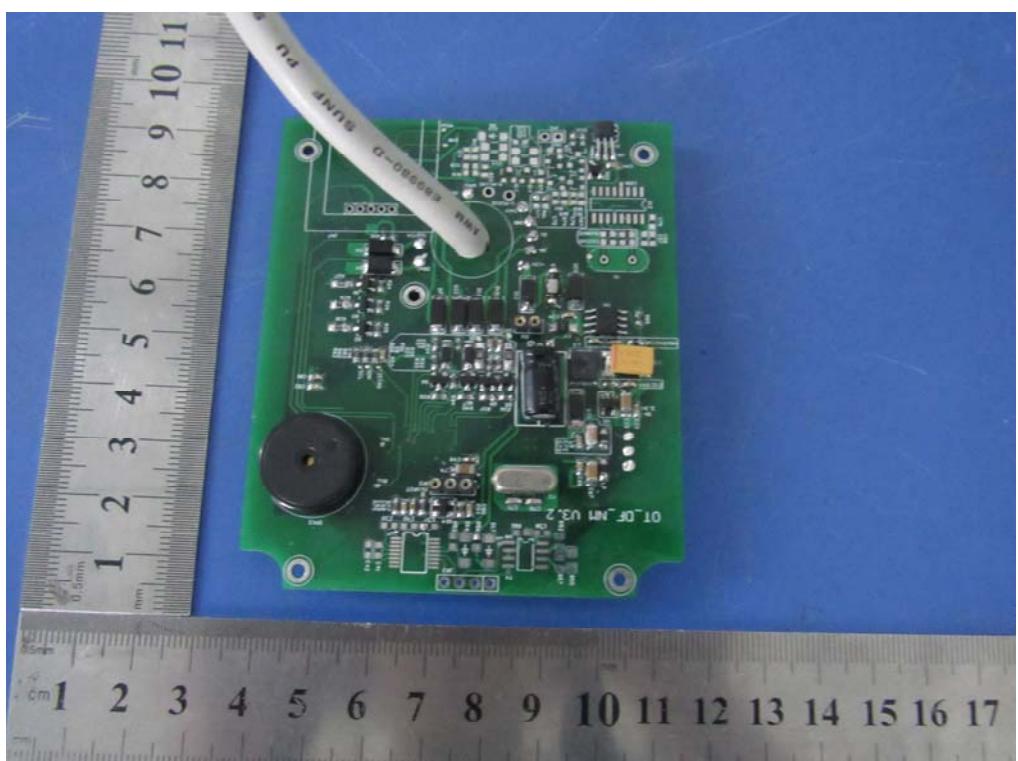


EUT PCBA 1 – Front View

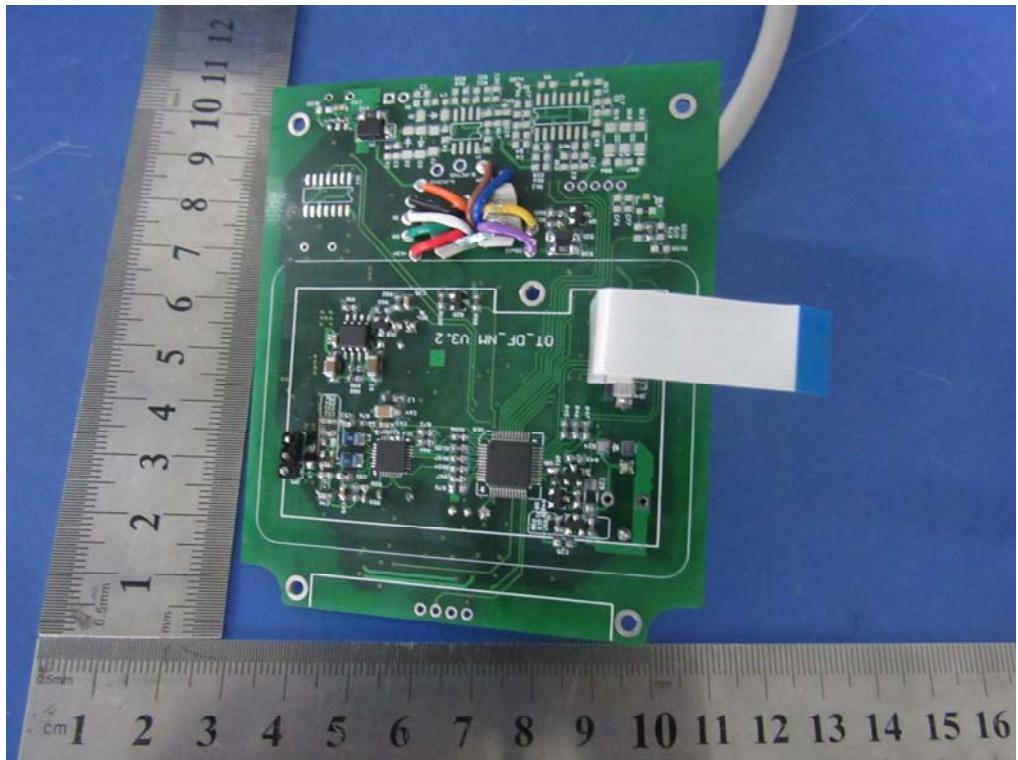


EUT PCB 1 – Rear View



EUT PCBA 2 – Front View

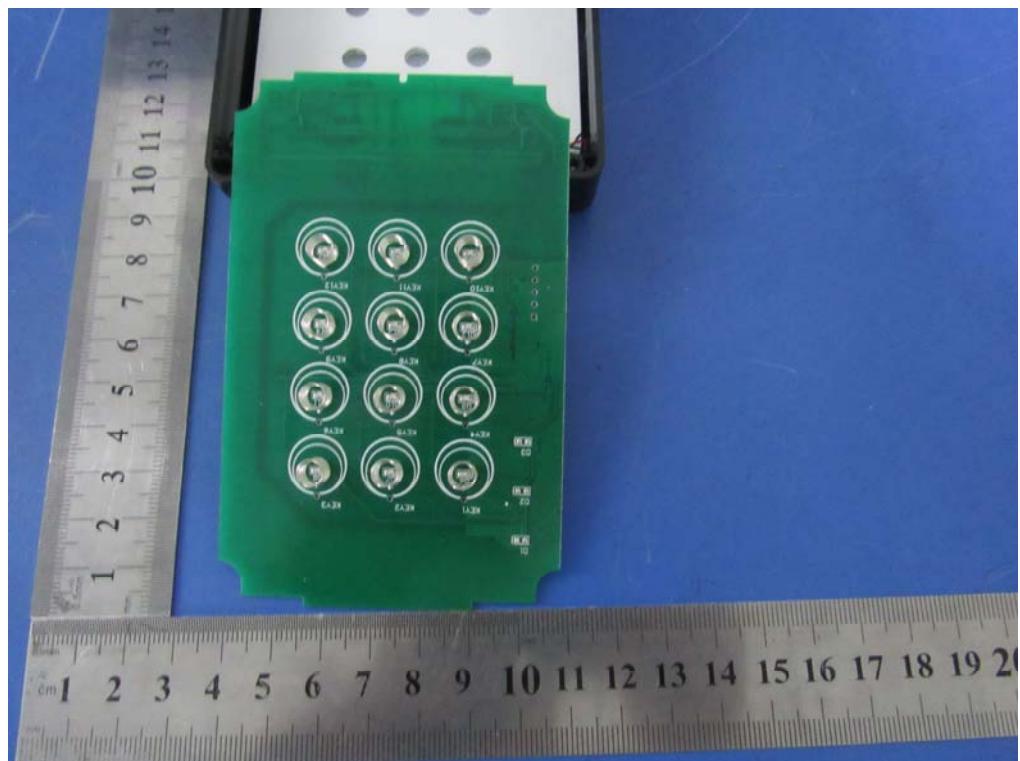

EUT PCB 2 – Rear View

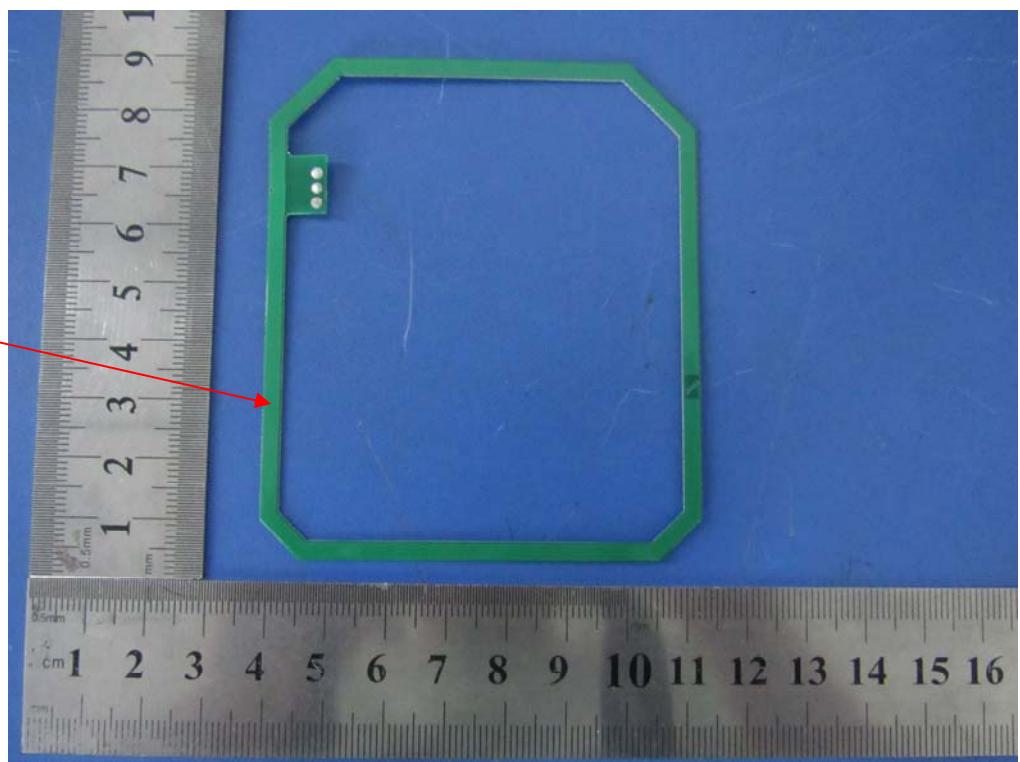

EUT Antenna – Front View


Annex B.iii. Photograph Test Setup Photo




Conducted Emissions Setup Front View



Conducted Emissions Setup Side View

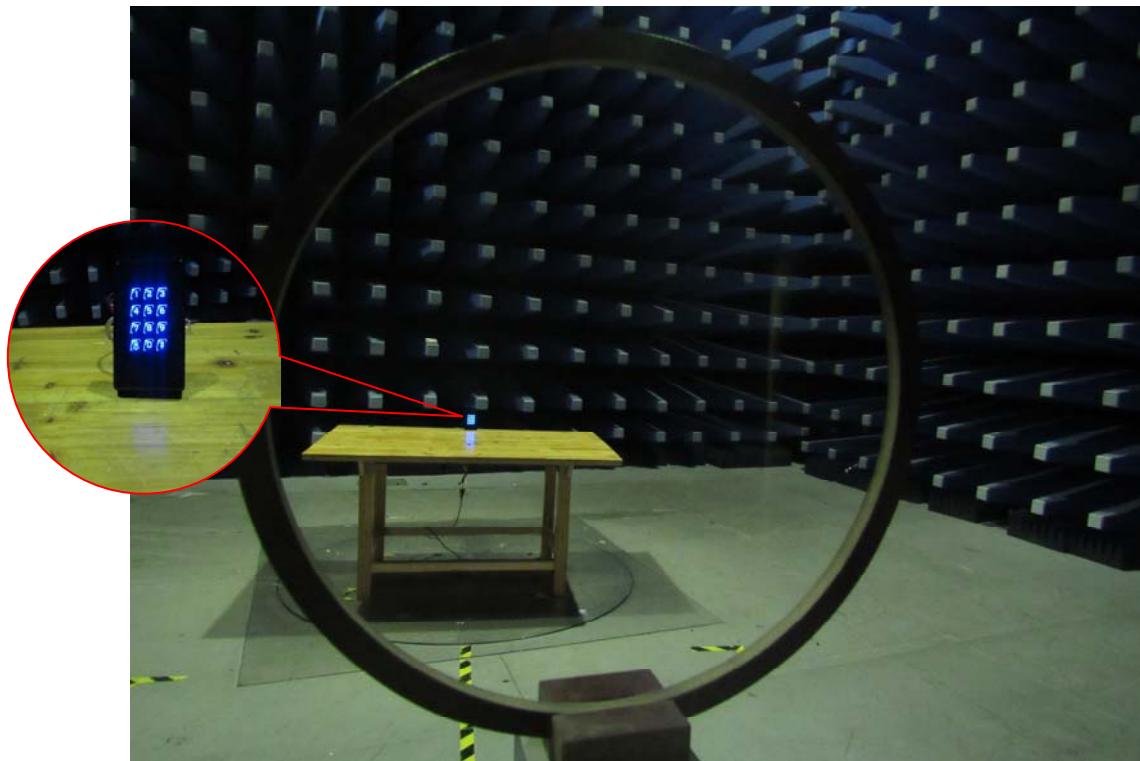

Front View of Radiated Emissions Test Setup below 30MHz

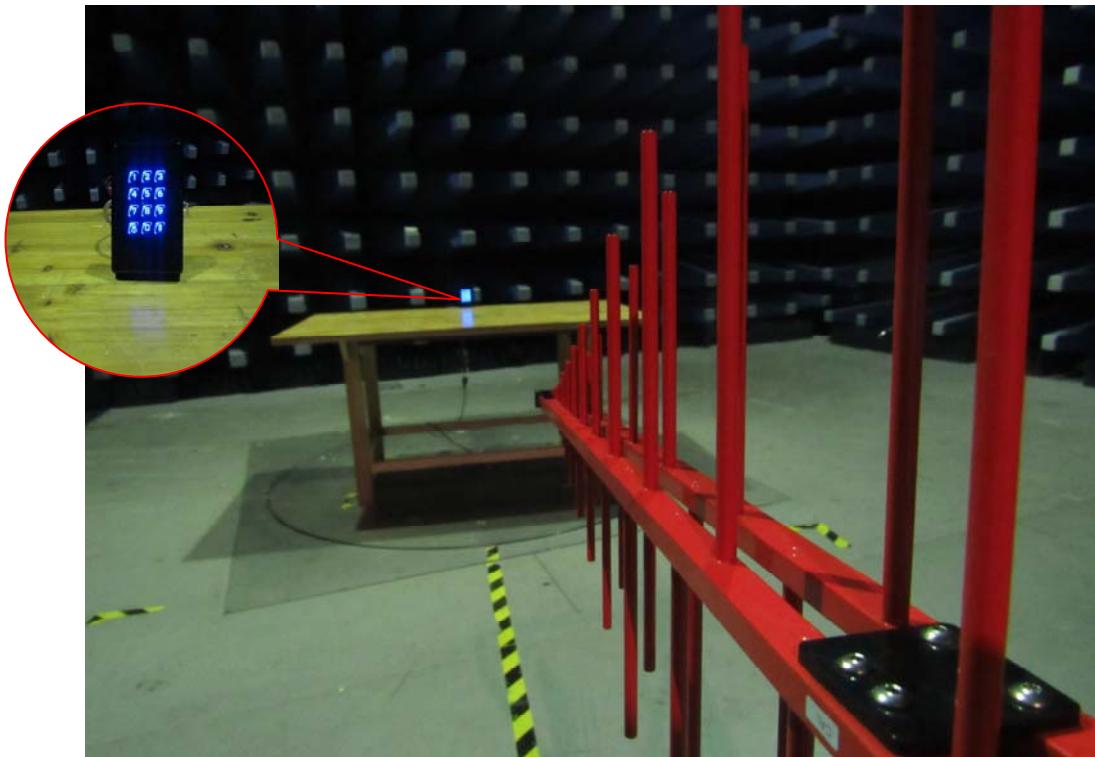


Front View of Radiated Emissions Test Setup (30MHz-1GHz)


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.i. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

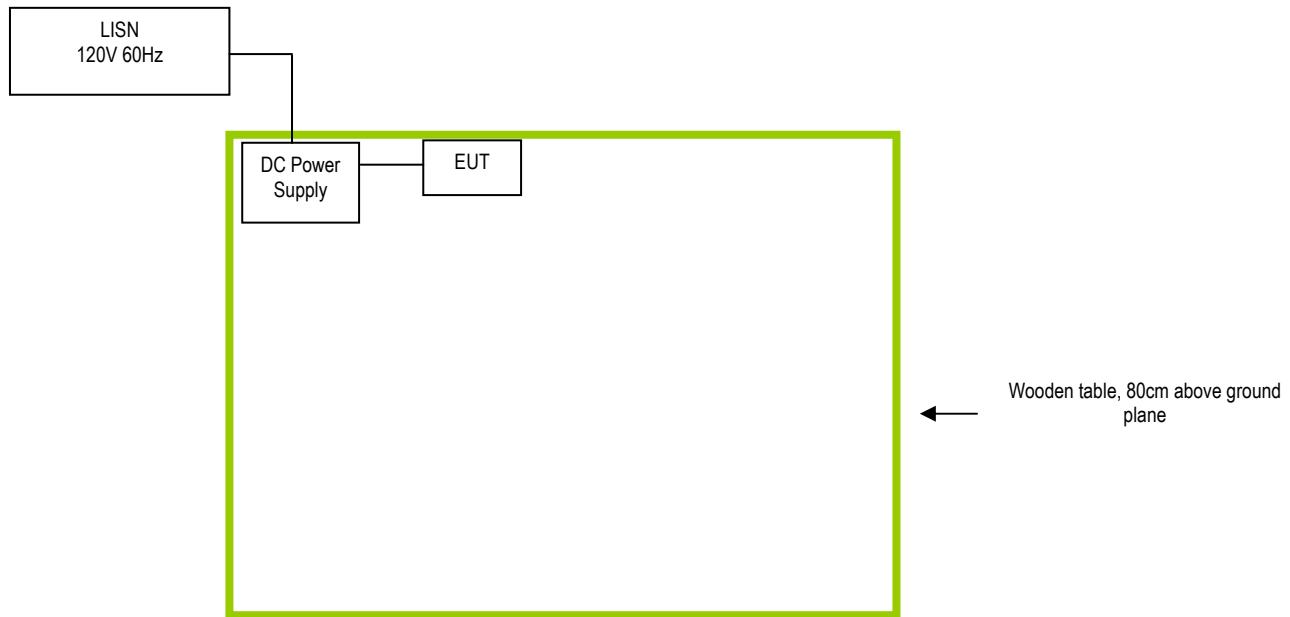

Block Configuration Diagram for Radiated Emissions

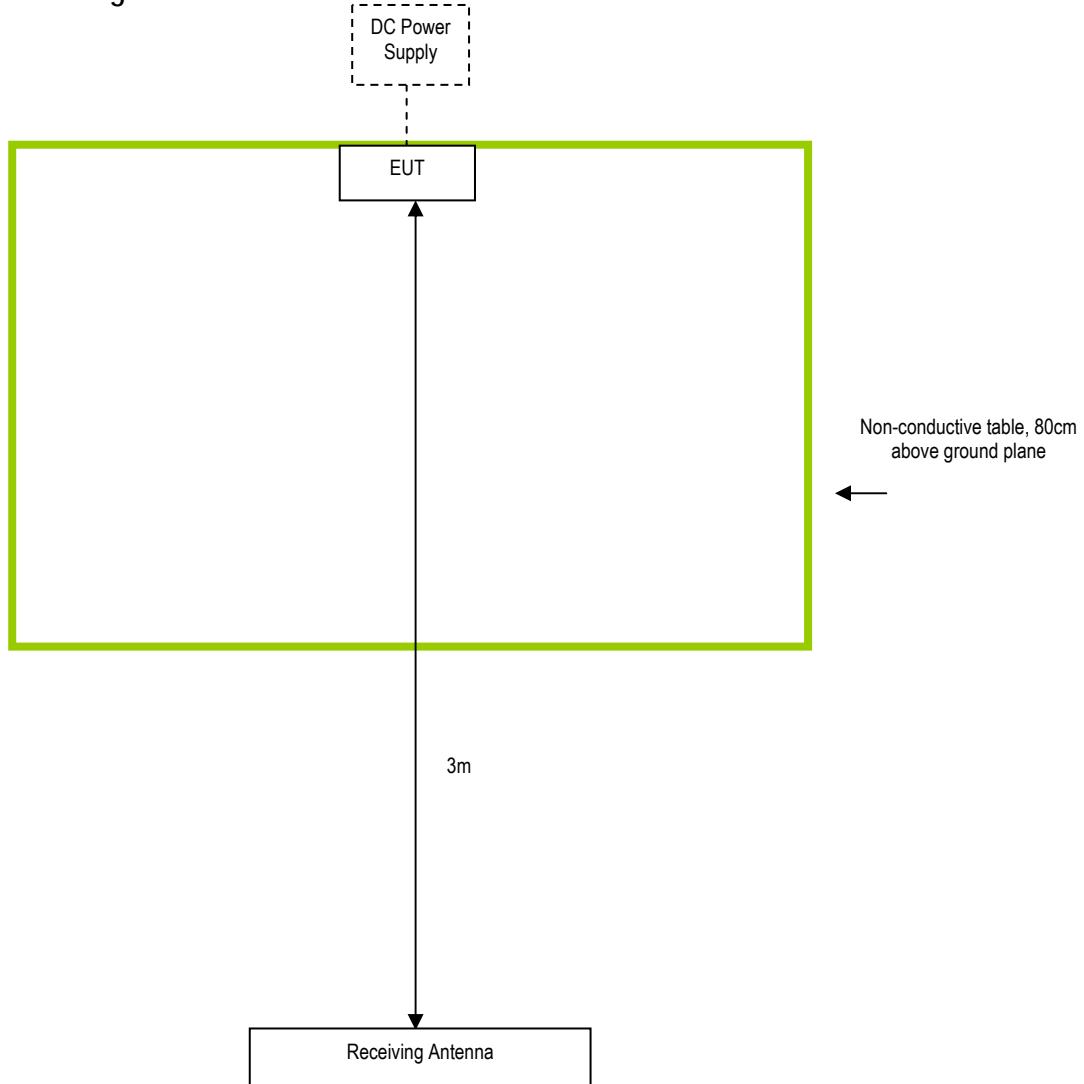

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Cal Date	Cal Due Date
BK PRECISION	DC Power Supply	1786B	N/A	N/A

Test Report No.	16020758-FCC-R1
Page	36 of 37

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

SMARFID

Shanghai Smarfid Security Equipment Co., Ltd.
Add: Room 301, 4th Bldg., No.4 TongLi Road, SongJiang District, Shanghai 201615,
China
Tel: (86-21) 54260103, 54260132 ext.215 Fax: (86-21) 54260132 ext.222

To: SIEMIC INC

Declaration letter

Dear :

For our business issue and marketing requirement, we would like to list different models numbers on the FCC certificates and reports, as following:

Model No: MD322-8K
 MD322-8N


The two models have the same Circuits, components and color.

The difference of these models are have different model name, but others differences as follows:

MD322-8K Have the function of button, but MD322-8 No button function.

Thank you!

Signature:



Printed name/title: Songlin Dai