

Shanghai Smarfid Security Equipment Co.,Ltd

Remote Control

Main Model: KL100-1
Serial Model: KL100-2


March 21, 2014

Report No.: 13021075-FCC-R1
(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

		
William Long Compliance Engineer	Alex Liu Technical Manager	

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.

RF Test Report
TO: FCC 15.231:2013

SIEMIC, INC.
Accessing global markets

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 2 of 32
www.siemic.com.cn

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management through out a project. Our extensive experience with China, Asia Pacific, North America, European, and international compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC , RF/Wireless , Telecom
Canada	EMC, RF/Wireless , Telecom
Taiwan	EMC, RF, Telecom , Safety
Hong Kong	RF/Wireless , Telecom
Australia	EMC, RF, Telecom , Safety
Korea	EMI, EMS, RF , Telecom, Safety
Japan	EMI, RF/Wireless, Telecom
Singapore	EMC , RF , Telecom
Europe	EMC, RF, Telecom , Safety



Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 3 of 32
www.siemic.com.cn

This page has been left blank intentionally.



Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 4 of 32
www.siemic.com.cn

CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	5
2	TECHNICAL DETAILS	6
3	MODIFICATION	7
4	TEST SUMMARY	8
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
ANNEX A. TEST INSTRUMENT & METHOD		18
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS		22
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT		28
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST		31
ANNEX E. DECLARATION OF SIMILARITY		32



1 EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programmed was to demonstrate compliance of the Shanghai Smarfid Security Equipment Co.,Ltd, The Remote Control, and model: KL100-1 against the current Stipulated Standards. The Remote Control has demonstrated compliance with the FCC 15.231:2013.

EUT Information

EUT Description	Remote Control
Model No	KL100-1
Serial No	KL100-2
Antenna Gain	9dbi
Input Power	6VDC , 150mA
Classification Per Stipulated Test Standard	FCC Part 15.231:2013

Note:the difference between these models please refer to the Annex E.



Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 6 of 32
www.siemic.com.cn

2 TECHNICAL DETAILS

Purpose	Compliance testing of Remote Control with stipulated standard
Applicant / Client	Shanghai Smarfid Security Equipment Co.,Ltd Room 301,4th Bldg.,No.4 TongLi Road,Songjiang District,Shanghai 201615,China
Manufacturer	Shanghai Smarfid Security Equipment Co.,Ltd Room 301,4th Bldg.,No.4 TongLi Road,Songjiang District,Shanghai 201615,China
Laboratory performing the tests	SIEMIC (Nanjing-China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: China@siemic.com
Test report reference number	13021075-FCC-R1
Date EUT received	January 08, 2014
Standard applied	FCC 15.231:2013
Dates of test	March 19, 2014
No of Units :	1#
Equipment Category :	DSC
Trade Name :	N/A
Test Model :	KL100-1
RF Operating Frequency (ies)	433.896MHz: (Tx)
Number of Channels :	1 CH(433MHz)
Modulation :	OOK
FCC ID :	X3AREX2110KL



Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 7 of 32
www.siemic.com.cn

3 MODIFICATION

NONE



4 TEST SUMMARY

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

Test Results Summary

Test Standard	Description	Pass / Fail
CFR 47 Part 15.231: 2013		
15.203	Antenna Requirement	Pass
15.207	Conducted Emissions Voltage	N/A
15.231(b)	Fundamental & Radiated Spurious Emission	Pass
15.231(c)	20dB Bandwidth	Pass
15.231(a)(1)	Deactivation	Pass

ANSI C63.4: 2009

PS: All measurement uncertainties are not taken into consideration for all presented test result.

Preliminary radiated emission testing has been performed on X, Y, Z axis, only worst case test result is presented in this test report.



5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 Antenna Requirement


Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
- b) Antenna must use a unique type of connector to attach to the device.
- c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The antenna is permanently attached to the device which meets the requirement.

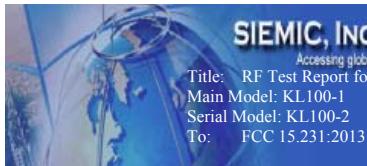

5.2 Conducted Emissions Voltage

Requirement:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

Procedures:

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 3.5 dB.
4. Environmental Conditions
Temperature 19 °C
Relative Humidity 51 %
Atmospheric Pressure 1009 mbar
5. Test date : --
Tested By : --

Test result: N/A
Battery Operated



5.3 20dB Occupied Bandwidth

1. 20dB bandwidth was measured by conducted method using a spectrum analyzer.

2. Environmental Conditions


Temperature	19°C
Relative Humidity	51%
Atmospheric Pressure	1009mbar

3. Test Date: March 19, 2014

Test By: William Long

Test Result:

Fundamental Frequency (MHz)	Measured 20dB Bandwidth (kHz)	FCC 15.231 Limit (kHz)	Result
433.896	148	1084.74	Pass

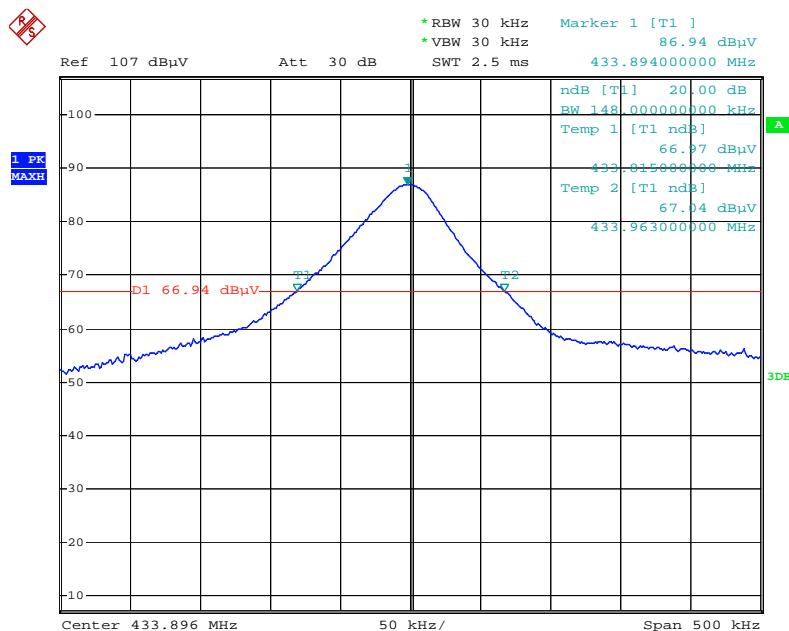

Date: 19.MAR.2014 15:41:19

5.4 Radiated Fundamental and Spurious Emission

1. Radiated emissions were measured according to ANSI C63.4. The EUT was set 3 meter away from the measuring antenna. The loop antenna was positioned 1meter above the ground from the center of the loop. The measuring bandwidth was set to 10KHz. All possible modes of operation were investigated. Only the worst case emissions measured, All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Sample Calculation: Corrected Amplitude=Raw Amplitude(dBuV/m)+ACF(dB)+Cable Loss(dB)-Distance Correction Factor.
 Sample Calculation:
 1) Corrected Amplitude= Raw Amplitude(dBuV/m)+ACF(dB)+Cable Loss(dB)-Distance Correction Factor
 2) Average = peak reading + 20log(duty cycle)
4. Radiated Emissions Measurement Uncertainty
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz(QP only3m & 10m) is +5.6/-4.5dB(for EUTs<0.5m×0.5m×0.5m).In range of 1-40GHz) is ±3.6dB.
5. Environmental Conditions

Temperature	19°C
Relative Humidity	50%
Atmospheric Pressure	1009mbar
6. Test date : March 19, 2014
 Tested By : William Long

Standard Requirement:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750	125 to 375
174-260	3750	375
260-470	3750-12500	375 to 1250
Above 470	12500	1250

Note: All 3 axes have been investigated. Only worst case is presented in the test report.

Test Result: Pass

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1

Issue Date: March 21, 2014

Page: 13 of 32

www.siemic.com.cn

Fundamental Measurement @ 433.896MHz @3 Meter FCC 15.231(a)

Frequency (MHz)	Cord. Amp. (dB μ V/m)	Azimuth	Polarity	Height(m)	Factors(dB)	FCC 15.231(a) Limit (dB μ V)	Margin (dB)	Comments
433.896	79.89	265.20	V	1.30	-31.37	100.82	-20.93	Peak
433.896	76.92	-	V	-	-2.97	80.82	-3.90	Ave
433.896	81.50	15.00	H	1.50	-31.37	100.82	-19.32	Peak
433.896	78.53	-	H	-	-2.97	80.82	-2.29	Ave

Spurious Emissions (<1GHz) Measurement @ 3 Meter FCC 15.231(a)

Frequency (MHz)	Cord. Amp. (dB μ V/m)	Azimuth	Polarity	Height(m)	Factors(dB)	FCC 15.231(a) Limit (dB μ V)	Margin (dB)	Comments
867.79	59.89	15.00	V	2.1	-25.03	80.82	-20.93	Pk
867.79	56.92	-	V	-	-2.97	60.82	-3.90	Ave
867.79	60.56	332.00	H	2	-25.03	80.82	-20.26	Pk
867.79	57.59	-	H	-	-2.97	60.82	-3.23	Ave
451.26	52.2	26.00	V	1.3	-31.17	80.82	-28.62	Pk
451.26	49.23	-	V	-	-2.97	60.82	-11.59	Ave
366.20	48.55	154.00	H	1.5	-32.9	80.82	-32.27	Pk
366.20	45.58	-	H	-	-2.97	60.82	-15.24	Ave

Notes:

1. Duty cycle is 71%, $20\log(\text{duty cycle}) = -2.97\text{dB}$ correction was used to determine the average level from the peak reading. Average = peak reading + $20\log(\text{duty cycle})$, Final Average = peak reading -2.97
2. All the data measurement of peak values.
3. FCC Limit for Average Measurement = $18079 \text{ (433.896MHz)} - 7083.3333 = 10993.25\mu\text{V/m} = 80.8\text{dB}\mu\text{V/m}$
4. Average pulsed signal over one complete pulse train or 100 ms time frame if pulse train exceeds 100 ms
5. Maximum average in 100 ms
6. Calculate duty cycle for pulse train or 100 ms
7. Duty cycle = $(t_1 + t_2 + t_3 + \dots + t_n)/T$ where t_n = pulse width, T = pulse train length or 100 ms

Spurious Emissions (>1GHz) Measurement @ 3 Meter FCC 15.231(a)

Frequency	Direction	Height	Polar	Factors (dB)	Amplifier	Cord. Amp.	FCC 15.231	Margin	Comments
GHz	Degree	Meter	H/V	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	(dB)	(Pk/Av)
1301.53	1.1	H	-26.7	55	53.33	74.00	-20.67	Peak	1301.53
1301.53	-	H	-2.97	-	50.36	54.00	-3.64	Ave	1301.53
1735.15	1.5	H	-25.47	55	61.3	80.82	-19.52	Peak	1735.15
1735.15	-	H	-2.97	-	58.33	60.82	-2.49	Ave	1735.15
2166.56	2.2	H	-23.17	55	55.2	80.82	-25.62	Peak	2166.56
2166.56	-	H	-2.97	-	52.23	60.82	-8.59	Ave	2166.56
3037.26	1.6	H	-19.37	55	54.89	80.82	-25.93	Peak	3037.26
3037.26	-	H	-2.97	-	51.92	60.82	-8.90	Ave	3037.26
3471.56	1.5	H	-18.7	55	49.88	80.82	-30.94	Peak	3471.56
3471.56	-	H	-2.97	-	46.91	60.82	-13.91	Ave	3471.56
2666.45	1	H	-21.2	55	36.6	80.82	-44.22	Peak	2666.45
2666.45	-	H	-2.97	-	33.63	60.82	-27.19	Ave	2666.45
1301.53	1.9	V	-26.7	55	52	74.00	-22.00	Peak	1301.53
1301.53	-	V	-2.97	-	49.03	54.00	-4.97	Ave	1301.53
1735.15	2	V	-25.47	55	60	80.82	-20.82	Peak	1735.15
1735.15	-	V	-2.97	-	57.03	60.82	-3.79	Ave	1735.15
2166.56	1.5	V	-23.17	55	58.5	80.82	-22.32	Peak	2166.56
2166.56	-	V	-2.97	-	55.53	60.82	-5.29	Ave	2166.56
3037.26	1	V	-19.37	55	52.5	80.82	-28.32	Peak	3037.26
3037.26	-	V	-2.97	-	49.53	60.82	-11.29	Ave	3037.26
3471.56	1.2	V	-18.7	55	53	80.82	-27.82	Peak	3471.56
3471.56	-	V	-2.97	-	50.03	60.82	-10.79	Ave	3471.56
2123.56	1.6	V	-23.17	55	45.3	80.82	-35.52	Peak	2123.56
2123.56	-	V	-2.97	-	42.33	60.82	-18.49	Ave	2123.56

Note: Duty cycle is 71%, 20log (duty cycle) = -2.97dB correction was used to determine the average level from the peak reading. Average = peak reading + 20log (duty cycle), final Average= peak reading -2.97

Note:

Pulse width (PW) = 26.2ms

2/PW = 2/26.2ms =0.076336kHz

RBW > 2/PW (0.076336kHz)

Therefore PDCF is not needed.



Pulse Duty Cycle:


Wide Pulse: 1.4ms

Narrow Pulse: 0.6ms

Duty cycle = $(1.4*14+0.6*11)/36.9 = 71\%$


Average Duty Factor: $20*\log(\text{Duty Cycle}) = -2.97\text{dB}$

Duty Cycle 1

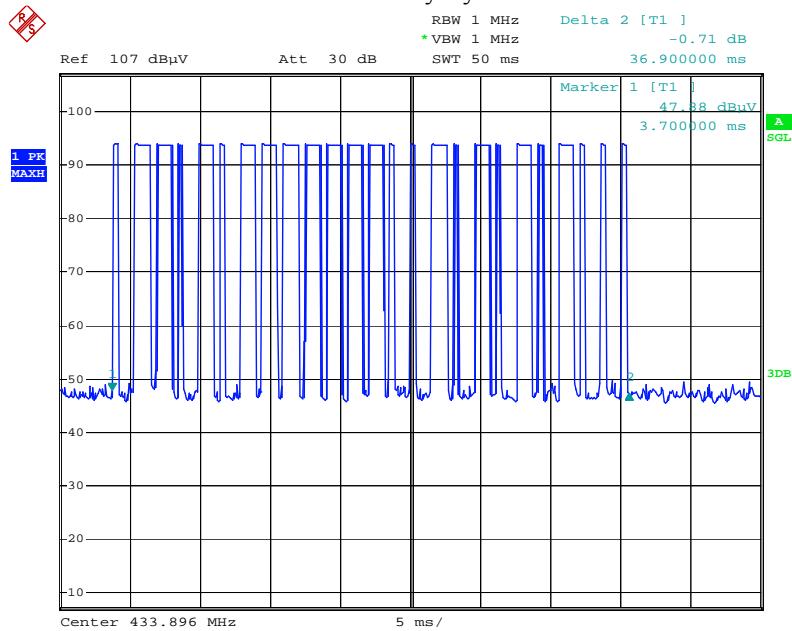

Date: 19.MAR.2014 15:52:31

Duty Cycle 2

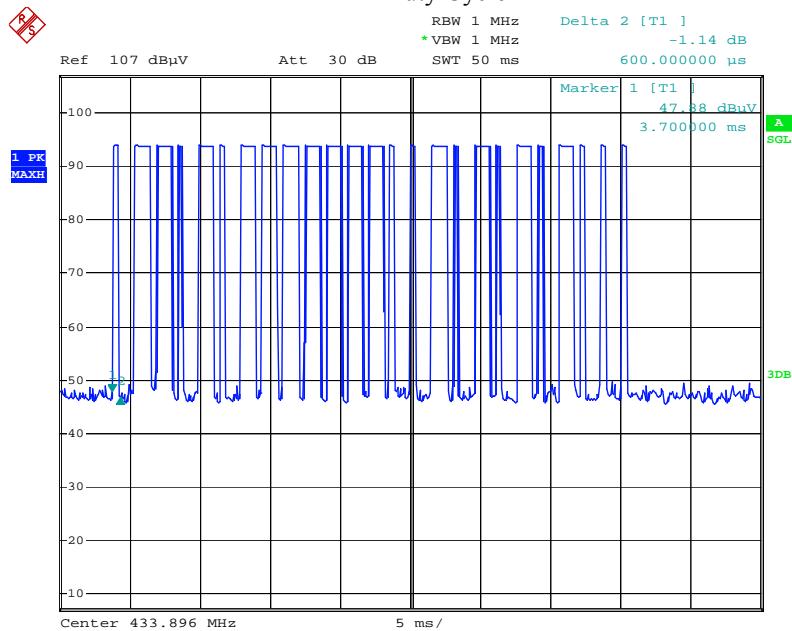

Date: 19.MAR.2014 15:53:07




SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 16 of 32
www.siemic.com.cn

Duty Cycle 3

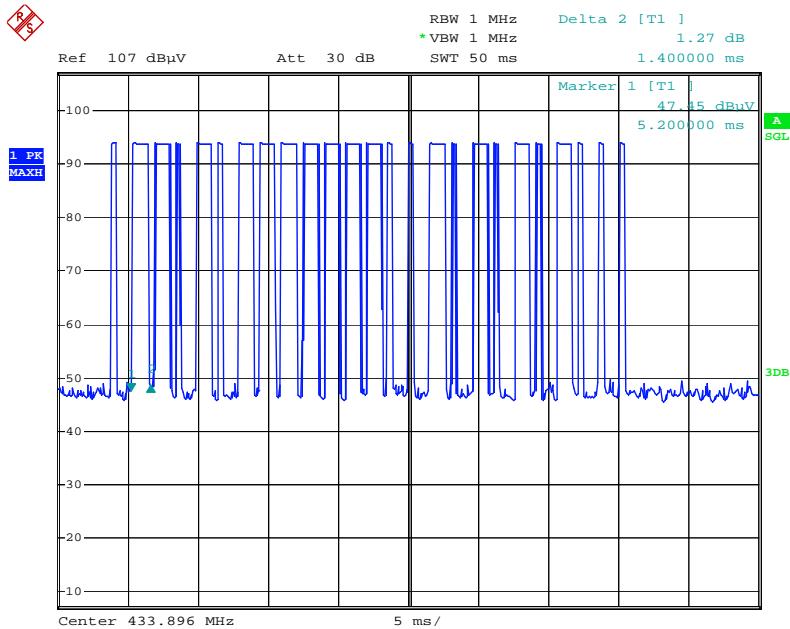

Date: 19.MAR.2014 15:53:36



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 17 of 32
www.siemic.com.cn

5.5 Deactivation


1. Deactivation was measured by conducted method using a spectrum analyzer.
2. Environmental Conditions

Temperature	19°C
Relative Humidity	51%
Atmospheric Pressure	1009mbar
3. Test Data: March 19, 2014
Test By: William Long

Standard requirement: 47 CFR §15.231 (a)(1)

Release Time < 5 seconds

Test Result: Pass

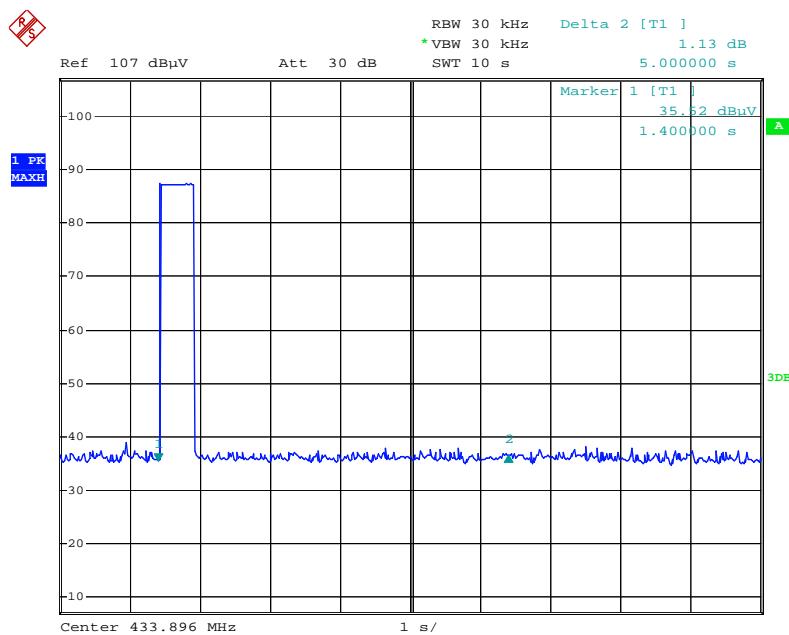

Date: 19.MAR.2014 15:57:18



Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 18 of 32
www.siemic.com.cn

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Model	Serial #	Calibration Date	Calibration Due Date
Radiated Emissions				
R&S Receiver	ESPI 3	101216	09/27/2013	09/26/2014
HP Spectrum Analyzer	8563E	3821A09023	09/27/2013	09/26/2014
HP Pre-amplifier	8447F	1937A01160	10/27/2013	10/26/2014
Sunol Sciences, Inc. antenna	JB6	A121411	03/27/2013	03/26/2014
A-INFOMW Horn Antenna (1~18GHz)	JXTXLB-10180	J2031081120092	10/09/2013	10/08/2014
MITEQ Pre-Amplifier(0.1 ~ 18GHz)	AMF-7D-00101800-30-10P	1451710	11/03/2013	11/02/2014
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A



Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Sample Calculation Example

At 20 MHz

limit = $250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver = $40.00 \text{ dB}\mu\text{V}$
(Calibrated for system losses)

Therefore, Q-P margin = $47.96 - 40.00 = 7.96$ i.e. **7.96 dB below limit**



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 20 of 32
www.siemic.com.cn

Annex A. iii. RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer/receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

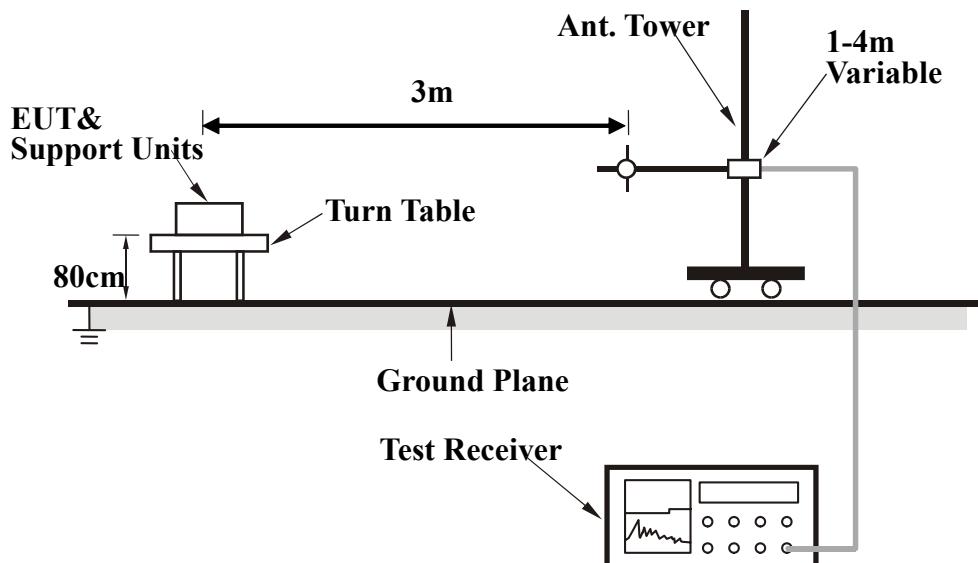



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 21 of 32
www.siemic.com.cn

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor} \text{ or}$$
$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 22 of 32
www.siemic.com.cn

Annex B. EUT AND TEST SETUP PHOTOGRAPHS

Annex B.i. Photograph : EUT External Photo



EUT - Front View



EUT - Rear View



Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 23 of 32
www.siemic.com.cn



EUT – Top View



EUT – Bottom View (Transmitter)



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1

Issue Date: March 21, 2014

Page: 24 of 32

www.siemic.com.cn



EUT – Left View



EUT – Right View




Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 25 of 32
www.siemic.com.cn


Annex B.ii. Photograph 2: EUT Internal Photo



EUT (Transmitter) – Uncover Front View

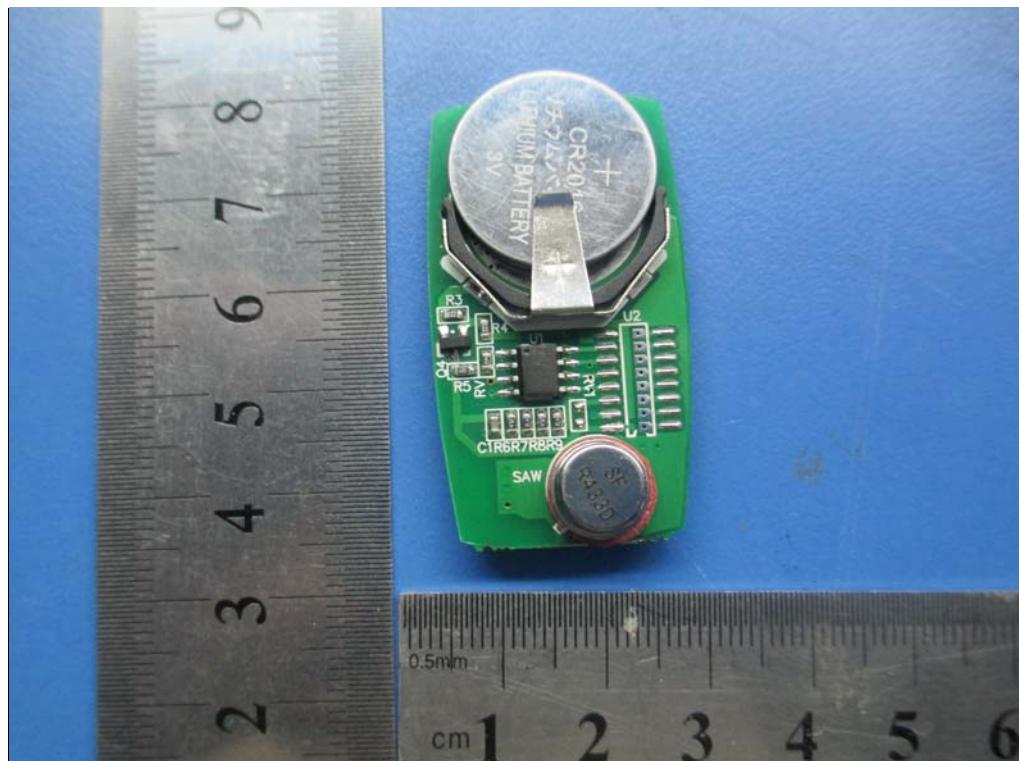


EUT (Transmitter) – PCB 1 Front View

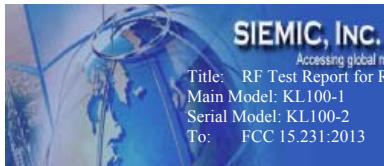

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 26 of 32
www.siemic.com.cn

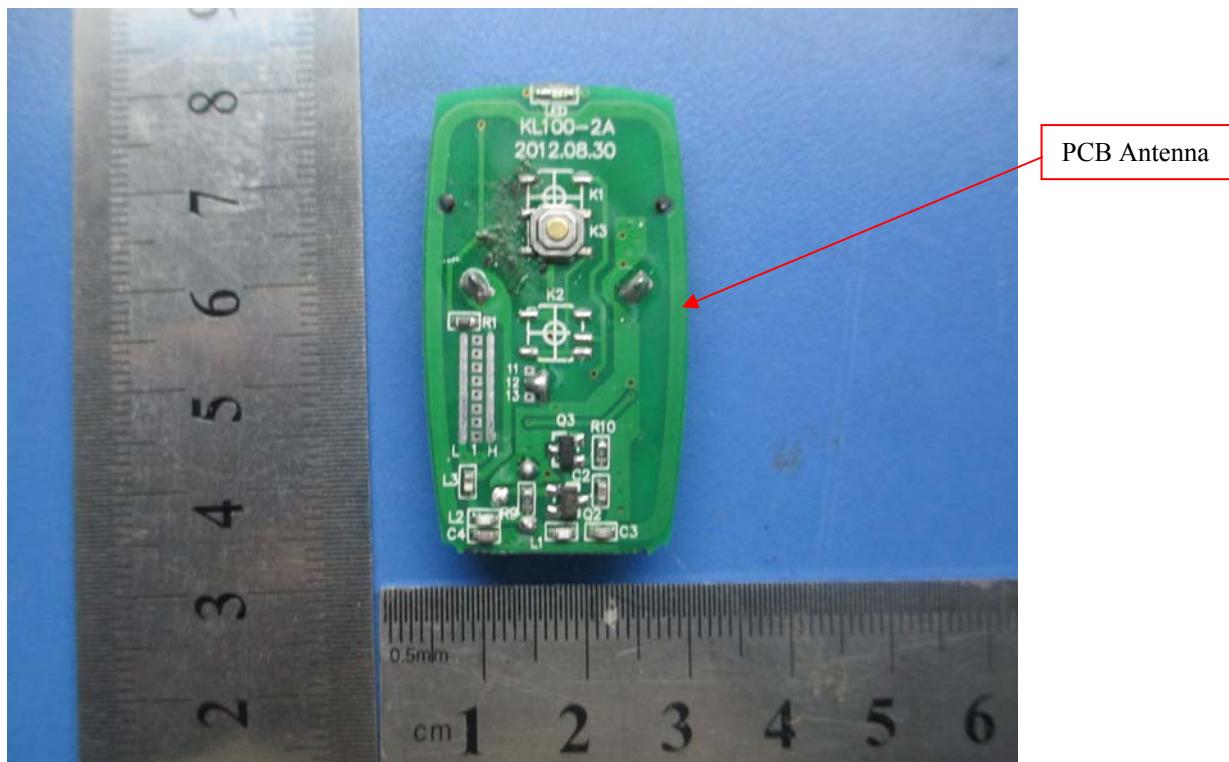

EUT (Transmitter) – PCB 1 Rear View




SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 27 of 32
www.siemic.com.cn


Annex B.iii. Photograph : Test Setup Photo

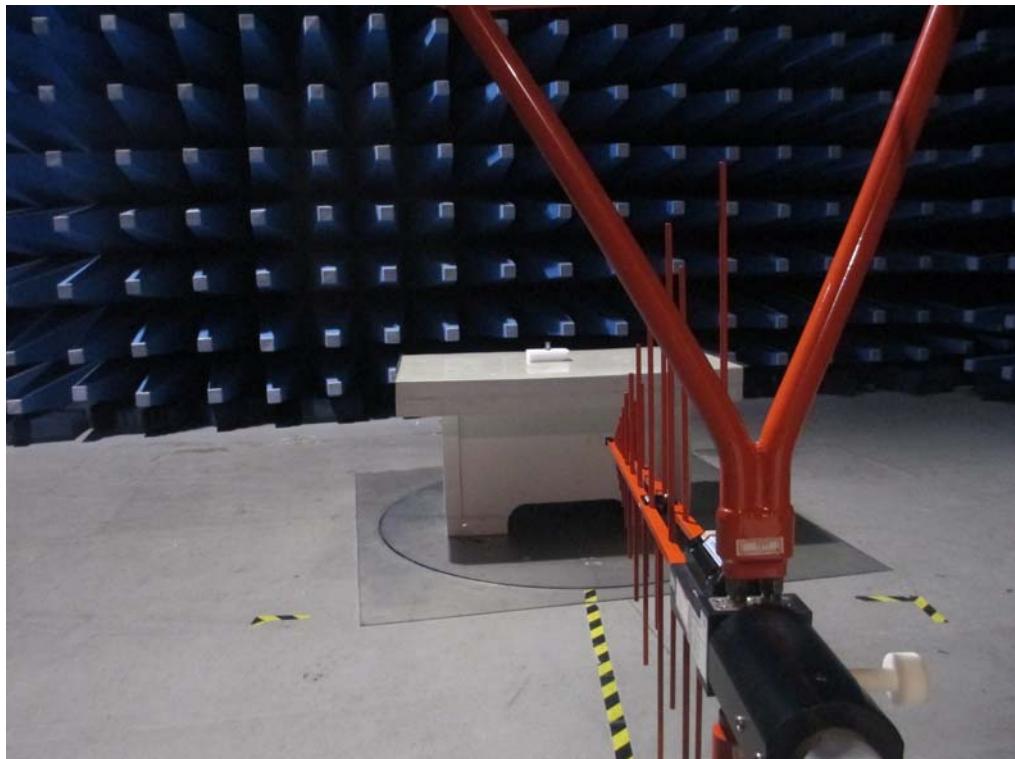

Radiated Emission Test Setup Front View Below 1GHz



Radiated Emission Test Setup Front View Above 1GHz

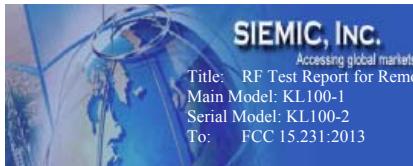

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 28 of 32
www.siemic.com.cn

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

EUT TEST CONDITIONS

Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.


Manufacturer	Equipment Description (Including Brand Name)	Model	Calibration Due Date
N/A	N/A	N/A	N/A



Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 29 of 32
www.siemic.com.cn

Block Configuration Diagram for Radiated Emission

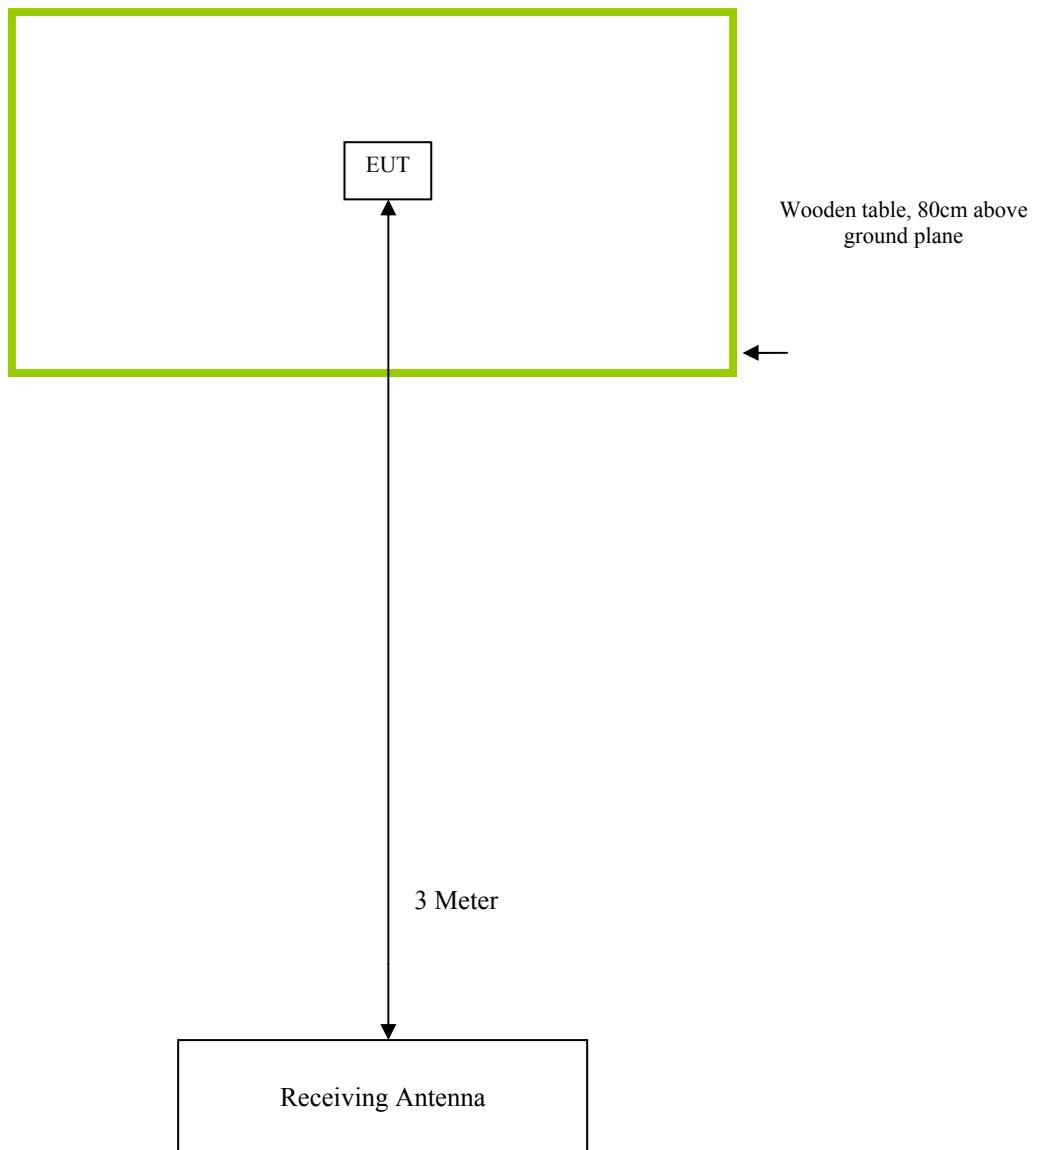



Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231;2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 30 of 32
www.siemic.com.cn

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing	TX mode is continuous transmitting with full power.



Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 31 of 32
www.siemic.com.cn

Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST

Please see attachment



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for Remote Control
Main Model: KL100-1
Serial Model: KL100-2
To: FCC 15.231:2013

Report No.: 13021075-FCC-R1
Issue Date: March 21, 2014
Page: 32 of 32
www.siemic.com.cn

Annex E. DECLARATION OF SIMILARITY

SMARFID

Shanghai Smarfid Security Equipment Co., Ltd.
Add: Room 301, 4th Bldg., No.4 TongLi Road, SongJiang District, Shanghai 201615,
China
Tel: (86-21) 54260103, 54260132 ext.215 Fax: (86-21) 54260132 ext.222

DECLARATION OF SIMILARITY

March,25, 2014

To: SIEMIC (Nanjing-China) Laboratories
Tel: 25-8673 0128-618 Fax: +86-25-8673 0127
www.siemic.com.cn

For our business issue and marketing requirement, we would like to list different models numbers on the CE certificates and reports, as following:

The product name: Remote Control

Model No.: KL100-1, KL100-2

The difference between the two models are different name.

Please contact me should there be need for any additional clarification or information.

Best Regards,
Songlin dai
Manager

Songling Dai