### Changes made to TempTrackr<sup>TM</sup> System for FCC Compliance

## Heatshrink over primary antenna connection



## Unused antenna ports deactivated by Software: User can not select other ports


#### Step 1: continued...

The software will apply regulatory restrictions based on your geographic region. The FCC complaint version of the kit will include software that conforms to FCC requirements. The CE compliant version of the kit will include software that conforms to CE requirements:

- FCC requirements impose the following restrictions on the reader:
  - The reader will read sensors only once every 30s.
  - The reader will only make use of one antenna. The other two antenna ports are deactivated on FCC compliant readers.
- CE requirements restrict the reader to only operate in the 433 MHz ISM-Band. This means that you will only be able to read one sensor with a CE compliant reader.



# Unused antenna ports deactivated by Software

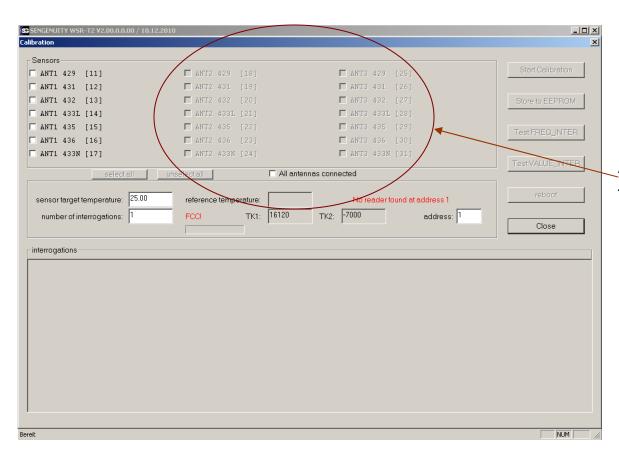

Antennas 2 & 3 Deactivated for FCC compliant readers