

Design Pool Ltd

MPE ASSESSMENT REPORT

Report Type:

FCC MPE assessment report

Model:

APWADG01

REPORT NUMBER:

200303064SHA-003

ISSUE DATE:

June 17, 2020

DOCUMENT CONTROL NUMBER:

TTRFFCCMPE-01_V1 © 2018 Intertek





Total Quality. Assured.

TEST REPORT

Intertek Testing Services Shanghai
Building No.86, 1198 Qinzhou Road (North)
Caohejing Development Zone
Shanghai 200233, China

Telephone: 86 21 6127 8200
www.intertek.com

Report no.: 200303064SHA-003

Applicant: Design Pool Ltd

Address of Applicant: 2/F East Town Bldg, 41 Lockhart Road, Wan Chai, Hong Kong

Manufacturer: ASAP Technology (Jiangxi) Co., Ltd

Address of Manufacturer: Ji'an Industrial Park, Ji'an, Jiangxi 343100 China

FCC ID: X3QDROPXLW01

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

KDB447498 D01 General RF Exposure Guidance v06

FCC Part2.1091, FCC Part2.1093 FCC Part1.1307(b)

TESTED, PREPARED AND CHECKED BY :

REVIEWED AND APPROVED BY :

Project Engineer

Wade Zhang

Intertek Testing Services Shanghai

Reviewer

Daniel Zhao

Intertek Testing Services Shanghai

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Revision History**

Report No.	Version	Description	Issued Date
200303064SHA-003	Rev. 01	Initial issue of report	June 17, 2020

TEST REPORT**1 GENERAL INFORMATION****1.1 Description of Equipment Under Test (EUT)**

Product name:	Apple Watch dongle
Type/Model:	APWADG01
Description of EUT:	Apple Watch dongle
Rating:	DC 5V
Category of EUT:	Class B
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Operating Frequency Range:	326.5 KHz
Antenna Type:	Coil antenna
Sample received date:	May. 12, 2020
Date of test:	May. 12, 2020 to May 23, 2020

TEST REPORT**1.2 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

All tests were sub-contracted.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

Tested, Prepared and Checked by Henry Lu from Shenzhen UnionTrust Quality and Technology Co., Ltd.

Reviewed and Approved by Daniel Zhao from Intertek Testing Services Shanghai.

The test facility is recognized, certified, or accredited by the following organizations:**CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

TEST REPORT

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.3 Instrument list

Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Broadband Field meter	STT	SEM-600	D-1044	May 29, 2018	May 28, 2021
<input checked="" type="checkbox"/>	Probe	STT	LF-04	I-1044	May 29, 2018	May 28, 2021
<input checked="" type="checkbox"/>	Probe holder	STT	TR-01	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Optical fiber line	STT	L=5M	N/A	N/A	N/A

TEST REPORT**2 MPE Assessment****Test result:** Pass**2.1 MPE Assessment Limit**

According to §1.1307(b)(1), system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

Limits for Occupational / Controlled Exposure

Frequency range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100000	/	/	5	6

Limits for General Population/Uncontrolled Exposure

Frequency range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

Note: f = frequency in MHz: * = Plane-wave equivalents power density.

2.2 Testing Procedure

Enabled the EUT to transmit and receive data continue

a. The field strength of both E-field and H-field was measured at 15 cm surrounding the device and 20 cm above the top surface using the equipment list above for determining compliance with the MPE requirements of FCC Part 1.1310.

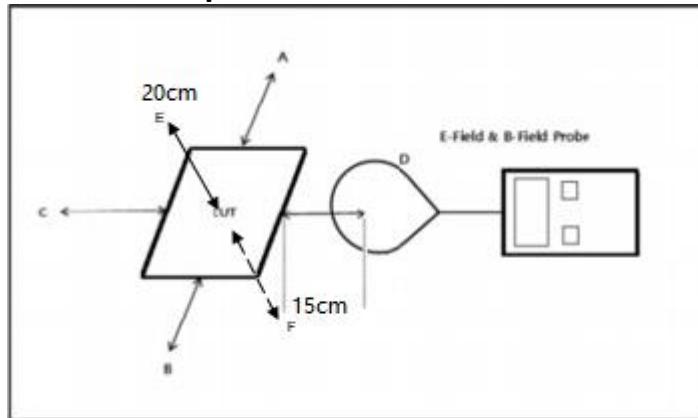
b. The RF power density was measured with the battery at 3 different charge conditions: battery at less than 1 %, battery at 50% charger, battery at 99% charger.

c. Maximum E-field and H-field measurements were made 15cm from each side of the EUT. Along the side of the EUT and still 15cm away from the edge of the EU T, the field probes were positioned at the location where there is maximum field strength. The maximum E-field and H-field is reported below.

d. This device uses a wireless charging circuit for power transfer operating at the frequency of X

TEST REPORT

kHz. Thus, the 300 kHz limits were used: E-field Limit = 614 (V/m); H-field limit = 1.63 (A/m).

2.3 Test setup**Note**

The RF exposure test is performed in the shield room

The test distance is between the edge of the charger and the geometric center of probe

The aggregate at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated.

2.4 TEST DATA**E-Field Strength**

Test Position	Test distance (cm)	Test result (V/m)			Limit (V/m)	Result (Pass/Fail)
		<1% Battery status	<50% Battery status	<99% Battery status		
A: Right	15	0.10	0.13	0.12	614	Pass
B: Left	15	0.11	0.11	0.08	614	Pass
C: Front	15	0.11	0.12	0.13	614	Pass
D: Back	15	0.12	0.09	0.09	614	Pass
E: Top	20	0.09	0.11	0.11	614	Pass
F: Bottom	15	0.08	0.11	0.12	614	Pass

TEST REPORT**H-Field Strength**

Test Position	Test distance (cm)	Test result (A/m)			Limit (A/m)	Result (Pass/Fail)
		<1% Battery status	<50% Battery status	<99% Battery status		
A: Right	15	0.0054	0.0052	0.0051	1.63	Pass
B: Left	15	0.0049	0.0051	0.0047	1.63	Pass
C: Front	15	0.0051	0.0051	0.0050	1.63	Pass
D: Back	15	0.0053	0.0052	0.0051	1.63	Pass
E: Top	20	0.0061	0.0055	0.0057	1.63	Pass
F: Bottom	15	0.0058	0.0061	0.0053	1.63	Pass

Remark:

The device meets the mobile RF exposure limit at a 15cm and 20cm separation distance as specified in &2.1091 of the FCC Rules.

All simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

TEST REPORT**2.5 Equipment Approval Considerations**

Requirements of section 5 of KDB680106 D01 RF Exposure Wireless Charging App v03	Yes/No	Description
Power transfer frequency is less than 1 MHz.	Yes	The device operate in the frequency 326.5KHz
Output power from each primary coil is less than or equal to 15 watts.	Yes	The maximum output power of the primary coil is 5W
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes only single coil
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes	Product is not a portable device.
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	See the test data in section 2.4 of this report

TEST REPORT**Appendix I: Photograph of test setup**

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

Appendix II: Photograph of equipment under test

Refer to Appendix 2 for EUT external and internal photos.

***** END *****