

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Design Pool Limited
FCC ID:	X3QRISE2IN101

1.2 EUT INFORMATION

Product Name:	Rise 2-in-1 Magnetic Wireless Charger
Model No.:	RISE2IN101
Brand Name:	Native Union
DUT Stage:	<i>Production Unit</i>
Operating Frequency Range:	Smartphone Charge Pad: 115kHz to 205kHz and 360kHz Earpod Charge Pad: 115kHz to 205kHz
Antenna Type:	Coil Antenna
Power Supply	120VAC
Sample Received Date:	October 07, 2024
Sample Tested Date:	October 07, 2024 to October 28, 2024

1.3 OTHER INFORMATION

Support Equipment

Description	Remark
An AC adaptor (Model: TB-G-C35-I-IP; Input: 100-240VAC 50/60Hz 1.0A; Output: 5.0V 3.0A, 9.0V 3.0A, 12.0V 2.92A, 15.0V 2.33A, 20.0V 1.75A)	Provided by Applicant
2m USB Type-C Power Supply Cable	Provided by Applicant
Airpod	Provided by Intertek
15W Loading	Provided by Intertek
iPhone	Provided by Intertek

Prepared and Checked by:

Approved by:

Leung Chun Ning, Peter
Assistant Engineer

Wong Cheuk Ho, Herbert
Assistant Manager
Date: November 01, 2024

1.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

According to KDB680106 D01 RF Exposure Wireless Charging Apps v04 (October 24, 2023), the requirement of RF exposure for the Wireless Charging device shall be met.

2. EQUIPMENT LIST

Test Equipment List						
Equipment No.	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
EW-3412	Electric and Magnetic Field Probe - Analyzer	NARDASAFETY	EHP-200A	170WX91004	Jul 20, 2022	Jan 20, 2025

3. MPE EVALUATION

3.1 REFERENCE DOCUMENTS FOR EVALUATION

According to KDB680106 D01 RF Exposure Wireless Charging Apps v04 (October 24, 2023), the requirement of RF exposure for the Wireless Charging device shall be met.

3.2 MPE COMPLIANCE REQUIREMENT

3.2.1 Limits

3.2.1.1

According to §1.1310(e)(1), system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

Limits for Occupational / Controlled Exposure

Frequency range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	F/300	6
1500-100000	/	/	5	6

Limits for General Population/Uncontrolled Exposure

Frequency range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30


Note: f = frequency in MHz: * = Plane-wave equivalents power density.

3.2.2 Test Procedure

Enabled the EUT to transmit and receive data continue

- The field strength of both E-field and H-field was measured at 20 cm surrounding the device and 20 cm above the top surface using the equipment list above for determining compliance with the MPE requirements of FCC Part 1.1310.
- For 15W wireless charging, specific loading is required for providing Max. output power for testing.
- Maximum E-field and H-field measurements were made 20cm from each side of the EUT. Along the side of the EUT and still 20cm away from the edge of the EUT, the field probes were positioned at the location where there is maximum field strength. The maximum E-field and H-field is reported below.
- This device uses a wireless charging circuit for power transfer operating at the frequency range of 115kHz to 205kHz and 360kHz for the smartphone charge pad; 115kHz to 205kHz for the earpod charge pad. Thus, the 300 kHz limits were used: E-field Limit = 614 (V/m); H-field limit = 1.63 (A/m).

3.2.3 Test setup

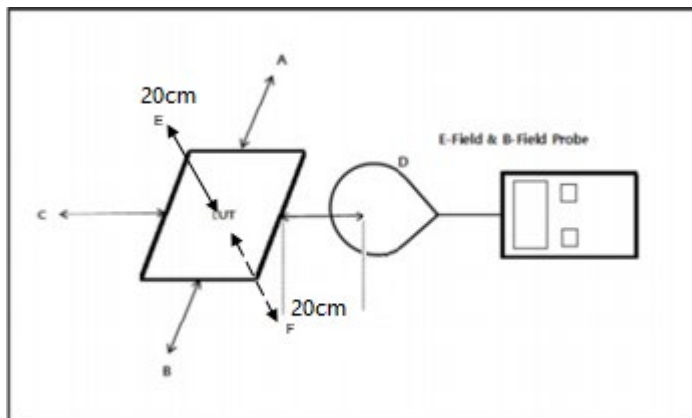

Since this application applied short-term confidentiality, thus the outlook photos of the Coil Plates are saved with filename: setup photo.pdf

Note

- The RF exposure test is performed in the shield room
- The test distance is between the edge of the charger and the geometric center of probe
- The aggregate at 20 cm surrounding the device and 20 cm above the top surface from transmitting coil is demonstrated.
- Test Position: Rear, Right, Front, Left, Top, Bottom

3.3 TEST DATA

Charging with Full Load – Max. output power

E-Field Strength

Test Mode	Probe Position (V/m) C-Rear	Probe Position (V/m) B-Right	Probe Position (V/m) D-Front	Probe Position (V/m) A-Left	Probe Position (V/m) E-Top	Probe Position (V/m) F-Bottom	Limits (V/m)	Result
Charging with Full Load	0.2919	0.3497	0.6551	0.5286	0.4389	0.4808	614	Complied

H-Field Strength

Test Mode	Probe Position (A/m) C-Rear	Probe Position (A/m) B-Right	Probe Position (A/m) D-Front	Probe Position (A/m) A-Left	Probe Position (A/m) E-Top	Probe Position (A/m) F-Bottom	Limits (A/m)	Result
Charging with Full Load	0.0581	0.0402	0.2042	0.0737	0.0636	0.0496	1.63	Complied

Note: Charging with full load refers to all loads are charging at 1% battery power simultaneously.

Standby Mode

E-Field Strength

Test Mode	Probe Position (V/m) C-Rear	Probe Position (V/m) B-Right	Probe Position (V/m) D-Front	Probe Position (V/m) A-Left	Probe Position (V/m) E-Top	Probe Position (V/m) F-Bottom	Limits (V/m)	Result
Standby	0.2139	0.2140	0.2092	0.2105	0.2082	0.2110	614	Complied

H-Field Strength

Test Mode	Probe Position (A/m) C-Rear	Probe Position (A/m) B-Right	Probe Position (A/m) D-Front	Probe Position (A/m) A-Left	Probe Position (A/m) E-Top	Probe Position (A/m) F-Bottom	Limits (A/m)	Result
Standby	0.0273	0.0291	0.0269	0.0272	0.0277	0.0276	1.63	Complied

Test Setup Photo:

Since this application applied short-term confidentiality, thus the setup photos of RF exposure test are saved with filename: setup photo.pdf

*** End of Report ***
