



DATE: 29 December 2013

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
Haldor Advanced Technologies Ltd.

Equipment under test:

ORLocate OR Lite System

**ORLocate OR Lite Module, OrLocate Check
Out Module*, ORLocate Check In Module***

*See customer's Declaration on page 5

Written by:

R. Pinchuck, Documentation

Approved by:

A. Sharabi, Test Engineer

Approved by:

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written
permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Haldor Advanced Technologies Ltd.

ORLocate OR Lite System

ORLocate OR Lite Module, OrLocate Check Out Module*, ORLocate Check In Module*

FCC ID: X4V-ORL-L40

This report concerns:

Original Grant:

Class I change:

Class II change:

Equipment type:

Part 15 Low Power Communication Device Transmitter

Limits used:

47CFR15 Section 15.225

Measurement procedure used is ANSI C63.4-2003.

Application for Certification
prepared by:

R. Pinchuck

ITL (Product Testing) Ltd.

1 Batsheva Street

Lod,7120101

Israel

e-mail Rpinchuck@itl.co.il

Applicant for this device:
(different from "prepared by")

Morr Avissara

Haldor Advanced Technologies Ltd.

2 Habanai St.

Hod Hasharon 45319

Israel

Tel: +972- 9 – 788 - 5867

Fax: +972- 9 - 788 - 5861

e-mail: morr.avissara@haldor-tech.com



TABLE OF CONTENTS

1. GENERAL INFORMATION -----	4
1.1. Administrative Information.....	4
1.2. List of Accreditations	6
1.3. Product Description	7
1.4. Test Methodology.....	8
1.5. Test Facility	8
1.6. Measurement Uncertainty	8
2. SYSTEM TEST CONFIGURATION-----	9
2.1. Justification.....	9
2.2. EUT Exercise Software	9
2.3. Special Accessories	9
2.4. Equipment Modifications	9
2.5. Configuration of Tested System	9
3. TEST SET-UP PHOTOS-----	10
4. 26DB MINIMUM BANDWIDTH -----	15
4.1. Test Specification	15
4.2. Test Procedure	15
4.3. Test Results.....	16
4.4. Test Equipment Used.....	17
5. FIELD STRENGTH OF FUNDAMENTAL-----	18
5.1. Test Specification	18
5.2. Test Procedure	18
5.3. Test Results.....	18
5.4. Test Instrumentation Used, Field Strength of Fundamental	23
6. SPURIOUS RADIATED EMISSION, 9 KHZ – 30 MHZ -----	24
6.1. Test Specification	24
6.2. Test Procedure	24
6.3. Test Results.....	24
6.4. Test Instrumentation Used, Radiated Measurements.....	25
6.5. Field Strength Calculation	25
7. SPURIOUS RADIATED EMISSION 30 – 1000 MHZ-----	26
7.1. Test Specification	26
7.2. Test Procedure	26
7.3. Test Results.....	26
7.4. Test Instrumentation Used, Radiated Measurements.....	31
7.5. Field Strength Calculation	31
8. APPENDIX A - CORRECTION FACTORS -----	32
8.1. Correction factors for CABLE	32
8.2. Correction factors for CABLE	33
8.3. Correction factors for LOG PERIODIC ANTENNA	34
8.4. Correction factors for BICONICAL ANTENNA	35
8.5. Correction factors for ACTIVE LOOP ANTENNA	36



1. General Information

1.1. Administrative Information

Manufacturer: Haldor Advanced Technologies Ltd.

Manufacturer's Address: 2 Habanai St.,
Hod Hasharon, 4531902
Israel
Tel: +972-9-788-5858
Fax: +972-9-788-5861

Manufacturer's Representative: Gregory Bass

Equipment Under Test (E.U.T): ORLocate OR Lite System

Equipment Model No.: ORLocate OR Lite Module, OrLocate
Check Out Module*, ORLocate
Check In Module* (See customer's
declaration on following page.)

Equipment Part No.: Not designated

Date of Receipt of E.U.T: 19.11.2013

Start of Test: 19.11.2013

End of Test: 20.11.2103

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 15 Subpart C
Section 15.225



Date: 13/10/2013

DECLARATION

I HEREBY DECLARE THAT THE FOLLOWING PRODUCT(S):

OR-Check Out; OR-Check In

ARE IDENTICAL ELECTRONICALLY, PHYSICALLY, AND MECHANICALLY TO:

ORLocate OR-Lite

Please relate to them all (from an EMC point of view) as the same product.

Thank you,

Signature:

**Uzi Bar
Production Manager
Haldor Advanced Technologies Ltd.**



1.2. List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3. Product Description

Haldor ORLocate OR Lite System is an RFID system, which provides a solution enabling the enumeration and tracking of RFID tagged surgical instruments and sponges, by utilizing passive RFID tags (battery-less transponder that do not radiate any electromagnetic field when not activated).



1.4. Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5. Test Facility

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin Nun, Israel 99780. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing November 21, 2012).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6. Measurement Uncertainty

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB.

2. System Test Configuration

2.1. Justification

The 13.56 transmitter was originally authorized for FCC certification under FCC ID: X4V-ORL-L40.

The Class II Permissive Changes to the original product are as follows:

1. Request for Limited Modular Approval in hosts manufactured by Haldor Advanced Technologies Ltd.
2. Use of antennas manufactured by Haldor Advanced Technologies Ltd.

Testing was performed with the E.U.T. on the table transmitting to each type of antenna separately, since the transmission on regular operation does not allow more than one antenna to be active at a specific time.

The C2PC testing includes fundamental power one each antenna type, spurious emission on each antenna and mask test. Frequency tolerance test was not repeated since it was tested on the original Grant and there is no change with the transmitting unit, only the use of new antennas.

2.2. EUT Exercise Software

Normal operation software was used.

2.3. Special Accessories

No special accessories were needed in order to achieve compliance.

2.4. Equipment Modifications

No modifications were needed in order to achieve compliance.

2.5. Configuration of Tested System

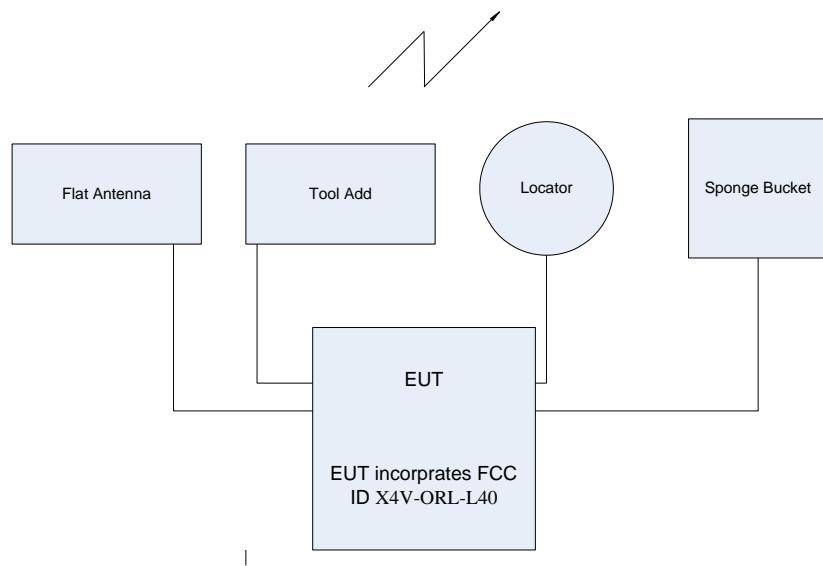


Figure 1. Configuration of Tested System

3. Test Set-up Photos



Figure 2. Radiated Emission Test 9kHz-30MHz Flat Antenna



Figure 3. Radiated Emission Test 9kHz-30MHz Tool Add

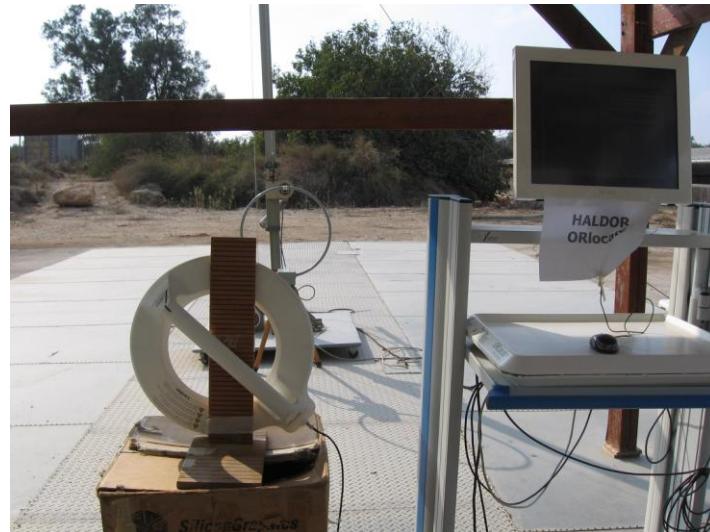


Figure 4. Radiated Emission Test 9kHz-30MHz Locator



Figure 5. Radiated Emission Test 9kHz-30MHz Sponge Bucket



Figure 6. Radiated Emission Test 30MHz-300MHz Flat Antenna



Figure 7. Radiated Emission Test 30MHz-300MHz Tool Add



Figure 8. Radiated Emission Test 30MHz-300MHz Locator



Figure 9. Radiated Emission Test 30MHz-300MHz Sponge Bucket



Figure 10. Radiated Emission Test 300MHz-1000MHz Flat Antenna



Figure 11. Radiated Emission Test 300MHz-1000MHz Tool Add

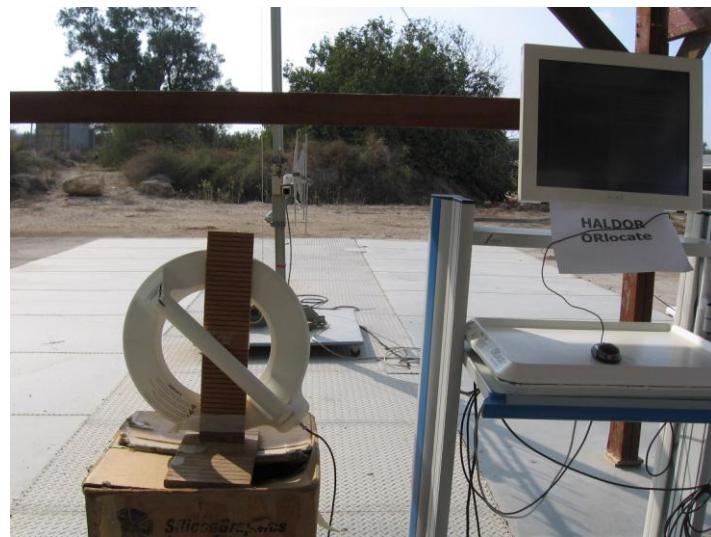


Figure 12. Radiated Emission Test 300MHz-1000MHz Locator



Figure 13. Radiated Emission Test 300MHz-1000MHz Sponge Bucket

4. 26dB Minimum Bandwidth

4.1. Test Specification

F.C.C. Part 15, Subpart C, part 2.1049

4.2. Test Procedure

The E.U.T was placed on a non-metallic table, 0.8 meters above the ground plane, on a remote-controlled turntable in the OATS. The test distance was 3 meters. The transmitter unit operated with normal modulation. The EMI receiver was set to 1 kHz resolution BW. The spectrum bandwidth of the transmitter unit was measured and recorded. The test was performed to measure the transmitter occupied bandwidth. The EUT was set up as shown in Figure 3, and its proper operation was checked. The transmitter occupied bandwidth was measured with the EMI receiver as frequency delta between reference points on modulation envelope. The E.U.T. was tested at 13.56 MHz.

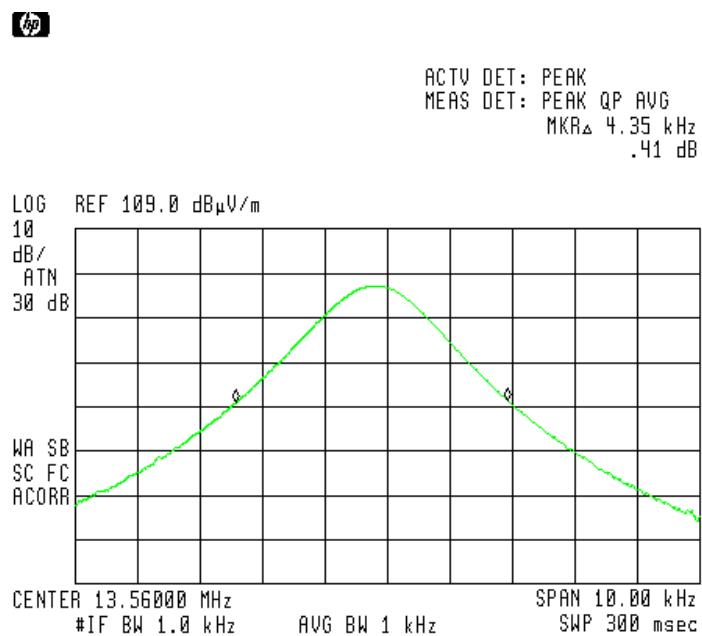


Figure 14. 13.56 MHz



4.3. Test Results

E.U.T Description: ORLocate OR Lite System

Model: ORLocate OR Lite Module, OrLocate Check Out Module*, ORLocate Check In Module*

Serial Number: Not designated

Operation Frequency (MHz)	Bandwidth Reading (MHz)
13.56	0.00435

Figure 15 Test Results

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature:  Date: 20.01.14

Typed/Printed Name: A. Sharabi



4.4. Test Equipment Used.

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 16 Test Equipment Used



5. Field Strength of Fundamental

5.1. Test Specification

F.C.C., Part 15, Subpart C, Section 15.225(a) (b)

5.2. Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

The E.U.T. was placed on a non-conductive table, 0.8 meters above the O.A.T.S. ground plane.

The EMI receiver was set to the E.U.T. Fundamental Frequency (13.56 MHz) and Peak Detection.

The distance between the E.U.T. and test antenna was 3 meters.

The turntable and antenna were adjusted for maximum level reading on the EMI receiver. The loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter.

5.3. Test Results

Frequency (MHz)	Antenna	Field Strength dBuV/m	Limit dBuV/m	Margin dB
13.56	Sponge Bucket	100.67	124	-23.33
13.56	Tool Add	95.00	124	-29.00
13.56	Locator	120.24	124	-3.76
13.56	Flat Antenna	95.82	124	-28.18

JUDGEMENT: Passed

The EUT met the FCC Part 15, Subpart C, Sections 15.225(a); (b); (c); Section 15.209; specifications requirements.

The details of the highest emissions are given in *Figure 17* to *Figure 24*.

TEST PERSONNEL:

Tester Signature: 

Date: 20.01.14

Typed/Printed Name: A. Sharabi

Field Strength of Fundamental

E.U.T Description: ORLocate OR Lite System
 Model Number: ORLocate OR Lite Module, OrLocate Check Out
 Module*, ORLocate Check In Module*
 Part Number: Not designated

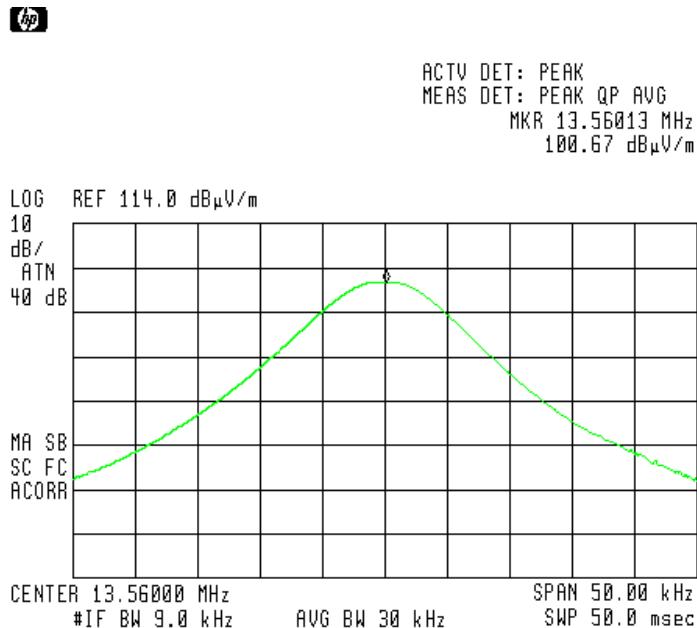


Figure 17. Field Strength of Fundamental, Sponge Bucket Antenna

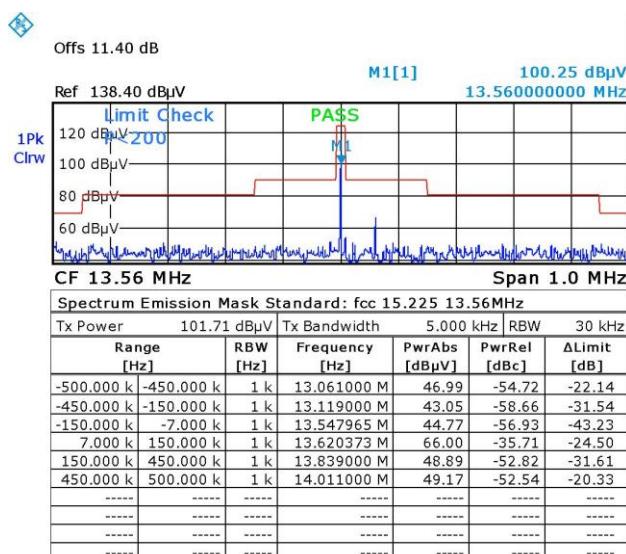


Figure 18. Mask of Fundamental Sponge Bucket Antenna

Field Strength of Fundamental

E.U.T Description: ORLocate OR Lite System
 Model Number: ORLocate OR Lite Module, OrLocate Check Out
 Module*, ORLocate Check In Module*
 Part Number: Not designated



ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 13.56013 MHz
 94.99 dB μ V/m


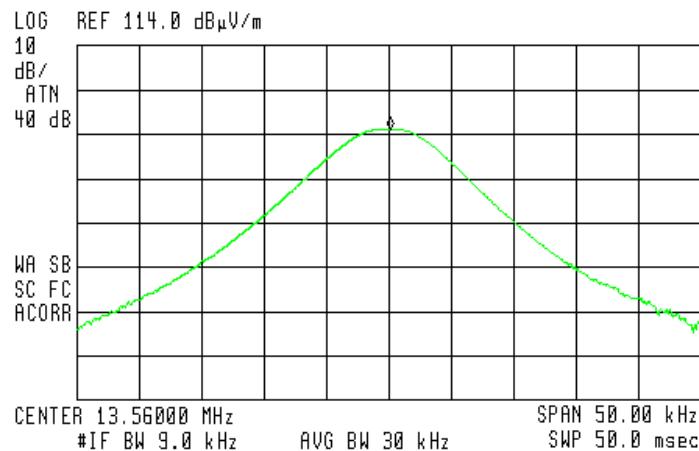


Figure 19. Field Strength of Fundamental, Tool Add Antenna

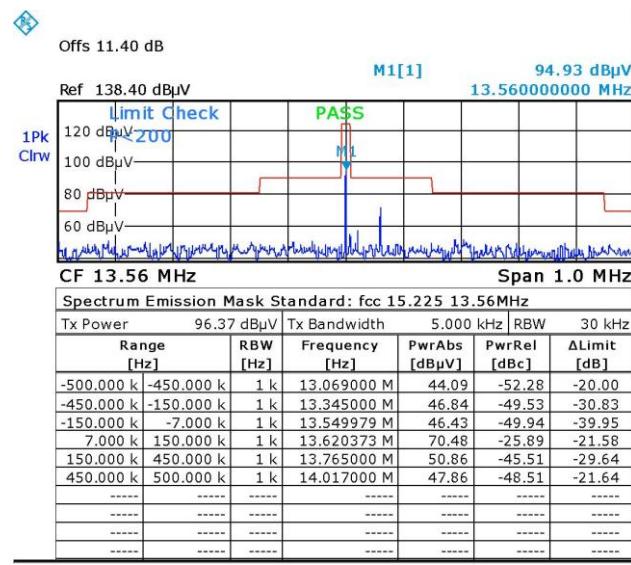

Date: 20.NOV.2013 11:45:46

Figure 20. Mask of Fundamental Tool Add Antenna

Field Strength of Fundamental

E.U.T Description ORLocate OR Lite System
 Model Number ORLocate OR Lite Module, OrLocate Check Out
 Module*, ORLocate Check In Module*
 Part Number: Not designated


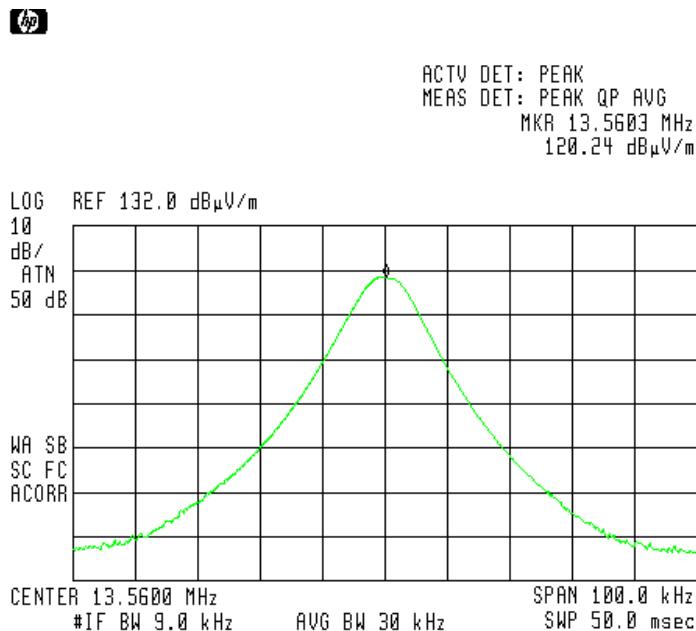


Figure 21. Field Strength of Fundamental, Locator Antenna

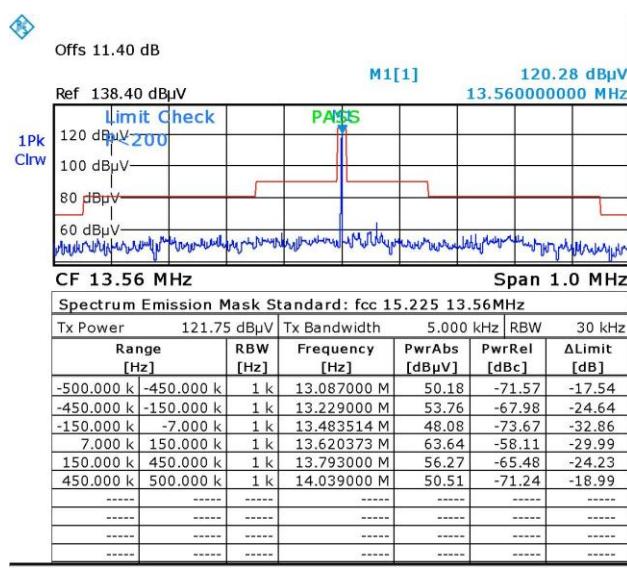

Date: 21.NOV.2013 11:35:33

Figure 22. Mask of Fundamental, Locator Antenna

Field Strength of Fundamental

E.U.T Description ORLocate OR Lite System
 Model Number ORLocate OR Lite Module, OrLocate Check Out
 Module*, ORLocate Check In Module*
 Part Number: Not designated

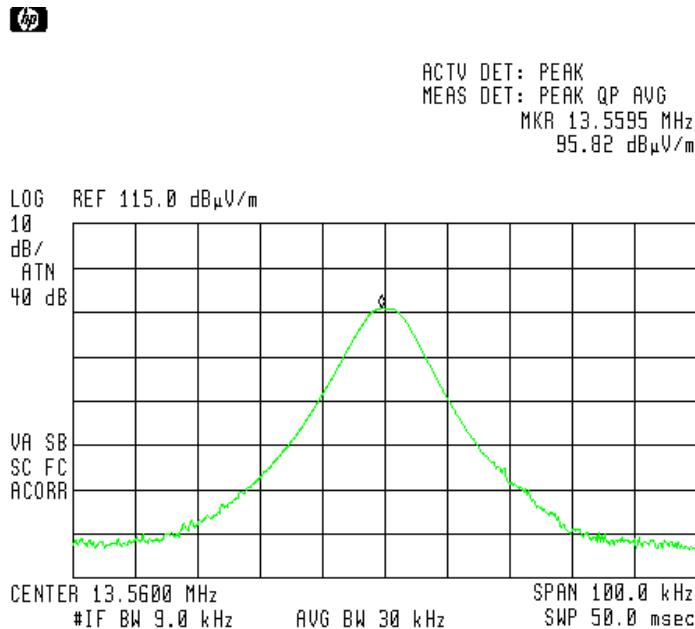


Figure 23. Field Strength of Fundamental, Flat Antenna

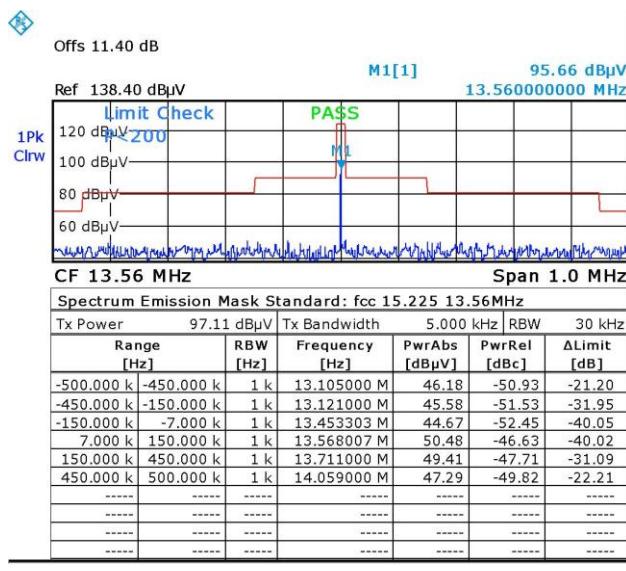


Figure 24. Mask of Fundamental Flat Antenna



5.4. Test Instrumentation Used, Field Strength of Fundamental

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A



6. Spurious Radiated Emission, 9 kHz – 30 MHz

6.1. Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

6.2. Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are pre-loaded to the receiver.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was operated at the frequency of 13.56 MHz. This frequency was measured using a peak detector.

6.3. Test Results

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

The signals were more than 20 dB below the specification limit.

TEST PERSONNEL:

Tester Signature:

Date: 20.01.14

Typed/Printed Name: A. Sharabi



6.4. Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

6.5. Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]
RA: Receiver Amplitude [dB μ V]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.



7. Spurious Radiated Emission 30 – 1000 MHz

7.1. Test Specification

30 MHz-1000 MHz, F.C.C., Part 15, Subpart C

7.2. Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3. See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The configuration tested is shown in *Figure 2*.

The frequency range 30 MHz-1000 MHz was scanned and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements. The specification limits and applicable correction factors are pre-loaded to the receiver.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

Turning the E.U.T on and off.

Using a frequency span less than 10 MHz.

Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

7.3. Test Results

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification.

TEST PERSONNEL:

Tester Signature: 

Date: 20.01.14

Typed/Printed Name: A. Sharabi



Spurious Radiated Emission 30 – 1000 MHz

E.U.T Description ORLocate OR Lite System
Model Number ORLocate OR Lite Module, OrLocate Check
 Out Module*, ORLocate Check In Module*
Part Number: Not designated

Freq. (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Q.Pea k Reading (dB μ V/m)	Q.Pea k Specification (dB μ V/m)	Peak. Margin (dB)
40.69	H	38.9	34.1	40.0	-5.9
54.19	H	40.0	35.3	40.0	-4.7
67.75	H	38.0	35.6	40.0	-4.4
81.37	H	34.1	28.9	40.0	-11.1

Figure 25. Spurious Emission, Sponge Bucket



Spurious Radiated Emission 30 – 1000 MHz

E.U.T Description ORLocate OR Lite System
Model Number ORLocate OR Lite Module, OrLocate Check
 Out Module*, ORLocate Check In Module*
Part Number: Not designated

Freq. (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Q.Pea k Reading (dB μ V/m)	Q.Pea k Specification (dB μ V/m)	Peak. Margin (dB)
40.69	H	43.0	39.3	40.0	-0.7
54.19	H	42.1	36.5	40.0	-3.5
67.75	H	28.4	22.3	40.0	-17.7
81.37	H	37.4	31.2	40.0	-8.8

Figure 26. Spurious Emission, Locator



Spurious Radiated Emission 30 – 1000 MHz

E.U.T Description ORLocate OR Lite System
Model Number ORLocate OR Lite Module, OrLocate Check Out
 Module*, ORLocate Check In Module*
Part Number: Not designated

Freq. (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Q.Pea k Reading (dB μ V/m)	Q.Pea k Specification (dB μ V/m)	Peak. Margin (dB)
40.69	H	42.4	38.7	40.0	-1.3
54.19	H	52.4	36.8	40.0	-3.2
67.75	H	36.0	31.0	40.0	-9.0
81.37	H	34.1	29.2	40.0	-10.8

Figure 27. Spurious Emission, Tool Add



Spurious Radiated Emission 30 – 1000 MHz

E.U.T Description ORLocate OR Lite System
Model Number ORLocate OR Lite Module, OrLocate Check
 Out Module*, ORLocate Check In Module*
Part Number: Not designated

Freq. (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Q.Pea k Reading (dB μ V/m)	Q.Pea k Specification (dB μ V/m)	Peak. Margin (dB)
40.69	V	42.9	39.7	40.0	-0.3
54.19	V	44.6	38.9	40.0	-1.1
67.75	V	40.5	37.3	40.0	-2.7
81.37	V	35.4	30.4	40.0	-9.6

Figure 28. Spurious Emission, Flat Antenna



7.4. Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	February 26, 2013	1 year
RF Section	HP	85420E	3705A00248	February 26, 2013	1 year
Antenna Biconical	EMCO	3104	2606	August 30, 2013	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	April 2, 2013	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

7.5. Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ V/m]
RA: Receiver Amplitude [dB μ V]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dB μ V (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μ V

No external pre-amplifiers are used.



8. APPENDIX A - CORRECTION FACTORS

8.1. Correction factors for CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".



8.2. Correction factors for

CABLE from spectrum analyzer to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.



8.3. Correction factors for

LOG PERIODIC ANTENNA

Type LPD 2010/A

at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".



8.4. Correction factors for

**BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



**8.5. Correction factors for ACTIVE LOOP ANTENNA
Model 6502
S/N 9506-2950**

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2