

Test Report

Applicant: Astera LED-Technology GmbH
Address of Applicant: Stahlgruberring 36, 81829 Munich, Germany
Manufacturer: Astera Manufacturing Limited
Address of Manufacturer: Rm. 201, Huazhong Indutrial Park, No. 12 South Huancheng Road, Bantian Street, Longgang District, 518129 Shenzhen, China

Equipment Under Test (EUT)

Product Name: Stage Luminaires
Model No.: AX1-U
Trade Mark: ASTERA
FCC ID: X55AX1-U
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of sample receipt: August 05, 2019
Date of Test: August 05-October 10, 2019
Date of report issued: November 26, 2019
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	November 26, 2019	Original

Prepared By:



Date:

November 26, 2019

Project Engineer

Check By:



Date:

November 26, 2019

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
5.6 TEST FACILITY.....	7
5.7 TEST LOCATION.....	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 CONDUCTED PEAK OUTPUT POWER	14
7.4 20DB EMISSION BANDWIDTH.....	16
7.5 CARRIER FREQUENCIES SEPARATION.....	18
7.6 HOPPING CHANNEL NUMBER.....	20
7.7 DWELL TIME	21
7.8 BAND EDGE.....	25
7.9 SPURIOUS EMISSION.....	28
7.9.1 <i>Conducted Emission Method</i>	28
7.9.2 <i>Radiated Emission Method</i>	32
8 TEST SETUP PHOTO	52
9 EUT CONSTRUCTIONAL DETAILS	53

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(2)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)(i)	Pass
Carrier Frequencies Separation	15.247 (a)(1)(i)	Pass
Hopping Channel Number	15.247 (a)(1)(i)	Pass
Dwell Time	15.247 (a)(1)(i)	Pass
Pseudorandom Frequency Hopping Sequence	15.247 (a)(1)(i)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Stage Luminaires
Model No.:	AX1-U
Serial No.:	N/A
Test sample(s) ID:	GTS201912000095-1
Sample(s) Status:	Engineer sample
Operation Frequency:	917.00MHz~922.20MHz
Channel numbers:	53
Channel separation:	0.1MHz
Modulation type:	GFSK
Antenna Type:	PIFA Antenna
Antenna gain:	2.0dBi(Declare by applicant)
Power supply:	DC 28.8V Adaptor: PA1024-480IB050 Input: 100-240V~, 50-60Hz, 0.6A Output: DC 48V, 0.5A, 24W Max

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	917.0MHz	16	918.5MHz	31	920.0MHz	46	921.5MHz
2	917.1MHz	17	918.6MHz	32	920.1MHz	47	921.6MHz
3	917.2MHz	18	918.7MHz	33	920.2MHz	48	921.7MHz
4	917.3MHz	19	918.8MHz	34	920.3MHz	49	921.8MHz
5	917.4MHz	20	918.9MHz	35	920.4MHz	50	921.9MHz
6	917.5MHz	21	919.0MHz	36	920.5MHz	51	922.0MHz
7	917.6MHz	22	919.1MHz	37	920.6MHz	52	922.1MHz
8	917.7MHz	23	919.2MHz	38	920.7MHz	53	922.2MHz
9	917.8MHz	24	919.3MHz	39	920.8MHz		
10	917.9MHz	25	919.4MHz	40	920.9MHz		
11	918.0MHz	26	919.5MHz	41	921.0MHz		
12	918.1MHz	27	919.6MHz	42	921.1MHz		
13	918.2MHz	28	919.7MHz	43	921.2MHz		
14	918.3MHz	29	919.8MHz	44	921.3MHz		
15	918.4MHz	30	919.9MHz	45	921.4MHz		

Test CH

Channel	Frequency
The lowest channel	917.0MHz
The middle channel	919.6MHz
The Highest channel	922.2MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

5.3 Description of Support Units

None.

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none">• FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.• IC —Registration No.: 9079A The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A• NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 26 2019	June. 25 2020
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 26 2019	June. 25 2020
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 26 2019	June. 25 2020
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 26 2019	June. 25 2020
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 26 2019	June. 25 2020
9	Coaxial Cable	GTS	N/A	GTS211	June. 26 2019	June. 25 2020
10	Coaxial cable	GTS	N/A	GTS210	June. 26 2019	June. 25 2020
11	Coaxial Cable	GTS	N/A	GTS212	June. 26 2019	June. 25 2020
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 26 2019	June. 25 2020
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 26 2019	June. 25 2020
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 26 2019	June. 25 2020
15	Band filter	Amindeon	82346	GTS219	June. 26 2019	June. 25 2020
16	Power Meter	Anritsu	ML2495A	GTS540	June. 26 2019	June. 25 2020
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 26 2019	June. 25 2020
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 26 2019	June. 25 2020
19	Splitter	Agilent	11636B	GTS237	June. 26 2019	June. 25 2020
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 26 2019	June. 25 2020
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 20 2018	Oct. 19 2019
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 20 2018	Oct. 19 2019
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 20 2018	Oct. 19 2019
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 26 2019	June. 25 2020

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 26 2019	June. 25 2020
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 26 2019	June. 25 2020
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 26 2019	June. 25 2020
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 26 2019	June. 25 2020
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 26 2019	June. 25 2020

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 26 2019	June. 25 2020
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 26 2019	June. 25 2020
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 26 2019	June. 25 2020
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 26 2019	June. 25 2020
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 26 2019	June. 25 2020
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 26 2019	June. 25 2020
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 26 2019	June. 25 2020

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 26 2019	June. 25 2020
2	Barometer	ChangChun	DYM3	GTS255	June. 26 2019	June. 25 2020

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	

7.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	<small>* Decreases with the logarithm of the frequency.</small>																
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.2 for details																
Test environment:	Temp.:	25 °C	Humid.:	50%	Press.:	1012mbar											
Test voltage:	AC 120V, 60Hz																
Test results:	Pass																

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Pre-scan all channels, found worst case at 917MHz, and so only show the test result of 917MHz.

Measurement data:

Test mode:	917MHz mode	Phase Polarity:	Line
------------	-------------	-----------------	------

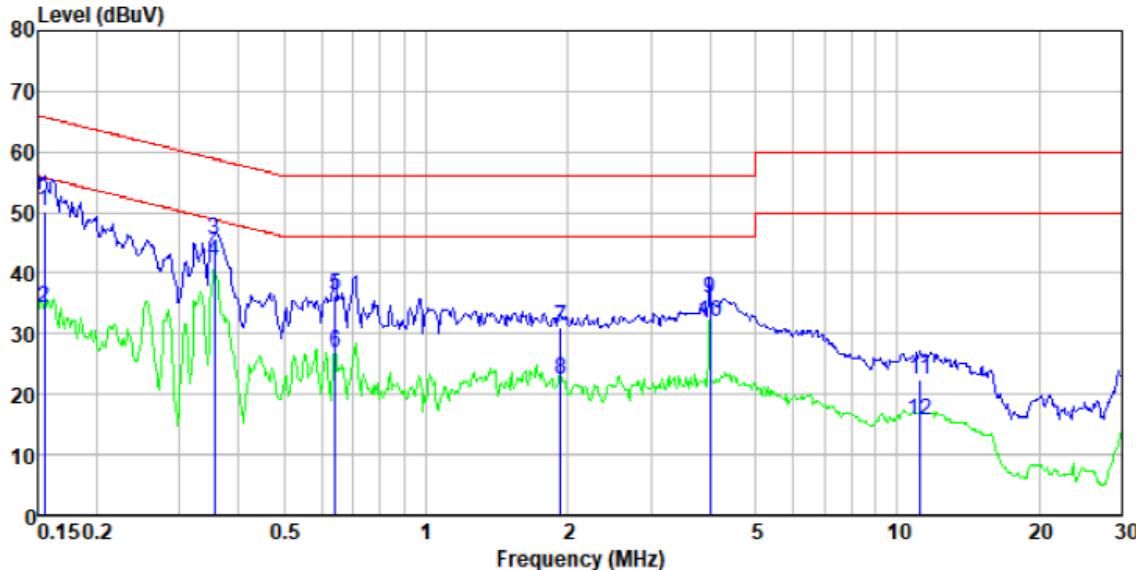

Condition : FCC PART15 CLASSB QP LINE

EUT name : Stage lumminaires

Test Model : AX1

Test Mode : 900MHz


Test Voltage : 120V/60Hz

Test Engineer: Sam

T/H : 25°C 50%

Freq	Read	LISN	Cable	Limit	Over	Remark
	MHz	Level	Factor	Loss	Level	
1	0.155	49.64	0.40	0.07	50.11	65.74 -15.63 QP
2	0.155	33.84	0.40	0.07	34.31	55.74 -21.43 Average
3	0.356	45.01	0.37	0.10	45.48	58.83 -13.35 QP
4	0.356	41.41	0.37	0.10	41.88	48.83 -6.95 Average
5	0.641	35.83	0.27	0.12	36.22	56.00 -19.78 QP
6	0.641	26.51	0.27	0.12	26.90	46.00 -19.10 Average
7	1.928	30.49	0.20	0.17	30.86	56.00 -25.14 QP
8	1.928	21.95	0.20	0.17	22.32	46.00 -23.68 Average
9	3.999	35.23	0.20	0.18	35.61	56.00 -20.39 QP
10	3.999	31.50	0.20	0.18	31.88	46.00 -14.12 Average
11	11.198	22.08	0.20	0.20	22.48	60.00 -37.52 QP
12	11.198	15.11	0.20	0.20	15.51	50.00 -34.49 Average

Test mode:	917MHz mode	Phase Polarity:	Neutral
------------	-------------	-----------------	---------

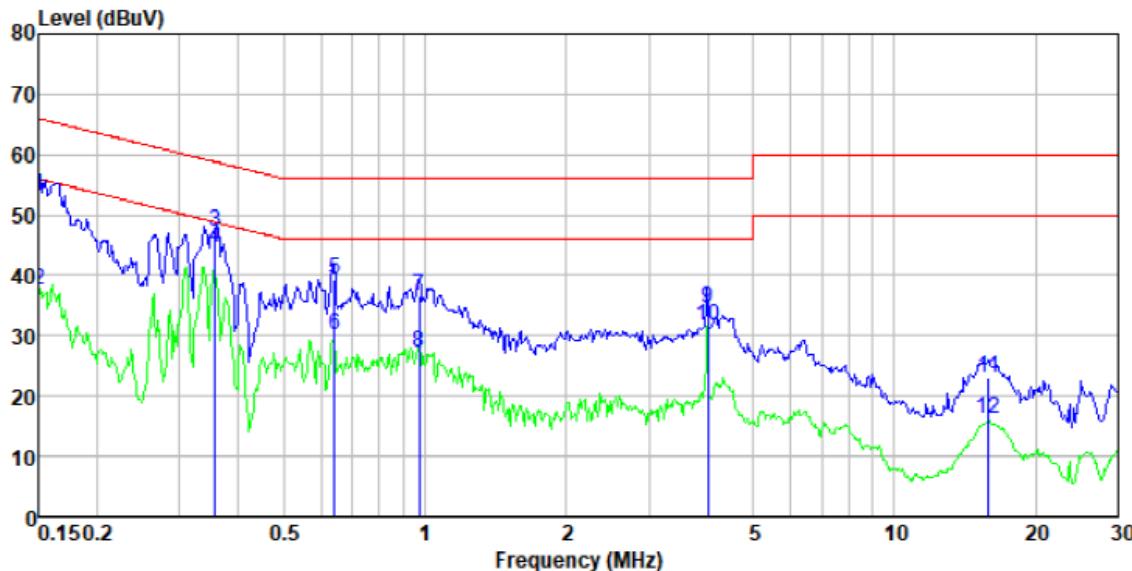

Condition : FCC PART15 CLASSB QP NEUTRAL


EUT name : Stage lumminaires
 Test Model : AX1
 Test Mode : 900MHz
 Test Voltage : 120V/60Hz
 Test Engineer: Sam
 T/H : 25°C 50%

Freq	Read Level	LISN Factor	Cable Loss	Level	Limit	Over	Remark
					Line	Line	
MHz	dBuV		dB	dB	dBuV	dBuV	dB
1	0.150	52.54	0.40	0.07	53.01	66.00	-12.99 QP
2	0.150	37.02	0.40	0.07	37.49	56.00	-18.51 Average
3	0.358	46.70	0.37	0.10	47.17	58.78	-11.61 QP
4	0.358	44.00	0.37	0.10	44.47	48.78	-4.31 Average
5	0.641	38.81	0.27	0.12	39.20	56.00	-16.80 QP
6	0.641	29.77	0.27	0.12	30.16	46.00	-15.84 Average
7	0.974	36.26	0.21	0.15	36.62	56.00	-19.38 QP
8	0.974	26.77	0.21	0.15	27.13	46.00	-18.87 Average
9	3.999	34.29	0.20	0.18	34.67	56.00	-21.33 QP
10	3.999	31.29	0.20	0.18	31.67	46.00	-14.33 Average
11	15.885	22.57	0.22	0.21	23.00	60.00	-37.00 QP
12	15.885	15.73	0.22	0.21	16.16	50.00	-33.84 Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss


7.3 Conducted Peak Output Power

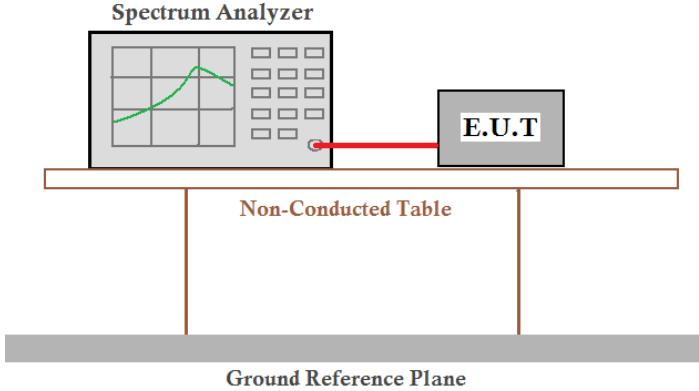Test Requirement:	FCC Part15 C Section 15.247 (b)(2)
Test Method:	ANSI C63.10:2013
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	8.88	30.00	Pass
Middle	8.91		
Highest	8.87		

Test plot as follows:

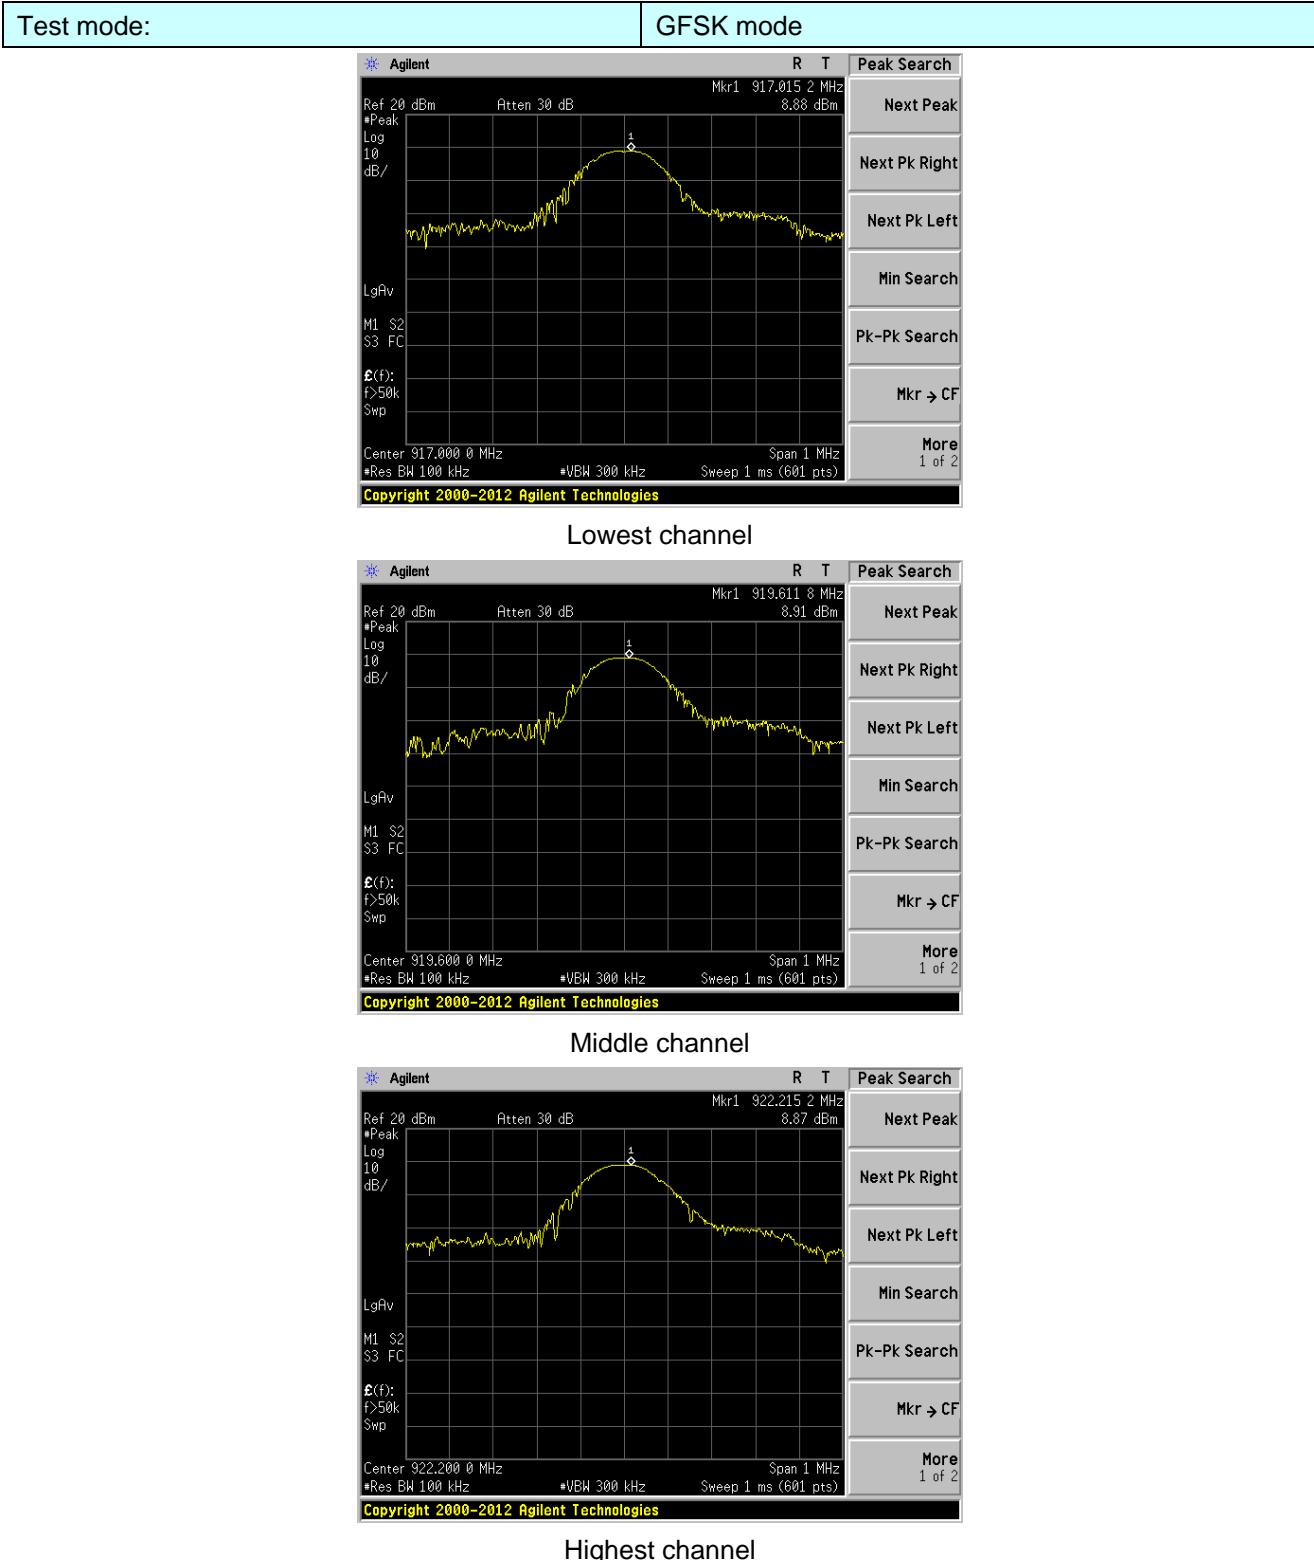

7.4 20dB Emission Bandwidth

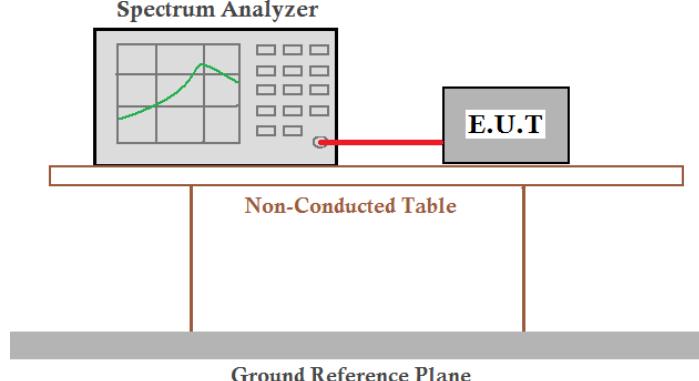Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(i)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	20dB Emission Bandwidth (MHz)	Result
Lowest	0.062096	Pass
Middle	0.061695	
Highest	0.062375	

Test plot as follows:



7.5 Carrier Frequencies Separation

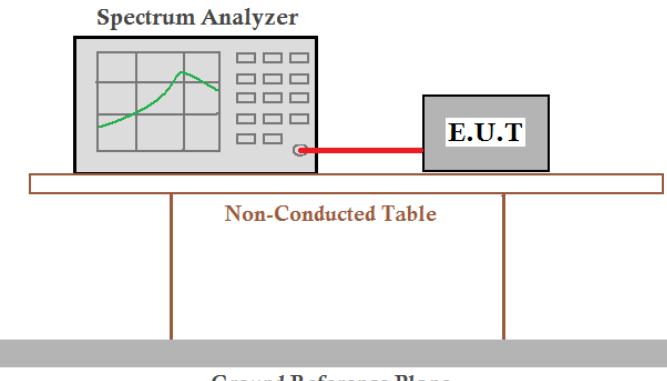Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(i)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	20dB bandwidth
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	100.1	62.375	Pass
Middle	100.1	62.375	Pass
Highest	100.1	62.375	Pass


Note: According to section 7.4

20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
62.375	62.375

Test plot as follows:

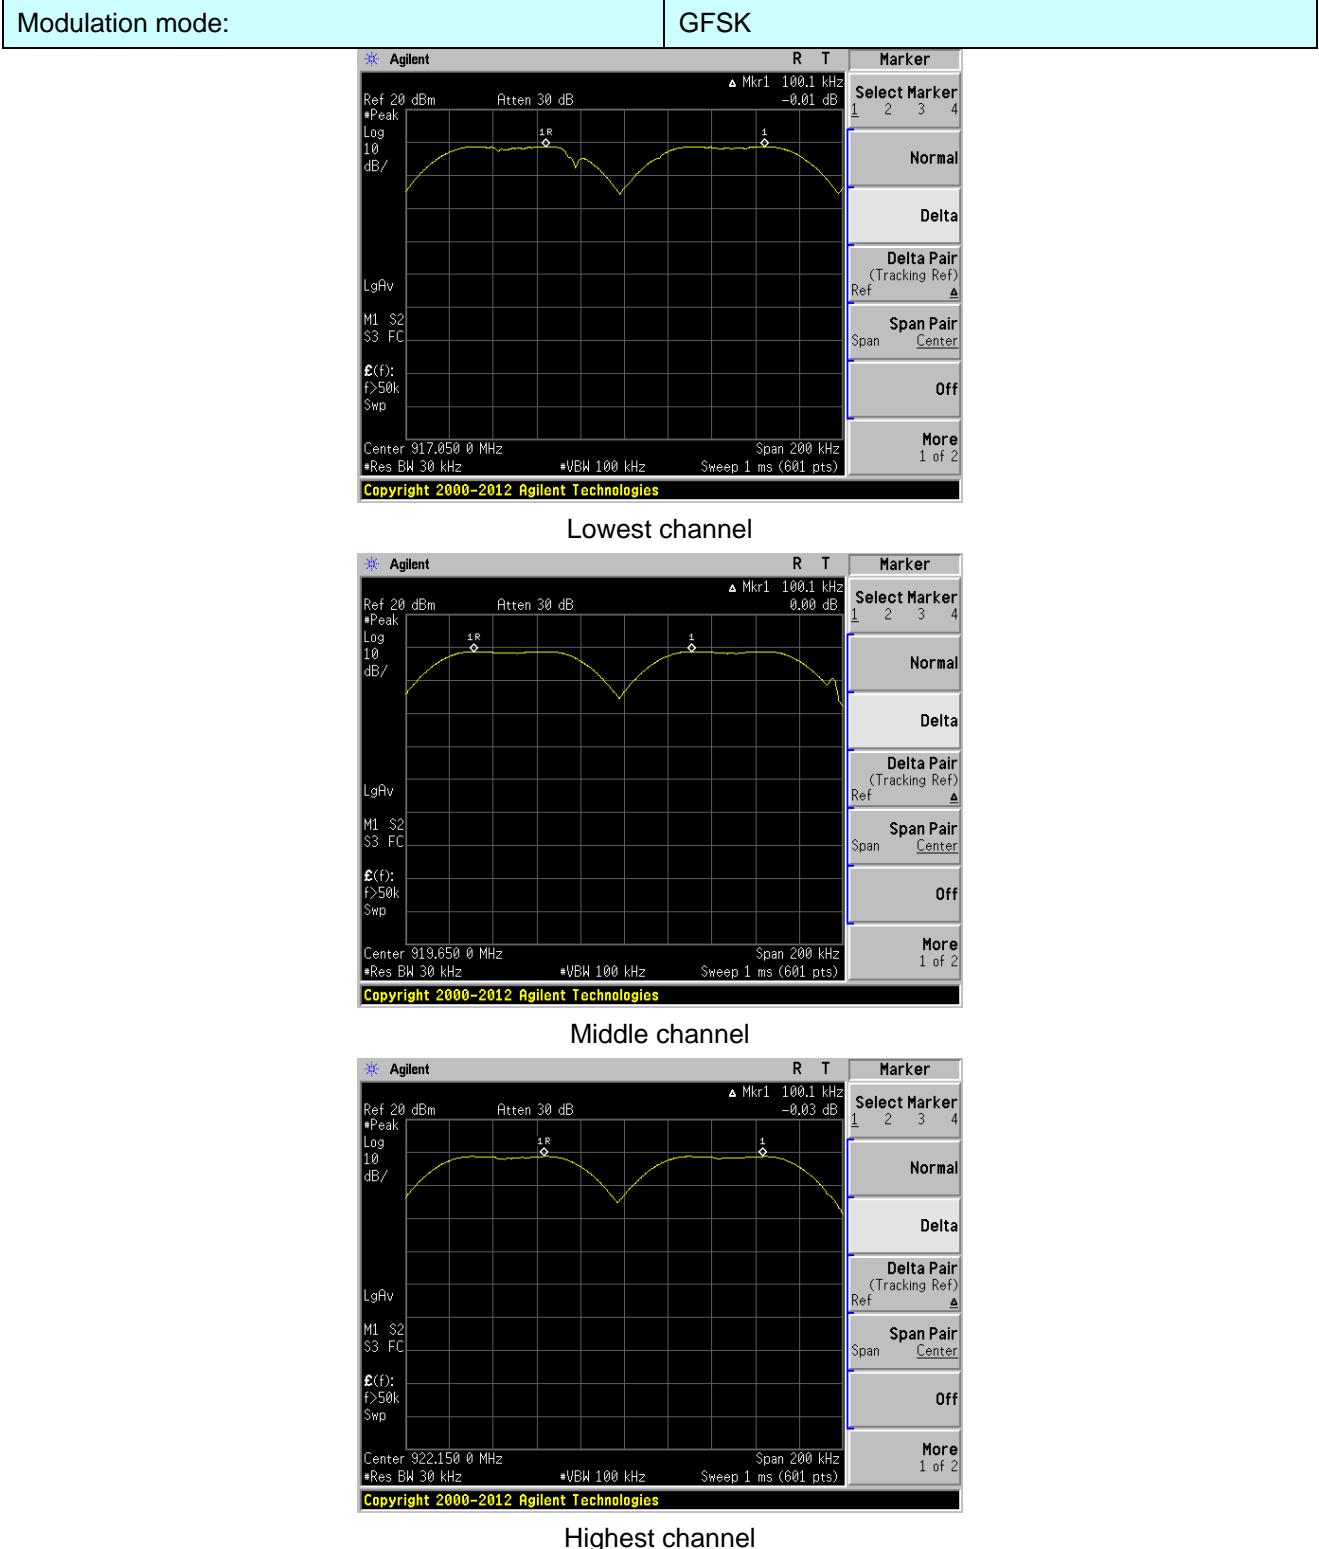


7.6 Hopping Channel Number

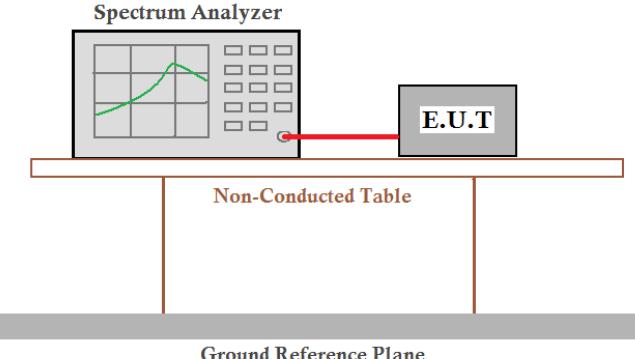Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(i)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=30kHz, VBW=100kHz, Frequency range=916.5MHz-922.5MHz, Detector=Peak
Limit:	50 channels
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	53	50	Pass

Test plot as follows:

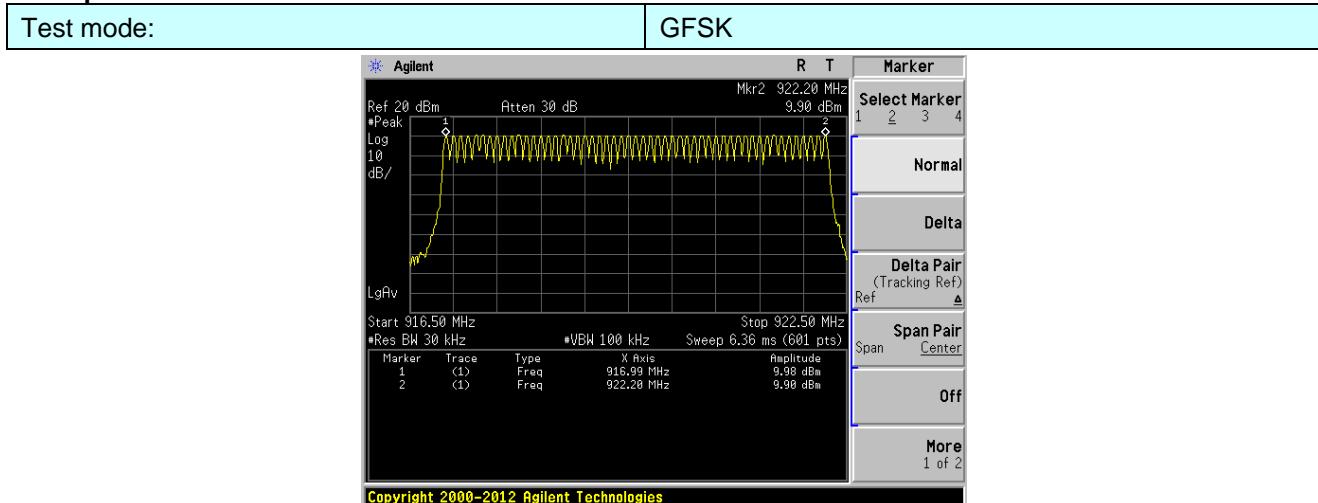

7.7 Dwell Time

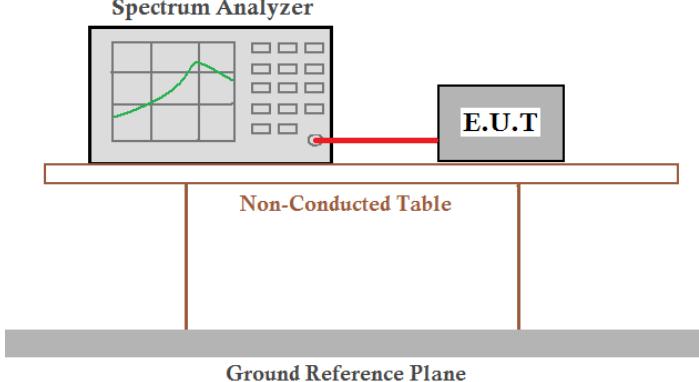
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(i)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=10kHz, VBW=30kHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	<p style="text-align: center;">  Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane </p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data


Frequency (MHz)	Dwell time Per Hop (s)	Number of hopping channels in 20s	Dwell time (s)	Limit (s)
917.00	0.0202	14	0.28	0.4
919.60	0.0202	14	0.28	0.4
922.20	0.0202	13	0.26	0.4

Note: For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

Test plot as follows:

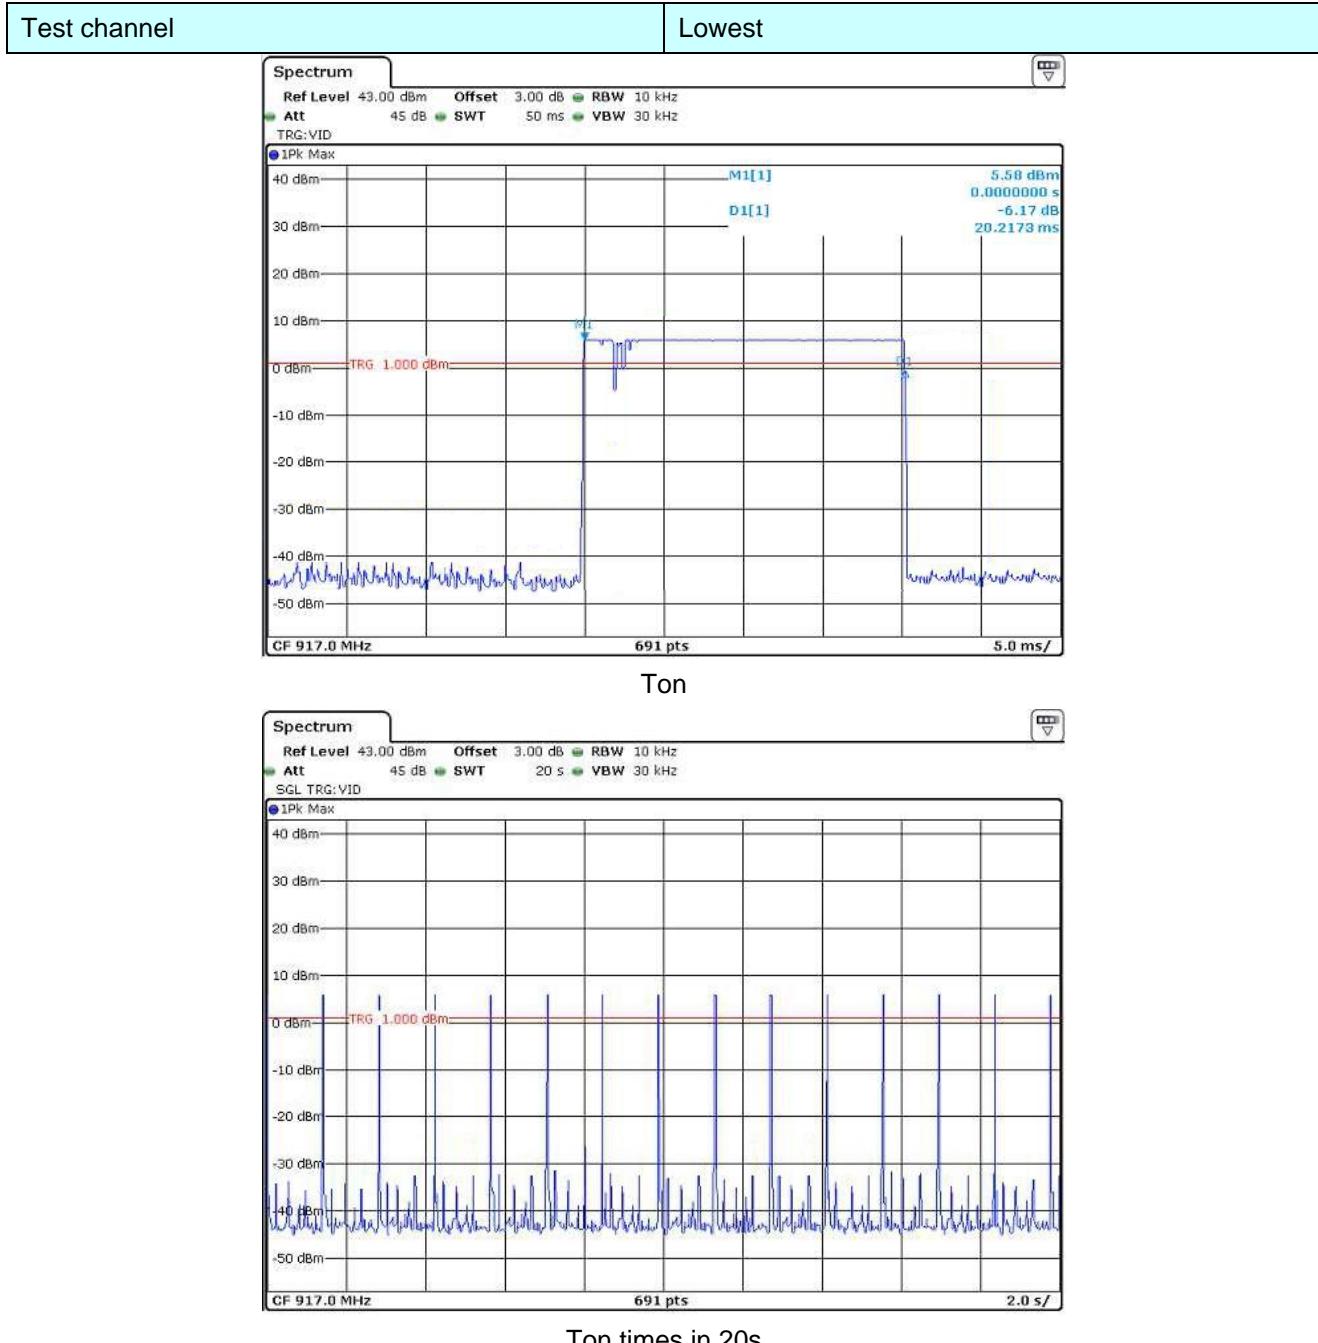

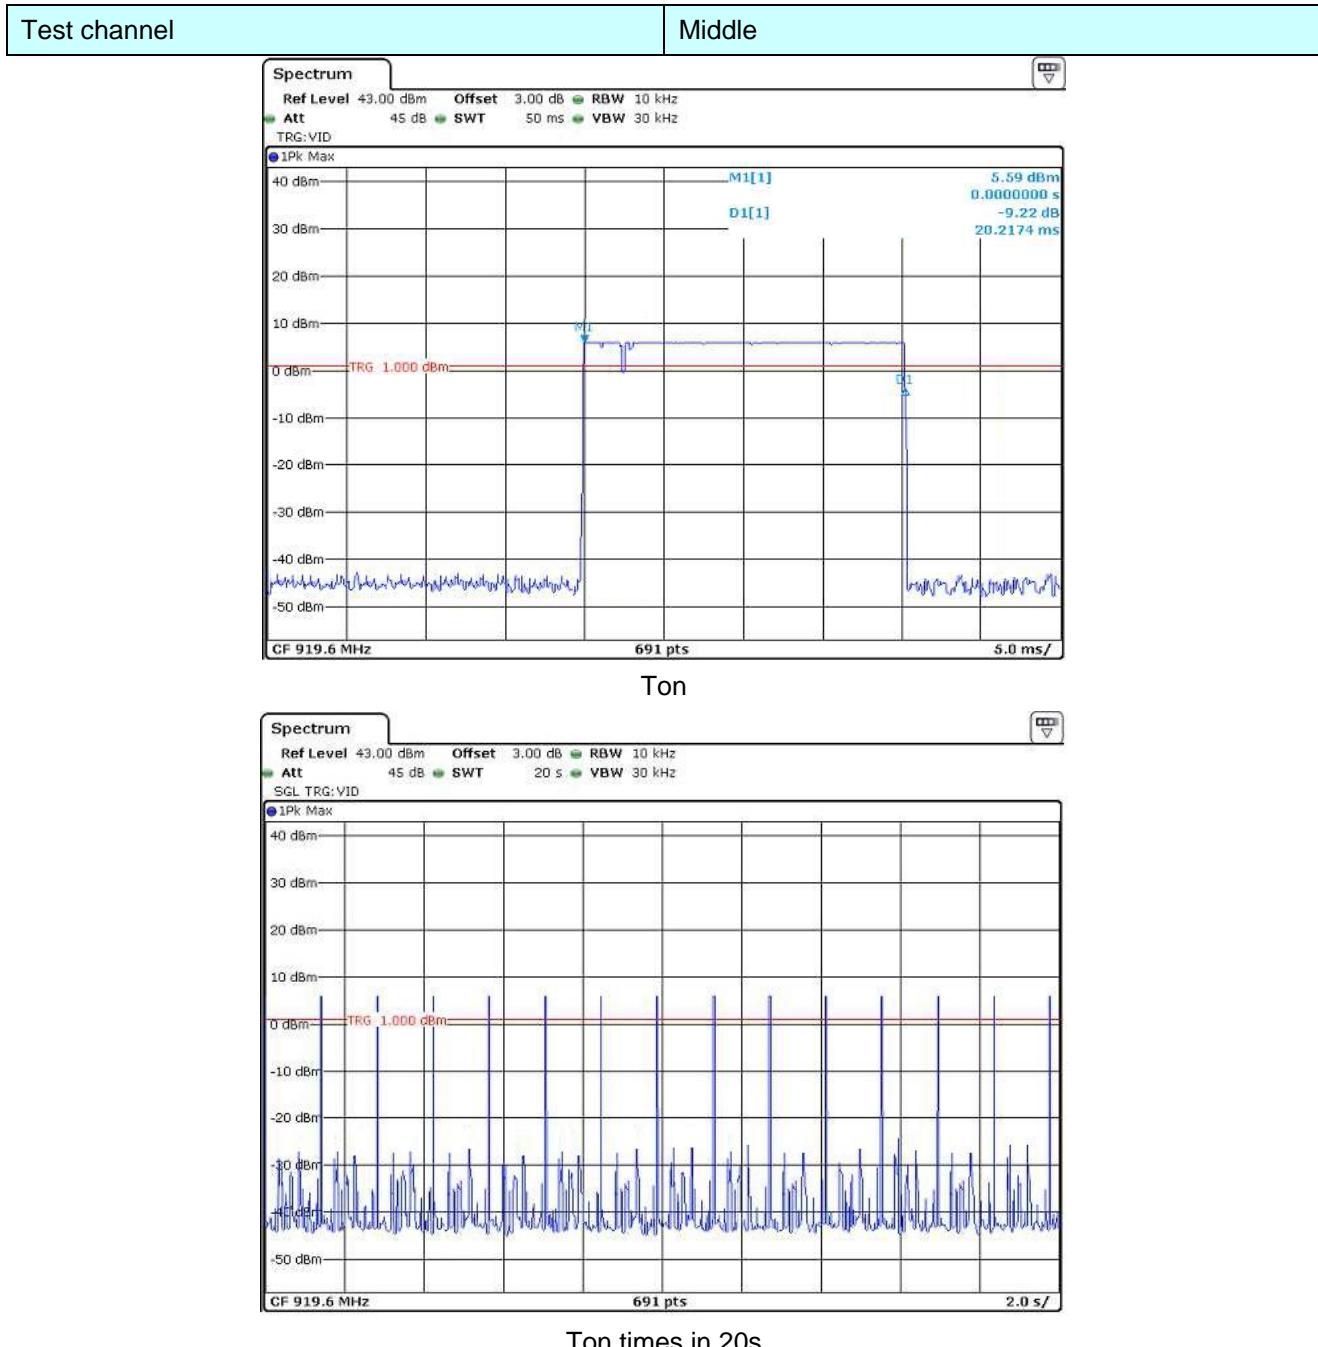

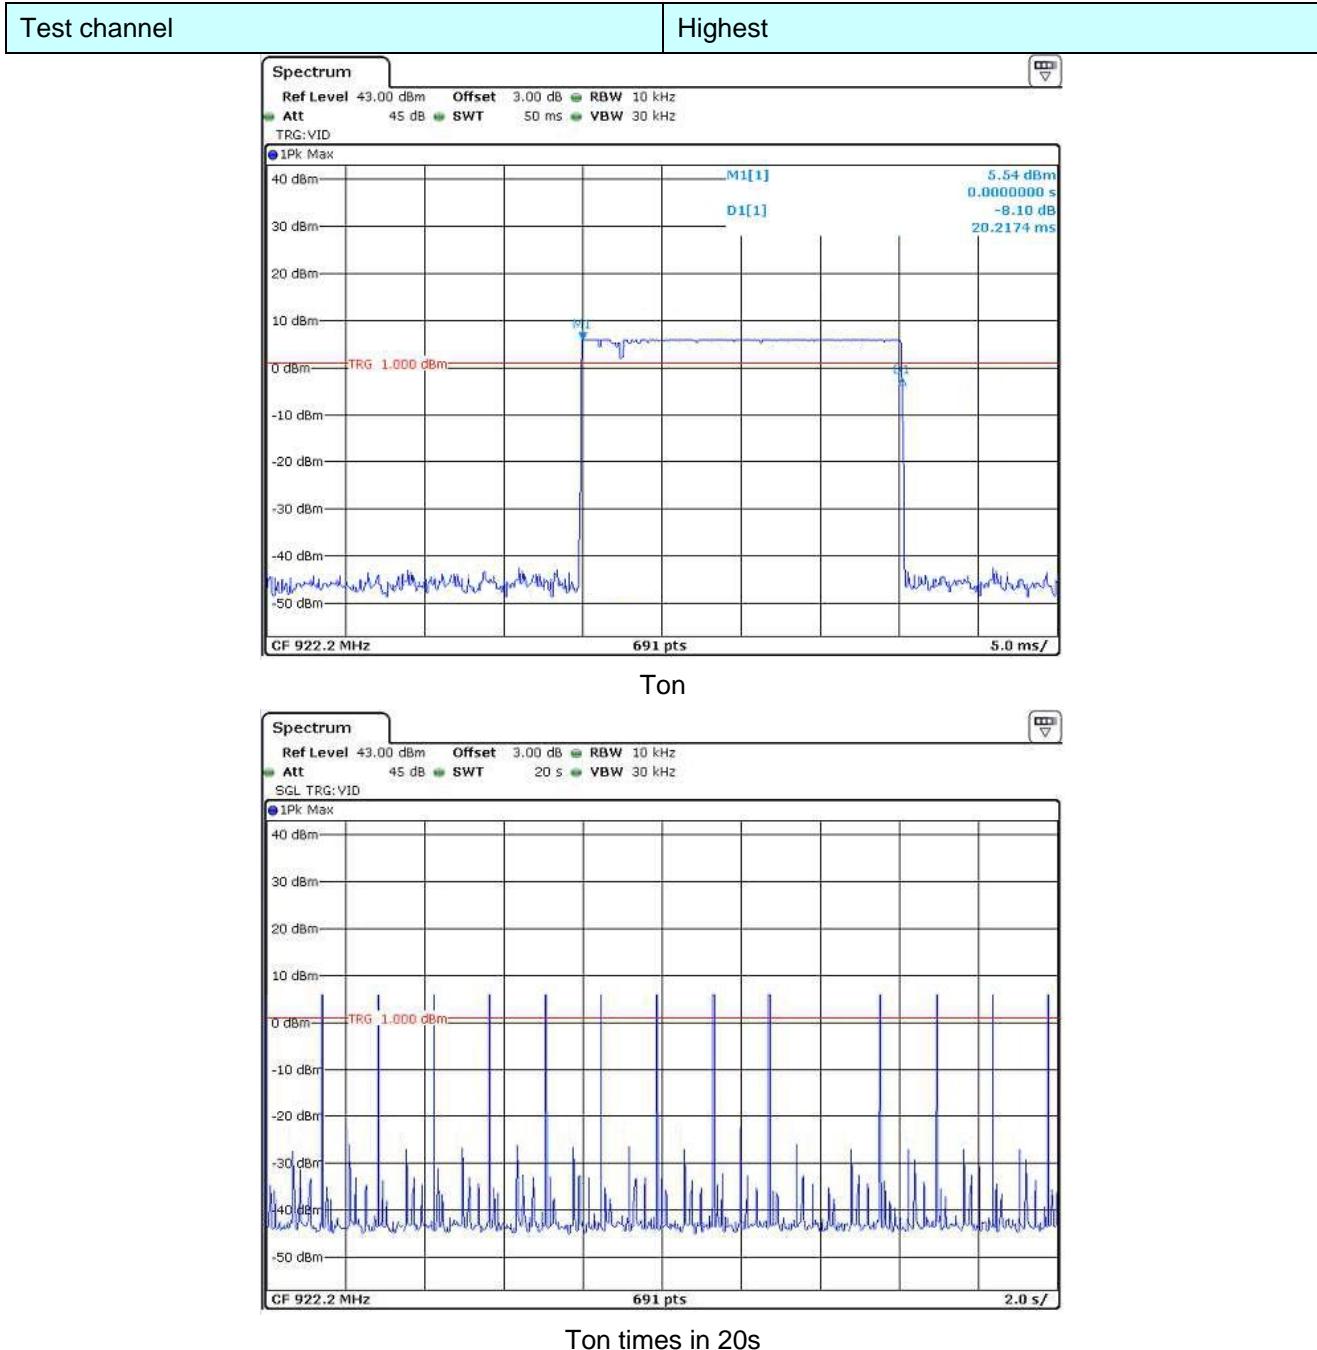


7.8 Band Edge

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Out of Band Conducted Emissions, FCC Rule 15.247(d):



In any 100 KHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

Lower channel 917.00 MHz:

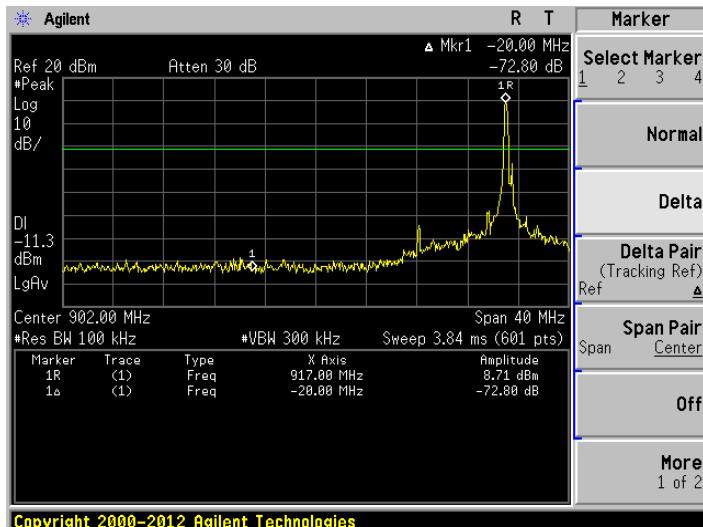


Upper channel 922.20 MHz:

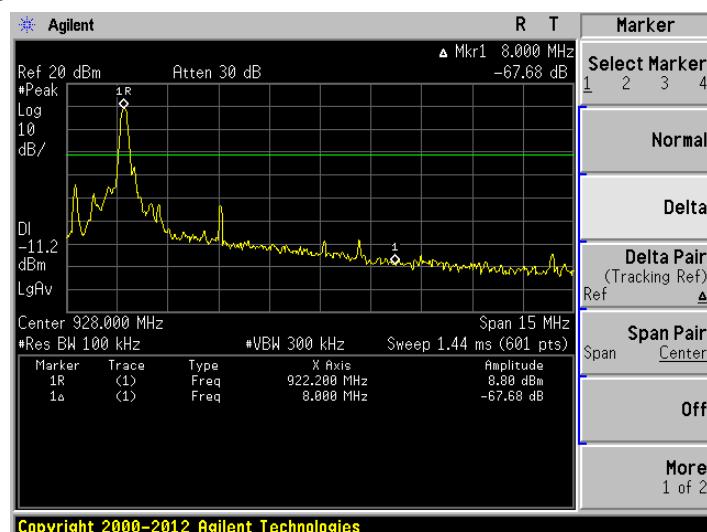

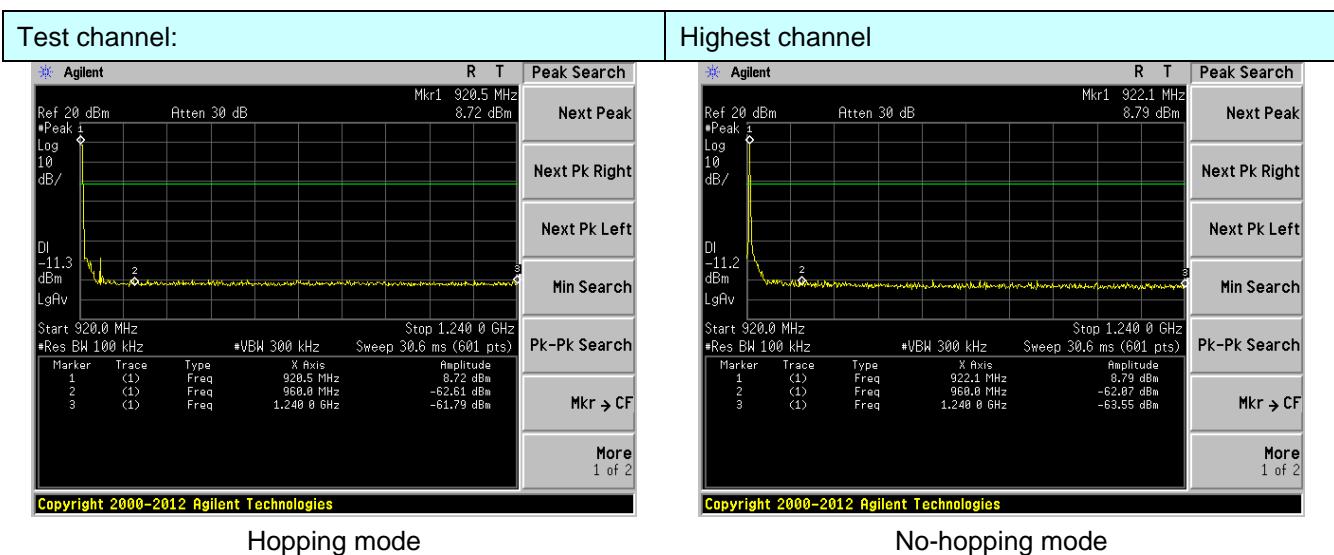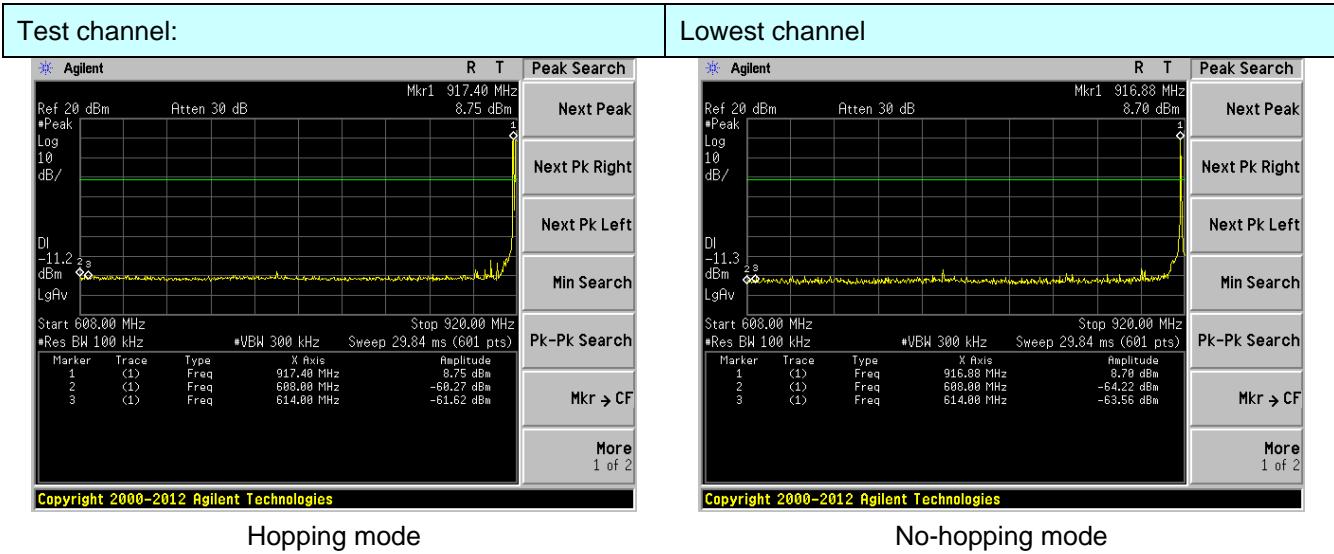
Test plot as follows:


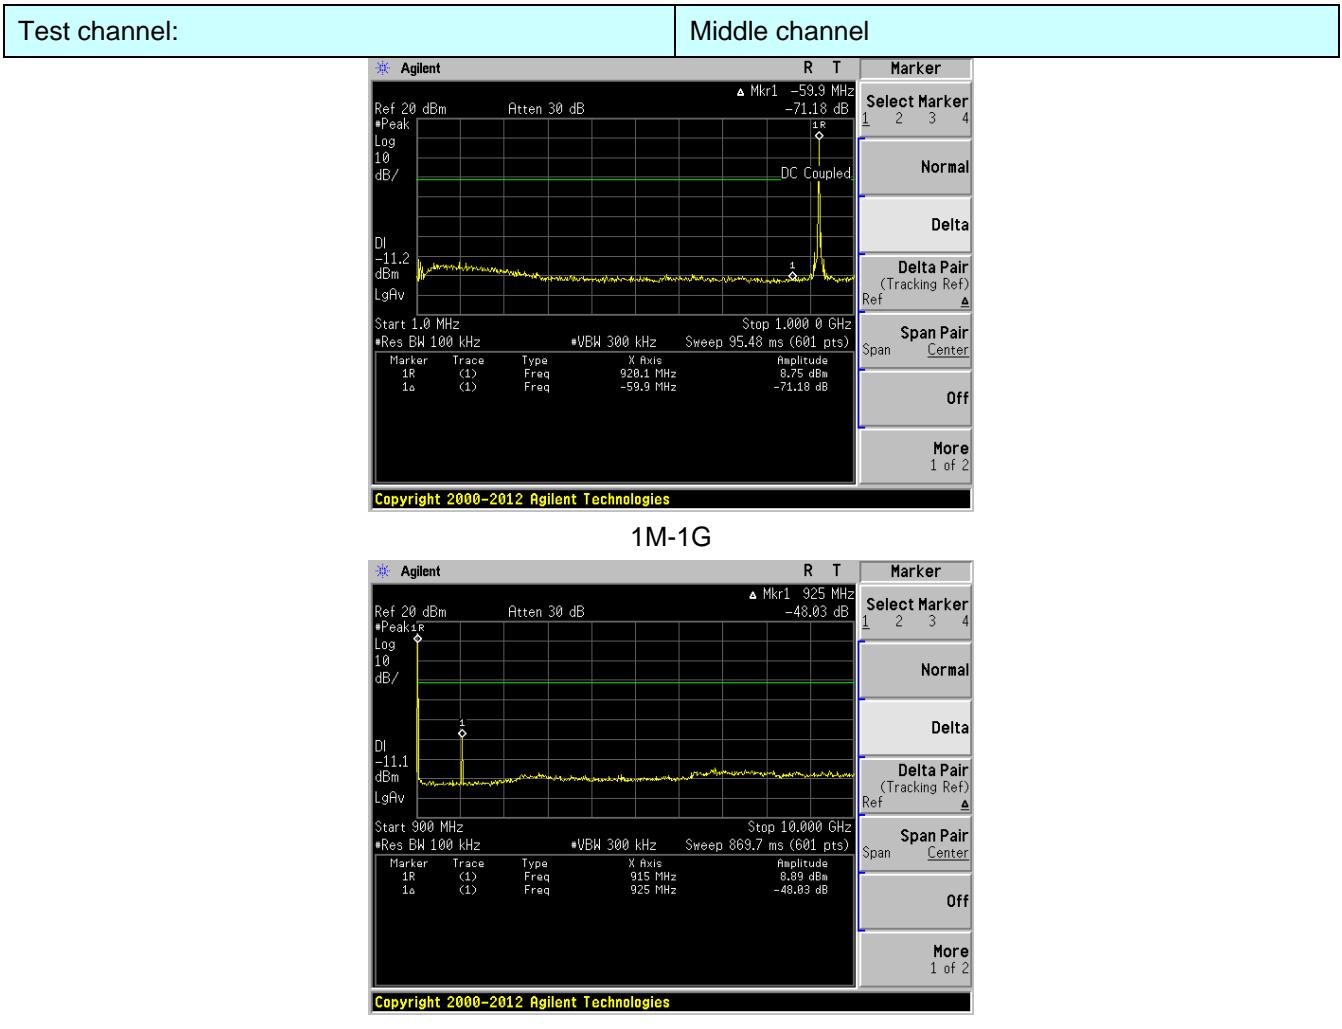
7.9 Spurious Emission

7.9.1 Conducted Emission Method

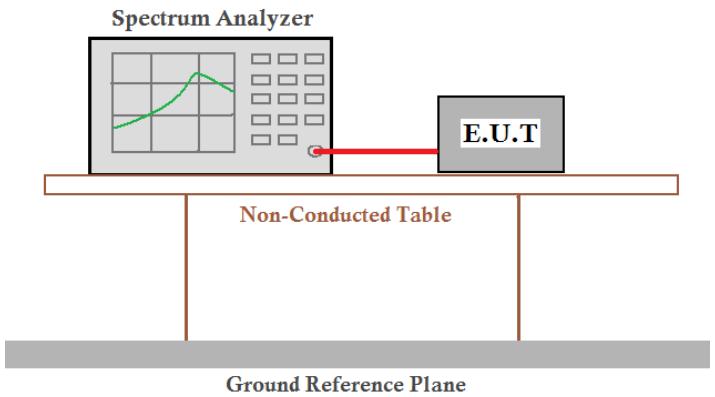Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

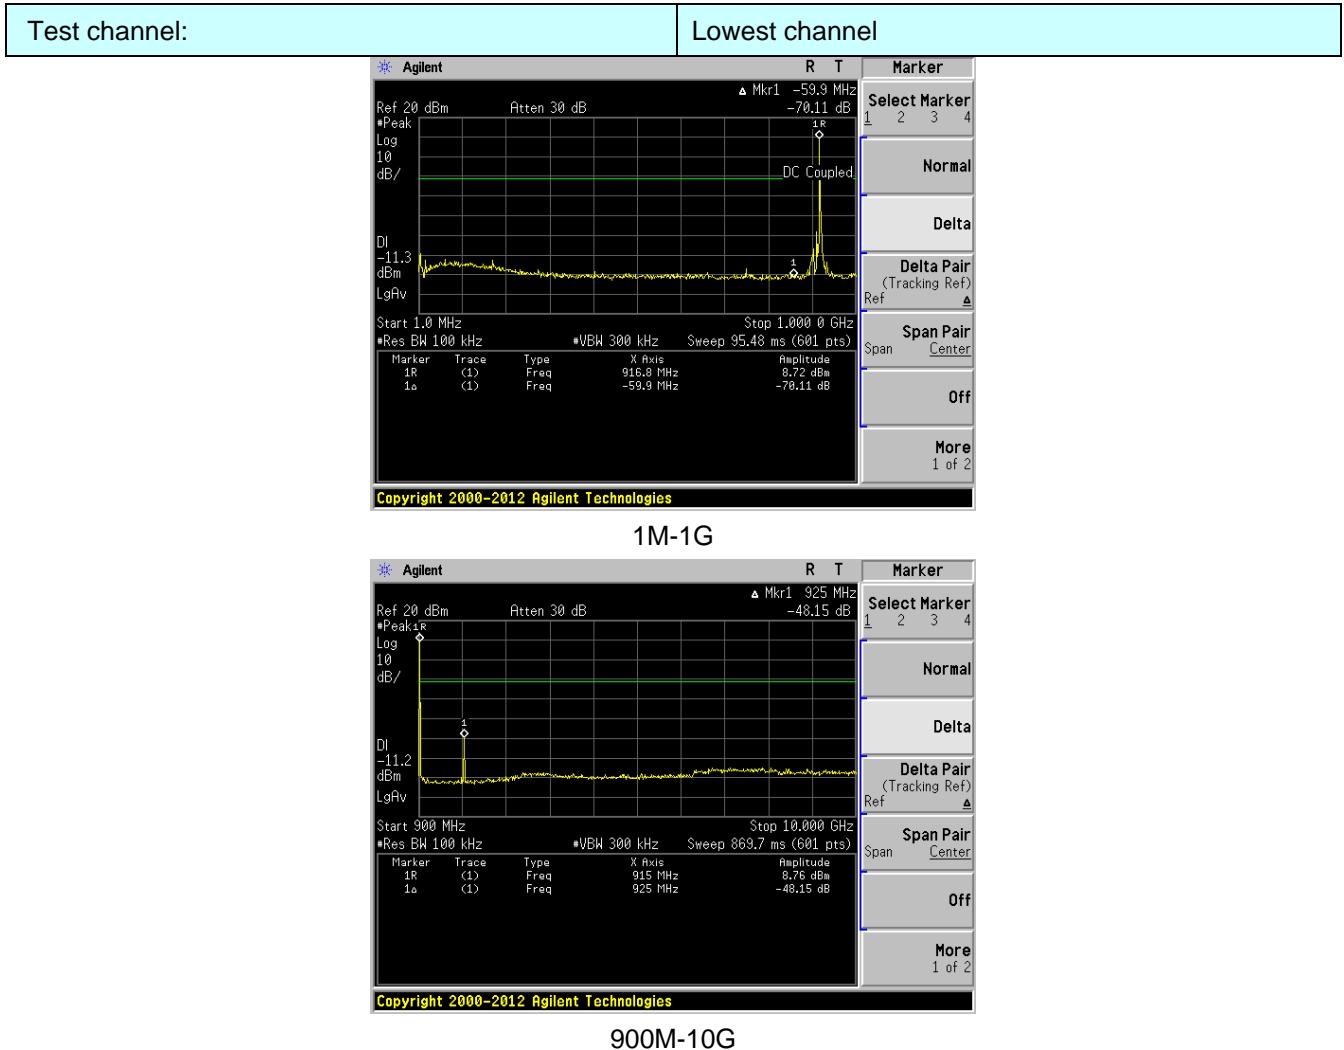





1M-1G

900M-10G

Test channel:	Highest channel
---------------	-----------------

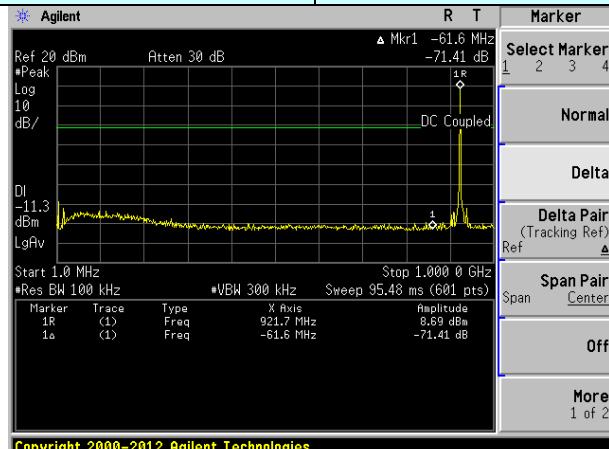


1M-1G

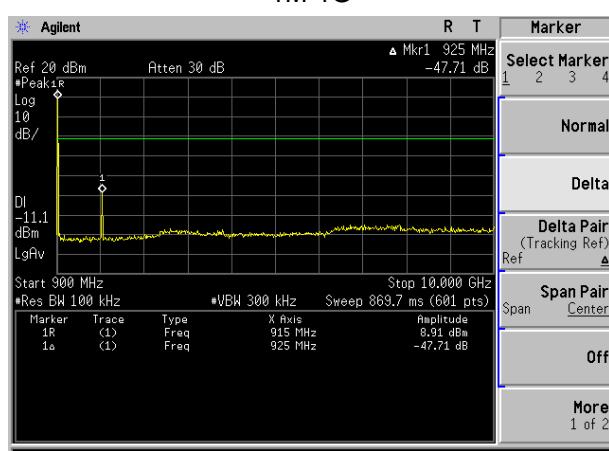

900M-10G

7.9.2 Radiated Emission Method

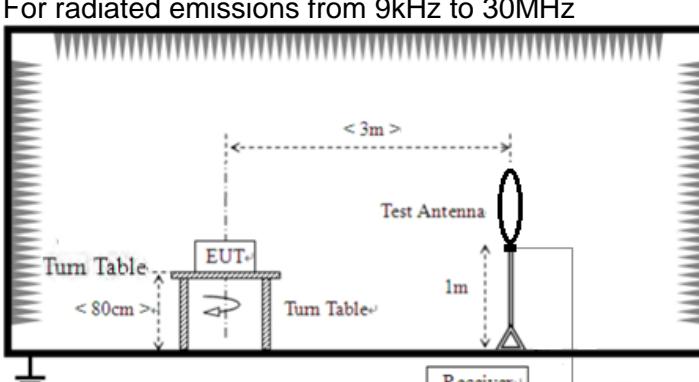Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance 3m	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP		
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					

	<p>For radiated emissions from 30MHz to1GHz</p>
	<p>For radiated emissions above 1GHz</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test environment:	Temp.: 25 °C Humid.: 48-49% Press.: 1012mbar
Test voltage:	AC 120V, 60Hz
Test results:	Pass

Measurement data:

Remarks:


1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which is worse case.

■ 9kHz~30MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ Below 1GHz

Antenna Polarity:	Horizontal	Test channel:	Lowest
-------------------	------------	---------------	--------

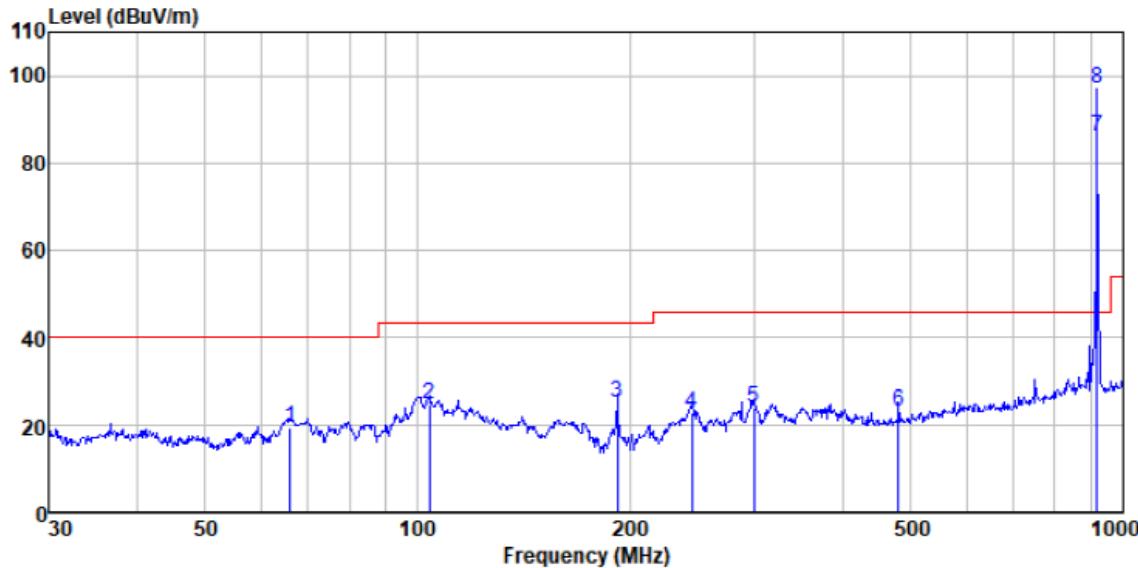

Condition : FCC PART15 CLASS B 3m HORIZONTAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX Mode

T&H : 25°C 48%


Test Engineer: Bourne

Test Voltage : 120V/60Hz

CH : 917MHz

	Read	Antenna	Preamp	Cable	Limit	Over	
Freq	Level	Factor	Factor	Loss	Level	Line	Limit
<hr/>							
MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	66.034	46.42	8.73	36.40	0.91	19.66	40.00 -20.34 QP
2	103.806	48.34	11.80	36.75	1.22	24.61	43.50 -18.89 QP
3	191.745	51.08	9.70	37.29	1.80	25.29	43.50 -18.21 QP
4	245.090	46.43	11.66	37.38	2.10	22.81	46.00 -23.19 QP
5	299.316	45.47	13.50	37.42	2.35	23.90	46.00 -22.10 QP
6	480.528	40.41	17.14	37.51	3.22	23.26	46.00 -22.74 QP
7 *	917.000	96.61	22.31	37.58	4.91	86.25	46.00 40.25 Average
8 *	917.000	107.38	22.31	37.58	4.91	97.02	46.00 51.02 Peak

Antenna Polarity:	Vertical	Test channel:	Lowest
-------------------	----------	---------------	--------

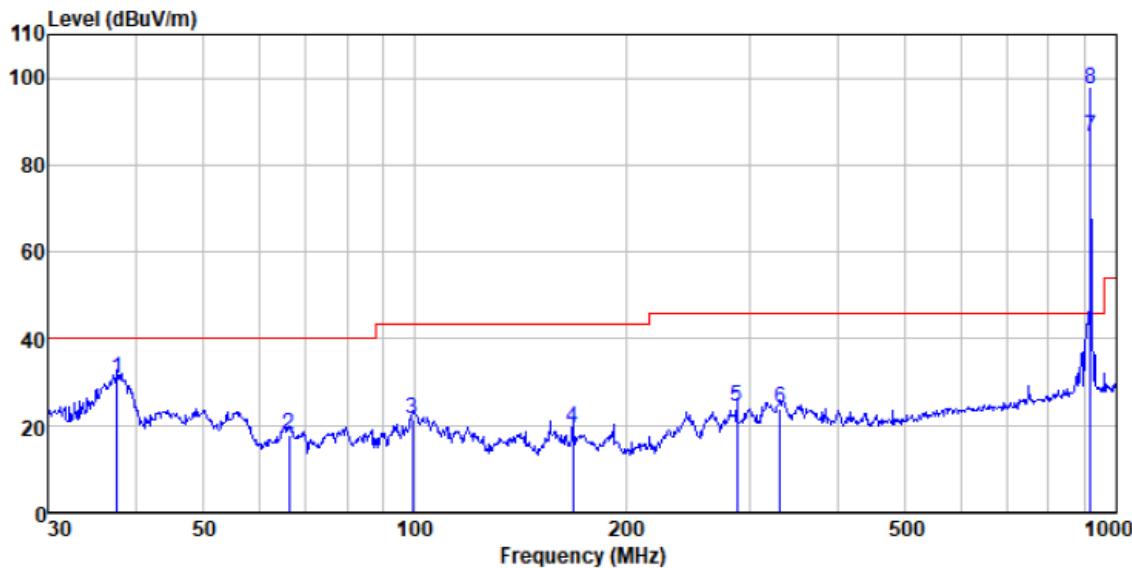

Condition : FCC PART15 CLASS B 3m VERTICAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX Mode

T&H : 25°C 48%


Test Engineer: Bourne

Test Voltage : 120V/60Hz

CH : 917MHz

Freq	Read	Antenna	Preamp	Cable	Limit	Over	Over	
	Level	Factor	Factor	Loss				Remark
MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB	
1	37.680	53.33	12.30	35.53	0.64	30.74	40.00	-9.26 QP
2	66.266	44.57	8.73	36.40	0.91	17.81	40.00	-22.19 QP
3	99.180	45.27	11.73	36.71	1.18	21.47	43.50	-22.03 QP
4	167.824	46.74	8.33	37.18	1.67	19.56	43.50	-23.94 QP
5	287.990	46.23	13.11	37.41	2.31	24.24	46.00	-21.76 QP
6	331.355	44.64	14.09	37.45	2.53	23.81	46.00	-22.19 QP
7 *	917.000	96.99	22.31	37.58	4.91	86.63	46.00	40.63 Average
8 *	917.000	107.73	22.31	37.58	4.91	97.37	46.00	51.37 Peak

Antenna Polarity:	Horizontal	Test channel:	Middle
-------------------	------------	---------------	--------

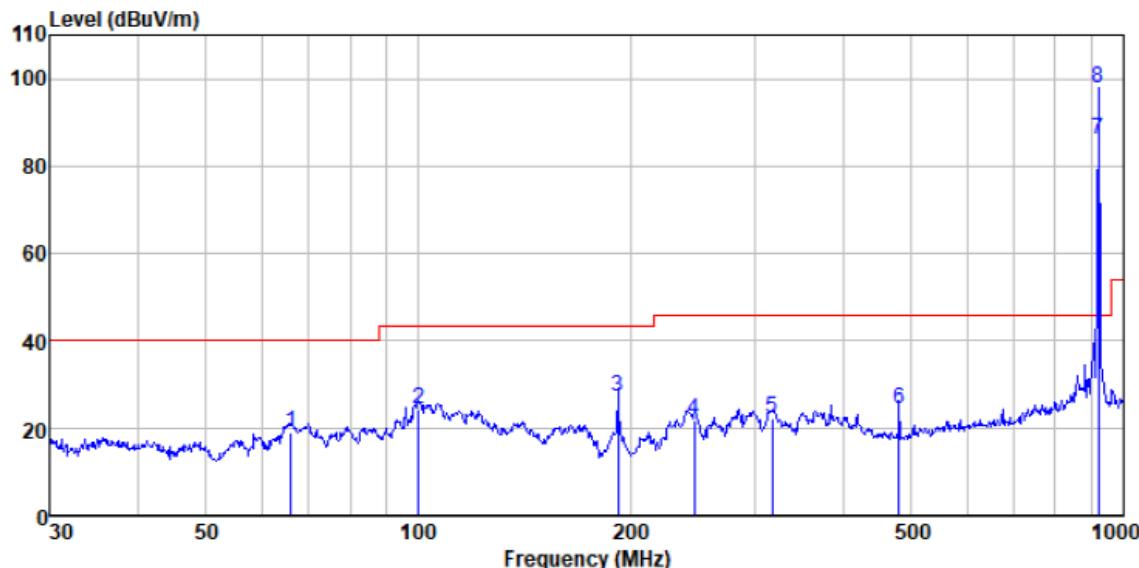

Condition : FCC PART15 CLASS B 3m HORIZONTAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX Mode

T&H : 25°C 48%


Test Engineer: Bourne

Test Voltage : 120V/60Hz

CH : 919.6MHz

Freq	Read	Antenna	Preamp	Cable	Limit	Over	Line	Limit	Remark
	MHz	dBm	dB/m	dB					
1	66.034	45.98	8.73	36.40	0.91	19.22	40.00	-20.78	QP
2	100.229	47.76	12.10	36.72	1.19	24.33	43.50	-19.17	QP
3	191.745	53.17	9.70	37.29	1.80	27.38	43.50	-16.12	QP
4	245.951	45.60	11.75	37.38	2.10	22.07	46.00	-23.93	QP
5	317.701	43.52	13.85	37.44	2.45	22.38	46.00	-23.62	QP
6	480.528	41.38	17.14	37.51	3.22	24.23	46.00	-21.77	QP
7 *	919.600	96.19	22.32	37.58	4.93	85.86	46.00	39.86	Average
8 *	919.600	108.02	22.32	37.58	4.93	97.69	46.00	51.69	Peak

Antenna Polarity:	Vertical	Test channel:	Middle
-------------------	----------	---------------	--------

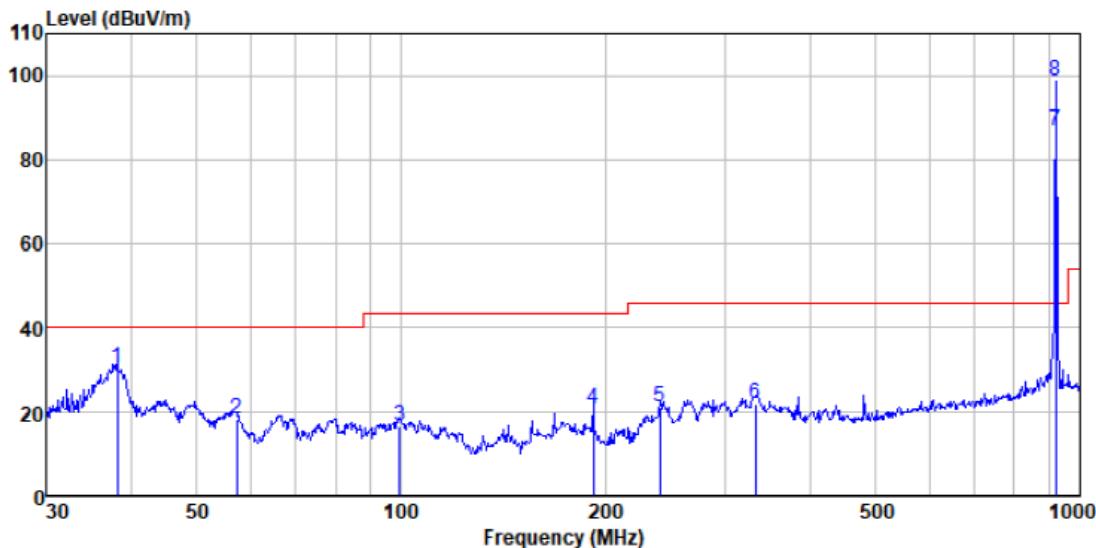

Condition : FCC PART15 CLASS B 3m VERTICAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX Mode

T&H : 25°C 48%


Test Engineer: Bourne

Test Voltage : 120V/60Hz

CH :

Freq	ReadAntenna		Preamp	Cable	Limit	Over	Remark
	Level	Factor	Factor	Loss			
MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	38.212	52.93	12.30	35.56	0.64	30.31	40.00 -9.69 QP
2	57.191	41.86	11.67	36.28	0.84	18.09	40.00 -21.91 QP
3	99.528	40.36	11.73	36.72	1.19	16.56	43.50 -26.94 QP
4	191.745	46.56	9.70	37.29	1.80	20.77	43.50 -22.73 QP
5	240.830	44.66	11.56	37.37	2.08	20.93	46.00 -25.07 QP
6	332.519	42.72	14.15	37.46	2.53	21.94	46.00 -24.06 QP
7 *	919.600	97.14	22.32	37.58	4.93	86.81	46.00 40.81 Average
8 *	919.600	108.92	22.32	37.58	4.93	98.59	46.00 52.59 Peak

Antenna Polarity:	Horizontal	Test channel:	Highest
-------------------	------------	---------------	---------

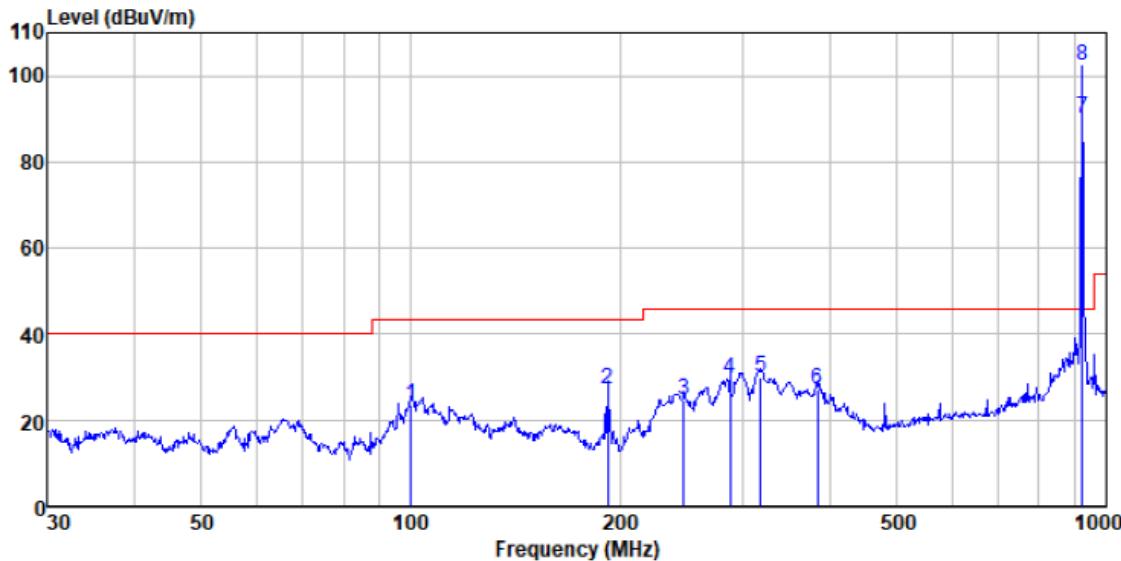

Condition : FCC PART15 CLASS B 3m HORIZONTAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX Mode

T&H : 25°C 48%


Test Engineer: Bourne

Test Voltage : 120V/60Hz

CH : 922.2MHz

Freq	Read		Antenna	Preamp	Cable	Limit	Over	Remark
	Level	Factor	Level	Factor	Cable	Level	Line	
MHz	dBm	dB/m		dB	dB	dBm/m	dBm/m	dB
1	100.229	46.83	12.10	36.72	1.19	23.40	43.50	-20.10 QP
2	191.745	53.12	9.70	37.29	1.80	27.33	43.50	-16.17 QP
3	246.815	48.21	11.75	37.38	2.11	24.69	46.00	-21.31 QP
4	287.990	51.49	13.11	37.41	2.31	29.50	46.00	-16.50 QP
5	318.817	51.16	13.85	37.44	2.46	30.03	46.00	-15.97 QP
6	383.932	46.82	15.15	37.51	2.78	27.24	46.00	-18.76 QP
7 *	922.200	100.32	22.32	37.58	4.93	89.99	46.00	43.99 Average
8 *	922.200	112.64	22.32	37.58	4.93	102.31	46.00	56.31 Peak

Antenna Polarity:	Vertical	Test channel:	Highest
-------------------	----------	---------------	---------

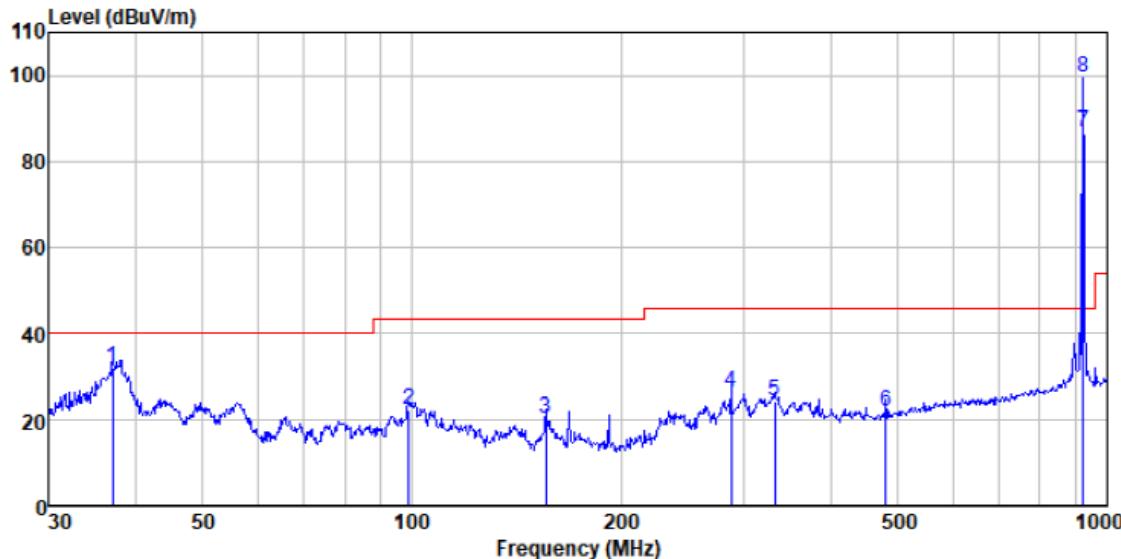

Condition : FCC PART15 CLASS B 3m VERTICAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX Mode

T&H : 25°C 48%

Test Engineer: Bourne


Test Voltage : 120V/60Hz

CH : 922.2MHz

Freq	Read	Antenna	Preamp	Cable	Limit	Over	Remark
	MHz	Level	Factor	Loss	Level	Line	
1	37.155	55.59	11.20	35.49	0.63	31.93	40.00 -8.07 QP
2	98.833	46.21	11.73	36.71	1.18	22.41	43.50 -21.09 QP
3	155.910	47.84	7.85	37.11	1.60	20.18	43.50 -23.32 QP
4	287.990	48.25	13.11	37.41	2.31	26.26	46.00 -19.74 QP
5	332.519	45.28	14.15	37.46	2.53	24.50	46.00 -21.50 QP
6	480.528	38.95	17.14	37.51	3.22	21.80	46.00 -24.20 QP
7 *	922.200	97.20	22.32	37.58	4.93	86.87	46.00 40.87 Average
8 *	922.200	109.82	22.32	37.58	4.93	99.49	46.00 53.49 Peak

■ Above 1GHz

Antenna Polarity:	Horizontal	Test channel:	Lowest
-------------------	------------	---------------	--------

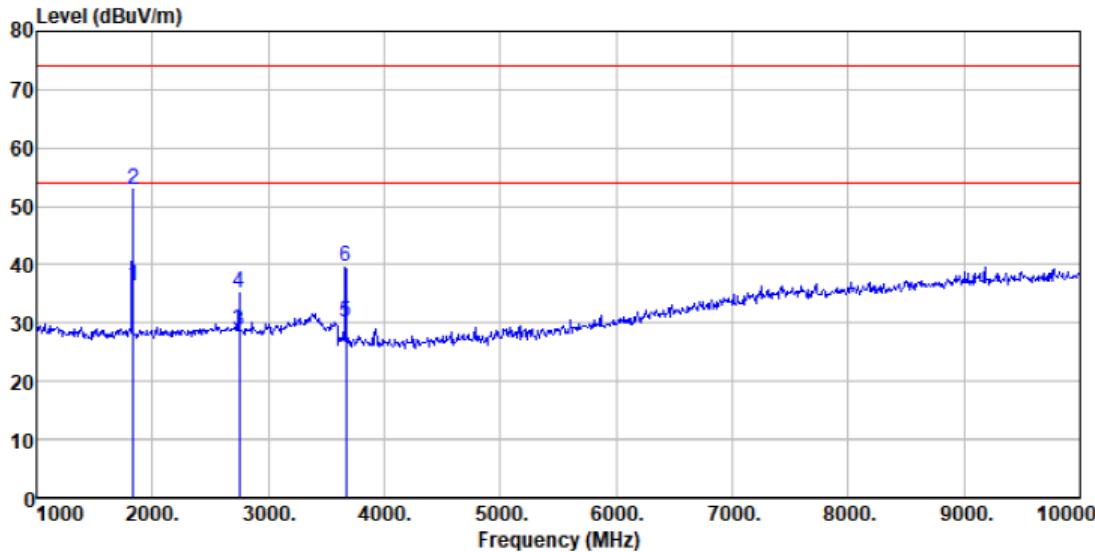

Condition : FCC PART 15 (PK) 3m HORIZONTAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX mode

T&H : 25°C 48%


Test Engineer: Bourne

Test Voltage : 120V/60Hz

CH : 917MHz

Freq	ReadAntenna		Preamp	Cable	Limit	Over	Remark	
	MHz	dBm	Factor	Factor				
	MHz	dBm	dB	dB	dBm/m	dBm/m	dB	
1	1834.000	44.30	25.86	36.40	2.49	36.25	54.00	-17.75 Average
2	1834.000	60.86	25.86	36.40	2.49	52.81	74.00	-21.19 Peak
3	2751.000	34.57	28.07	37.13	3.18	28.69	54.00	-25.31 Average
4	2751.000	40.98	28.07	37.13	3.18	35.10	74.00	-38.90 Peak
5	3668.000	34.56	28.91	37.37	3.87	29.97	54.00	-24.03 Average
6	3668.000	44.07	28.91	37.37	3.87	39.48	74.00	-34.52 Peak


Antenna Polarity:	Vertical	Test channel:	Lowest
-------------------	----------	---------------	--------

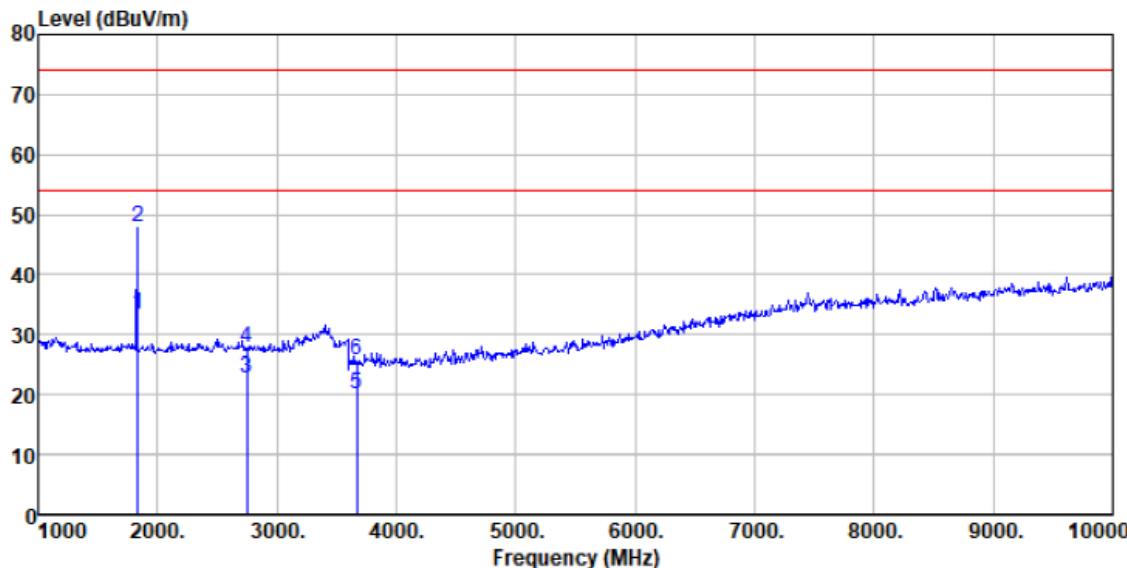

Condition : FCC PART 15 (PK) 3m VERTICAL
 EUT : Stage luminaires
 Test Model : AX1
 Test Mode : TX mode
 T&H : 25°C 48%
 Test Engineer: Bourne
 Test Voltage : 120V/60Hz
 CH : 917MHz

Freq	Read	Antenna	Preamp	Cable	Limit	Over	Remark	
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	1834.000	41.42	25.86	36.40	2.49	33.37	54.00	-20.63 Average
2	1834.000	55.86	25.86	36.40	2.49	47.81	74.00	-26.19 Peak
3	2751.000	28.58	28.07	37.13	3.18	22.70	54.00	-31.30 Average
4	2751.000	33.55	28.07	37.13	3.18	27.67	74.00	-46.33 Peak
5	3668.000	24.61	28.91	37.37	3.87	20.02	54.00	-33.98 Average
6	3668.000	30.19	28.91	37.37	3.87	25.60	74.00	-48.40 Peak

Antenna Polarity:	Horizontal	Test channel:	Middle
-------------------	------------	---------------	--------

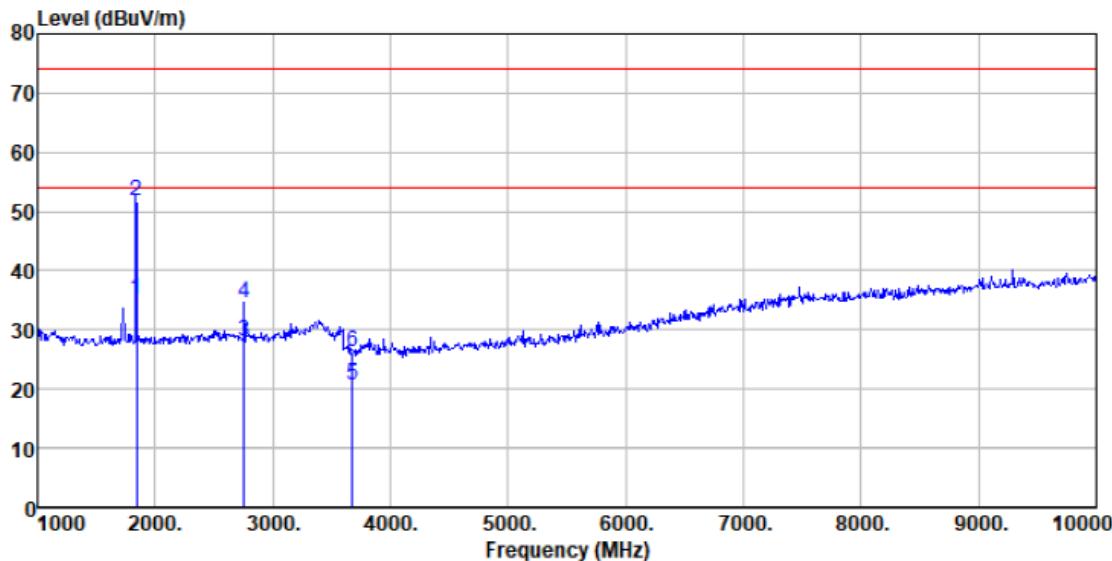

Condition : FCC PART 15 (PK) 3m HORIZONTAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX mode

T&H : 25°C 48%


Test Engineer: Bourne

Test Voltage : 120V/60Hz

CH : 919.6MHz

Freq	Read		Antenna	Preamp	Cable	Limit	Over	Remark
	Level	Factor	Factor	Loss	Level	Line	Limit	
MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB	
1	1839.200	43.29	25.87	36.40	2.49	35.25	54.00	-18.75 Average
2	1839.200	59.78	25.87	36.40	2.49	51.74	74.00	-22.26 Peak
3	2758.800	34.00	28.08	37.13	3.18	28.13	54.00	-25.87 Average
4	2758.800	40.30	28.08	37.13	3.18	34.43	74.00	-39.57 Peak
5	3678.400	25.29	28.94	37.37	3.87	20.73	54.00	-33.27 Average
6	3678.400	30.94	28.94	37.37	3.87	26.38	74.00	-47.62 Peak

Antenna Polarity:	Vertical	Test channel:	Middle
-------------------	----------	---------------	--------

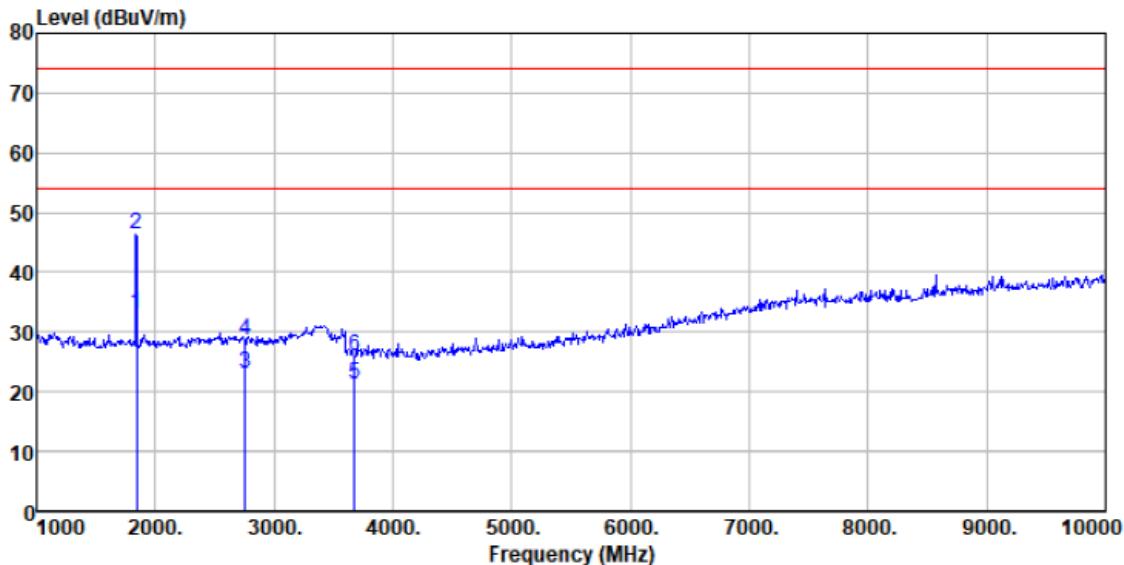

Condition : FCC PART 15 (PK) 3m VERTICAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX mode

T&H : 25°C 48%


Test Engineer: Bourne

Test Voltage : 120V/60Hz

CH : 919.6MHz

Freq	Read	Antenna	Preamp	Cable	Limit	Over	Remark	
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	1839.200	41.17	25.87	36.40	2.49	33.13	54.00	-20.87 Average
2	1839.200	54.38	25.87	36.40	2.49	46.34	74.00	-27.66 Peak
3	2758.800	28.80	28.08	37.13	3.18	22.93	54.00	-31.07 Average
4	2758.800	34.41	28.08	37.13	3.18	28.54	74.00	-45.46 Peak
5	3678.400	25.81	28.94	37.37	3.87	21.25	54.00	-32.75 Average
6	3678.400	30.59	28.94	37.37	3.87	26.03	74.00	-47.97 Peak

Antenna Polarity:	Horizontal	Test channel:	Highest
-------------------	------------	---------------	---------

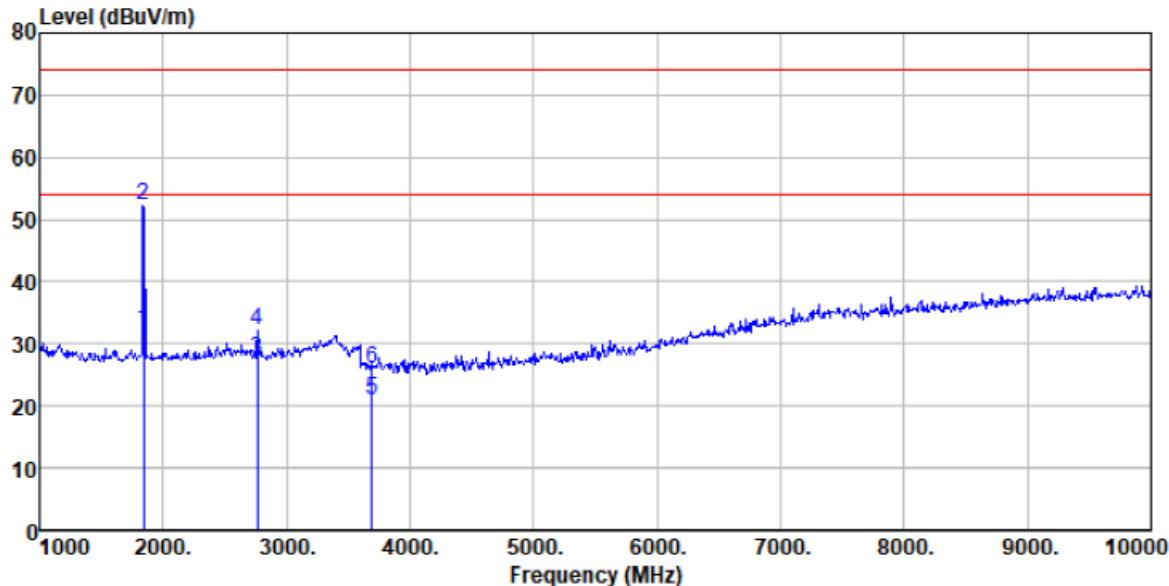

Condition : FCC PART 15 (PK) 3m HORIZONTAL

EUT : Stage luminaires

Test Model : AX1

Test Mode : TX mode

T&H : 25°C 48%


Test Engineer: Bourne

Test Voltage : 120V/60Hz

CH : 922.2MHz

Freq	Read	Antenna	Preamp	Cable	Limit	Over	Remark
	MHz	Level	Factor	Loss	Level	Line	
1	1844.400	40.30	25.88	36.41	2.49	32.26	54.00 -21.74 Average
2	1844.400	60.28	25.88	36.41	2.49	52.24	74.00 -21.76 Peak
3	2766.600	33.31	28.09	37.14	3.19	27.45	54.00 -26.55 Average
4	2766.600	38.13	28.09	37.14	3.19	32.27	74.00 -41.73 Peak
5	3688.800	25.57	28.97	37.37	3.87	21.04	54.00 -32.96 Average
6	3688.800	30.48	28.97	37.37	3.87	25.95	74.00 -48.05 Peak


Antenna Polarity:	Vertical	Test channel:	Highest
-------------------	----------	---------------	---------

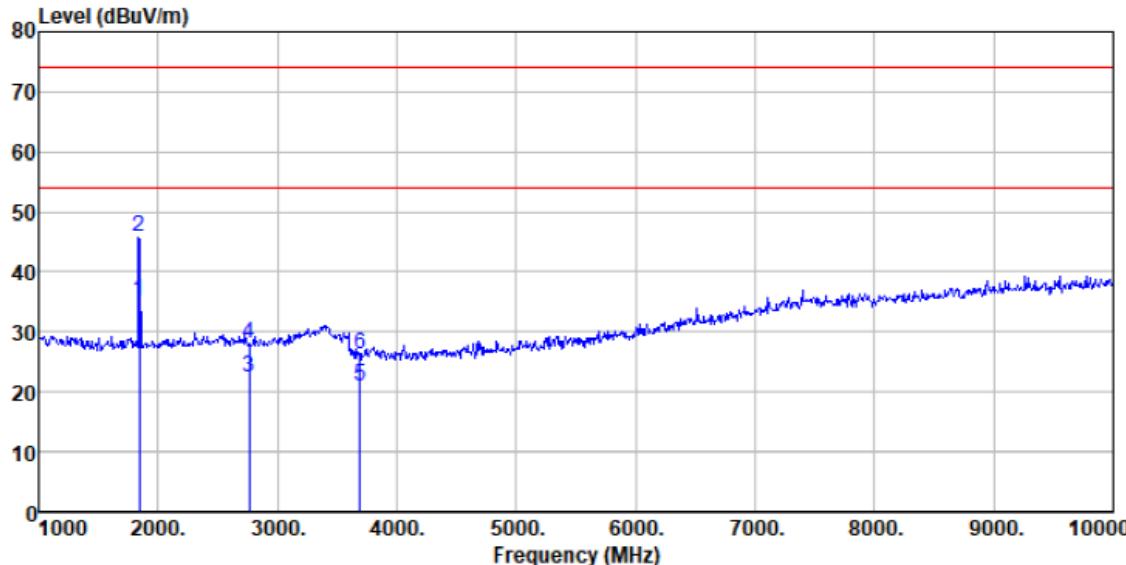

Condition : FCC PART 15 (PK) 3m VERTICAL
 EUT : Stage luminaires
 Test Model : AX1
 Test Mode : TX mode
 T&H : 25°C 48%
 Test Engineer: Bourne
 Test Voltage : 120V/60Hz
 CH : 922.2MHz


Freq	Read	Antenna	Preamp	Cable	Limit	Over	Remark
	MHz	dBm	dB/m	dB	dB	Line	
1	1844.400	43.10	25.88	36.41	2.49	35.06	54.00 -18.94 Average
2	1844.400	53.91	25.88	36.41	2.49	45.87	74.00 -28.13 Peak
3	2766.600	28.35	28.09	37.14	3.19	22.49	54.00 -31.51 Average
4	2766.600	33.88	28.09	37.14	3.19	28.02	74.00 -45.98 Peak
5	3688.800	25.58	28.97	37.37	3.87	21.05	54.00 -32.95 Average
6	3688.800	30.78	28.97	37.37	3.87	26.25	74.00 -47.75 Peak

Antenna Polarity:	Horizontal	Test channel:	Lowest
-------------------	------------	---------------	--------

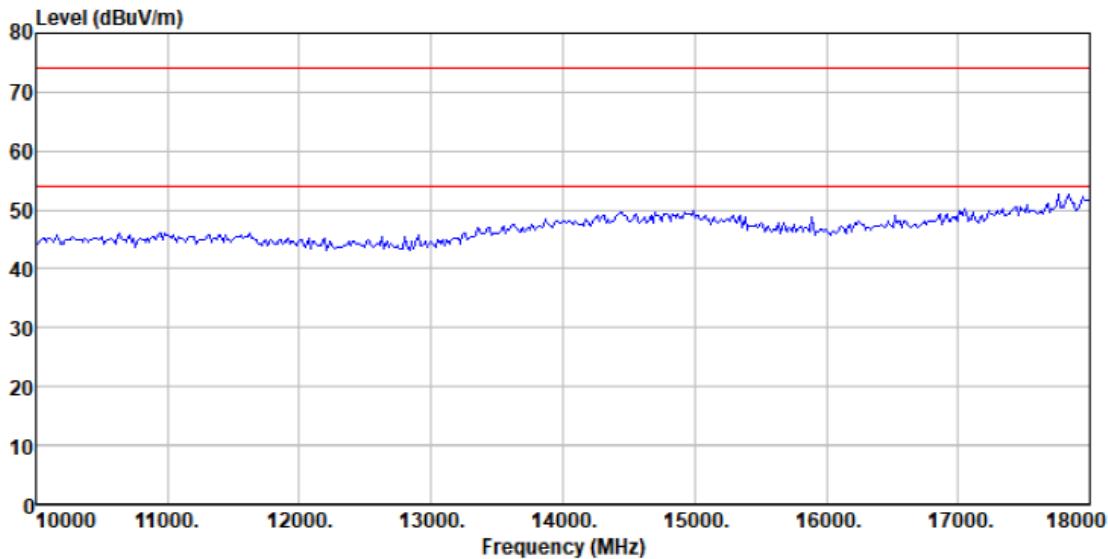


Condition : FCC PART 15 (PK) 3m HORIZONTAL
EUT : Stage luminaires
Test Mode : Charging + 920MHz TX mode
Test Engineer: Lee
Model : AX1
T&H : 24°C 49%
Test voltage : AC120V 60Hz
CH : 917MHz

Antenna Polarity:	Vertical	Test channel:	Lowest
-------------------	----------	---------------	--------

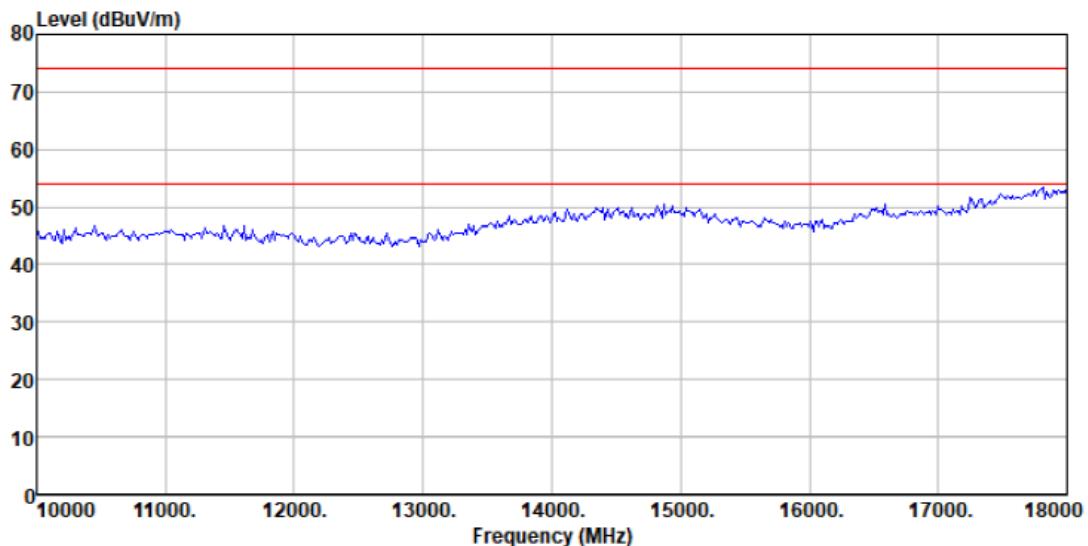


Condition : FCC PART 15 (PK) 3m VERTICAL
EUT : Stage luminaires
Test Mode : Charging + 920MHz TX mode
Test Engineer: Lee
Model : AX1
T&H : 24°C 49%
Test voltage : AC120V 60Hz
CH : 917MHz

Antenna Polarity:	Horizontal	Test channel:	Middle
-------------------	------------	---------------	--------

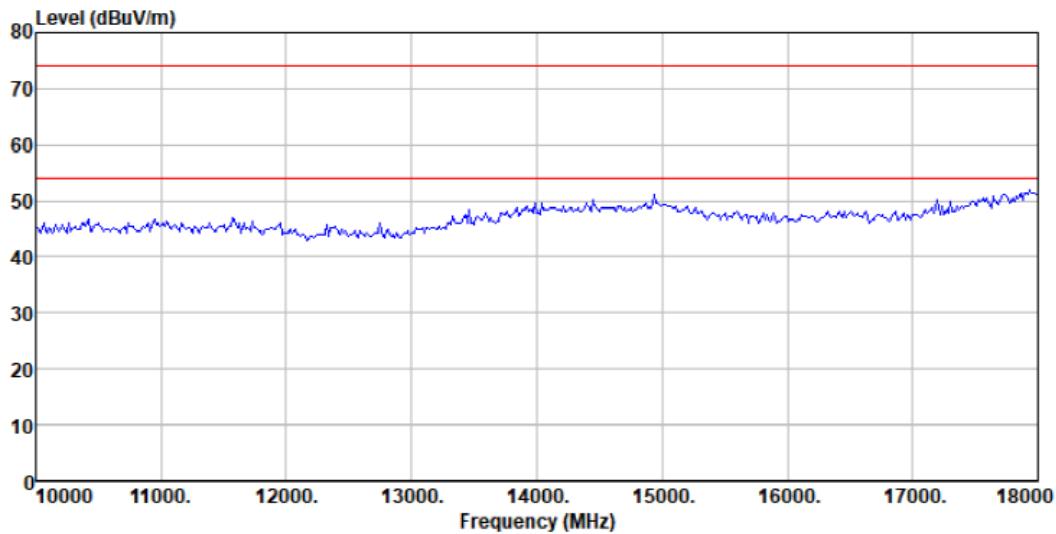


Condition : FCC PART 15 (PK) 3m HORIZONTAL
EUT : Stage luminaires
Test Mode : Charging + 920MHz TX mode
Test Engineer: Lee
Model : AX1
T&H : 24°C 49%
Test voltage : AC120V 60Hz
CH : 919.6MHz

Antenna Polarity:	Vertical	Test channel:	Middle
-------------------	----------	---------------	--------

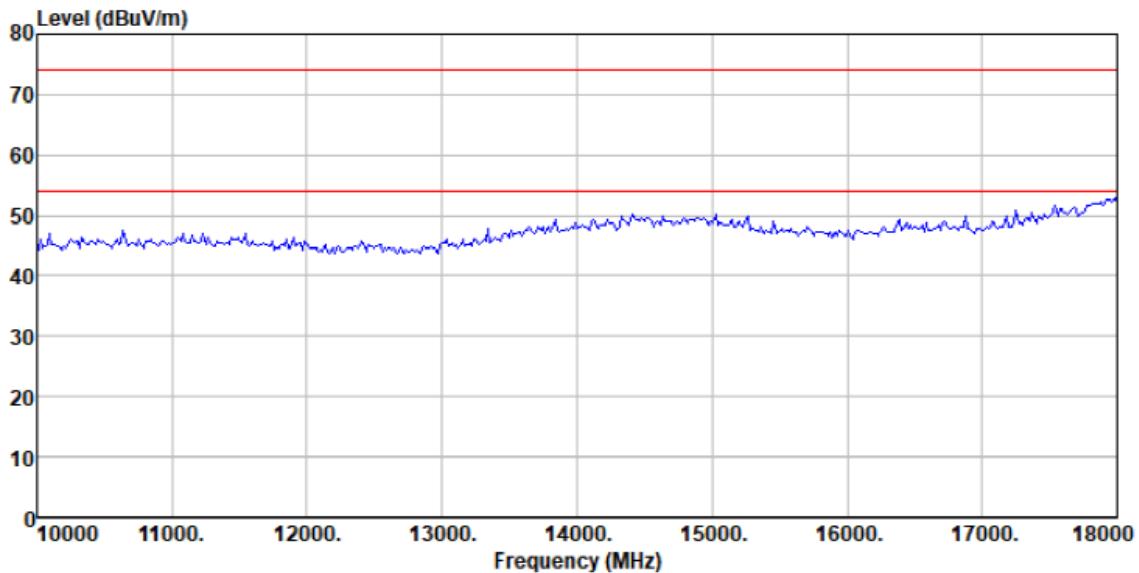

Condition : FCC PART 15 (PK) 3m VERTICAL
EUT : Stage luminaires
Test Mode : Charging + 920MHz TX mode
Test Engineer: Lee
Model : AX1
T&H : 24°C 49%
Test voltage : AC120V 60Hz
CH : 919.6MHz

Antenna Polarity:	Horizontal	Test channel:	Highest
-------------------	------------	---------------	---------

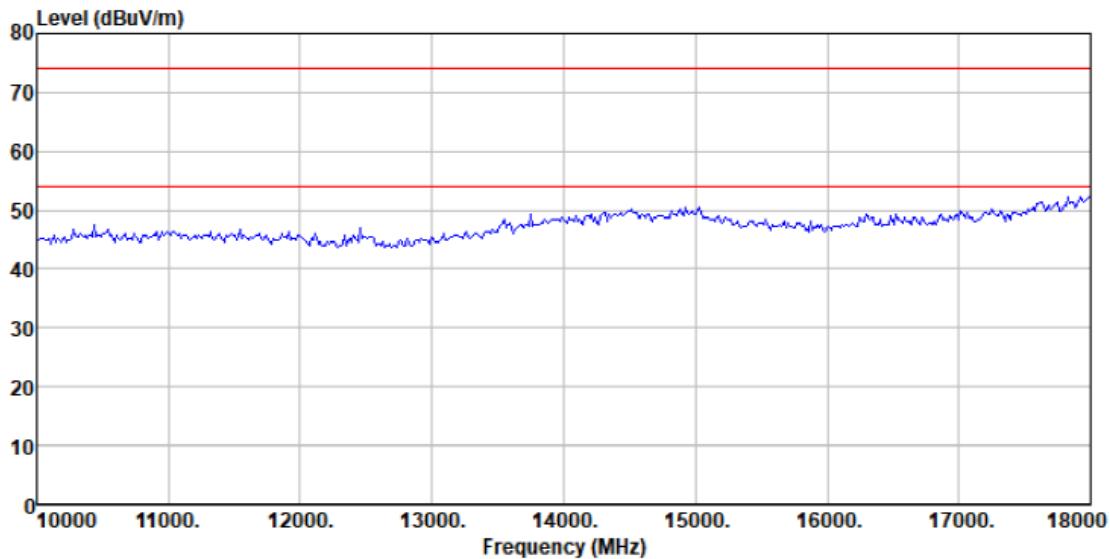

Condition : FCC PART 15 (PK) 3m HORIZONTAL

EUT : Stage luminaires

Test Mode : Charging + 920MHz TX mode

Test Engineer: Lee


Model : AX1

T&H : 24°C 49%

Test voltage : AC120V 60Hz

CH : 922.2MHz

Antenna Polarity:	Vertical	Test channel:	Highest
-------------------	----------	---------------	---------

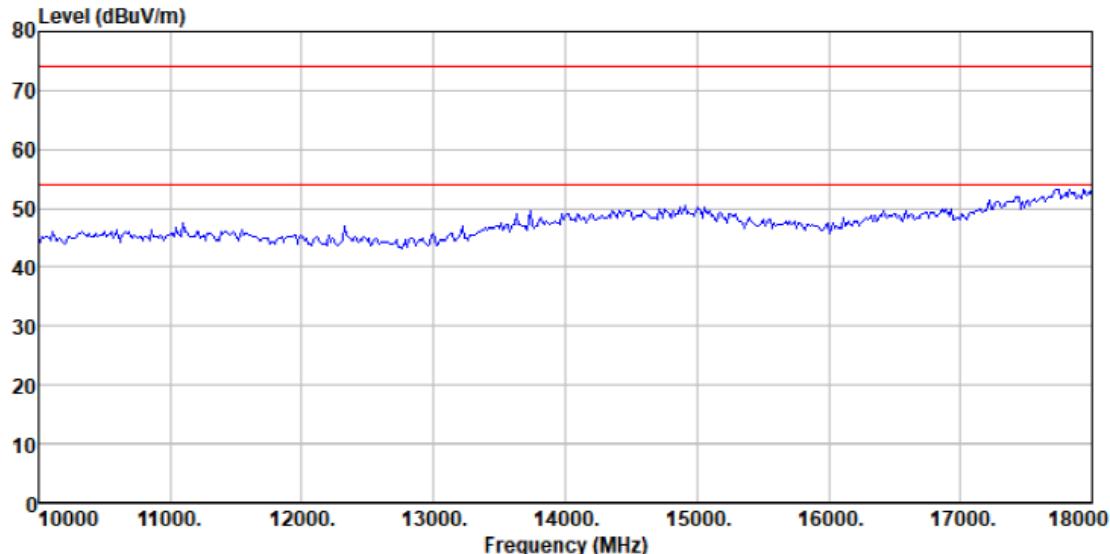


Condition : FCC PART 15 (PK) 3m VERTICAL
EUT : Stage luminaires
Test Mode : Charging + 920MHz TX mode
Test Engineer: Lee
Model : AX1
T&H : 24°C 49%
Test voltage : AC120V 60Hz
CH : 922.2MHz

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. There are measurements in 18~25GHz, but they are not recorded in the report due to only the bottom noise

8 Test Setup Photo

Radiated Emission

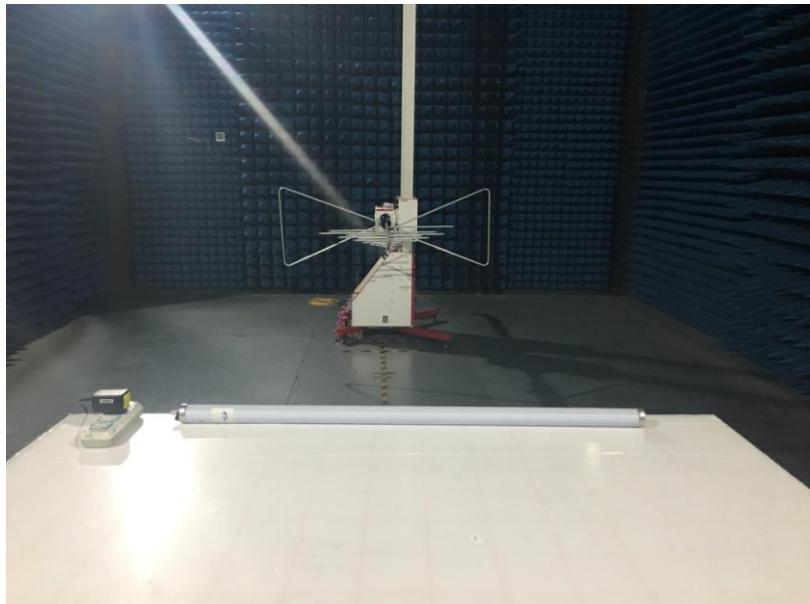

Conducted Emission



9 EUT Constructional Details

Reference to External picture and Internal picture for details.

-----End-----