


Model No.: AX1-U

Label location

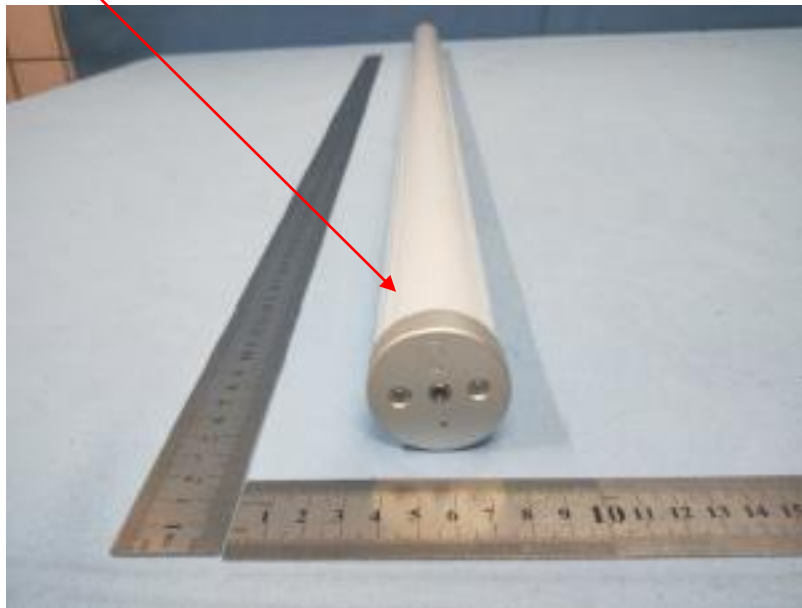

**PixelTube
AX1-U**

Input: 48V  0.5A

ta 40°C IP65



FCC ID: X55AX1-U Minimum 0.3m distances from flammable
Made In China materials to all exterior surfaces of the luminaire

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



SN: 035-XXXXXX



Intertek
5015410

Astera LED Technology GmbH
CONFORMS TO UL STD 1573 & 153
CERTIFIED TO CSA STD C22.2 No.166 & 250.4

SUITABLE FOR DAMP LOCATIONS
CONVIENT AUX EMPLACEMENTS HUMIDES
CLASS 2 CIRCUIT
CAUTION - RISK OF FIRE
ATTENTION - RISQUE D'INCENDIE