

FCC Part 15

TEST REPORT

For

MOBILE PHONE

Model Name: X200

Brand Name: BESTPOWER

FCC ID: X56-X200

Report No.: AGC10141201SZ03-1E4B

Date of Issue: Feb.03, 2010

Prepared For

Smart Communication Device Corporation Limited

**10F, Building A, Guo Qi Plaza, Shang Bu Road, Fu Tian District,
Shenzhen, GuangDong, China**

TEL: 0086-755-2588 0420

FAX: 0086-755-2588 0410

Prepared By

Attestation of Global Compliance Co., Ltd.

**2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei,
Xixiang, Baoan District, Shenzhen**

TEL: 0086-755-2908 1966

FAX: 0086-755-2600 8484

VERIFICATION OF COMPLIANCE

Applicant:	Smart Communication Device Corporation Limited
Address	10F, Building A, Guo Qi Plaza, Shang Bu Road, Fu Tian District, Shenzhen, GD, China
Product Description:	MOBILE PHONE
Brand Name:	BESTPOWER
Model Number:	X200
FCC ID	X56-X200
Report Number:	AGC10141201SZ03-1E4B
Date of Test:	Dec. 20, 2009 to Dec.31, 2009

WE HEREBY CERTIFY THAT:

The above equipment was tested by Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Checked By:

Jekey Zhang Feb.03, 2010

Authorized By:

King Zhang Feb.03, 2010

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION.....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 SPECIAL ACCESSORIES.....	4
1.6 EQUIPMENT MODIFICATIONS	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 CONFIGURATION OF TESTED SYSTEM	5
2.2 EQUIPMENT USED IN TESTED SYSTEM	5
3. SUMMARY OF TEST RESULTS	6
4. DESCRIPTION OF TEST MODES.....	6
5. CONDUCTION EMISSIONS	7
5.1 MEASUREMENT PROCEDURE:	7
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	7
5.3 MEASUREMENT EQUIPMENT USED:	7
5.4 LIMITS AND MEASUREMENT RESULT:.....	8
5.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST	9
6. MAXIMUM OUTPUT POWER	11
6.1 MEASUREMENT PROCEDURE:.....	11
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
6.3 MEASUREMENT EQUIPMENT USED:	14
6.4 LIMITS AND MEASUREMENT RESULT:.....	15
7. 20 DB BANDWIDTH	17
7.1 MEASUREMENT PROCEDURE	17
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
7.3 MEASUREMENT EQUIPMENT USED:	17
7.4 LIMITS AND MEASUREMENT RESULTS:.....	17
8. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY.....	19
8.1 MEASUREMENT PROCEDURE:.....	19
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
8.3 MEASUREMENT EQUIPMENT USED:	19
8.4 LIMITS AND MEASUREMENT RESULT:.....	19
9. OUT OF BAND EMISSION	20

9.1 MEASUREMENT PROCEDURE:.....	20
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	20
9.3 MEASUREMENT EQUIPMENT USED:.....	20
9.4 LIMITS AND MEASUREMENT RESULT:.....	20
10. NUMBER OF HOPPING FREQUENCY.....	29
10.1 MEASUREMENT PROCEDURE	29
10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	29
10.3 MEASUREMENT EQUIPMENT USED.....	29
10.4 LIMITS AND MEASUREMENT RESULT:.....	29
11. TIME OF OCCUPANCY (DWELL TIME).....	31
11.1 MEASUREMENT PROCEDURE	31
11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	31
11.3 MEASUREMENT EQUIPMENT USED.....	31
11.4 LIMITS AND MEASUREMENT RESULT	31
12. FREQUENCY SEPARATION.....	32
12.1 MEASUREMENT PROCEDURE	37
12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	37
12.3 MEASUREMENT EQUIPMENT USED.....	37
12.4 LIMITS AND MEASUREMENT RESULT	37
APPENDIX I.....	39
PHOTOGRAPHS OF THE EUT	39
APPENDIX II.....	44
PHOTOGRAPHS OF THE TEST SETUP	44

GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a short range, lower power; **MOBILE PHONE** designed as an “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following:

Operation Frequency	2.402 GHz to 2.480GHz
Rated Output Power	3.42 dBm
Modulation	GFSK
Number of channels	79
Antenna Designation	Integrated Antenna
Power Supply	Internal Lion Composite Battery DC 3.6~4.2V
Travel Adapter	Output :DC5.0V

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: X56-X200** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.3 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Word Standardization Certification & Testing Co., Ltd.

1-2/F, Dachong Keji Building, No.28 of Tonggu Road, Nanshan District, Shenzhen, 518057, China
The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2009.
FCC register No.: 276008

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

1.5 SPECIAL ACCESSORIES


Not available for this EUT intended for grant.

1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

1. SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF TESTED SYSTEM

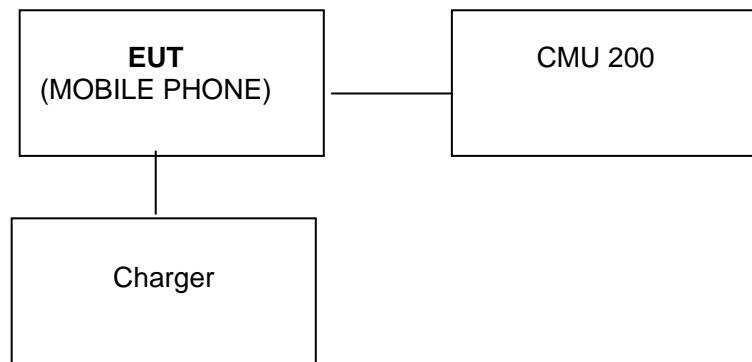

2.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID
1	MOBILE PHONE	BESTPOWER	X200	X56-X200
2	CMU	R&S	CMU200	--
3	Charger	BESTPOWER	X200	--

3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.207	Conduction Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Maximum Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Band Edges	Compliant
§15.247	Spurious Emission	Compliant
§15.247	Frequency Separation	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant

4. DESCRIPTION OF TEST MODES


1. The EUT has been set to operate continuously on the lowest, the middle and the highest operation frequency individually.
2. The EUT stays in continuous transmitting mode on the operation frequency being set.

5. CONDUCTION EMISSIONS

5.1 MEASUREMENT PROCEDURE:

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. The EUT received DC3.7V through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

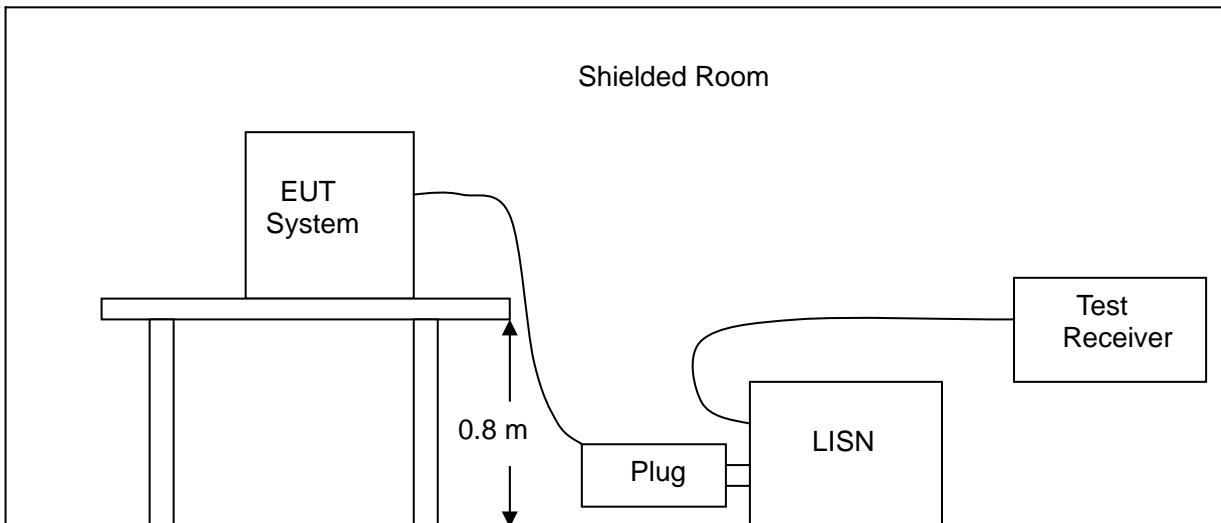

5.3 MEASUREMENT EQUIPMENT USED:

Conducted Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2010
LISN	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2010
LISN	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2010
50 Coaxial Switch	Anritsu	MP59B	M20531	05/29/2010

5.4 LIMITS AND MEASUREMENT RESULT:


LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50


1**Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

TEST RESULT OF LINE -L CONDUCTED EMISSION TEST

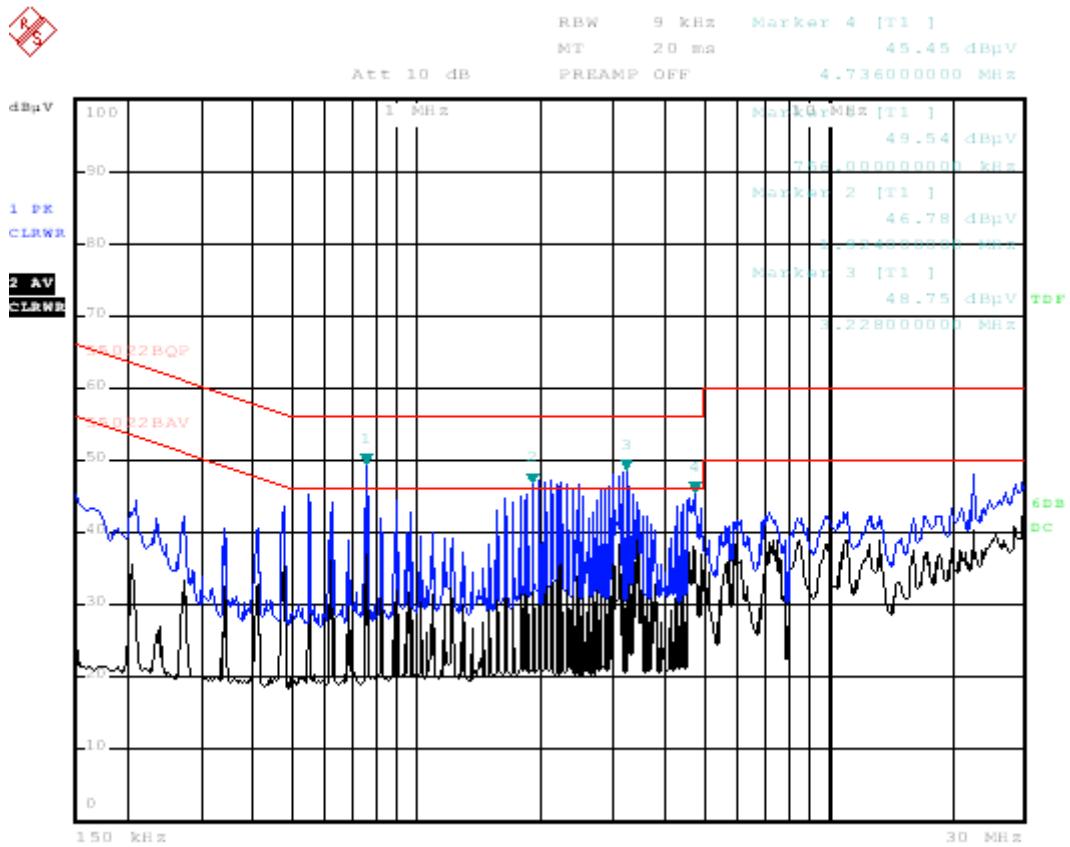

TEST RESULT OF LINE -N CONDUCTED EMISSION TEST

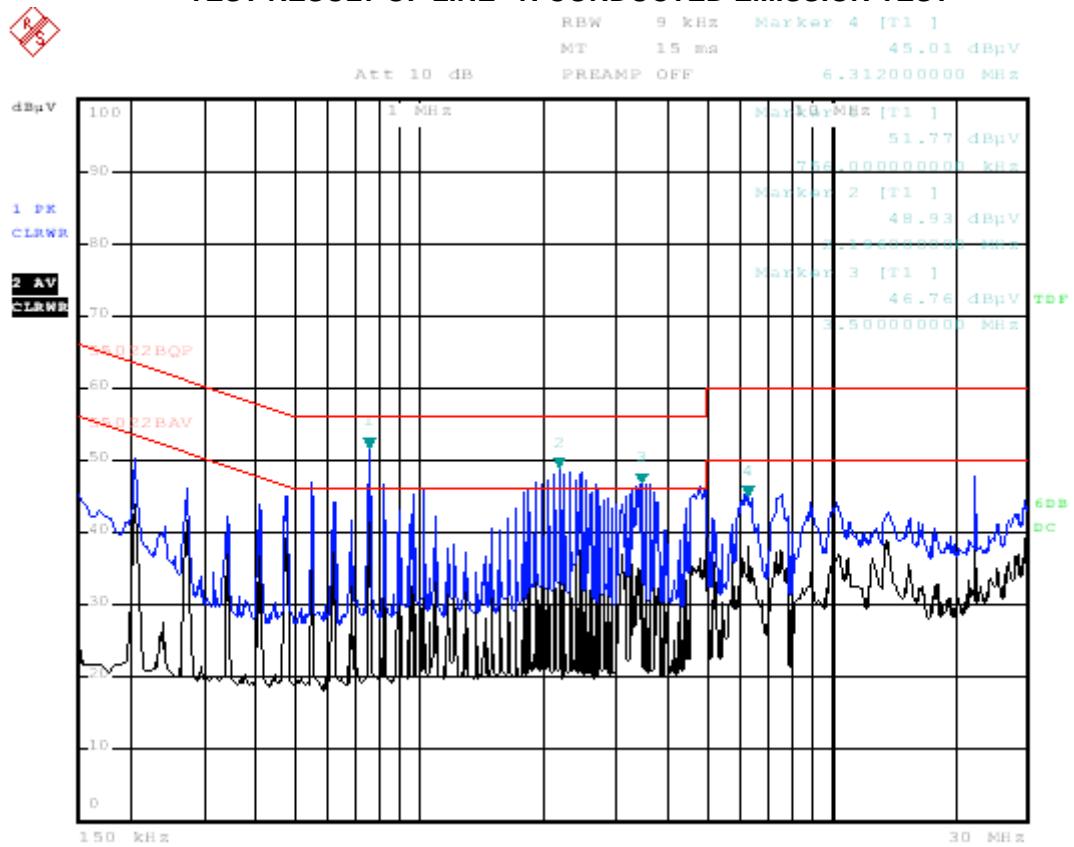

6. MAXIMUM OUTPUT POWER

6.1 MEASUREMENT PROCEDURE:

CONDUCTED METHOD


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set SPA Centre Frequency = Operation Frequency, RBW= 1 MHz,
VBW= 1 MHz.
5. Set SPA Trace 1 Max hold, then View.

RADIATED METHOD

According to ANSI C63.4:2009


6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

CONDUCTED METHOD

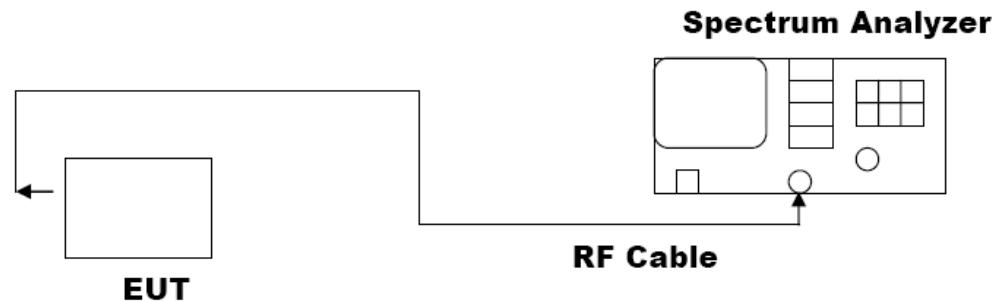


RADIATED EMISSION TEST SETUP


RADIATED MISSION TEST SETUP BELOW 30MHz

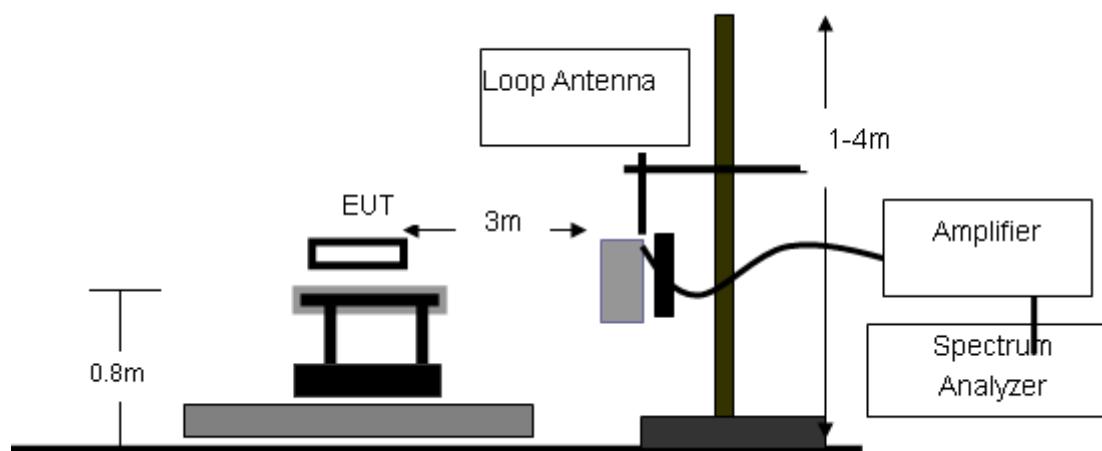

RADIATED MISSION TEST SETUP 30MHz-1000MHz

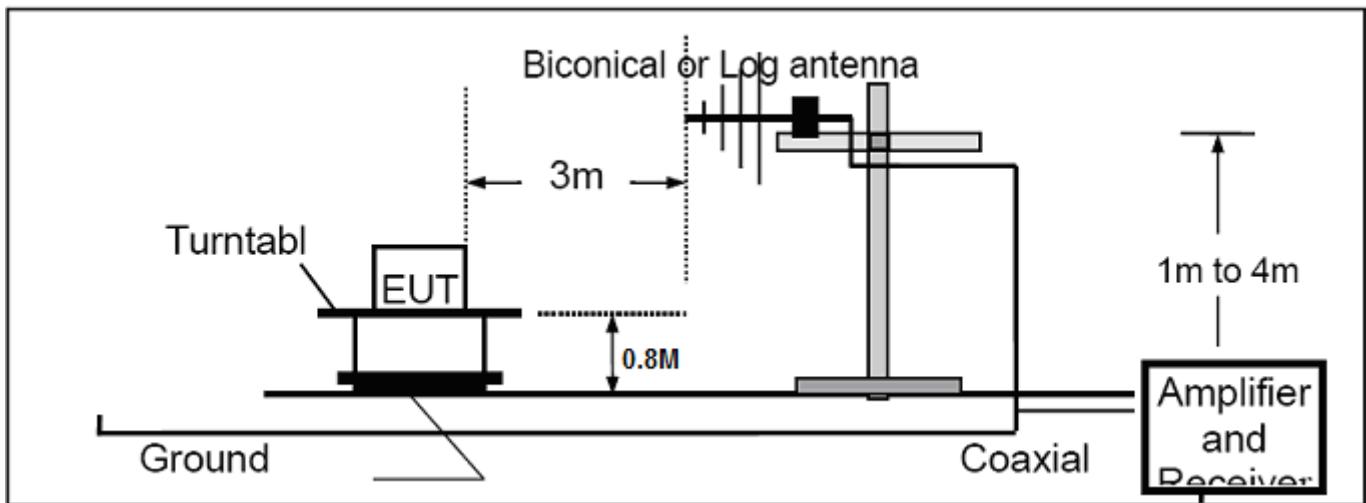



RADIATED MISSION TEST SETUP ABOVE 1000MHz

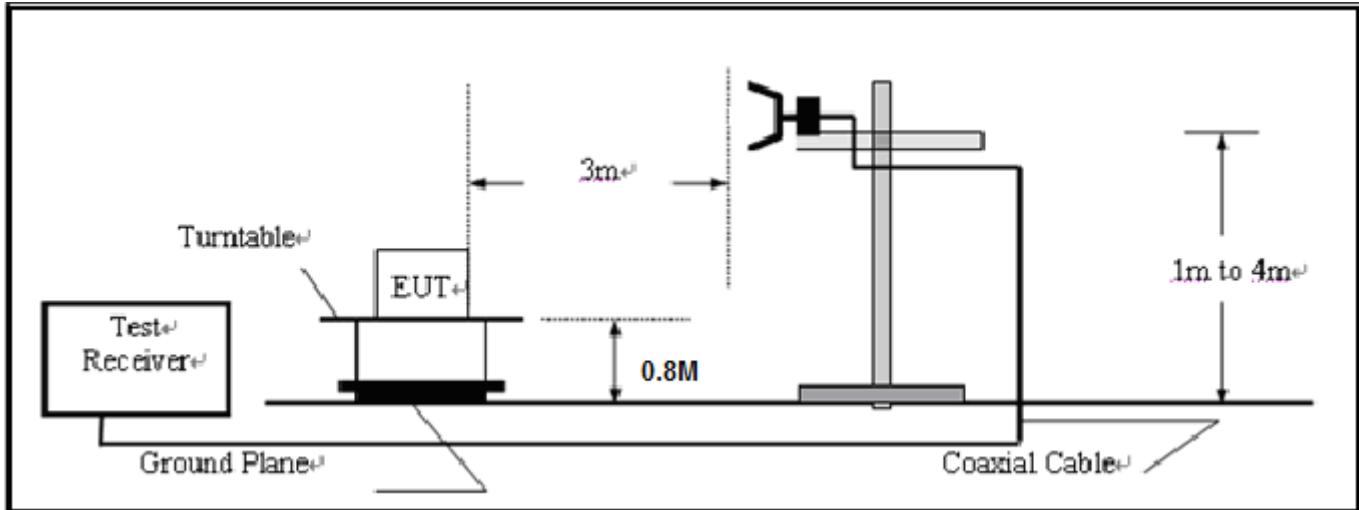



EIRP TEST SETUP

TEST SETUP BELOW 1GHZ

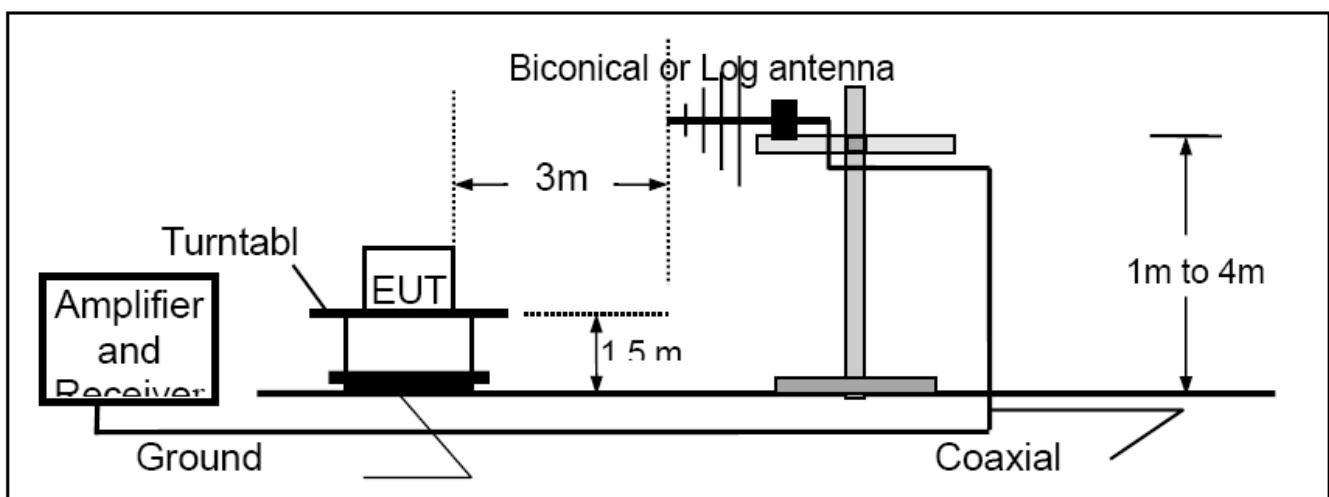

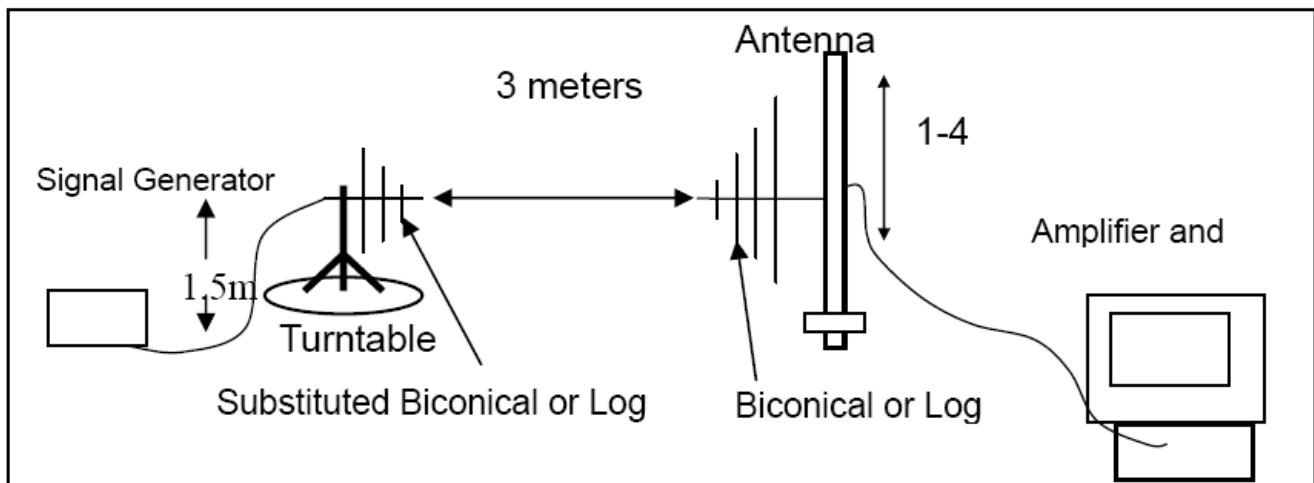

TEST SETUP ABOVE 1GHZ

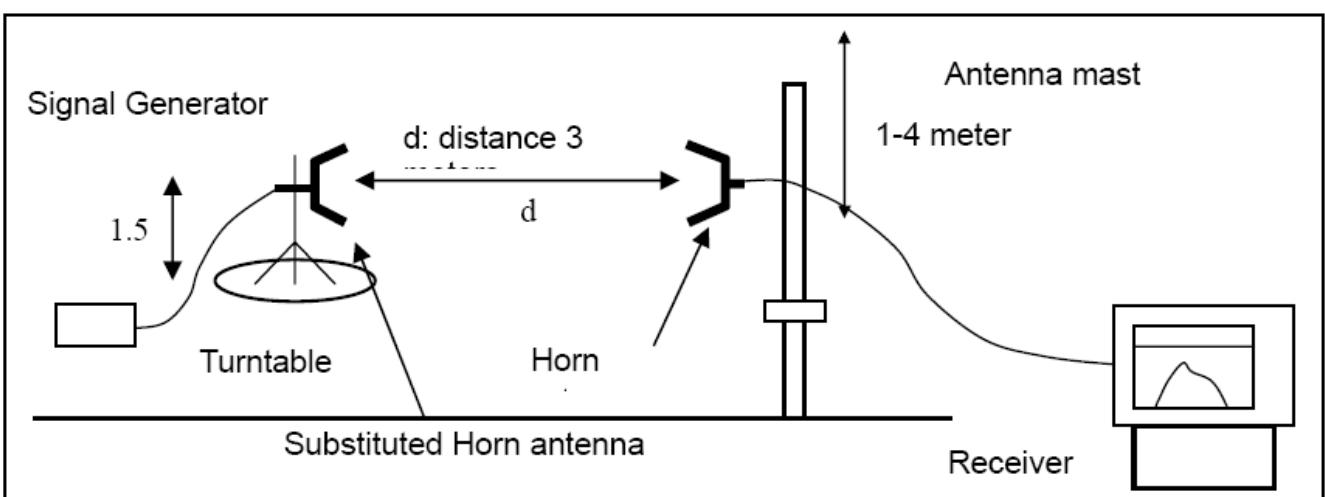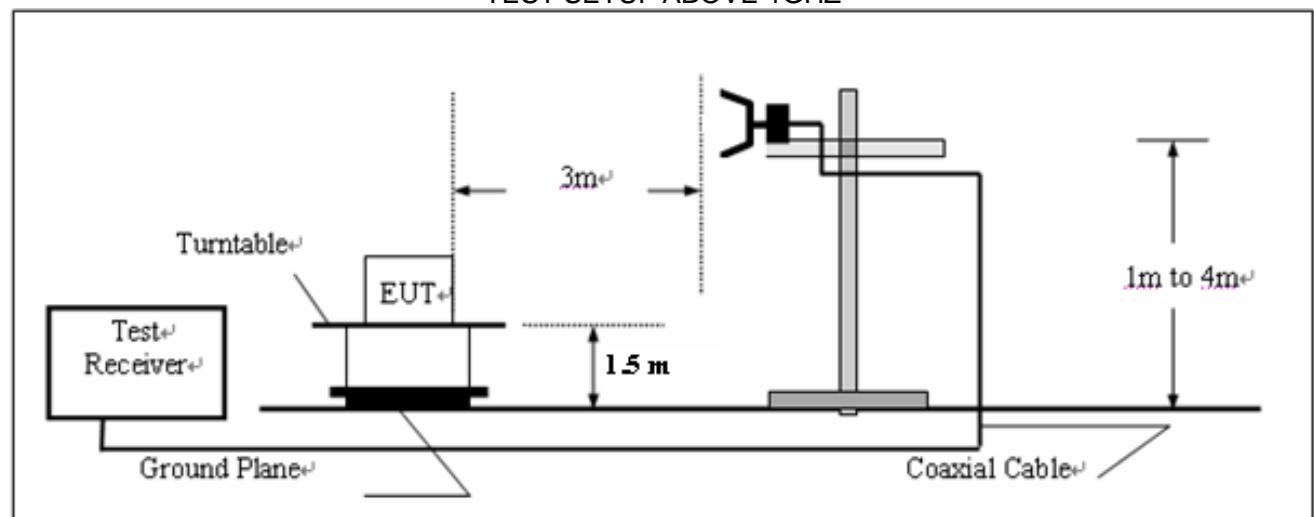


6.3 MEASUREMENT EQUIPMENT USED:

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSEM30	849720/019	05/29/2009	05/29/2010
Amplifier	H.P.	8449B	3008A00277	05/29/2009	05/29/2010
Horn Antenna	Sunol Sciences	DRH-118	A052604	05/29/2009	05/29/2010
Horn Antenna	A.H. Systems Inc.	SAS-574	--	09/05/2009	09/05/2010
EMI Test Receiver	Rohde & Schwarz	ESCI	100028	05/29/2009	05/29/2010
Amplifier	H.P.	HP8447E	1937A01046	05/29/2009	05/29/2010
Broadband Antenna	Sunol Sciences	JB1	A040904-2	05/29/2009	05/29/2010
LOOP ANTENNA	R&S	HM525	--	08/27/2009	08/27/2010


6.4 LIMITS AND MEASUREMENT RESULT:

LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Frequency	Measurement Result		
		EIRP (dBm)	Conducted (dBm)	Criteria
30 dBm	2.402GHz	3.37	2.82	PASS
30 dBm	2.441GHz	3.42	2.92	PASS
30 dBm	2.480GHz	3.23	2.72	PASS


TEST PLOT OF BOTTOM CHANNEL

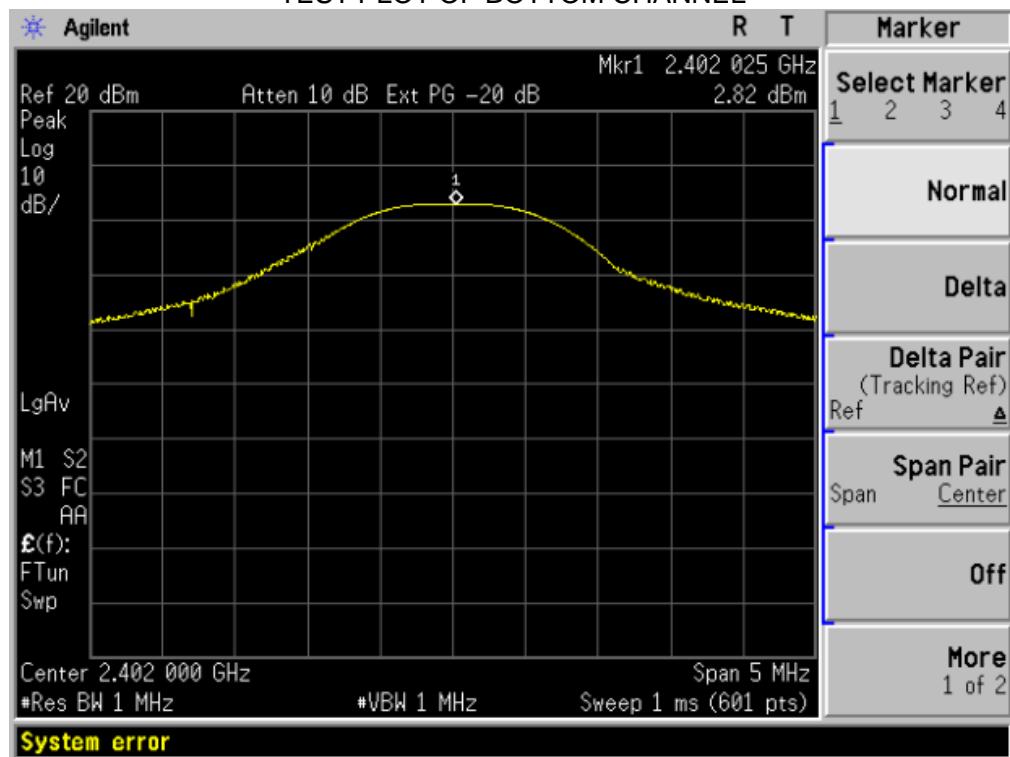

TEST PLOT OF MIDDLE CHANNEL

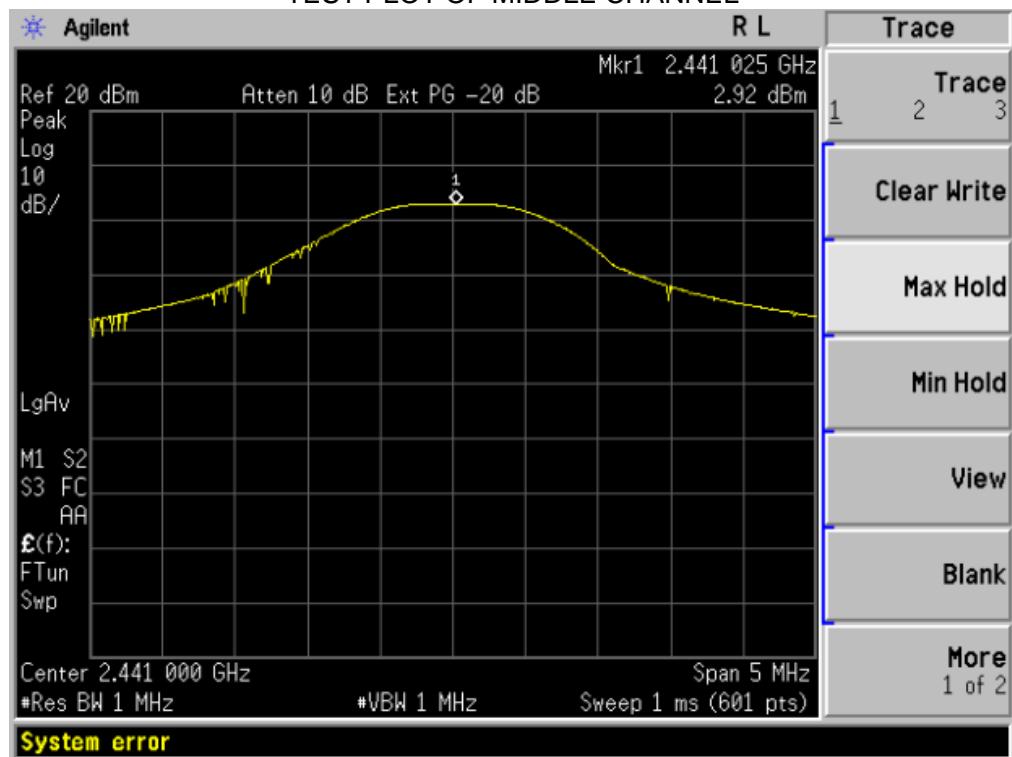

TEST PLOT OF TOP CHANNEL

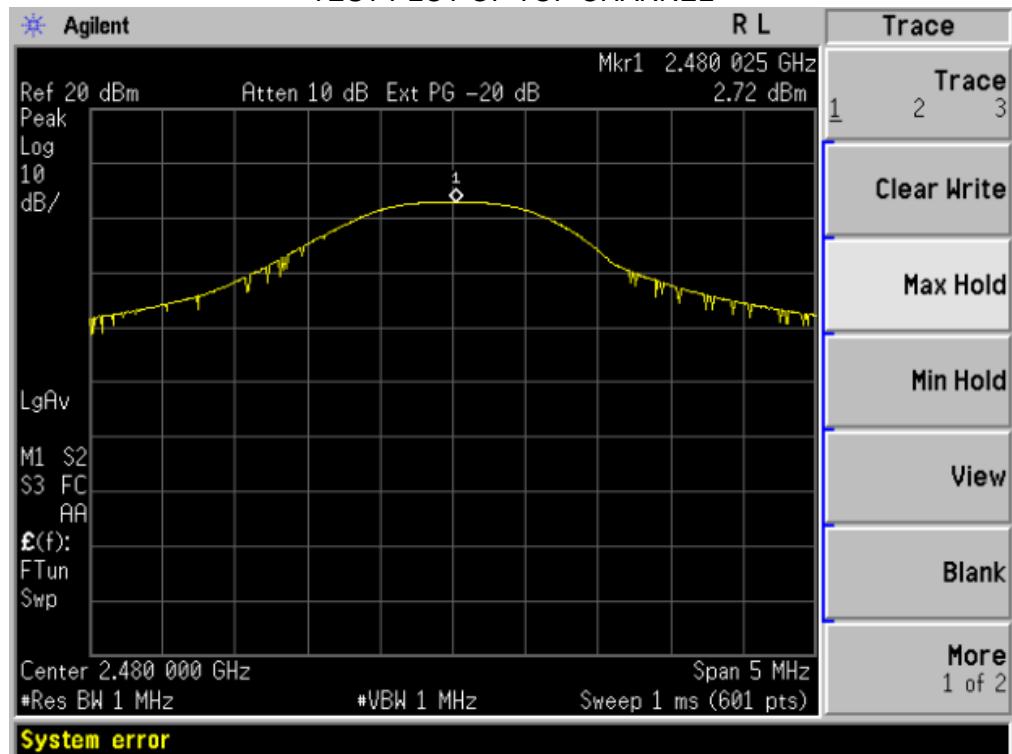

7. 20 DB BANDWIDTH

7.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,
VBW= 100 KHz.
4. Set SPA Trace 1 Max hold, then View.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in Section 6.2


7.3 MEASUREMENT EQUIPMENT USED:

The same as described in Section 6.3


7.4 LIMITS AND MEASUREMENT RESULTS:

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
--	Bottom Channel	1.054	PASS
	Middle Channel	1.043	PASS
	Top Channel	1.052	PASS


TEST PLOT OF BANDWIDTH FOR BOTTOM CHANNEL

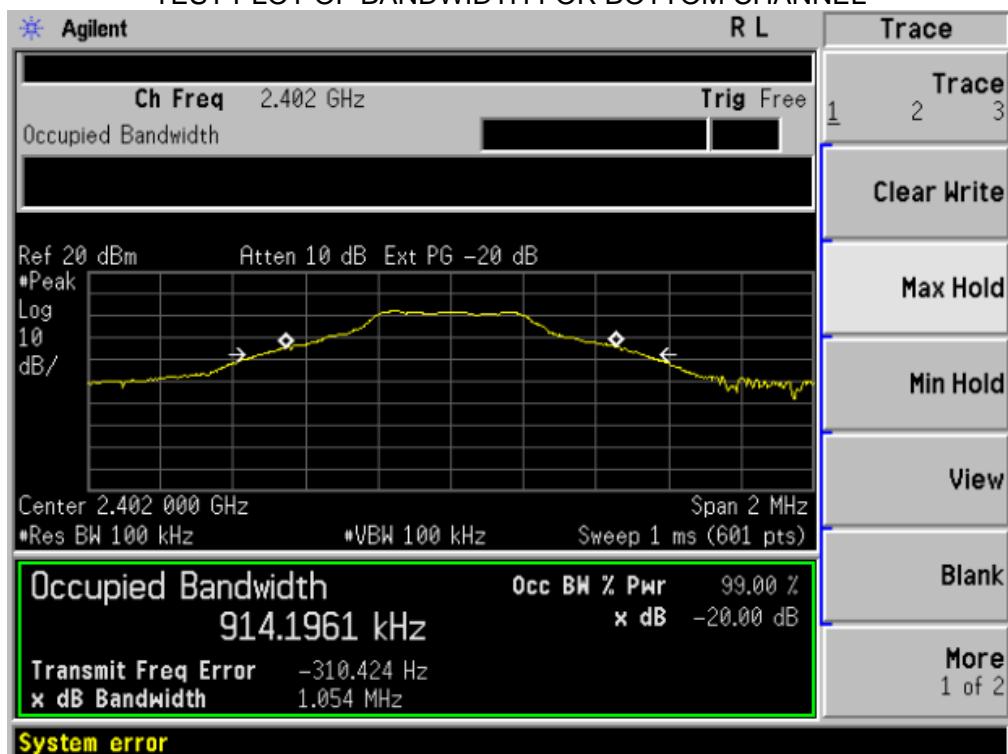

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

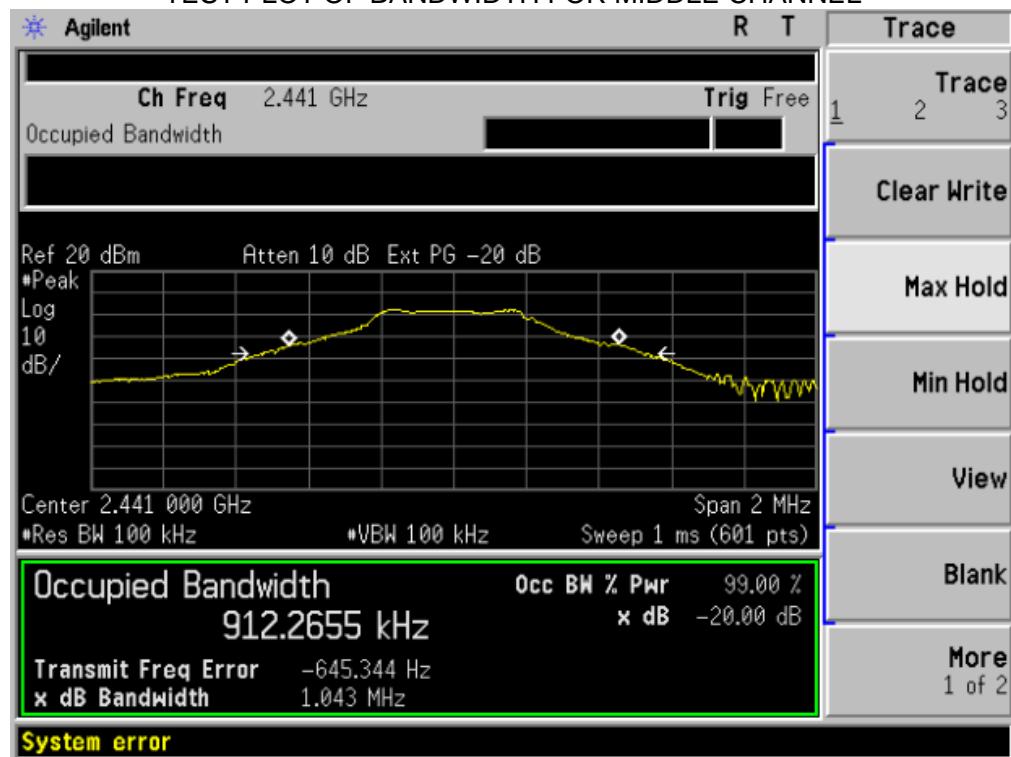

TEST PLOT OF BANDWIDTH FOR TOP CHANNEL

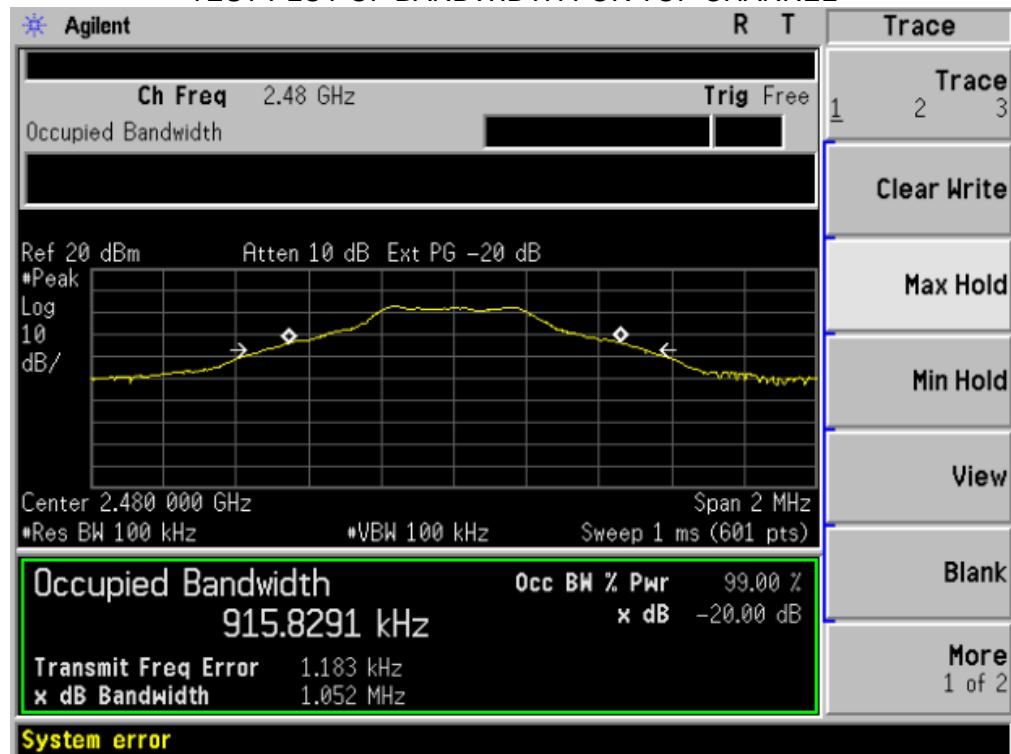


8. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY (N/A)

8.1 MEASUREMENT PROCEDURE:

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Centre Frequency = Operation Frequency, RBW= 3 KHz,
VBW= 10 KHz., Sweep time= Auto
- (5). Set SPA Trace 1 Max hold, then View.

8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

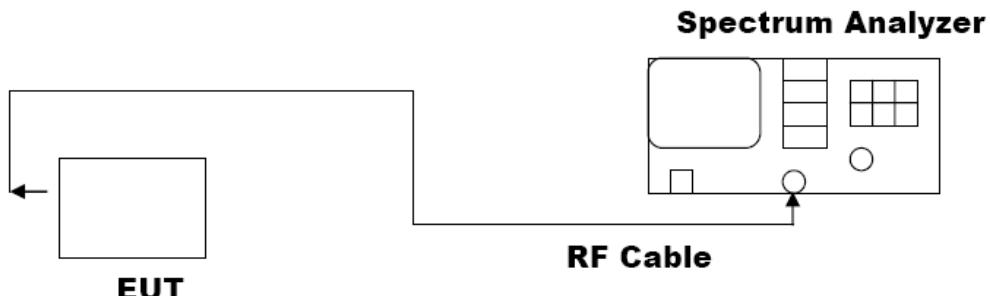

8.3 MEASUREMENT EQUIPMENT USED:

SHIELDING ROOM					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4440A	US41421290	04/16/2009	04/15/2010

8.4 LIMITS AND MEASUREMENT RESULT:

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (dBm/3KHz)		Criteria
8 dBm / 3KHz	Bottom Channel	--	--
	Middle Channel	--	--
	Top Channel	--	--

9. OUT OF BAND EMISSION

9.1 MEASUREMENT PROCEDURE:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,
VBW= 100 KHz.
4. Set SPA Trace 1 Max hold, then View.

9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in section 6.2

1. Conducted test setup
2. Radiated Emission test Setup below 1Ghz and Above 1GHz


9.3 MEASUREMENT EQUIPMENT USED:

The Same as described in section 6.3


9.4 LIMITS AND MEASUREMENT RESULT:

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
<p>In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.</p> <p>In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))</p>	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
	At least -20dBc than the limit Specified on the TOP Channel	PASS


TEST PLOT OF BAND ELDG FOR BOTTOM CHANNEL

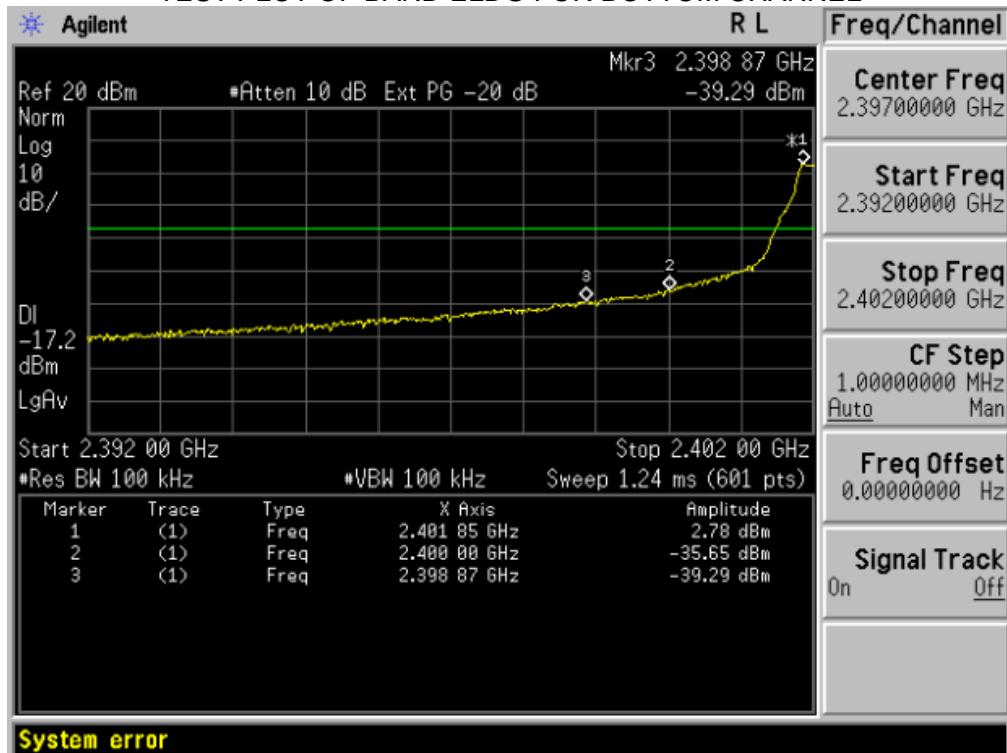

TEST PLOT OF BAND ELDG FOR TOP CHANNEL

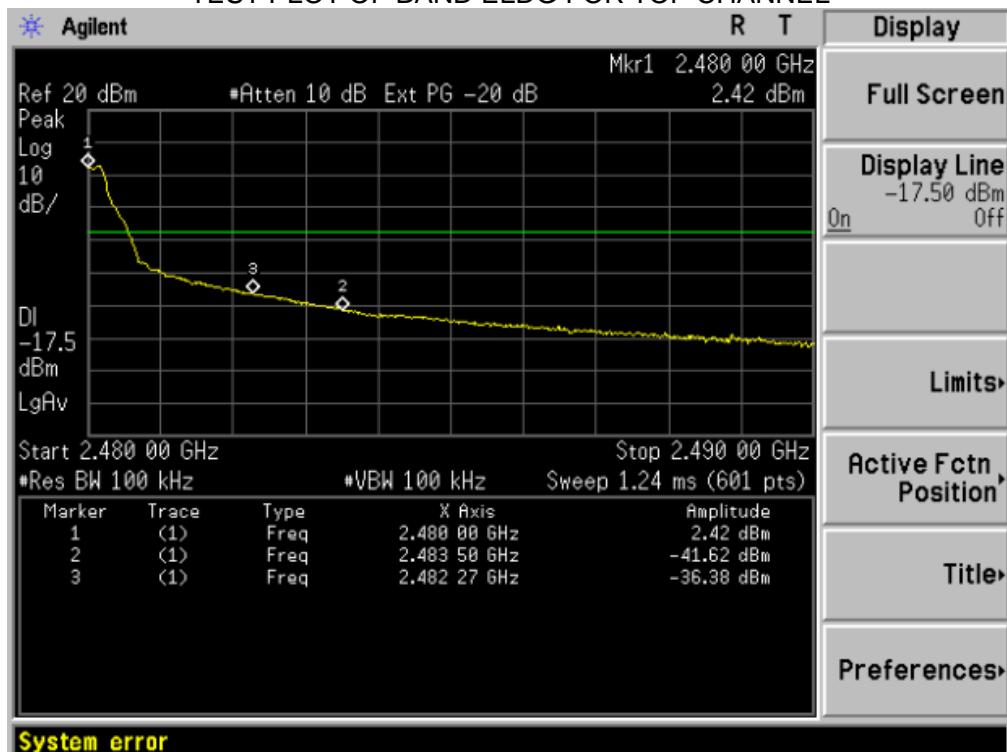


TEST PLOT OF OUT OF BAND EMISSIONS FOR BOTTOM CHANNEL - 1

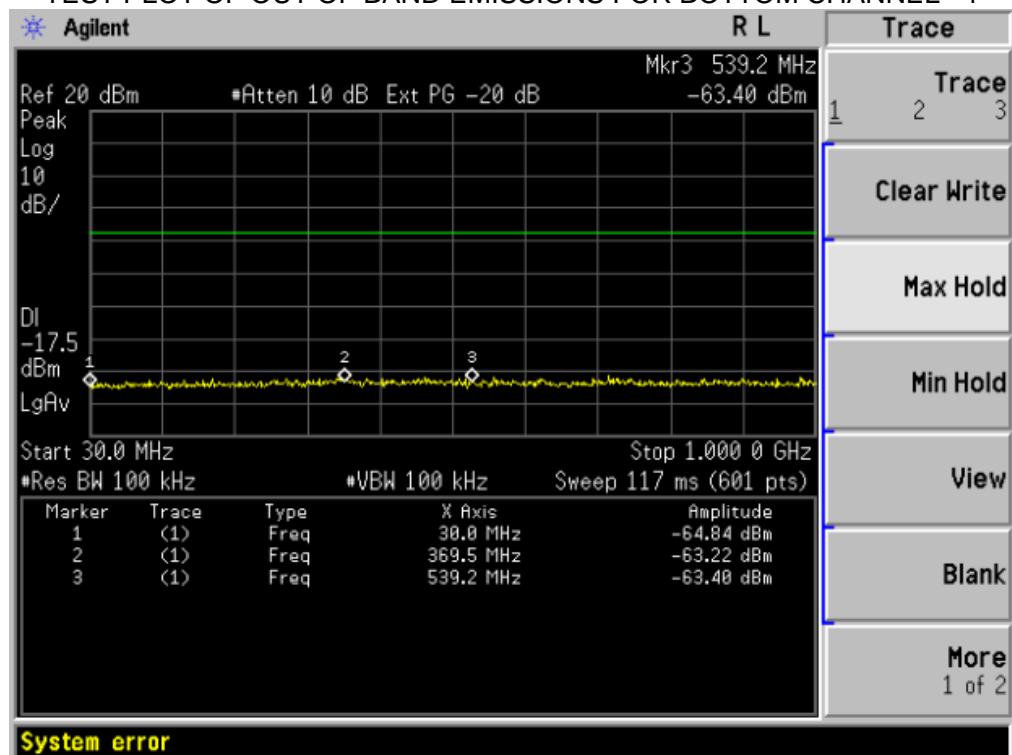

TEST PLOT OF OUT OF BAND EMISSIONS FOR BOTTOM CHANNEL - 2




TEST PLOT OF OUT OF BAND EMISSIONS FOR MIDDLE CHANNEL – 1

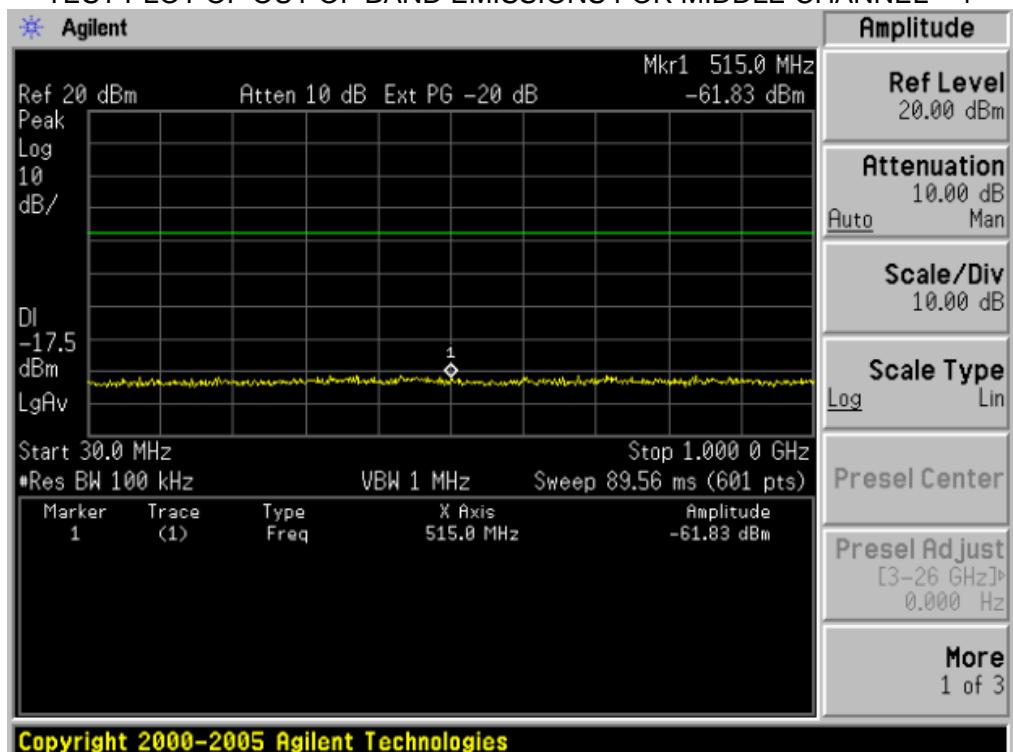

TEST PLOT OF OUT OF BAND EMISSIONS FOR MIDDLE CHANNEL – 2



TEST PLOT OF OUT OF BAND EMISSIONS FOR TOP CHANNEL – 1

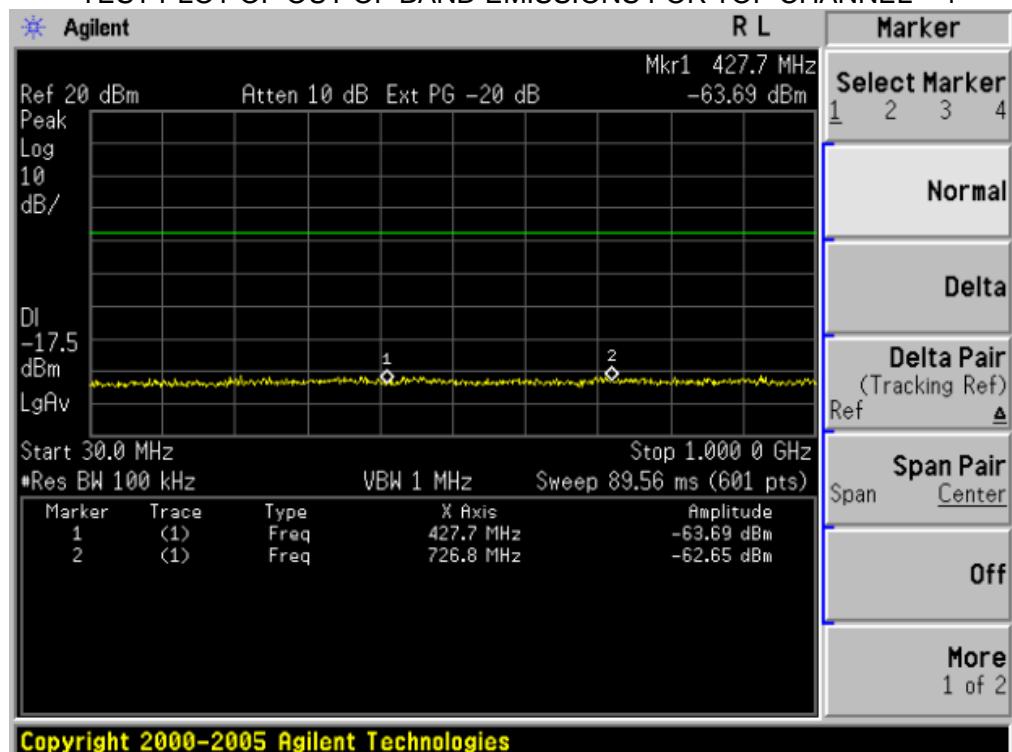

TEST PLOT OF OUT OF BAND EMISSIONS FOR TOP CHANNEL – 2



RADIATED EMISSION BELOW 1GHZ



Site 966 Chamber #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Part15 RE-Class B_30-1000MHz

Power:

Humidity: 60 %

EUT:

Distance: 3m


M/N:

Mode:

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Height	Degree
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	30.0000	24.49	4.96	29.45	40.00	-10.55	peak			
2		121.5486	25.25	-4.35	20.90	43.50	-22.60	peak			
3		185.1379	26.75	-7.63	19.12	43.50	-24.38	peak			
4		379.9141	27.23	-2.76	24.47	46.00	-21.53	peak			
5		665.8035	25.93	5.22	31.15	46.00	-14.85	peak			
6		760.7036	29.18	3.47	32.65	46.00	-13.35	peak			

Note: This Handheld EUT was tested in 3 orthogonal positions and the worst-case data was presented.

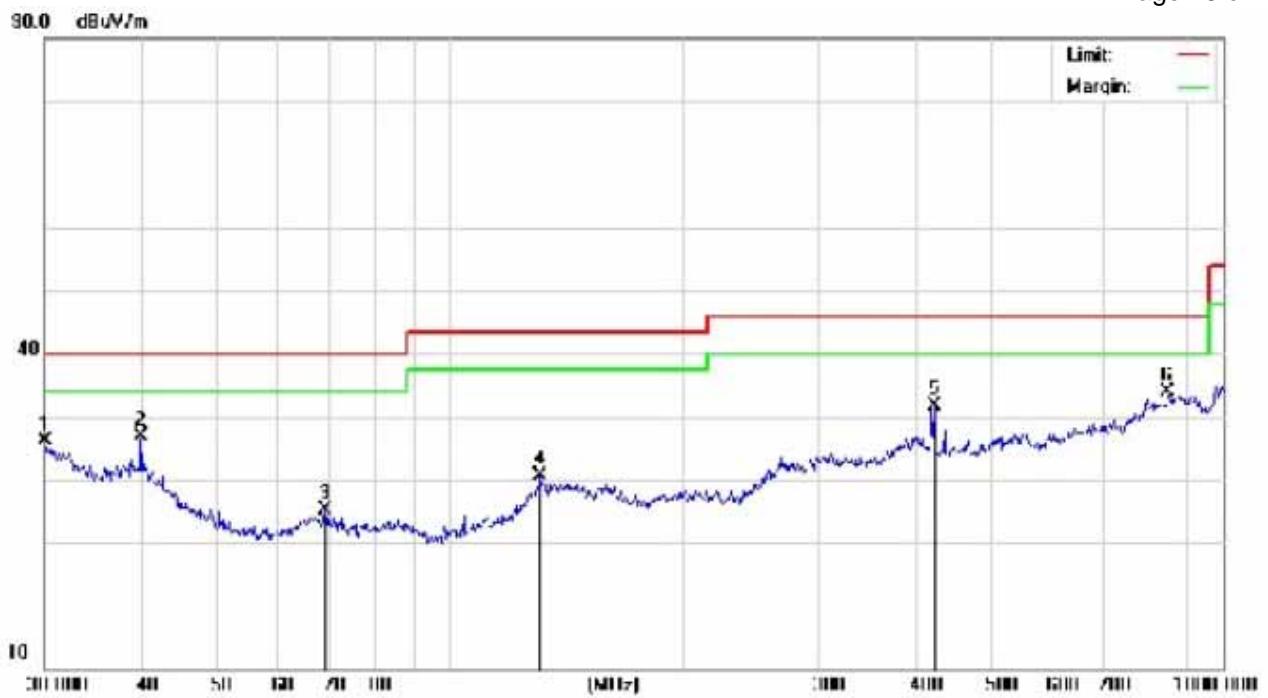

Site 966 Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 RE-Class B_30-1000MHz

Power:

Humidity: 60 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree	Comment
							Detector	degree		
1	30.1054	24.65	1.38	26.03	40.00	-13.97	peak			
2	39.9942	28.68	-1.73	26.95	40.00	-13.05	peak			
3	69.1141	25.54	-10.44	15.10	40.00	-24.90	peak			
4	131.2965	26.06	-5.50	20.56	43.50	-22.94	peak			
5	423.5403	31.73	-0.19	31.54	46.00	-14.46	peak			
6 *	848.0563	27.22	6.63	33.85	46.00	-12.15	peak			

Note: This Handheld EUT was tested in 3 orthogonal positions and the worst-case data was presented.

Band Edge Emission:

MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Centre Frequency = Operation Frequency, span=100MHz, RBW= 1 MHz, VBW= 1MHz.
3. The band edges was measured and receorded.

TEST SET-UP

The Same as described in section 6.2

Radiated Emission test Setup Above 1GHz

Band Edge Emission for Bottom Channel						
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	
2.386	H	59.78	46.90	74	54	*
2.400	H	57.12	47.35	74	54	*
2.386	V	58.34	44.43	74	54	*
2.400	V	55.21	42.35	74	54	*

Band Edge Emission for Top Channel						
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	
2.483	H	57.32	48.34	74	54	*
2.484	H	55.56	47.67	74	54	*
2.496	H	49.67	44.23	74	54	*
2.483	V	56.78	46.34	74	54	*
2.484	V	54.54	46.45	74	54	*
2.496	V	48.56	43.55	74	54	*

Note: This Handheld EUT was tested in 3 orthogonal positions and the worst-case data was presented.

MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle, the bottom operation frequency individually.
2. Set SPA Centre Frequency = Operation Frequency, RBW= 1MHz,
VBW= 1MHz.
3. The Restricted Band Emission was measured and recorded.

TEST SET-UP

The Same as described in section 6.2

Radiated Emission test Setup Above 1GHz

Restricted Band Emission for Bottom Channel						
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	
4.81	H	55.45	48.23	74	54	*
4.81	V	56.56	47.54	74	54	*
Above 4.81 GHz	H	--	--	74	54	*
	V	--	--	74	54	*

Restricted Band Emission for Middle Channel						
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	
4.88	H	54.34	48.43	74	54	*
4.88	V	56.45	46.45	74	54	*
Above 4.88 GHz	H	--	--	74	54	*
	V	--	--	74	54	*

Restricted Band Emission for Top Channel						
Frequency	Antenna Pol.	Field Strength	Field Strength	Limit (PK)	Limit (AV)	Memo
GHz	H/V	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	
4.95	H	57.65	47.01	74	54	*
4.95	V	56.23	46.66	74	54	*
Above 4.95GHz	H	--	--	74	54	*
	V	--	--	74	54	*

Note: This Handheld EUT was tested in 3 orthogonal positions and the worst-case data was presented.

--" Indicated the test value is much lower to limit.

10. NUMBER OF HOPPING FREQUENCY

10.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz, span=20MHz
4. Set the Spectrum Analyzer as RBW = VBW = 300KHz

10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

1. Conducted Method.


10.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 6.3


10.4 LIMITS AND MEASUREMENT RESULT:

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	>=15	79	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS -1

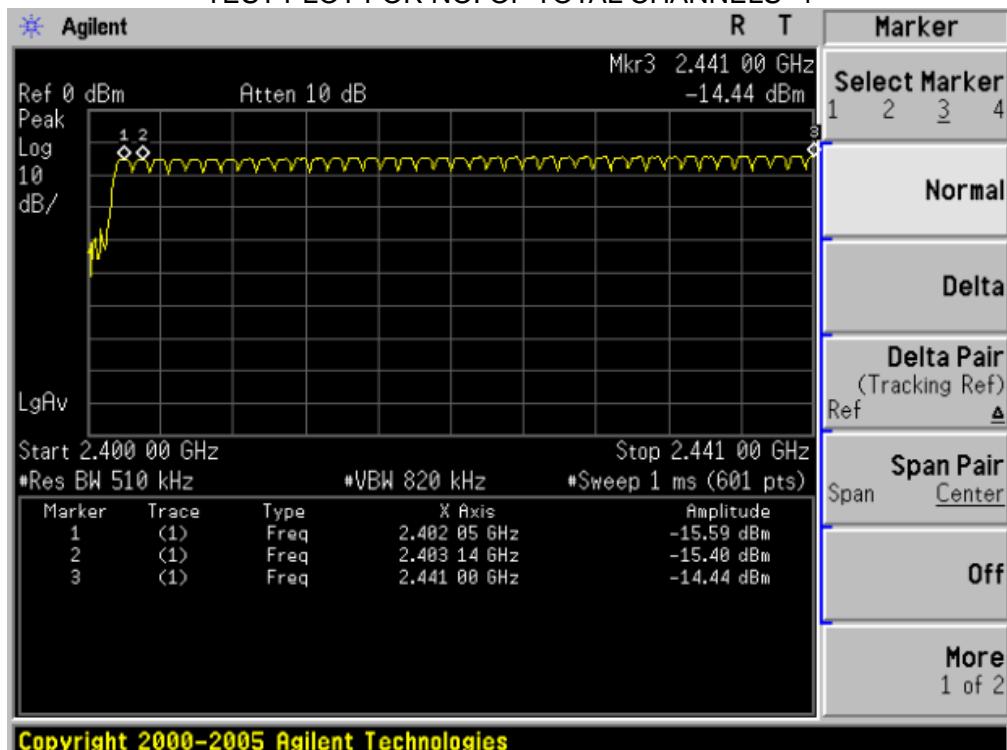

TEST PLOT FOR NO. OF TOTAL CHANNELS -2

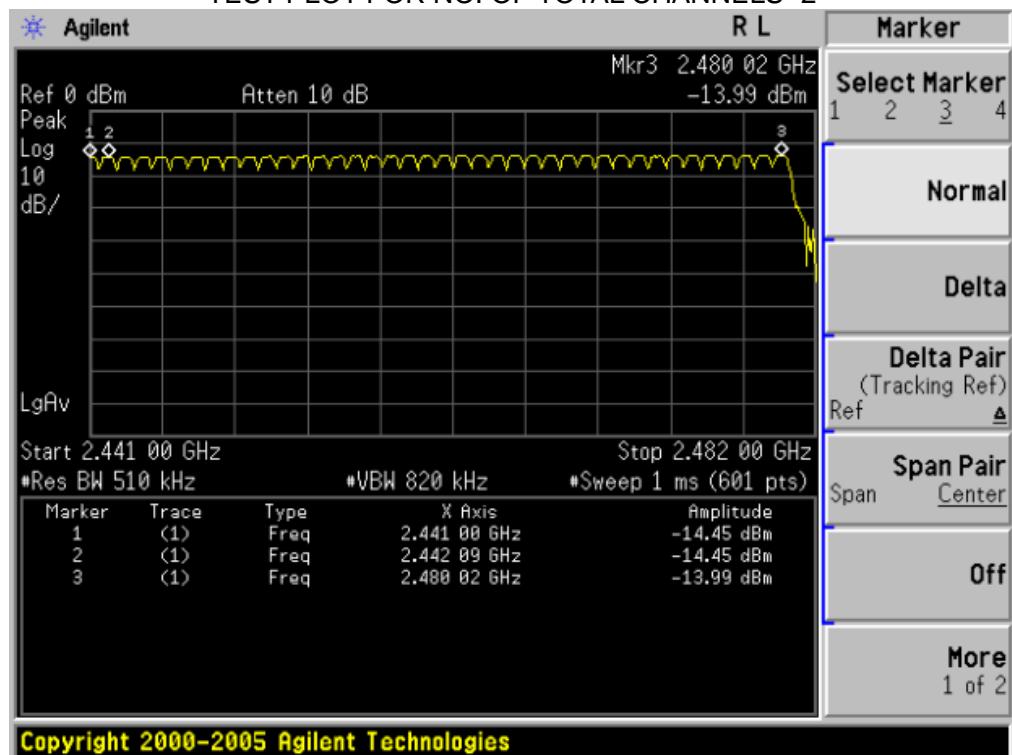

11. TIME OF OCCUPANCY (DWELL TIME)

11.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set center frequency of spectrum analyzer = Operating frequency
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0 Hz,

11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2
Conducted Method

11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

11.4 LIMITS AND MEASUREMENT RESULT

The dwell time = Time Slot Length * Hop Rate / Number of Hopping Channels * 0.4 * 79

L-CH:

DH1 Time Slot = $0.370 \text{ (ms)} * (1600/(2*79)) * 31.6 = 118.4 \text{ (ms)}$

DH3 Time Slot = $1.627 \text{ (ms)} * (1600/(4*79)) * 31.6 = 260.3 \text{ (ms)}$

DH5 Time Slot = $2.870 \text{ (ms)} * (1600/(6*79)) * 31.6 = 306.1 \text{ (ms)}$

M-CH:

DH1 Time Slot = $0.373 \text{ (ms)} * (1600/(2*79)) * 31.6 = 119.4 \text{ (ms)}$

DH3 Time Slot = $1.627 \text{ (ms)} * (1600/(4*79)) * 31.6 = 260.3 \text{ (ms)}$

DH5 Time Slot = $2.860 \text{ (ms)} * (1600/(6*79)) * 31.6 = 305.0 \text{ (ms)}$


H-CH:

DH1 Time Slot = $0.370 \text{ (ms)} * (1600/(2*79)) * 31.6 = 118.4 \text{ (ms)}$


DH3 Time Slot = $1.627 \text{ (ms)} * (1600/(4*79)) * 31.6 = 260.3 \text{ (ms)}$

DH5 Time Slot = $2.860 \text{ (ms)} * (1600/(6*79)) * 31.6 = 305.0 \text{ (ms)}$


TEST PLOT DH1 MODE BOTTOM CHANNEL

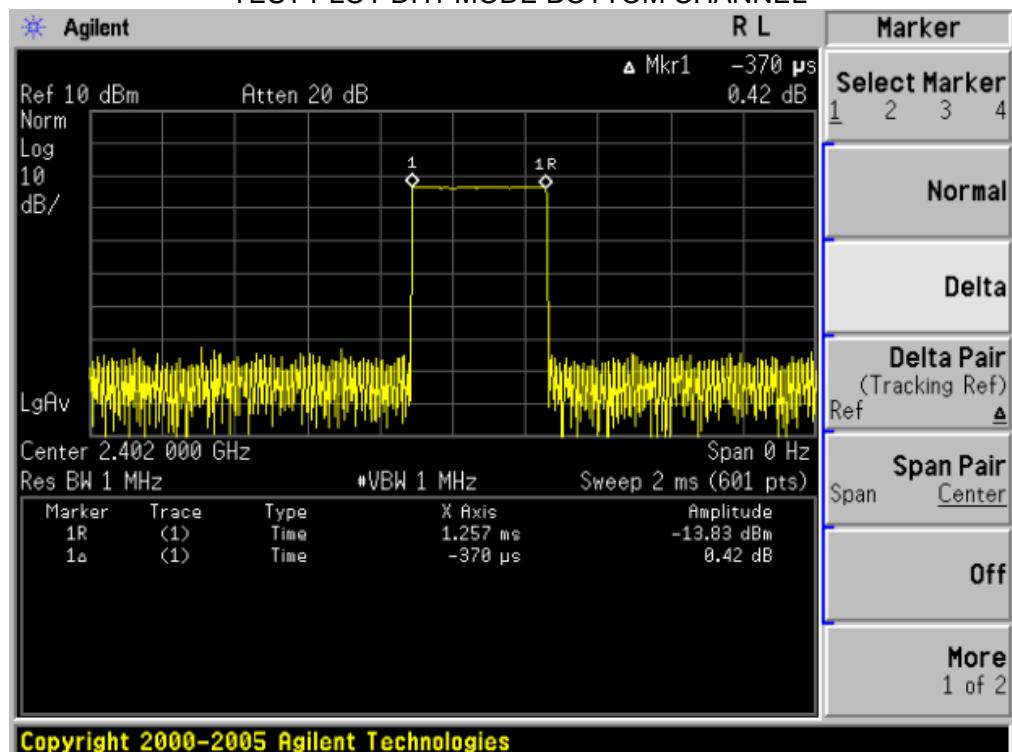


TEST PLOT DH3 MODE BOTTOM CHANNEL

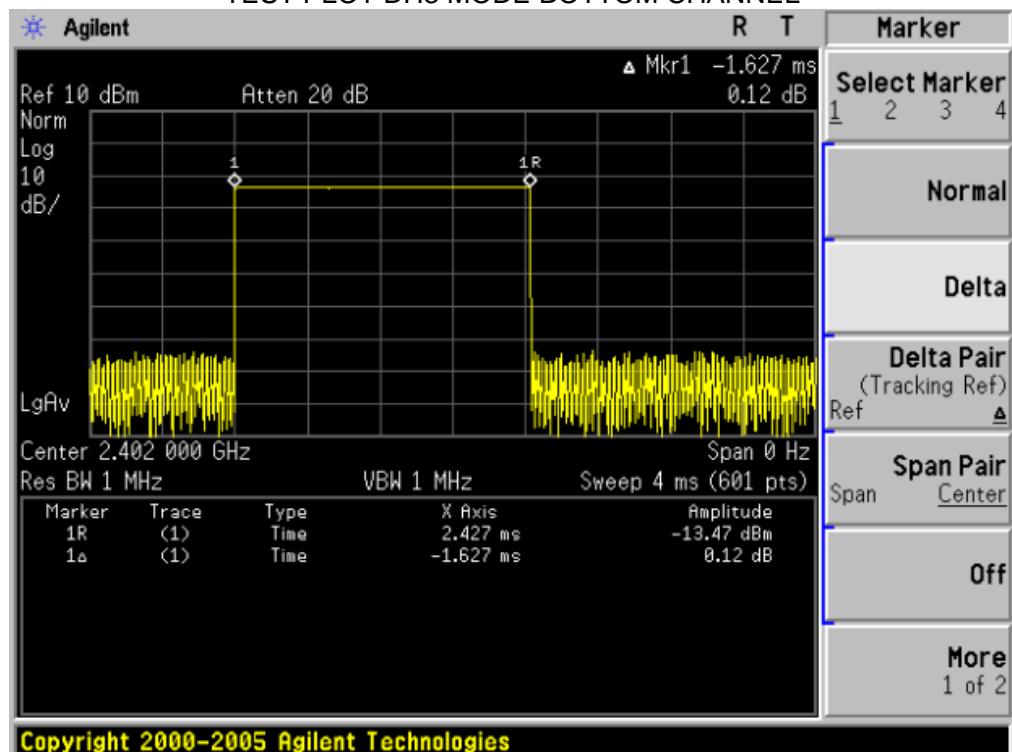


TEST PLOT DH5 MODE BOTTOM CHANNEL

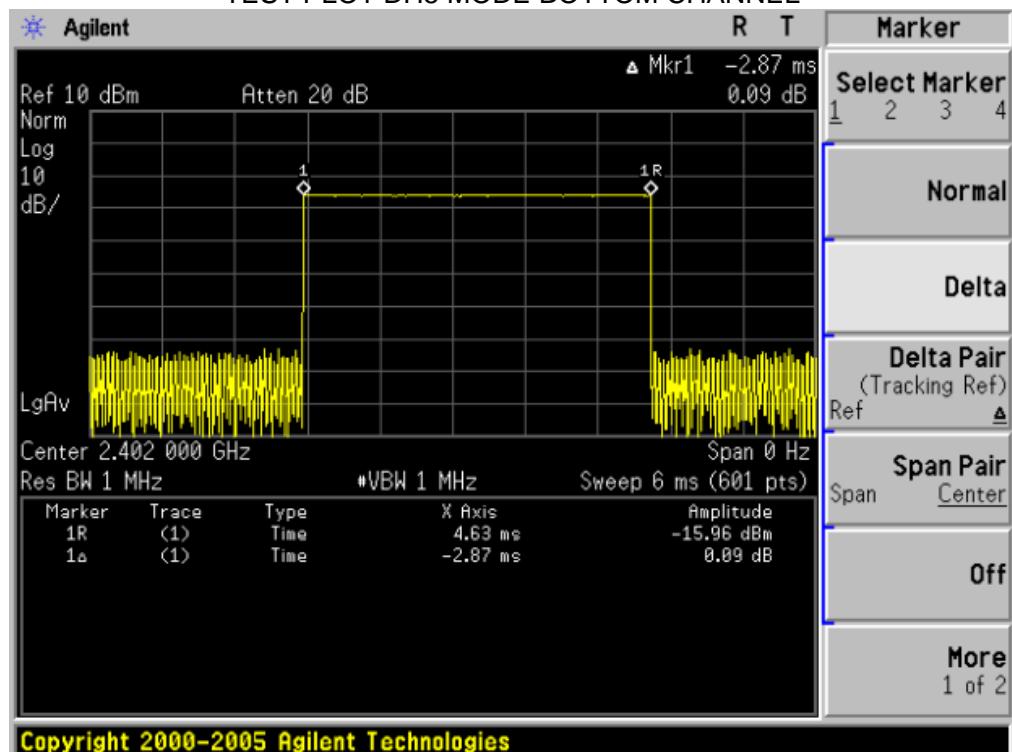


TEST PLOT DH1 MODE MIDDLE CHANNEL

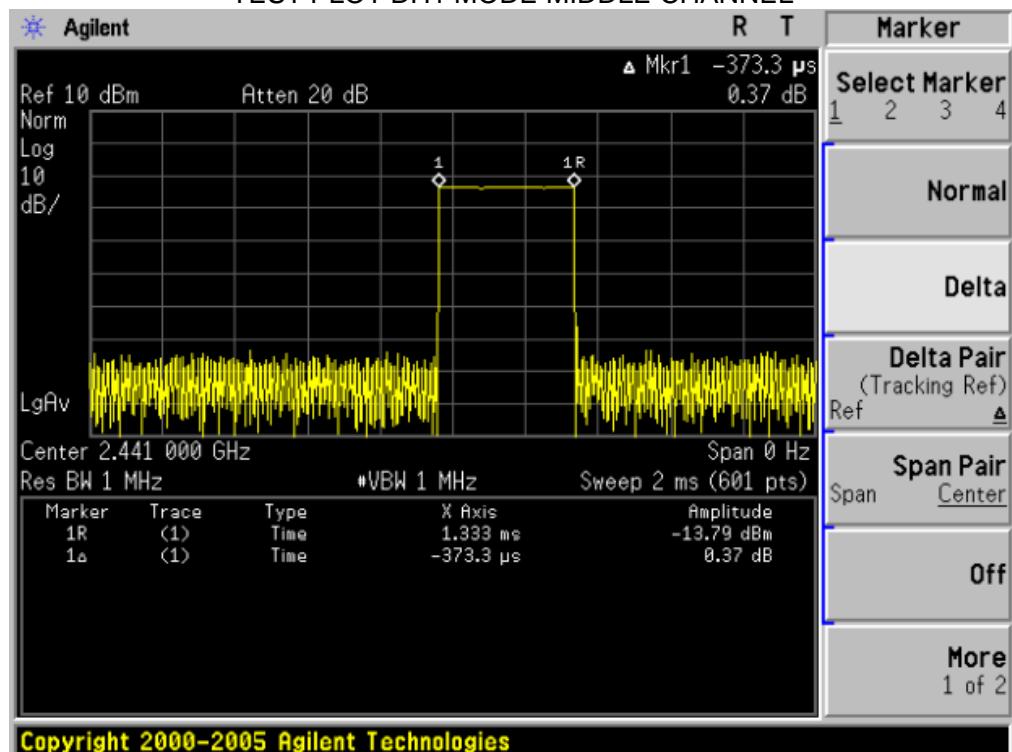


TEST PLOT DH3 MODE MIDDLE CHANNEL

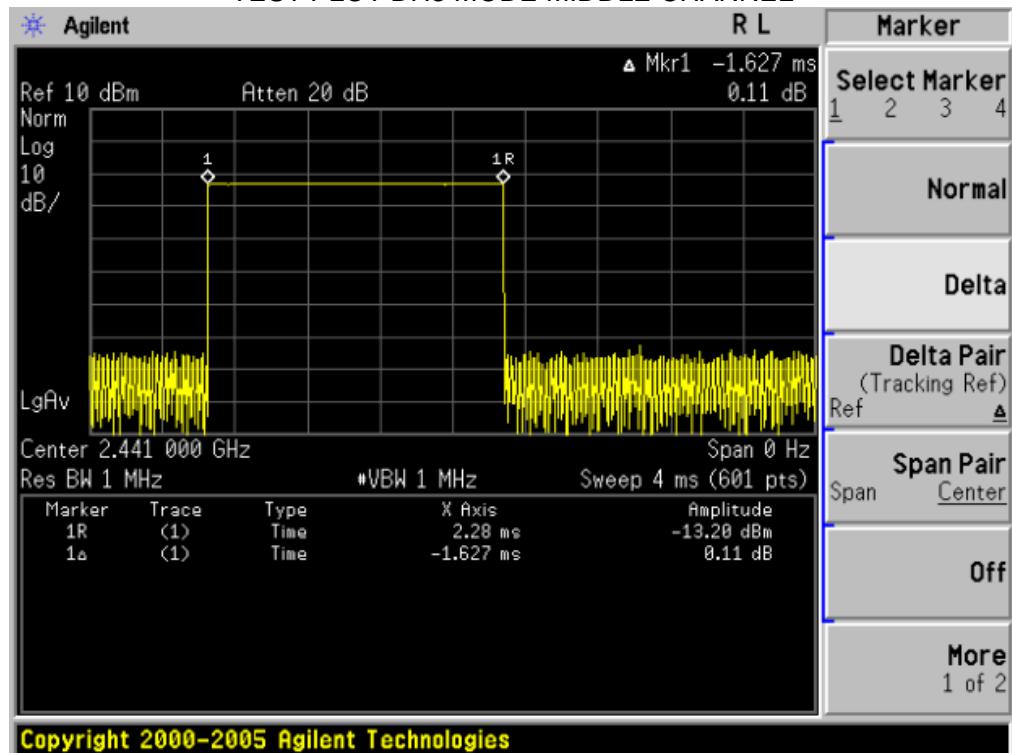


TEST PLOT DH5 MODE MIDDLE CHANNEL

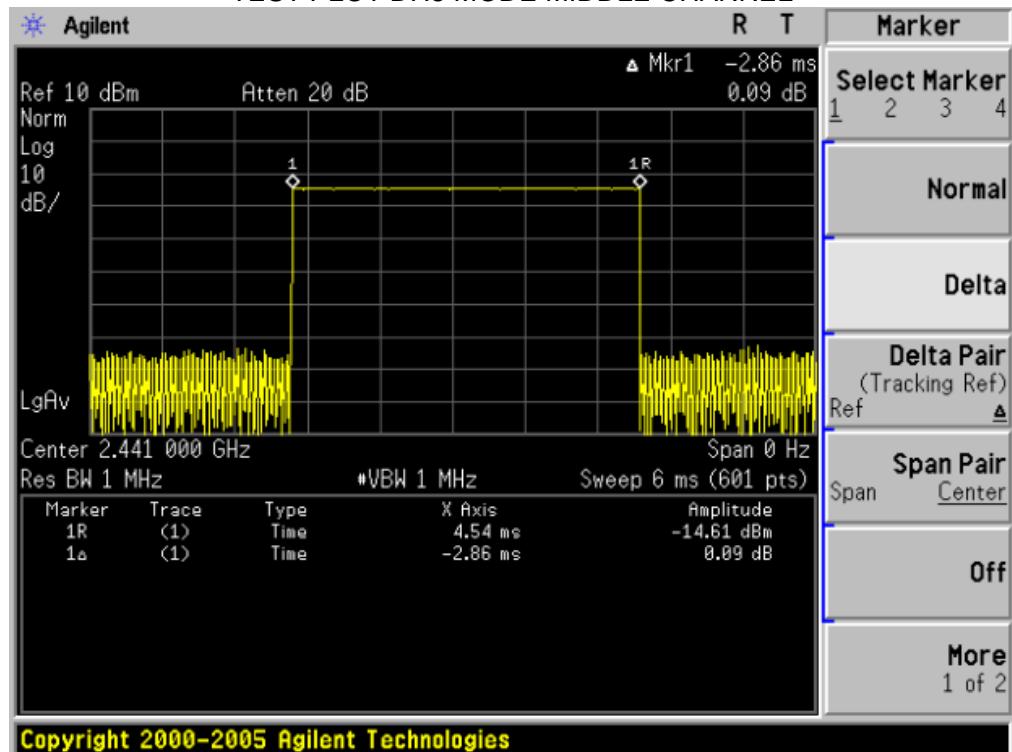


TEST PLOT DH1 MODE TOP CHANNEL

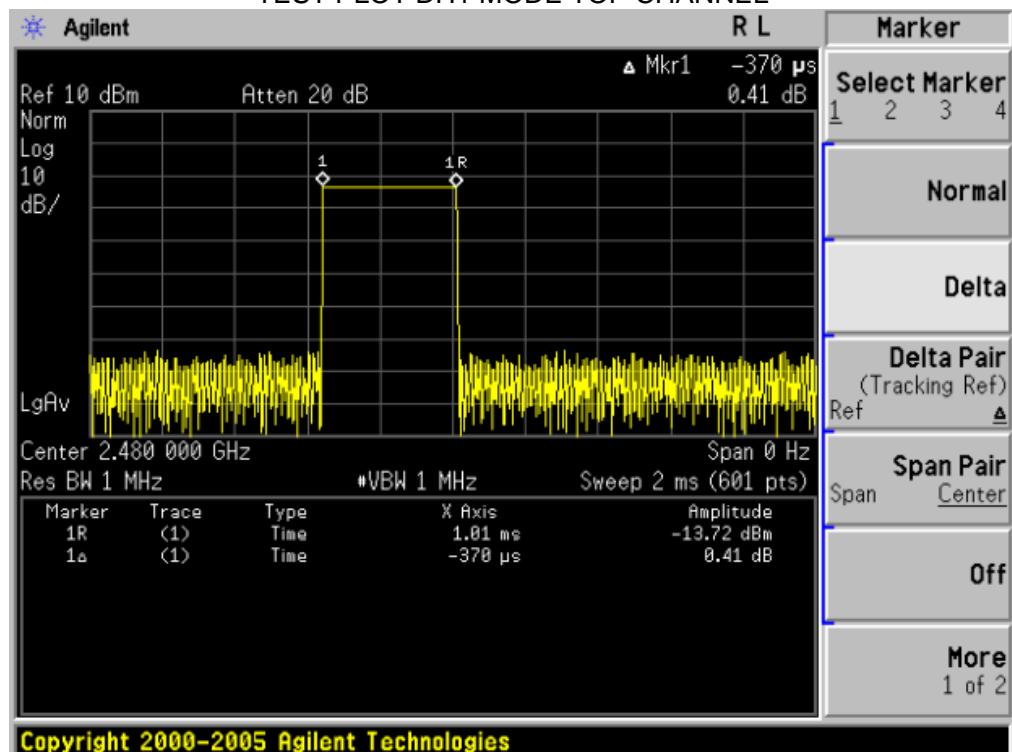

TEST PLOT DH3 MODE TOP CHANNEL

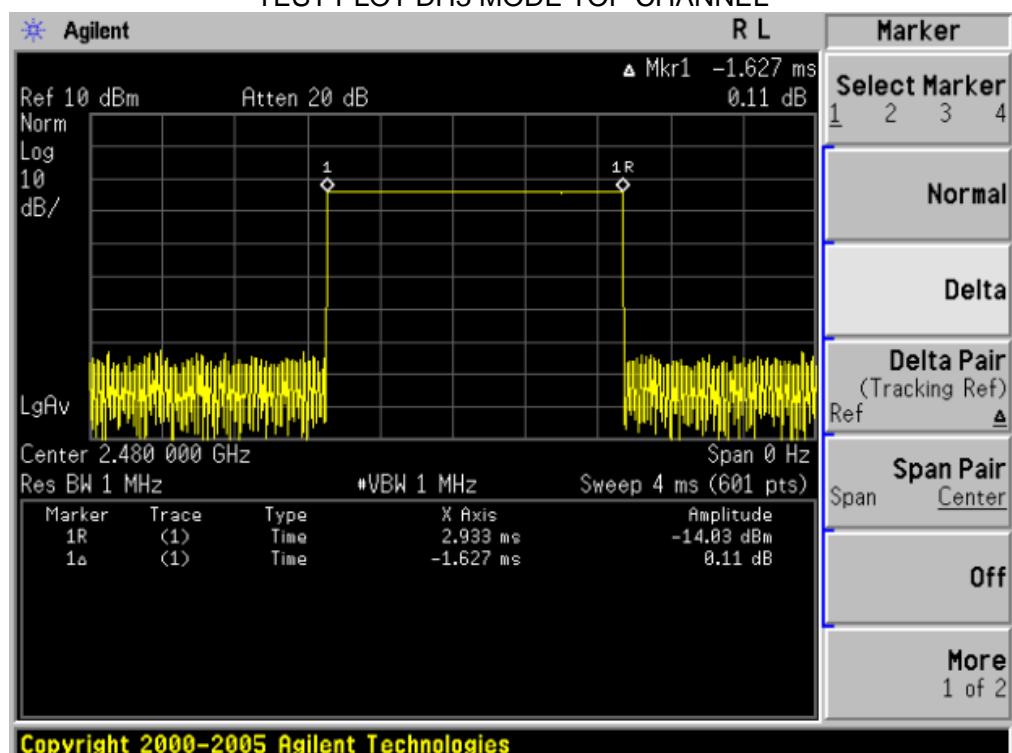

TEST PLOT DH5 MODE TOP CHANNEL

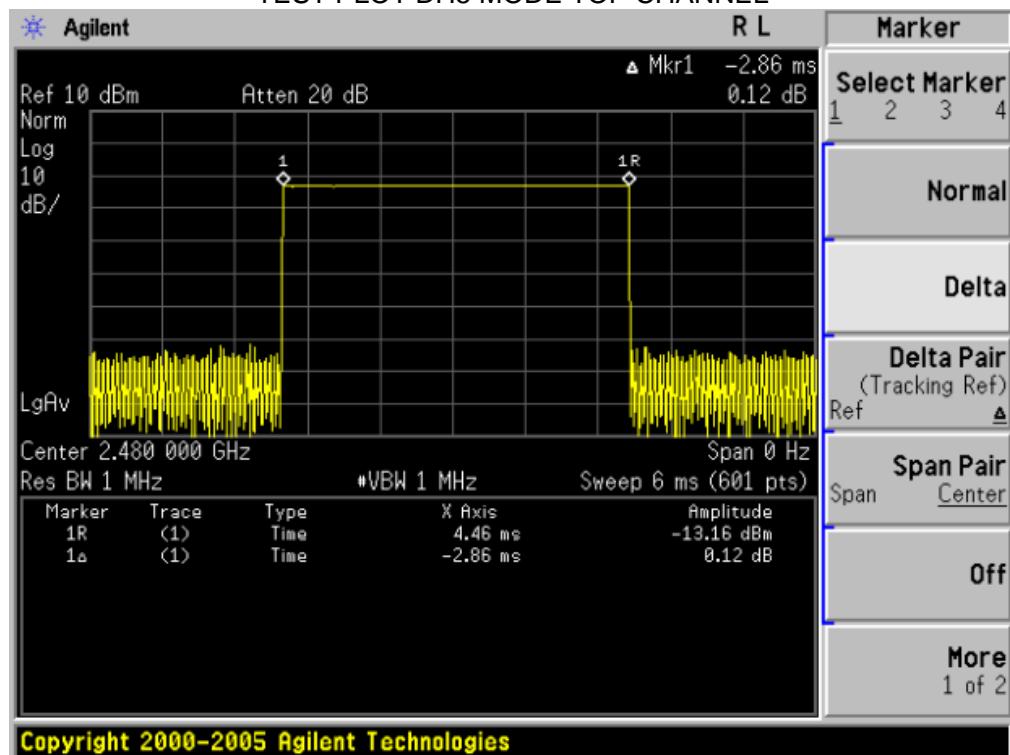

12. FREQUENCY SEPARATION

12.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set center frequency of spectrum analyzer = Middle of Operating frequency
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 5 MHz,

12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Same as described in section 6.2

12.3 MEASUREMENT EQUIPMENT USED


The same as described in section 6.3

12.4 LIMITS AND MEASUREMENT RESULT


CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT	
	KHz	KHz	Pass	
CH01-CH02	992	>=25 KHz or 2/3 20 dB BW		
CH39-CH40	1009			
CH78-CH79	992			

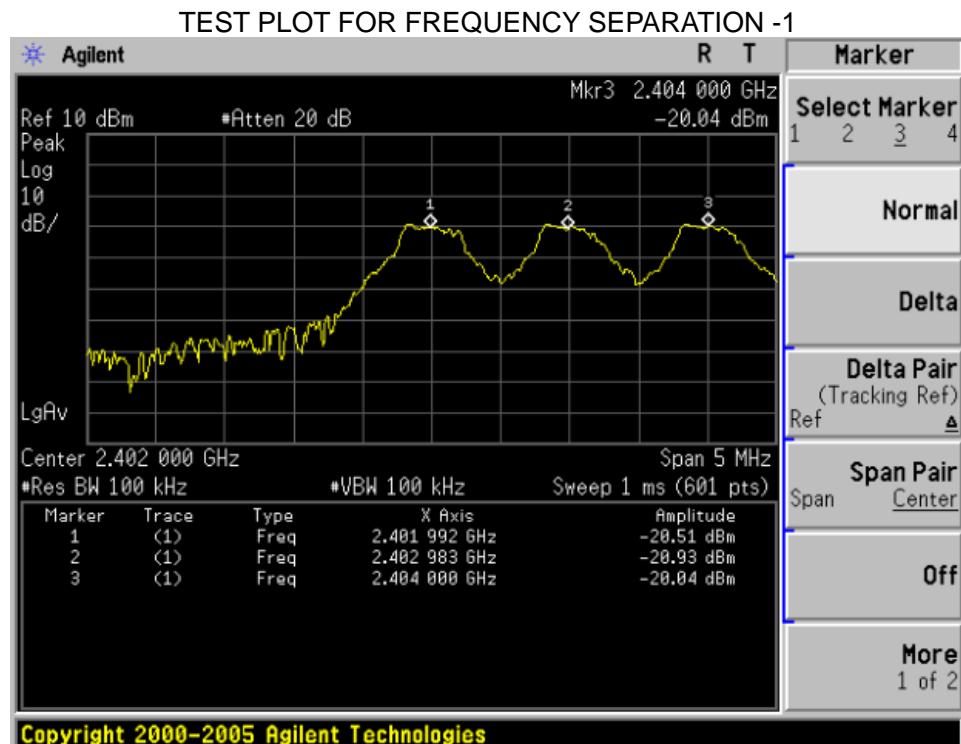

TEST PLOT FOR FREQUENCY SEPARATION -2

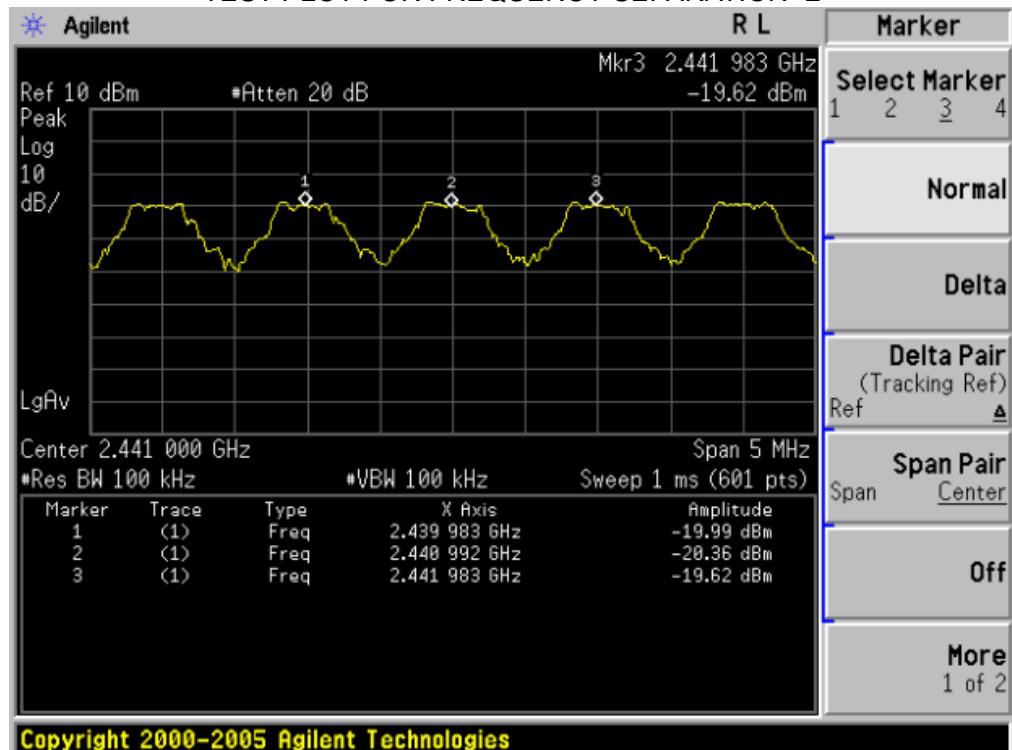

TEST PLOT FOR FREQUENCY SEPARATION -3

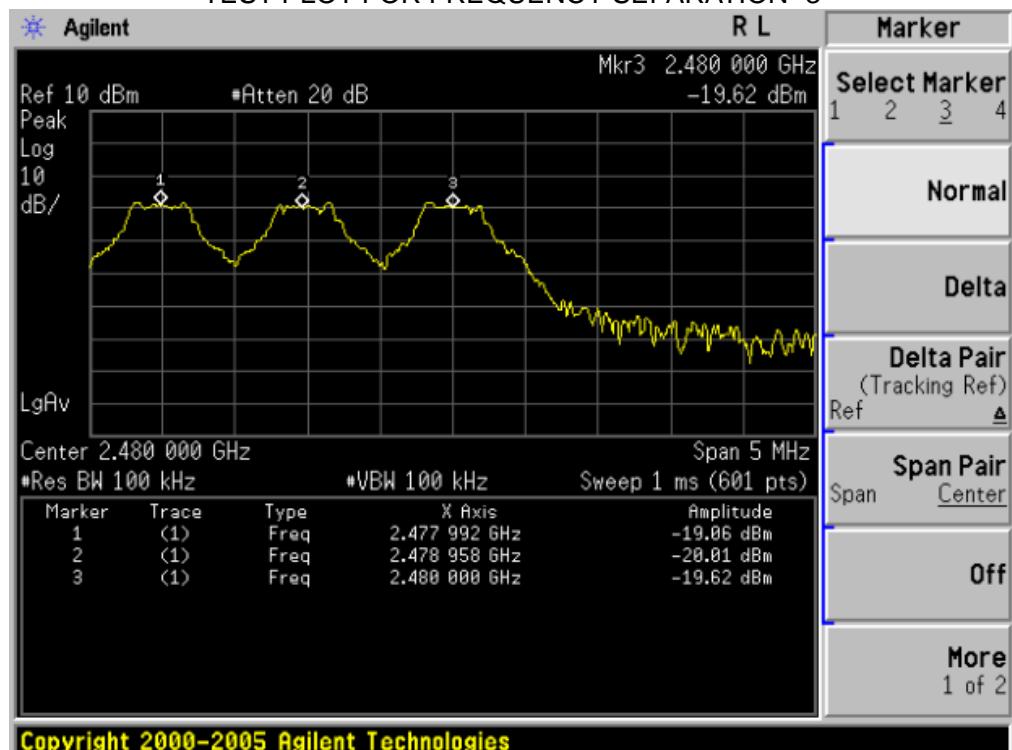

APPENDIX I

PHOTOGRAPHS OF THE EUT ADAPTER AND BATTERY



TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



FRONT VIEW OF SAMPLE



BACK VEIW OF SAMPLE



INTERNAL PHOTO OF SAMPLE – 1



INTERNAL PHOTO OF SAMPLE – 2



PPENDIX II
PHOTOGRAPHS OF THE TEST SETUP
CONDUCTED EMISSION TEST



EIRP TEST SETUP



RADIATED EMISSION TEST SETUP



----END OF REPORT----