FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Sound Cap

Model: C102

Trade Name: SiZEN

Issued to

SiZEN Corporation 7F.-9, No.20, Guanqian Rd., Taipei City 100, Taiwan

Issued by



Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
http://www.ccsrf.com
service@ccsrf.com



Page 1 Rev. 00



TABLE OF CONTENTS

	UT DESCRIPTION	
3. T	EST METHODOLOGY	5
3.1	EUT CONFIGURATION	5
3.2	EUT EXERCISE	
3.3	GENERAL TEST PROCEDURES.	
3.4	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	
3.5	DESCRIPTION OF TEST MODES	7
4. IN	NSTRUMENT CALIBRATION	8
4.1	MEASURING INSTRUMENT CALIBRATION	8
4.2	MEASUREMENT EQUIPMENT USED	8
4.3	MEASUREMENT UNCERTAINTY	9
5. F.	ACILITIES AND ACCREDITATIONS	10
5.1	FACILITIES	10
5.2	EQUIPMENT	
5.3	TABLE OF ACCREDITATIONS AND LISTINGS	11
6. S	ETUP OF EQUIPMENT UNDER TEST	12
6.1	SETUP CONFIGURATION OF EUT	12
6.2	SUPPORT EQUIPMENT	12
7. F	CC PART 15.247 REQUIREMENTS	13
7.1	20 DB BANDWIDTH	13
7.2	PEAK POWER	
7.3	AVERAGE POWER	
7.4	BAND EDGES MEASUREMENT	
7.5	FREQUENCY SEPARATION	
7.6	NUMBER OF HOPPING FREQUENCY	
7.7	TIME OF OCCUPANCY (DWELL TIME)	37
7.8	SPURIOUS EMISSIONS	
	3 POWERLINE CONDUCTED EMISSIONS	
APPE	ENDIX I RADIO FREQUENCY EXPOSURE	69
A PPF	ENDIX II PHOTOGRAPHS OF TEST SETUP	70

1. TEST RESULT CERTIFICATION

Applicant: SiZEN Corporation

7F.-9, No.20, Guanqian Rd., Taipei City 100, Taiwan

Date of Issue: February 10, 2010

Equipment Under Test: Sound Cap

Trade Name: SiZEN

Model: C102

Date of Test: December 10, 2009 ~ January 28, 2010

APPLICABLE STANDARDS				
STANDARD	TEST RESULT			
FCC 47 CFR Part 15 Subpart C	No non-compliance noted			

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by: Reviewed by:

Rex Lai Gina Lo

Section Manager Section Manager

Compliance Certification Services Inc.

Compliance Certification Services Inc.

Page 3 Rev. 00

Gina Lo

2. EUT DESCRIPTION

Product	Sound Cap
Trade Name	SiZEN
Model Number	C102
Model Discrepancy	N/A
Power Supply	1. VDC from host devices 2. Power from Battery (DC: 5V)
Frequency Range	2402 ~ 2480 MHz
Transmit Power	4.00 dBm
Modulation Technique	GFSK for 1Mbps; π/4-DQPSK for 2Mbps; 8DPSK for 3Mbps
Transmit Data Rate	1, 2, 3Mbps
Number of Channels	79 Channels
Antenna Specification	Gain: 2.5 dBi
Antenna Designation	Chip Antenna

Remark:

- 1. The sample selected for test was production product and was provided by manufacturer.
- 2. This submittal(s) (test report) is intended for FCC ID: <u>X57-C102100</u> filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

Page 4 Rev. 00

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 Part 15.207, 15.209 and 15.247.

Date of Issue: February 10, 2010

3.1EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

Page 5 Rev. 00

3.4FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	$\binom{2}{}$
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Page 6 Rev. 00

² Above 38.6

⁽b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5DESCRIPTION OF TEST MODES

The EUT (model: C102) had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode was programmed.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

Date of Issue: February 10, 2010

The worst case data rate is determined as the data rate with highest output power.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

During the preliminary test, GFSK, $\pi/4$ -QPSK & 8DPSK with DH1 were pre-tested and found that 8DPSK emits the highest output power. Then the tests were carried on with DH1 compare to DH3 & DH5 and found that 8DPSK with DH5 emit the highest output power, and therefore had been tested under operating condition.

Following channels were selected for the radiated emission testing only as listed below:

Tested Channel	sted Channel Modulation Type Packet Type		Date Rate	Axis
Low, Mid, High	GFSK	DH 5	1	X
Low, Mid, High	8DPSK	DH 5	3	X

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Page 7 Rev. 00

4. INSTRUMENT CALIBRATION

4.1MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Date of Issue: February 10, 2010

4.2MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site							
Name of Equipment Manufacturer Model Serial Number Calibration							
Spectrum Analyzer	Agilent	E4446A	MY43360131	02/22/2011			
Power Meter	Agilent	E4416A	GB41291611	04/05/2010			
Power Sensor	Agilent	E9327A	US40441097	06/05/2010			

3M Semi Anechoic Chamber						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
Spectrum Analyzer	Agilent	E4446A	US42510252	09/09/2010		
Test Receiver	Rohde&Schwarz	ESCI	100064	11/28/2010		
Switch Controller	TRC	Switch Controller	SC94050010	05/02/2010		
4 Port Switch	TRC	4 Port Switch	SC94050020	05/02/2010		
Loop Antenna	EMCO	6502	8905/2356	05/28/2010		
Horn-Antenna	TRC	HA-0502	06	06/03/2010		
Horn-Antenna	TRC	HA-0801	04	06/18/2010		
Horn-Antenna	TRC	HA-1201A	01	08/10/2010		
Horn-Antenna	TRC	HA-1301A	01	08/10/2010		
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/27/2010		
Loop Antenna	EMCO	6502	8905/2356	05/28/2010		
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.		
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.		
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.		
Site NSA	CCS	N/A	FCC MRA: TW1039 IC: 2324G-1 / -2	10/16/2010 11/04/2010		
Test S/W	LABVIEW (V 6.1)					

Powerline Conducted Emission room						
Name of Equipment	Manufacturer	Manufacturer Model S		Calibration Due		
TEST RECEIVER	R&S	ESHS20	840455/006	02/11/2011		
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127382	12/08/2010		
LISN	SOLAR	8012-50-R-24-BNC	8305114	12/08/2010		
BNC CABLE	MIYAZAKI	5D-FB	BNC A4	05/11/2010		
THERMO- HYGRO METER TECPEL		DTM-303 No.7		11/23/2010		
Test S/W	EMI 32.exe					

Page 8 Rev. 00

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 2.81
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	+/-3.70
3M Semi Anechoic Chamber / Above 1GHz	+/-3.09

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Date of Issue: February 10, 2010

Page 9 Rev. 00

5. FACILITIES AND ACCREDITATIONS

All measurement facilities used to collect the measurement data are located at

5.1 FACILITIES

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan Tel: 886-3-324-0332 / Fax: 886-3-324-5235
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and

Date of Issue: February 10, 2010

5.2EQUIPMENT

CISPR Publication 22.

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Page 10 Rev. 00

5.3TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	Canada IC 2324G-1 IC 2324G-2

Date of Issue: February 10, 2010

Page 11 Rev. 00

^{*} No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

6. SETUP OF EQUIPMENT UNDER TEST

6.1SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

Date of Issue: February 10, 2010

6.2SUPPORT EQUIPMENT

No.	Equipment	Trade Name	Model No.	Serial No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	DELL	PP19L	GK102 A00	QDS-BRCM1021	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	LCD Monitor	SAMSUNG	959NF	AQ19H2RT70 6126P	FCC DoC	Shielded, 1.8m with 2 cores	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
3.	USB Mouse	НР	M-UAL-96	570580-001	FCC DoC	Shielded, 1.8m	N/A
4	Notebook PC (Remote)	DELL	PP19L	GK102 A00	QDS-BRCM1021	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 12 Rev. 00


7. FCC PART 15.247 REQUIREMENTS

7.120 DB BANDWIDTH

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW= 10kHz, VBW = 30kHz, Span = auto, Sweep = auto.
- 4. Mark the peak frequency and 20dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted.

Test Data

For GFSK / DH5

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	0.923
Mid	2441	0.941
High	2480	0.947

For 8DPSK / DH5

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.290
Mid	2441	1.285
High	2480	1.270


Page 13 Rev. 00

Date of Issue: February 10, 2010


Test Plot

For GFSK / DH5

20dB Bandwidth (CH Low)

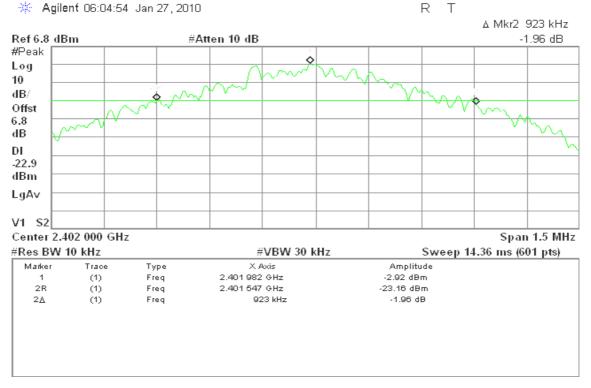


20dB Bandwidth (CH Mid)

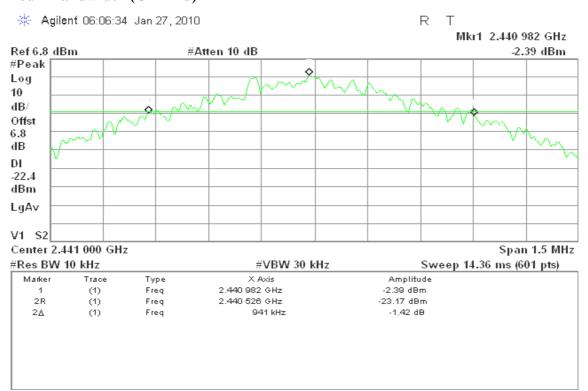

Page 14 Rev. 00


20dB Bandwidth (CH High)

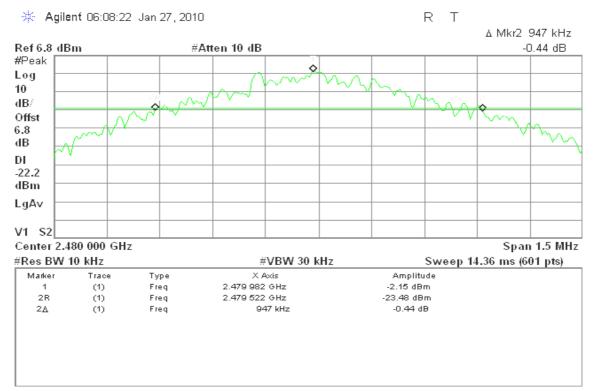


Page 15 Rev. 00

For 8DPSK / DH5

20dB Bandwidth (CH Low)

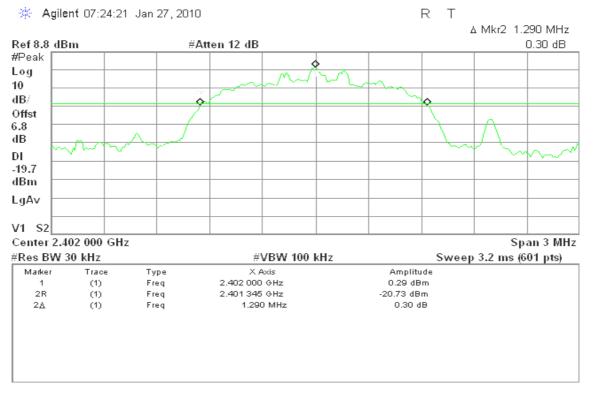


20dB Bandwidth (CH Mid)

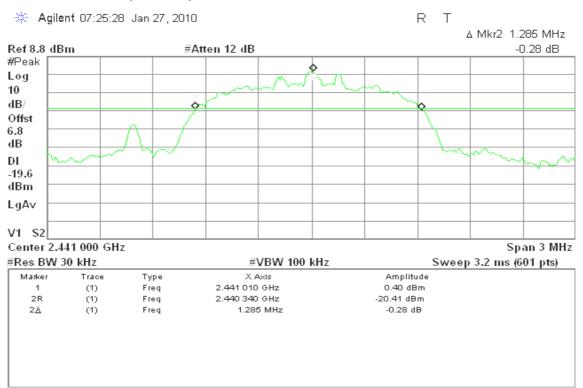

Page 16 Rev. 00

20dB Bandwidth (CH High)

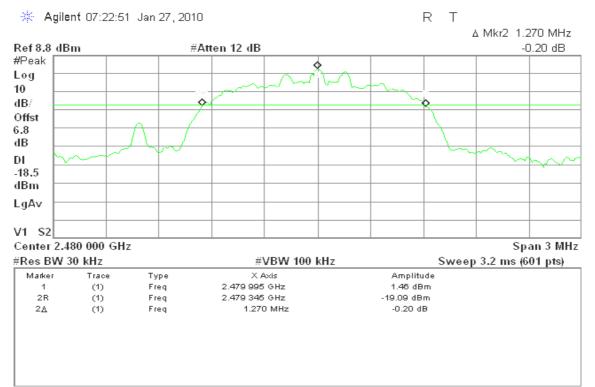

Page 17 Rev. 00

7.2PEAK POWER


LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

Date of Issue: February 10, 2010

- According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
- 2. According to \$15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted.

Page 18 Rev. 00

Test Data

For GFSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	2.98	0.00199		PASS
Mid	2441	3.59	0.00229	0.125	PASS
High	2480	4.00	0.00251		PASS

For 8DPSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	0.87	0.00122		PASS
Mid	2441	1.28	0.00134	0.125	PASS
High	2480	1.80	0.00151		PASS


Page 19 Rev. 00

7.3AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

For GFSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	1.50	0.00141
Mid	2441	2.12	0.00163
High	2480	2.55	0.00180

For 8DPSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	-2.50	0.00056
Mid	2441	-2.06	0.00062
High	2480	-1.59	0.00069

Page 20 Rev. 00

Date of Issue: February 10, 2010


7.4BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Date of Issue: February 10, 2010

Test Configuration

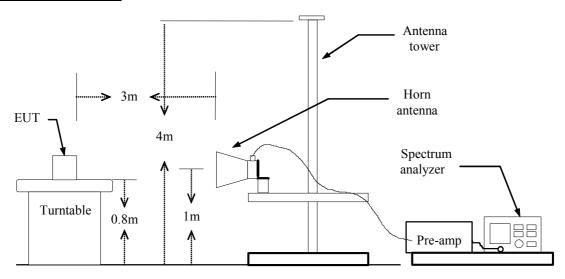

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS


Refer to attach spectrum analyzer data chart.

Page 21 Rev. 00


For GFSK / DH5

Band Edges (CH Low)

Detector mode: Peak Polarity: Vertical

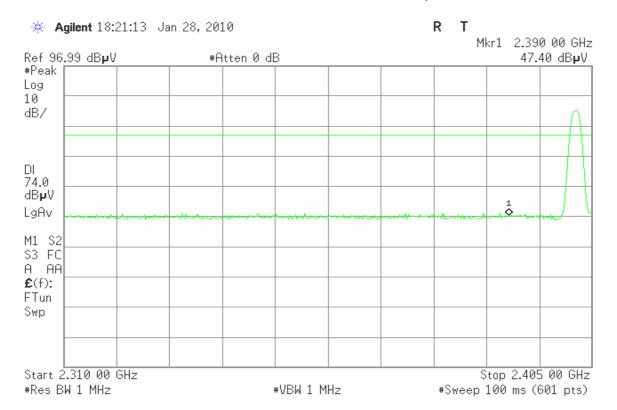


Detector mode: Average Polarity: Vertical

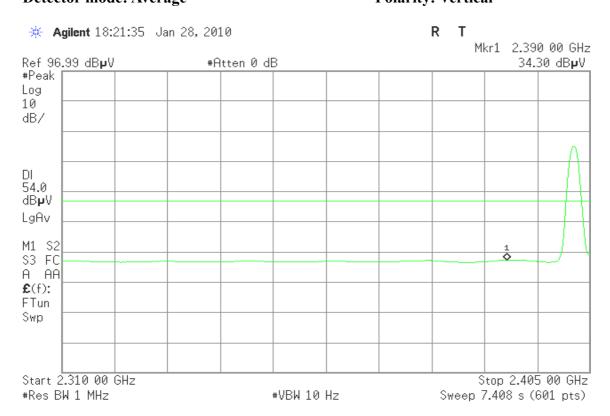


Page 22 Rev. 00

Date of Issue: February 10, 2010

Detector mode: Peak

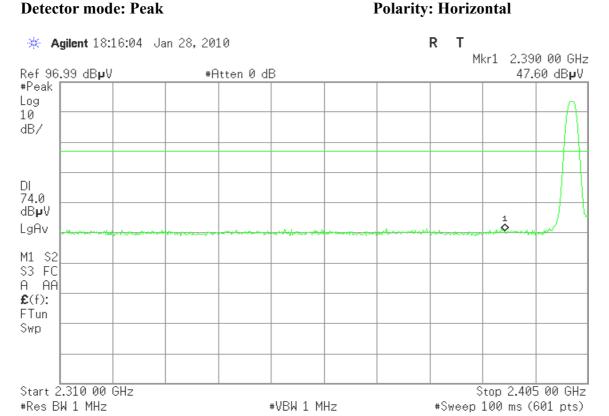


Detector mode: Average

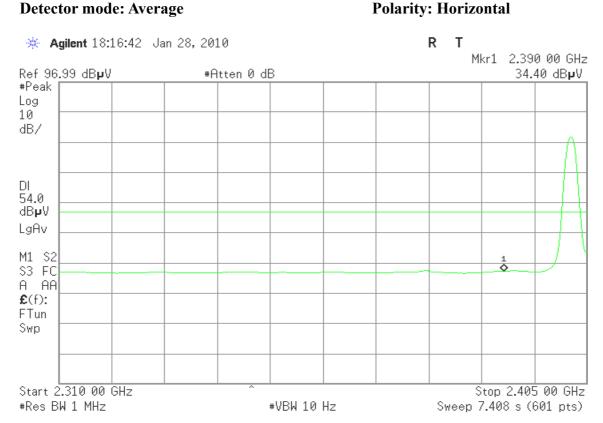


Page 23 Rev. 00

Band Edges (CH High)

Detector mode: Peak Polarity: Vertical

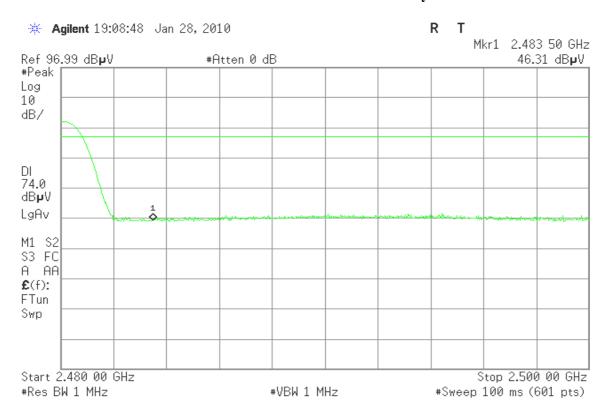


Detector mode: Average Polarity: Vertical

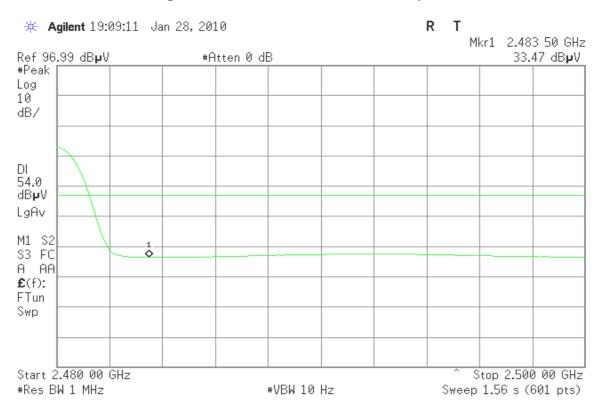

Page 24 Rev. 00


Detector mode: Peak

Polarity: Horizontal

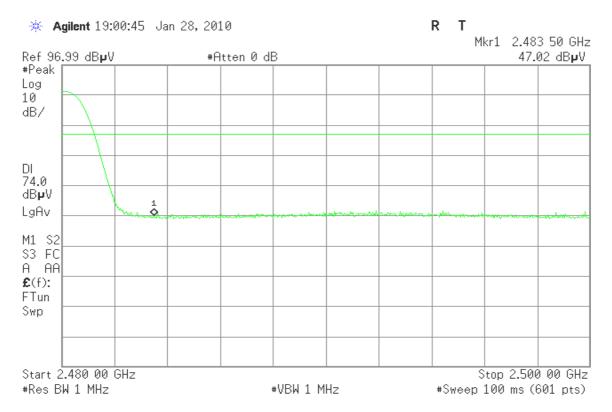

Detector mode: Average

Polarity: Horizontal

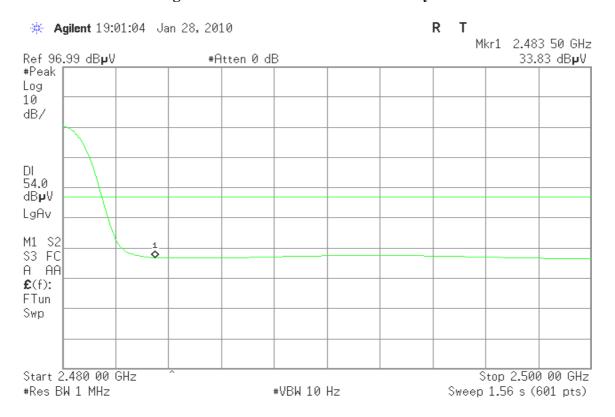


Page 25 Rev. 00


For 8DPSK / DH5

Band Edges (CH Low)

Detector mode: Peak Polarity: Vertical

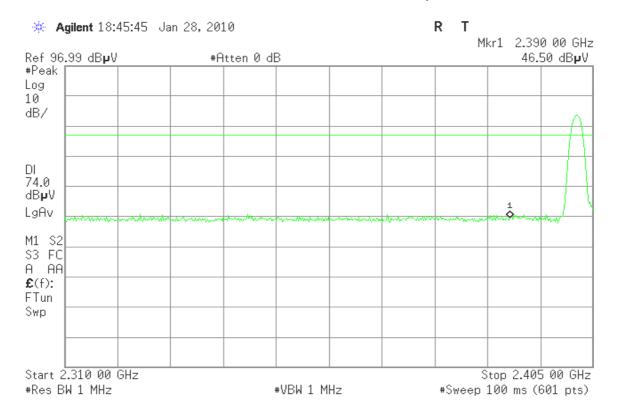


Detector mode: Average Polarity: Vertical

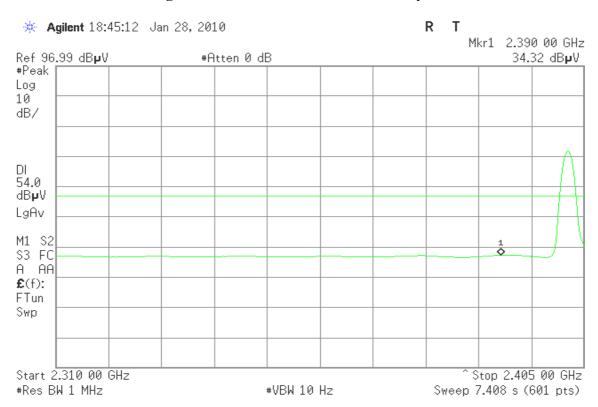


Page 26 Rev. 00

Detector mode: Peak

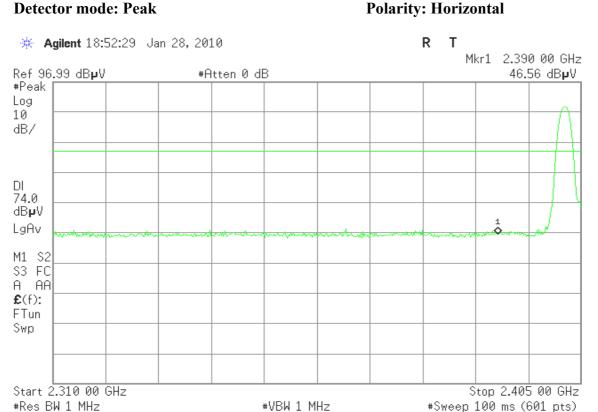


Detector mode: Average

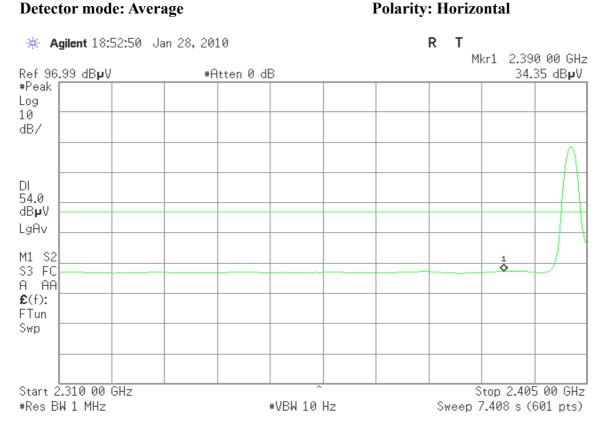


Page 27 Rev. 00

Band Edges (CH High)

Detector mode: Peak Polarity: Vertical

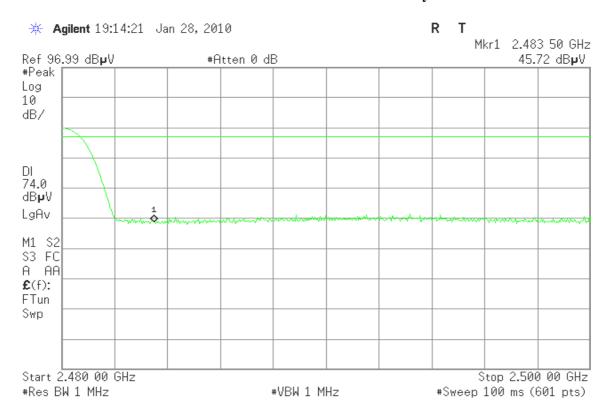

Detector mode: Average Polarity: Vertical

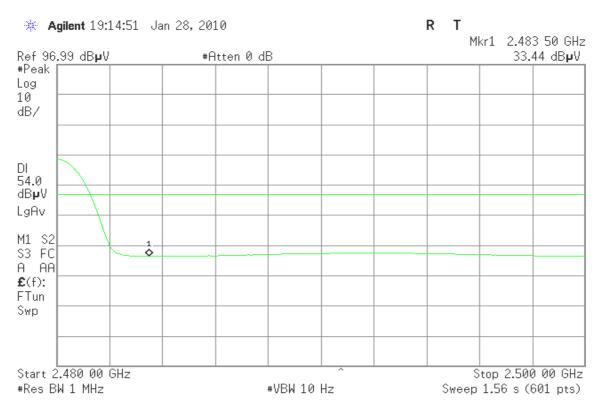


Page 28 Rev. 00

CID: X57-C102100 Date of Issue: February 10, 2010

Detector mode: Peak

Polarity: Horizontal

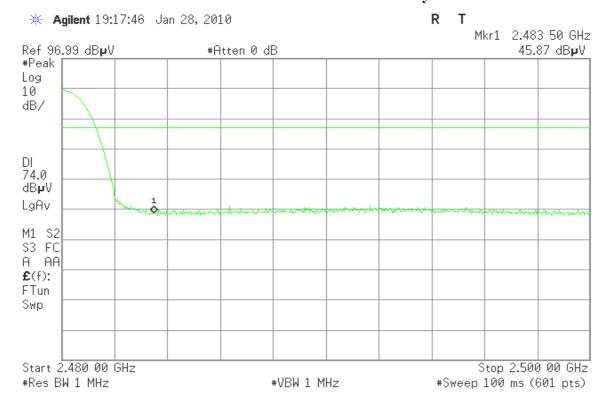


Detector mode: Average

* Agilent 19:18:16 Jan 28, 2010

Polarity: Horizontal

R T

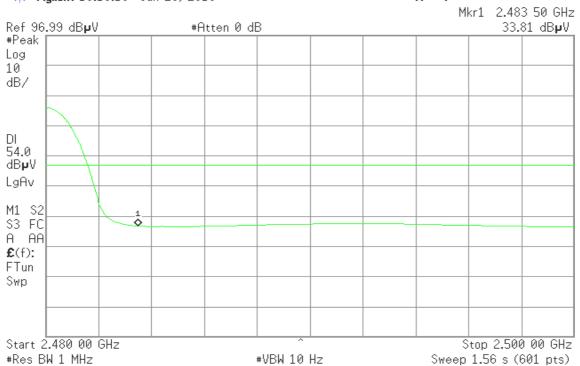

Page 29 Rev. 00


7.5FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Date of Issue: February 10, 2010

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
- 5. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Page 30 Rev. 00

Test Data

For GFSK / DH5

Channel Separation (MHz)	Two-thirds of the 20 dB bandwidth (kHz)	Channel Separation Limit	Result
1.00	654.6	>Two-thirds of the 20 dB bandwidth	Pass

For 8DPSK / DH5


el Separation (MHz)	Two-thirds of the 20 dB bandwidth (kHz)	Channel Separation Limit	Result
1.00	860	>Two-thirds of the 20 dB bandwidth	Pass

Page 31 Rev. 00


Test Plot

For GFSK / DH5

Measurement of Channel Separation

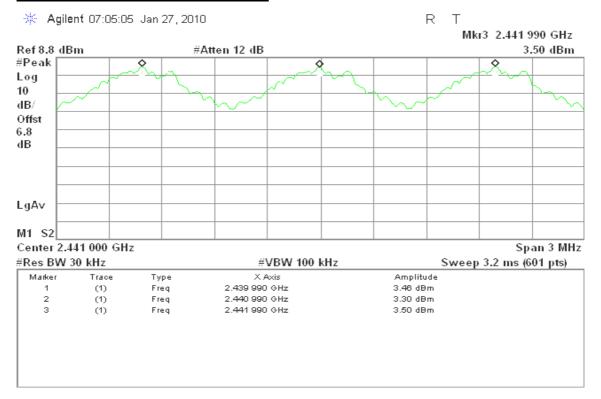

Measurement of 20dB Bandwidth

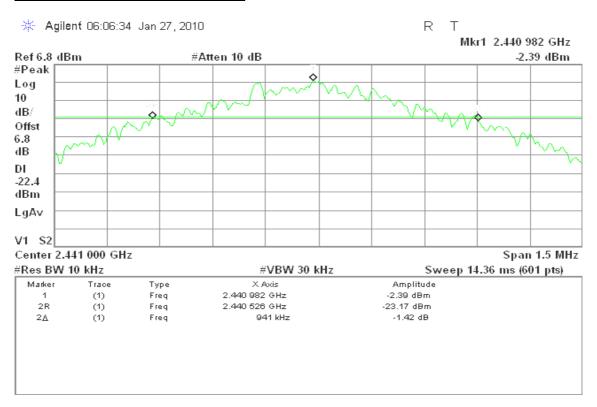


Page 32 Rev. 00


7-C102100 Date of Issue: February 10, 2010

For 8DPSK / DH5

Measurement of Channel Separation

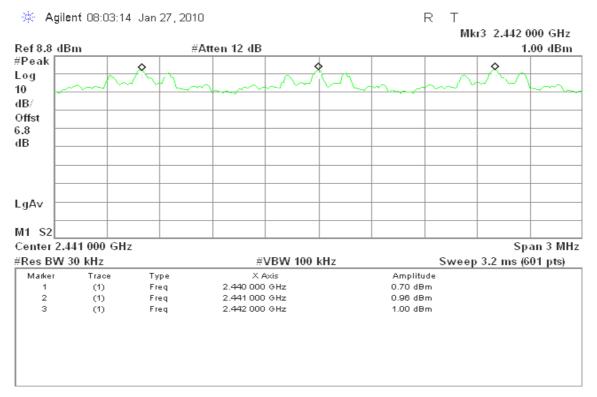

Measurement of 20dB Bandwidth

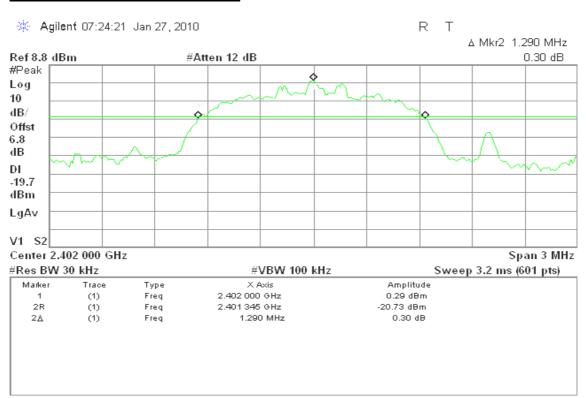

Page 33 Rev. 00


7.6NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

Date of Issue: February 10, 2010

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW, VBW=510kHz.
- 5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

For GFSK / 8DPSK

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

Page 34 Rev. 00

Sweep 1 ms (601 pts)


Rev. 00

Test Plot

For GFSK


Channel Number

2.4 GHz – 2.4415 GHz

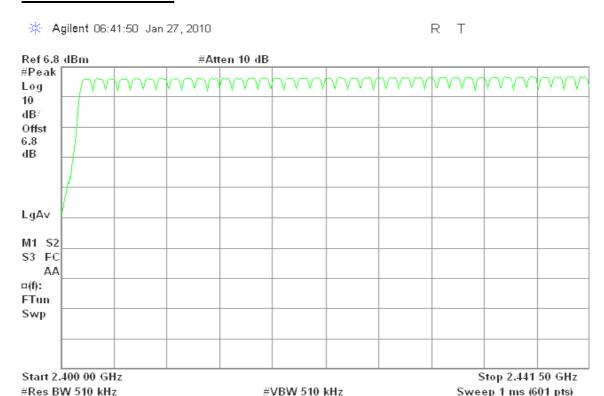

2.4415 GHz - 2.4835 GHz



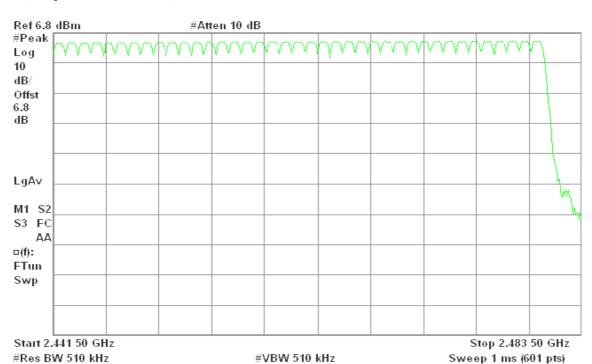


Page 35

For 8DPSK

Channel Number

2.4 GHz – 2.4415 GHz




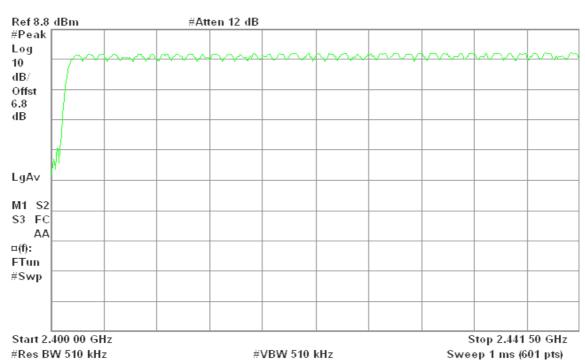

2.4415 GHz - 2.4835 GHz

★ Agilent 07:47:58 Jan 27, 2010

R T

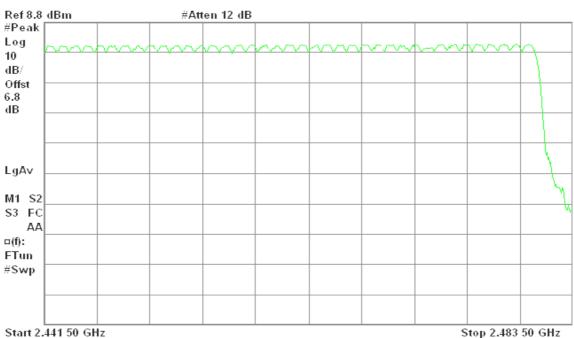

Start 2.441 50 GHz Stop 2.483 50 GH: #Res BW 510 kHz #VBW 510 kHz Sweep 1 ms (601 pts)

Page 36 Rev. 00


7.7TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Date of Issue: February 10, 2010

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 5. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

No non-compliance noted

Page 37 Rev. 00

Test Data

For GFSK

<u>DH 1</u>

CH Low: 0.40 * (1600/2)/79 * 31.6 = 128.00 (ms) CH Mid: 0.40 * (1600/2)/79 * 31.6 = 128.00 (ms) CH High: 0.40 * (1600/2)/79 * 31.6 = 128.00 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.40	128.00	31.60		PASS
Mid	0.40	128.00	31.60	400.00	PASS
High	0.40	128.00	31.60		PASS

DH 3

CH Low: 1.667 * (1600/4)/79 * 31.6 = 266.72 (ms) CH Mid: 1.667 * (1600/4)/79 * 31.6 = 266.72 (ms) CH High: 1.667 * (1600/4)/79 * 31.6 = 266.72 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.667	266.72	31.60		PASS
Mid	1.667	266.72	31.60	400.00	PASS
High	1.667	266.72	31.60		PASS

<u>DH 5</u>

CH Low: 2.90 * (1600/6)/79 * 31.6 = 309.33 (ms) CH Mid: 2.90 * (1600/6)/79 * 31.6 = 309.33 (ms) CH High: 2.90 * (1600/6)/79 * 31.6 = 309.33 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.90	309.33	31.60		PASS
Mid	2.90	309.33	31.60	400.00	PASS
High	2.90	309.33	31.60		PASS

Page 38 Rev. 00


Date of Issue: February 10, 2010

Test Plot

For GFSK

DH 1

CH Low

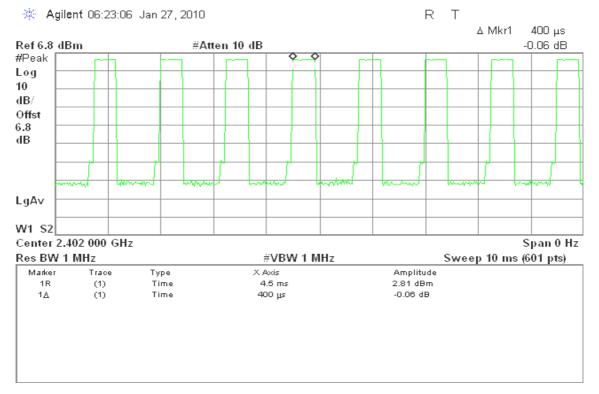


CH Mid




Page 39 Rev. 00

CH High

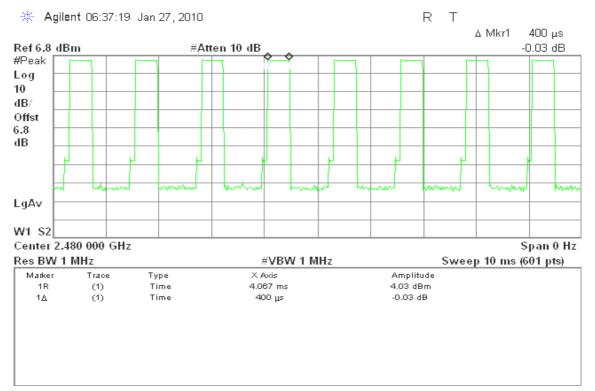


DH 3

CH Low

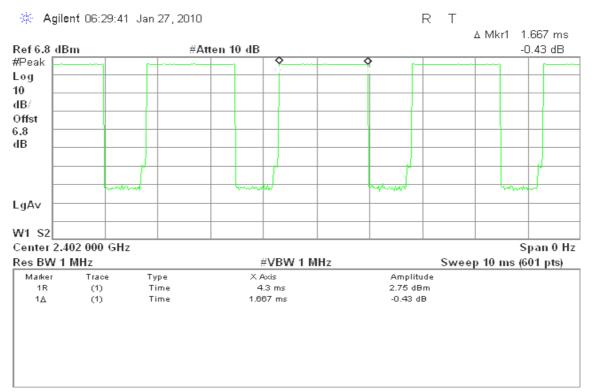


Page 40 Rev. 00

CH Mid

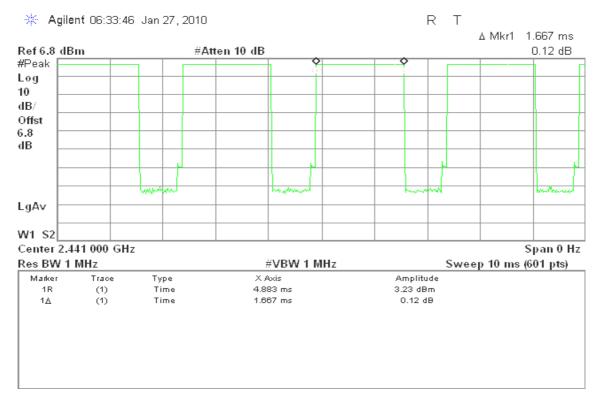


CH High

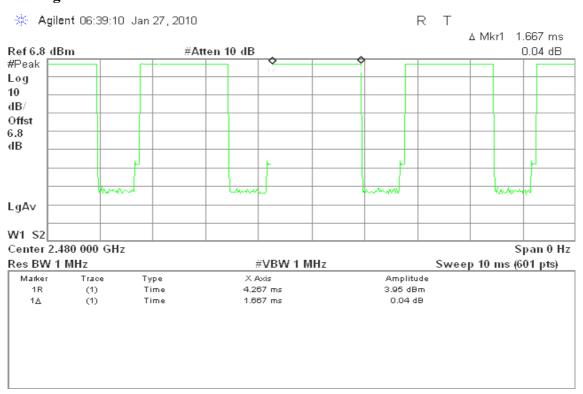


Page 41 Rev. 00

DH 5

CH Low

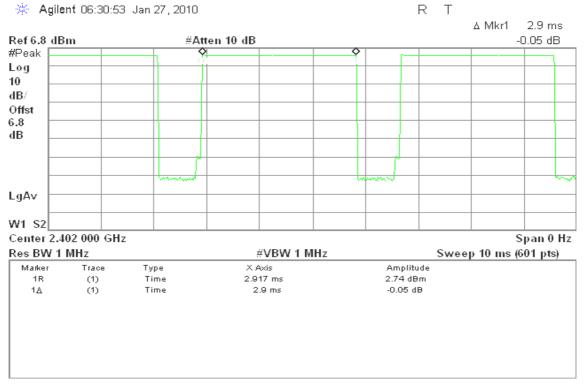


CH Mid

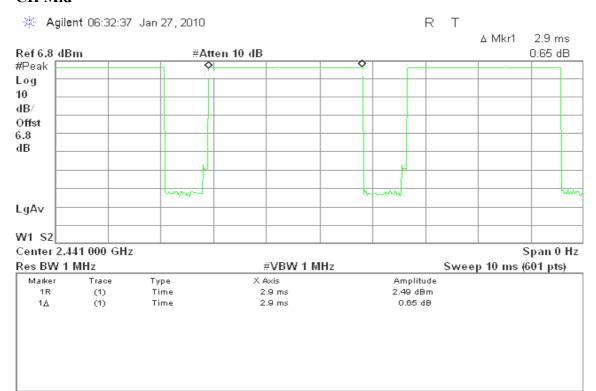

Page 42 Rev. 00

CH High

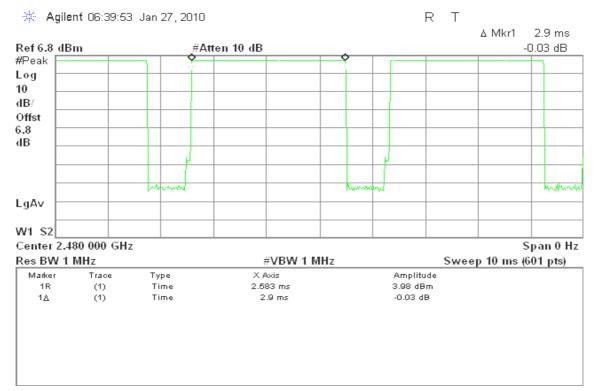

Page 43 Rev. 00

Date of Issue: February 10, 2010

Test Data

For 8DPSK

<u>DH 1</u>

CH Low: 0.400 * (1600/2)/79 * 31.6 = 128.00 (ms) CH Mid: 0.400 * (1600/2)/79 * 31.6 = 128.00 (ms) CH High: 0.400 * (1600/2)/79 * 31.6 = 128.00 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.400	128.00	31.60		PASS
Mid	0.400	128.00	31.60	400.00	PASS
High	0.400	128.00	31.60		PASS

<u>DH 3</u>

CH Low: 1.667 * (1600/4)/79 * 31.6 = 266.720 (ms) CH Mid: 1.667 * (1600/4)/79 * 31.6 = 266.720 (ms) CH High: 1.667 * (1600/4)/79 * 31.6 = 266.720 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.667	266.720	31.60		PASS
Mid	1.667	266.720	31.60	400.00	PASS
High	1.667	266.720	31.60		PASS

DH 5

CH Low: 2.917 * (1600/6)/79 * 31.6 = 311.147 (ms) CH Mid: 2.917 * (1600/6)/79 * 31.6 = 311.147 (ms) CH High: 2.917 * (1600/6)/79 * 31.6 = 311.147 (ms)

СН	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.917	311.147	31.60		PASS
Mid	2.917	311.147	31.60	400.00	PASS
High	2.917	311.147	31.60		PASS

Page 44 Rev. 00

Date of Issue: February 10, 2010

For 8DPSK

<u>DH 1</u>

CH Low



CH Mid



Page 45 Rev. 00

CH High



DH 3

CH Low



Page 46 Rev. 00

CH Mid



CH High




Page 47 Rev. 00


Date of Issue: February 10, 2010

<u>DH 5</u>

CH Low

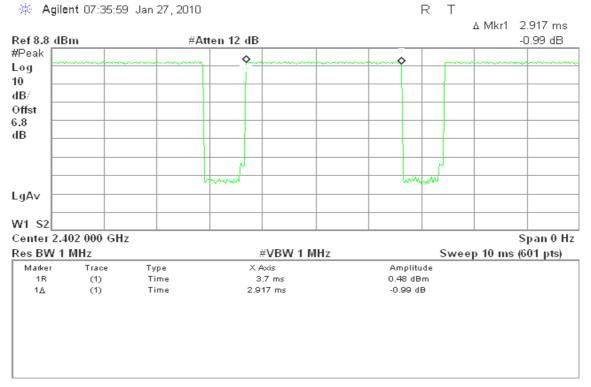


CH Mid

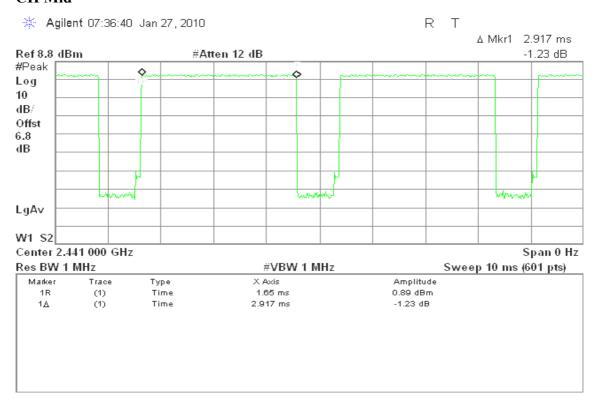

Page 48 Rev. 00

CH High

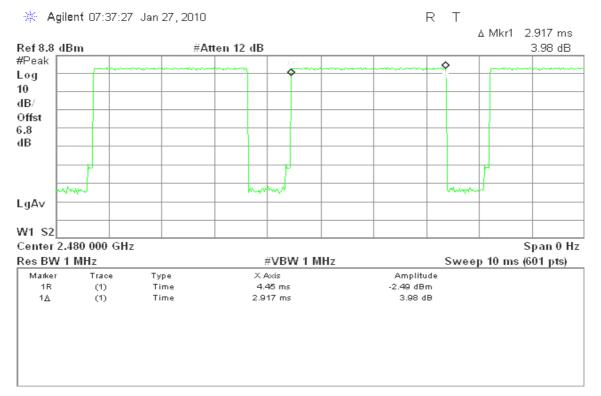

Page 49 Rev. 00

7.8SPURIOUS EMISSIONS


7.8.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Date of Issue: February 10, 2010

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted

Page 50 Rev. 00


Test Plot

For GFSK / DH5

CH Low

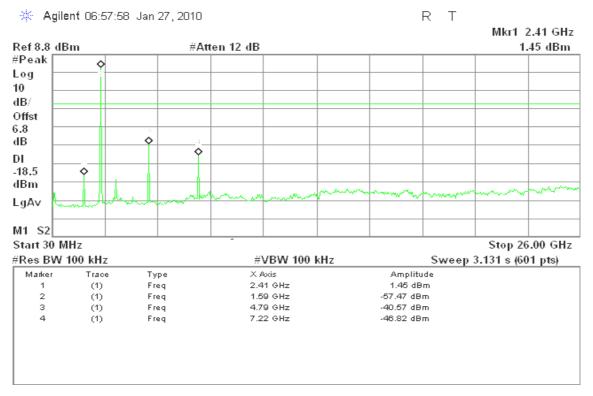


CH Mid

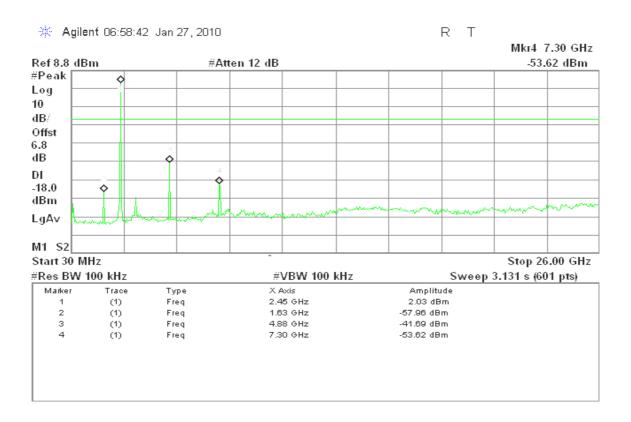

Page 51 Rev. 00


CH High

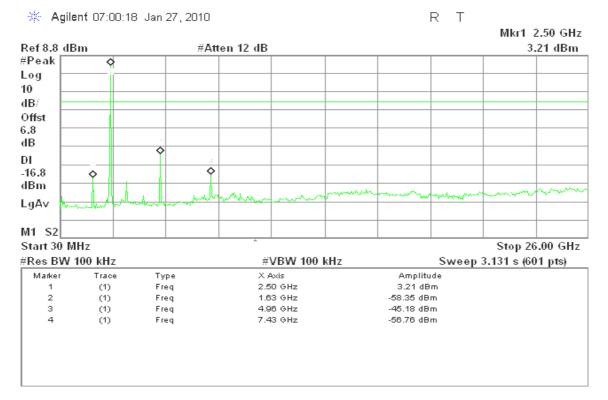


Page 52 Rev. 00

For 8DPSK / DH5

CH Low

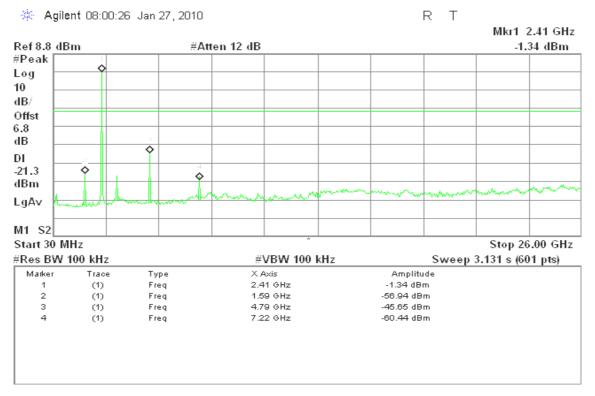


CH Mid

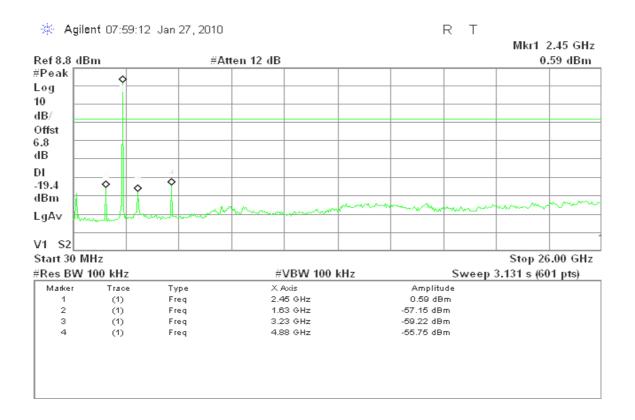

Page 53 Rev. 00

CH High

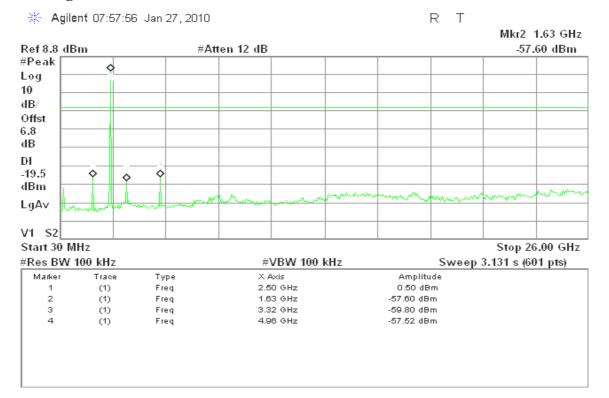

Page 54 Rev. 00

7.8.2 Radiated Emissions

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


Page 55 Rev. 00

Test Configuration

$9kHz \sim 30MHz$

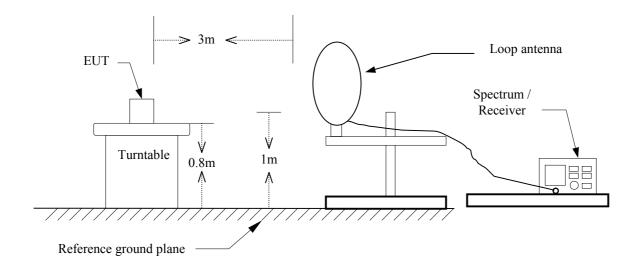


Below 1 GHz

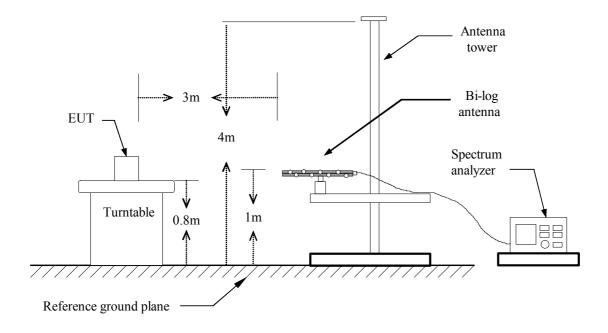

Page 56 Rev. 00

Above 1 GHz

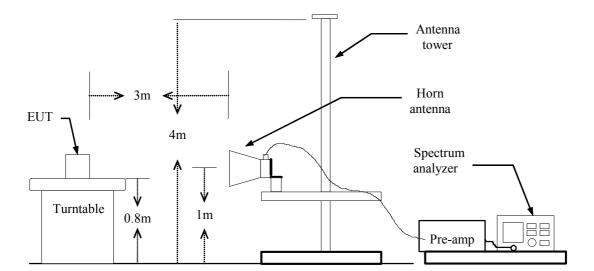

Page 57 Rev. 00

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

Date of Issue: February 10, 2010

- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

Page 58 Rev. 00

Below 1 GHz

Operation Mode: Normal Link **Test Date:** January 28, 2010

Date of Issue: February 10, 2010

Temperature: 23°C **Tested by:** Wolf Huang

Humidity: 50 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
36.47	V	38.54	-6.57	31.97	40.00	-8.03	Peak
99.52	V	47.05	-13.16	33.89	43.50	-9.61	Peak
136.70	V	43.28	-9.84	33.44	43.50	-10.06	Peak
416.38	V	36.73	-6.69	30.05	46.00	-15.95	Peak
511.77	V	35.86	-4.99	30.87	46.00	-15.13	Peak
544.10	V	33.65	-4.55	29.10	46.00	-16.90	Peak
104.37	Н	48.36	-12.28	36.08	43.50	-7.42	Peak
224.00	Н	47.26	-11.39	35.87	46.00	-10.13	Peak
288.67	Н	45.36	-9.36	35.99	46.00	-10.01	Peak
384.05	Н	44.39	-7.40	36.99	46.00	-9.01	Peak
424.47	Н	44.38	-6.49	37.89	46.00	-8.11	Peak
544.10	Н	35.69	-4.55	31.14	46.00	-14.86	Peak

Remark:

- 1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
- 2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Margin(dB) = Remark result(dBuV/m) Quasi-peak limit(dBuV/m).

Page 59 Rev. 00

Above 1 GHz

Operation Mode: TX / GFSK / DH5 / CH Low **Test Date:** January 28, 2010

Temperature: 23°C **Tested by:** Wolf Huang

Humidity: 50 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	57.59		-9.48	48.12		74.00	54.00	-5.88	Peak
4800.00	V	60.16	52.49	1.18	61.34	53.67	74.00	54.00	-0.33	AVG
N/A										
1336.67	Н	60.54		-9.03	51.51		74.00	54.00	-2.49	Peak
1603.33	Н	54.63		-7.81	46.82		74.00	54.00	-7.18	Peak
4800.00	Н	59.71	52.26	1.18	60.89	53.44	74.00	54.00	-0.56	AVG
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 60 Rev. 00

Operation Mode: TX / GFSK / DH5 / CH Mid **Test Date:** January 28, 2010

Date of Issue: February 10, 2010

Temperature: 23°C **Tested by:** Wolf Huang

Humidity: 50 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	60.28		-9.48	50.80		74.00	54.00	-3.20	Peak
1330.00	V	58.03		-9.04	48.99		74.00	54.00	-5.01	Peak
1626.67	V	52.66		-7.59	45.06		74.00	54.00	-8.94	Peak
4883.33	V	57.98	48.29	1.16	59.14	49.45	74.00	54.00	-4.55	AVG
N/A										
1063.33	Н	55.59		-9.48	46.11		74.00	54.00	-7.89	Peak
1333.33	Н	56.77		-9.04	47.73		74.00	54.00	-6.27	Peak
1626.67	Н	54.58		-7.59	46.99		74.00	54.00	-7.01	Peak
4883.33	Н	58.25	48.16	1.16	59.41	49.32	74.00	54.00	-4.68	AVG
N/A										
	·								·	

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 61 Rev. 00

Operation Mode: TX / GFSK / DH5 / CH High Test Date: January 28, 2010

Date of Issue: February 10, 2010

Temperature: 23°C **Tested by:** Wolf Huang

Humidity: 50 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	53.92		-9.48	44.44		74.00	54.00	-9.56	Peak
4958.33	V	53.01	43.01	1.13	54.14	44.14	74.00	54.00	-9.86	AVG
N/A										
1653.33	Н	52.49		-7.35	45.14		74.00	54.00	-8.86	Peak
4958.33	Н	57.78	44.01	1.13	58.91	45.14	74.00	54.00	-8.86	AVG
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 62 Rev. 00

Operation Mode: TX / 8DPSK / DH5 / CH Low **Test Date:** January 28, 2010

Date of Issue: February 10, 2010

Temperature: 23°C **Tested by:** Wolf Huang

Humidity: 50 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2036.67	V	50.25		-4.04	46.21		74.00	54.00	-7.79	Peak
4800.00	V	53.21	44.31	1.18	54.39	45.49	74.00	54.00	-8.51	AVG
N/A										
1603.33	Н	55.91		-7.81	48.10		74.00	54.00	-5.90	Peak
2136.67	Н	51.17		-3.74	47.42		74.00	54.00	-6.58	Peak
4800.00	Н	53.24	44.59	1.18	54.42	45.77	74.00	54.00	-8.23	AVG
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 63 Rev. 00

Operation Mode: TX / 8DPSK / DH5 / CH Mid Test Date: January 28, 2010

Date of Issue: February 10, 2010

Temperature: 23°C **Tested by:** Wolf Huang

Humidity: 50 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	61.08		-9.48	51.59		74.00	54.00	-2.41	Peak
4883.33	V	49.59		1.16	50.75		74.00	54.00	-3.25	Peak
N/A										
1196.67	Н	53.89		-9.26	44.63		74.00	54.00	-9.37	Peak
1626.67	Н	54.41		-7.59	46.82		74.00	54.00	-7.18	Peak
4883.33	Н	50.37		1.16	51.53		74.00	54.00	-2.47	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 64 Rev. 00

Operation Mode: TX / 8DPSK / DH5 / CH High Test Date: January 28, 2010

Date of Issue: February 10, 2010

Temperature: 23°C **Tested by:** Wolf Huang

Humidity: 50 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1816.67	V	51.43		-5.84	45.59		74.00	54.00	-8.41	Peak
4866.67	V	49.49		1.16	50.66		74.00	54.00	-3.34	Peak
N/A										
1653.33	Н	51.86		-7.35	44.51		74.00	54.00	-9.49	Peak
5183.33	Н	49.11		1.38	50.49		74.00	54.00	-3.51	Peak
N/A										

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 65 Rev. 00

7.8.3 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Date of Issue: February 10, 2010

Frequency Range (MHz)	Limits (dBμV)				
(IVIIIZ)	Quasi-peak	Average			
0.15 to 0.50	66 to 56*	56 to 46*			
0.50 to 5	56	46			
5 to 30	60	50			

^{*} Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Page 66 Rev. 00

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Date of Issue: February 10, 2010

Test Data

Operation Mode: Normal Link **Test Date:** December 10, 2009

Temperature: 22°C **Tested by:** Sehni Hu

Humidity: 45% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1519	47.09	29.29	0.12	47.21	29.41	65.90	55.90	-18.69	-26.49	L1
0.1714	52.55	41.89	0.11	52.66	42.00	64.89	54.89	-12.23	-12.89	L1
0.2278	42.64	28.30	0.09	42.73	28.39	62.53	52.53	-19.80	-24.14	L1
0.3065	31.65	20.17	0.08	31.73	20.25	60.06	50.06	-28.33	-29.81	L1
1.9895	31.18	20.18	0.06	31.24	20.24	56.00	46.00	-24.76	-25.76	L1
3.8648	35.42	21.01	0.06	35.48	21.07	56.00	46.00	-20.52	-24.93	L1
0.1519	46.50	27.86	0.14	46.64	28.00	65.90	55.90	-19.26	-27.90	L2
0.1701	49.89	32.91	0.13	50.02	33.04	64.96	54.96	-14.94	-21.92	L2
0.2843	39.21	25.63	0.09	39.30	25.72	60.69	50.69	-21.39	-24.97	L2
0.4080	22.09	13.79	0.09	22.18	13.88	57.69	47.69	-35.51	-33.81	L2
2.1557	29.17	14.41	0.08	29.25	14.49	56.00	46.00	-26.75	-31.51	L2
3.9715	33.05	15.46	0.09	33.14	15.55	56.00	46.00	-22.86	-30.45	L2


Remark:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
- 3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz;
- 4. $L1 = Line \ One \ (Live \ Line) \ / \ L2 = Line \ Two \ (Neutral \ Line)$


Page 67 Rev. 00

Test Plots

Conducted emissions (Line 1)

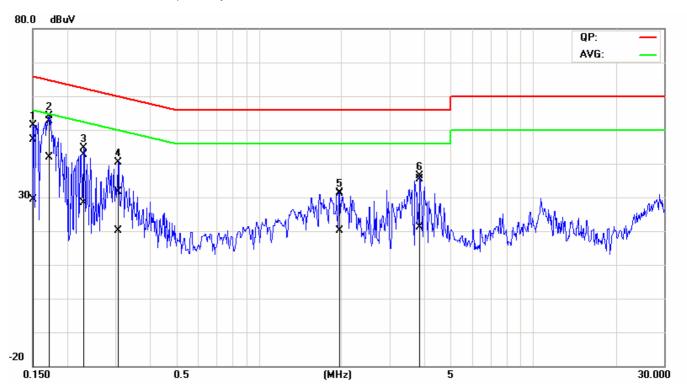

Conducted emissions (Line 2)

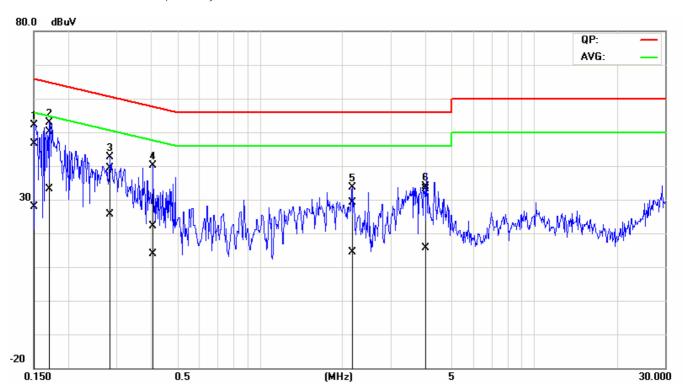

Page 68 Rev. 00

APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

Date of Issue: February 10, 2010

EUT Specification

EUT	Sound Cap				
Frequency band (Operating)	 WLAN: 2.412GHz ~ 2.462GHz WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz WLAN: 5.745GHz ~ 5.825GHz ✓ Others: Bluetooth: 2.402GHz ~ 2.480GHz 				
Device category	Portable (<20cm separation) Mobile (>20cm separation) Others				
Exposure classification	Occupational/Controlled exposure $(S = 5mW/cm^2)$ General Population/Uncontrolled exposure $(S=1mW/cm^2)$				
Antenna diversity	 Single antenna Multiple antennas ☐ Tx diversity ☐ Rx diversity ☐ Tx/Rx diversity 				
Max. output power	4.00 dBm (2.51189mW)				
Antenna gain (Max)	2.5 dBi (Numeric gain: 1.77)				
Evaluation applied					
Remark:					
 The maximum output power is 4.00 dBm (2.51189 mW) at 2480MHz (with 1.77 numeric antenna gain.) DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance. 					
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm ² even if the calculation indicates that the power density would be larger					

TEST RESULTS

No non-compliance noted.

(SAR evaluation is not required for the PORTABLE device while its maximum output power is lower than the general population low threshold: $60/f_{(GHz)}=60/2.441=24.58$ mW)

Page 69 Rev. 00