

FCC TEST REPORT

FCC ID : X5ALUMT5-AX0DXX
Applicant : Lumiversal, Inc.
Address : 500 N. Rainbow Blvd; Suite 300, Las Vegas, NV 89107

Equipment Under Test (EUT) :


Product Name : Lighting Fixture
Model No. : LUMT5-Ax0D/14-U, LUMT5-Ax0D/21-U,
LUMT5-Ax0D/28-U, LUMT5-Ax0D/35-U

Standards : FCC CFR47 Part 18 Section 18.305:2009

Date of Test : August 5 ~ August 23, 2011

Date of Issue : October 8, 2011

Test Engineer : Hunk yan 

Reviewed By : Philo zhong 

Test Result	: PASS
--------------------	---------------

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,
Shenzhen 518105, China

Tel :+86-755-27553488

Fax:+86-755-27553868

The sample detailed above has been tested to the requirements of Council Directives ANSI C63.4:2003. The test results have been reviewed against the Directives above and found to meet their essential requirements.

Waltek Services

Ref. No.: WT10093841-N-E-F

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 TEST SUMMARY.....	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 DETAILS OF E.U.T.....	4
4.4 DESCRIPTION OF SUPPORT UNITS	4
4.5 STANDARDS APPLICABLE FOR TESTING.....	4
4.6 TEST METHODOLOGY	4
4.7 TEST FACILITY.....	5
4.8 TEST LOCATION.....	5
5 EQUIPMENT USED DURING TEST	6
6 CONDUCTED EMISSION TEST	7
6.1 TEST EQUIPMENT.....	7
6.2 TEST PROCEDURE	7
6.3 CONDUCTED TEST SETUP	8
6.4 EUT OPERATING CONDITION	8
6.5 CONDUCTED EMISSION LIMITS	9
6.6 SPECTRUM ANALYZER.....	9
6.7 CONDUCTED EMISSION TEST RESULT.....	9
6.8 MEASUREMENT DATA	10
7 RADIATED EMISSIONS TEST	12
7.1 RADIATED EMISSION DATA	12
7.2 MEASUREMENT UNCERTAINTY.....	12
7.3 EUT SETUP.....	13
7.4 SPECTRUM ANALYZER SETUP.....	13
7.5 TEST PROCEDURE	14
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
7.7 SUMMARY OF TEST RESULTS.....	15
8 PHOTOGRAPHS OF TESTING.....	17
8.1 CONDUCTED EMISSION TEST VIEW.....	17
8.2 RADIATED EMISSION TEST VIEW	17
9 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	18
9.1 EUT - APPEARANCE VIEW.....	18
9.2 EUT - SPECIAL VIEW.....	18
9.3 PCB - FRONT VIEW	19
9.4 PCB - BACK VIEW	19
10 FCC LABEL	20

Lumiversal, Inc.

FCC ID: X5ALUMT5-AX0DXX

3 Test Summary

Test	Test Requirement	Test Method	Result
Radiated Emission (30MHz to 1GHz)	Part 18.305	ANSI C63.4:2003	PASS
Conducted Emission (450KHz to 30MHz)	Part 18.307	ANSI C63.4:2003	PASS

WALTEK SERVICES

Reference No.: WT10093841-N-E-F

Lumiversal, Inc.

FCC ID: X5ALUMT5-AX0DXX

4 General Information

4.1 Client Information

Applicant: Lumiversal, Inc.
Address of Applicant: 500 N. Rainbow Blvd; Suite 300, Las Vegas, NV 89107

Manufacturer: DEQING DANRAN ELECTRONICS CO., LTD.
Address of Manufacturer: 91# CHANGHONG WEST STREET, WUKANG TOWN,
DEQING COUNTY, ZHEJIANG PROVINCE

4.2 General Description of E.U.T.

Product description: Lighting Fixture
Model No.: LUMT5-Ax0D/14-U, LUMT5-Ax0D/21-U,
LUMT5-Ax0D/28-U, LUMT5-Ax0D/35-U
Difference description: All the models have similar circuit elements. They have the similar constructions, key components, materials, construction of transformers and electrical connections. Difference among these models are appearance (length) and power. On the basis of these, we choose the model LUMT5-Ax0D/35-U as the test model, and this report is also applicable to the above-mentioned models.

4.3 Details of E.U.T.

Power Supply: 120VAC / 60Hz

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for an Lighting Fixture. The standards used were FCC Part 18.

4.6 Test Methodology

All measurements contained in this report are conducted with FCC Measurement Procedure MP-5, technical requirements for Methods of Measurement of Radio-Noise Emission from ISM Equipment.

Lumiversal, Inc.

FCC ID: X5ALUMT5-AX0DXX

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration No.: 7760A, August 3, 2010.

4.8 Test Location

All Emission tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

WALTEK SERVICES

Reference No.: WT10093841-N-E-F

Lumiversal, Inc.

FCC ID: X5ALUMT5-AX0DXX

5 Equipment Used during Test

Equipment Name	Manufacturer Model	Equipment No.	Internal No.	Specification	Cal. Date	Due Date	Cert. No.	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY45114 943	W20080 01	9k- 26.5GHz	Aug.2, 2011	Aug.1, 2012	Wws2 00815 96	±1dB
Trilog Broadband Antenne 30- 3000 MHz	SCHWARZB ECK MESS- ELEKTROM / VULB9163	336	W20080 02	30-3000 MHz	Aug.2, 2011	Aug.1, 2012	-	±1dB
Broad-band Horn Antenna 1- 18 GHz	SCHWARZB ECK MESS- ELEKTROM / BBHA9120D	667	W20080 03	1-18GHz	Aug.2, 2011	Aug.1, 2012	-	f<10 GHz: ±1dB 10GHz<f <18 GHz: ±1.5dB
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connector	SCHWARZB ECK MESS- ELEKTROM /AK 9513	-	-	-	Aug.2, 2011	Aug.1, 2012	-	-
Positioning Controller	C&C LAB/ CC-C-IF	-	-	-	Aug.2, 2011	Aug.1, 2012	-	-
Color Monitor	SUNSPO/ SP-14C	-	-	-	Aug.2, 2011	Aug.1, 2012	-	-
Test Receiver	ROHDE&SC HWARZ/ ESPI	101155	W20050 01	9k-3GHz	Aug.2, 2011	Aug.1, 2012	Wws2 00809 42	±1dB
EMI Receiver	Beijingkehuan	KH3931	-	9k-1GHz	Aug.2, 2011	Aug.1, 2012	-	-
Two-Line V- Network	ROHDE&SC HWARZ/ ENV216	100115	W20050 02	50Ω/50μ H	Aug.2, 2011	Aug.1, 2012	Wws2 00809 41	±10%
V—LISN	SCHWARZB ECK MESS- ELEKTRON IK	NSLK 8128	8128- 259	9k-30MHz	Aug.2, 2011	Aug.1, 2012	-	-

WALTEK SERVICES

Reference No.: WT10093841-N-E-F

6 Conducted Emission Test

Test Requirement:	FCC Part 18.307
Test Method:	Based on ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	450kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment

Please refer to Section 5 in this report.

6.2 Test Procedure

1. During the conducted emission test, the power cord of the EUT is connected to the LISN.
2. The EUT was tested according to FCC MP-5. The frequency spectrum from 450kHz to 30MHz was investigated.
3. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


Lumiversal, Inc.

FCC ID: X5ALUMT5-AX0DXX

6.3 Conducted Test Setup

The conducted emission tests were performed using the setup accordance with the FCC MP-5 measurement procedure.


The EUT was tested in ON mode.

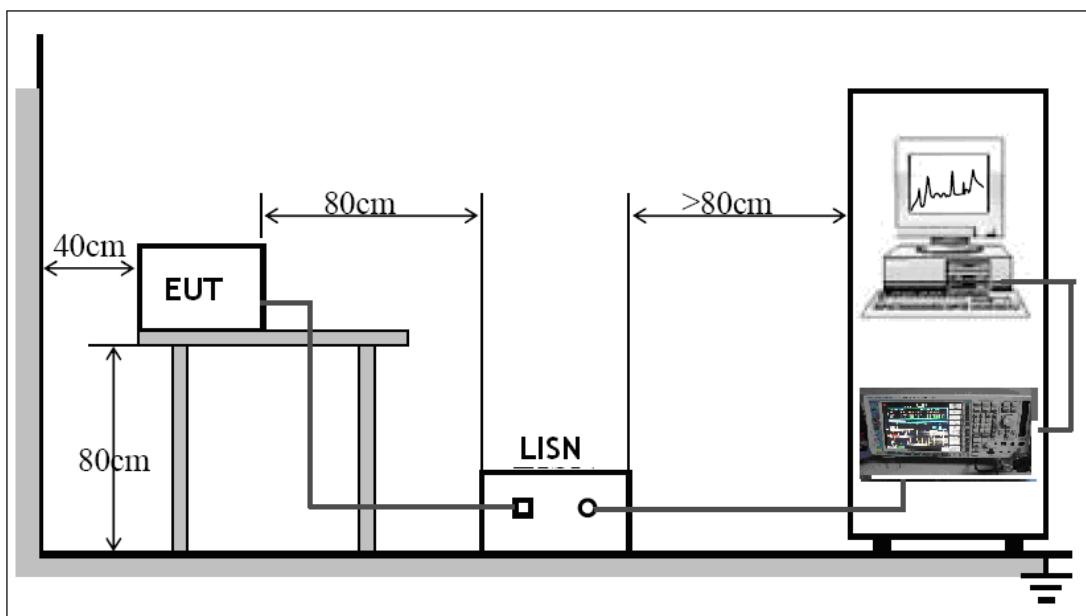

6.4 EUT Operating Condition

Operating condition is according to FCC MP-5.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

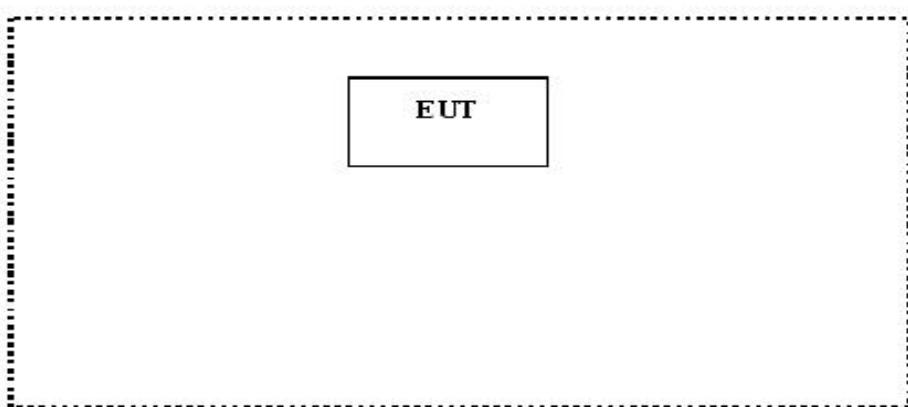

6.5 Conducted Emission Limits

Frequency of Emission (MHz)	Conducted Limit (dBuV)- Quasi-peak
0.45— 2.51	48
2.51 — 3.0	69.54
3.0 — 30	48

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Spectrum Analyzer

The spectrum analyzer is configured during the conduction test is as follows:

Start Frequency..... 450 KHz
 Stop Frequency..... 30 MHz
 Sweep Speed..... Auto
 IF Bandwidth..... 9 KHz
 Video Bandwidth..... 100 KHz
 Quasi-Peak Adaptor Bandwidth..... 9 KHz
 Quasi-Peak Adaptor Mode..... Normal

6.7 Conducted Emission Test Result

Test Item:	Conducted Emission Test
Test Voltage:	120VAC / 60Hz
Test Mode:	ON
Temperature:	25.5 °C
Humidity:	51%RH


6.8 Measurement Data

An initial pre-scan was performed on the live and neutral lines.

No further quasi-peak or average measurements were performed since no peak emissions were detected within 10dB line below the average limit.

Please refer to the following peak scan graph for reference.


LIVE LINE:

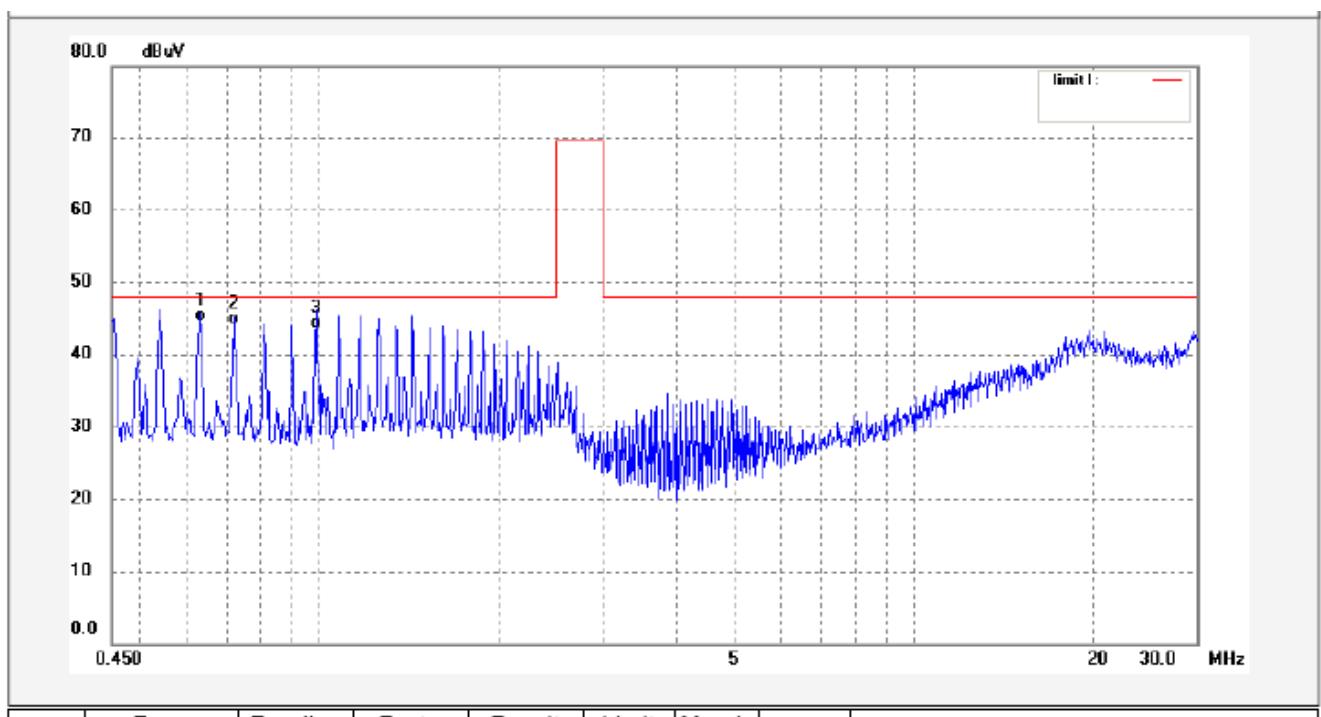

Lumiversal, Inc.

FCC ID: X5ALUMT5-AX0DXX

NEUTRAL LINE:

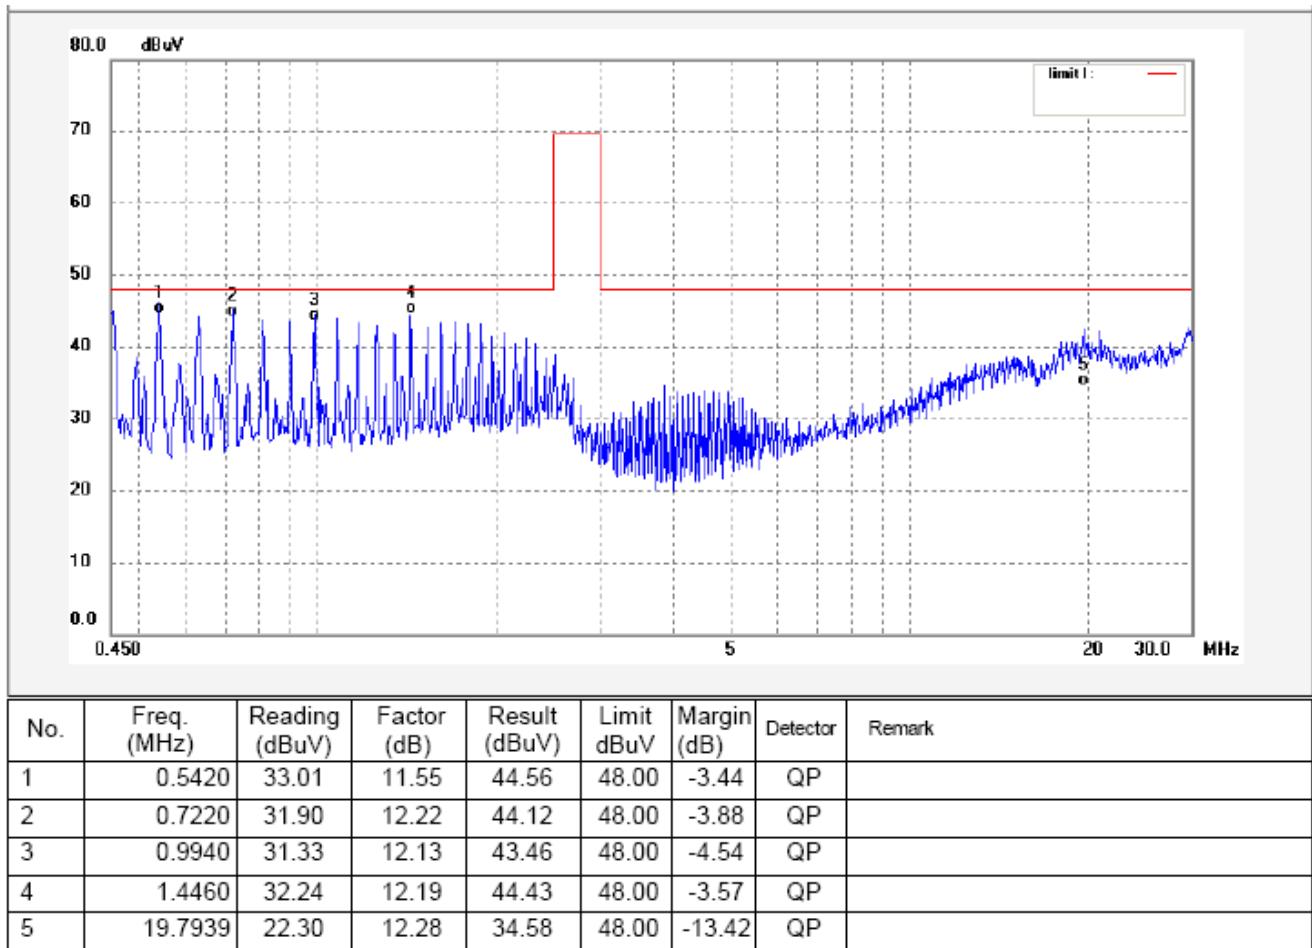

WALTEK SERVICES

Reference No.: WT10093841-N-E-F

7 Radiated Emissions Test

7.1 Radiated Emission Data

Test Requirement:	FCC Part18.305
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Class:	Class B
Limit:	40 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46 dB μ V/m between 216MHz & 1000MHz
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.2 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek Lab is ± 5.03 dB.

7.3 EUT Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part18.305 (C) Consumer equipment limits.

The EUT was tested in ON mode.

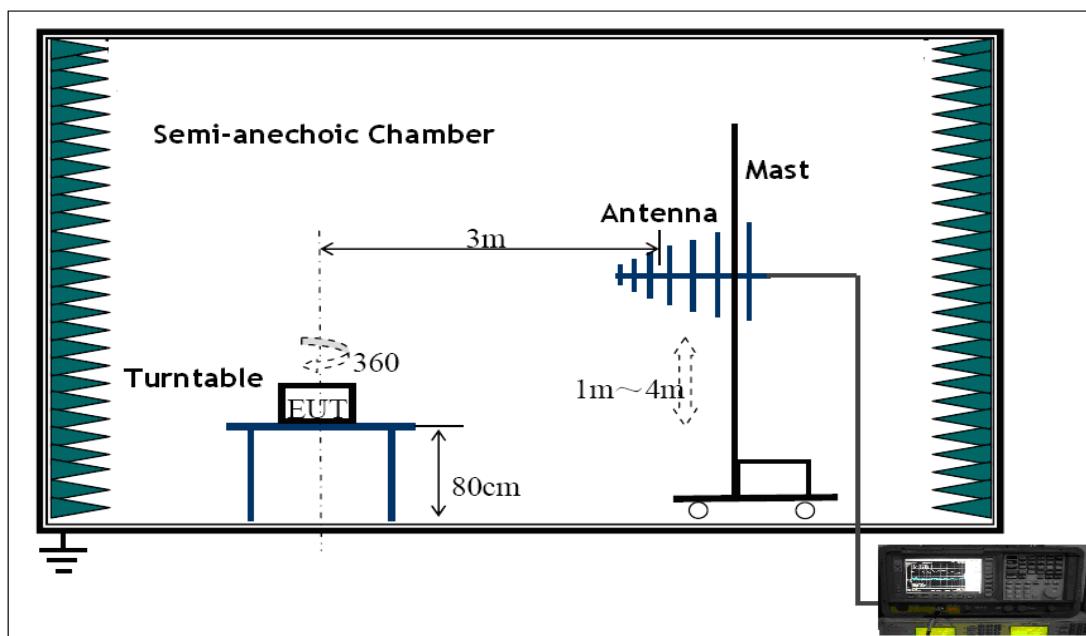

7.4 Spectrum Analyzer Setup

According to FCC Part18.305 Rules, the system was tested 30 to 1000MHz.

Start Frequency	30 MHz
Stop Frequency	1 GHz
IF Bandwidth	120 KHz
Video Bandwidth	100KHz
Quasi-Peak Adapter Bandwidth	120 KHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	100KHz

7.5 Test Procedure

For the radiated emissions test, maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table. But any frequency above 1000 MHz, the limit is based on average detector.

The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$


Lumiversal, Inc.

FCC ID: X5ALUMT5-AX0DXX

7.7 Summary of Test Results

According to the data in this section, the EUT complied with the FCC Part18 standards.

Horizontal:

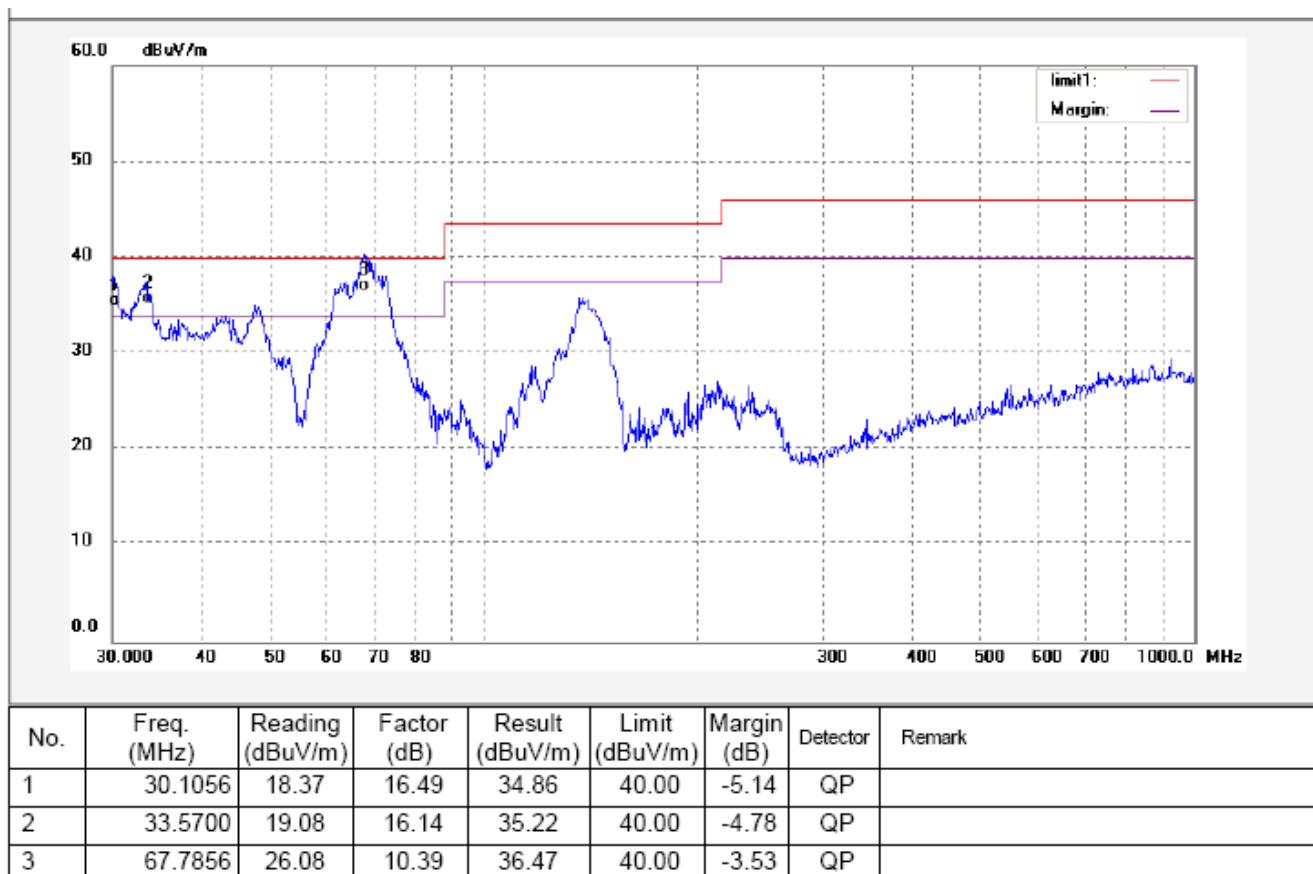


WALTEK SERVICES

Reference No.: WT10093841-N-E-F

Lumiversal, Inc.

FCC ID: X5ALUMT5-AX0DXX

Vertical:

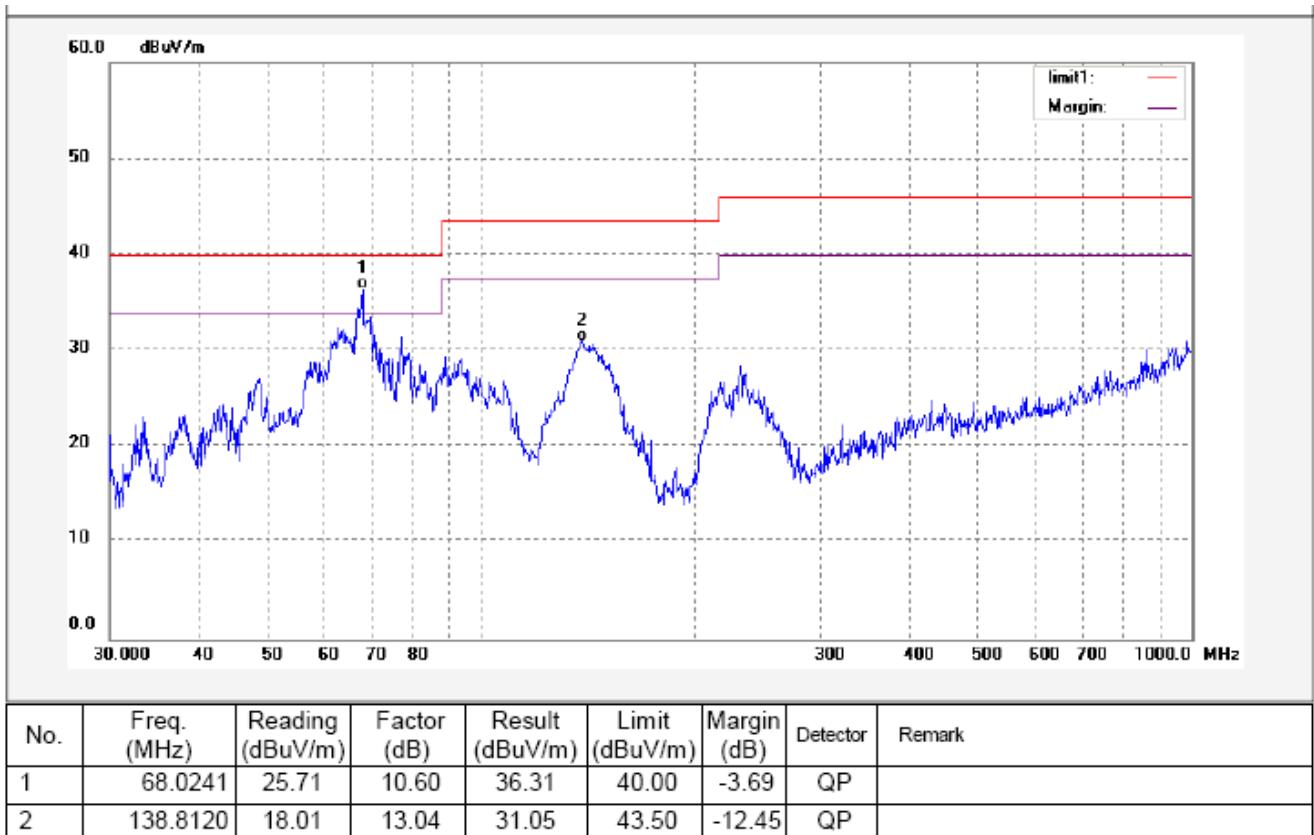


WALTEK SERVICES


Reference No.: WT10093841-N-E-F

8 Photographs of Testing

8.1 Conducted Emission Test View

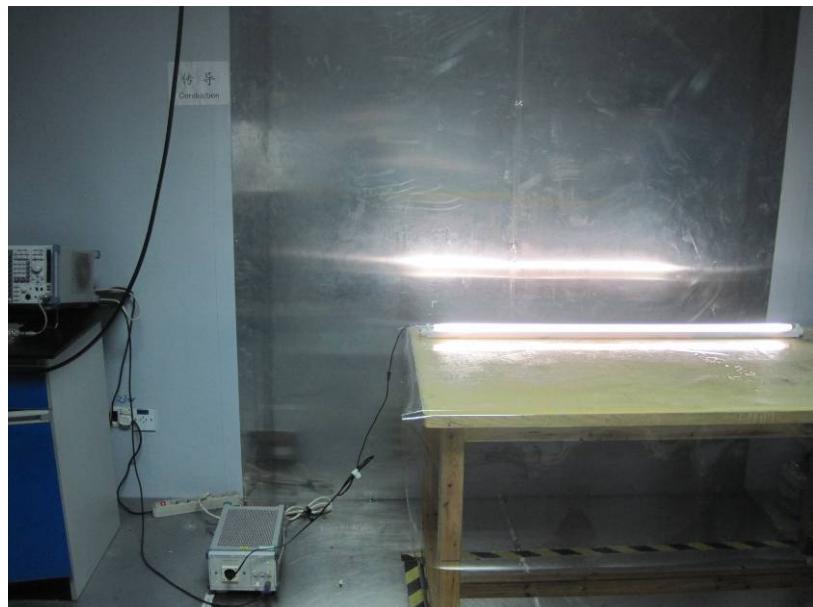


8.2 Radiated Emission Test View

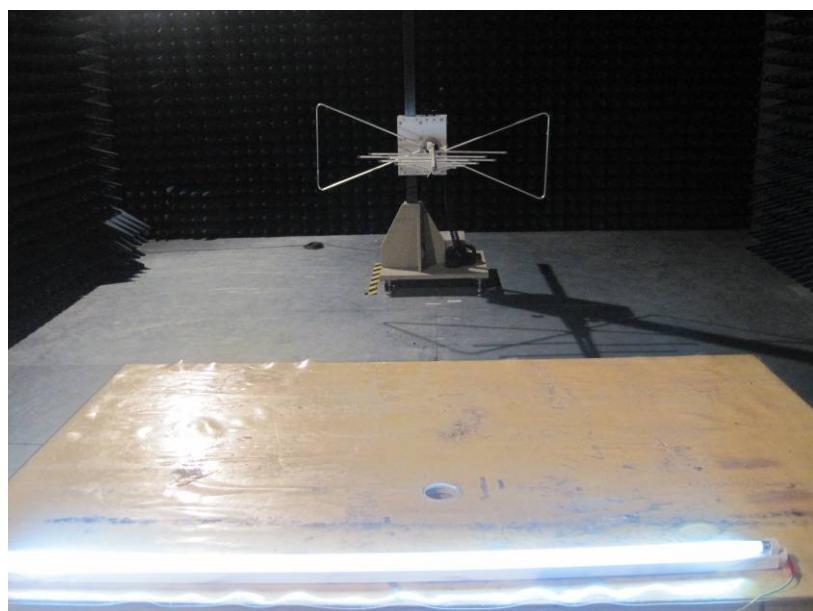

9 Photographs - Constructional Details

9.1 EUT - Appearance View

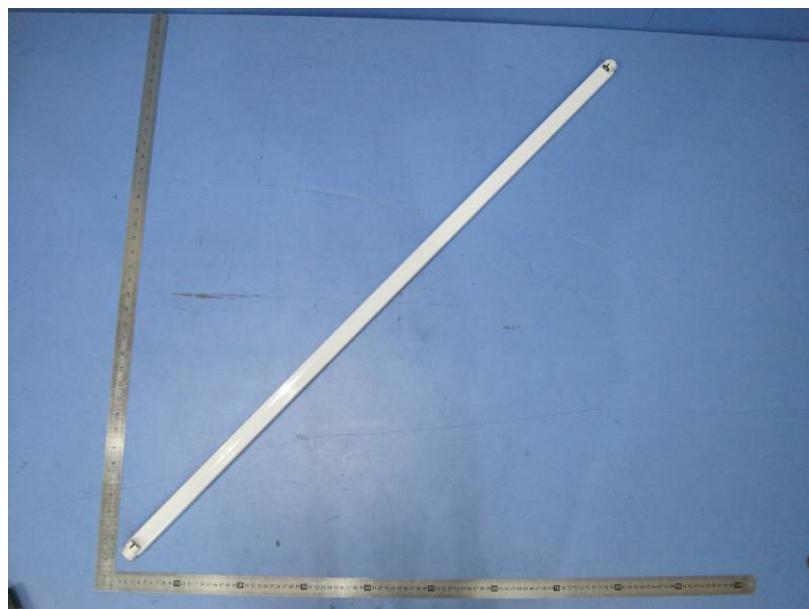


9.2 EUT - Special View




Lumiversal, Inc.

FCC ID: X5ALUMT5-AX0DXX

9.3 PCB - Front View

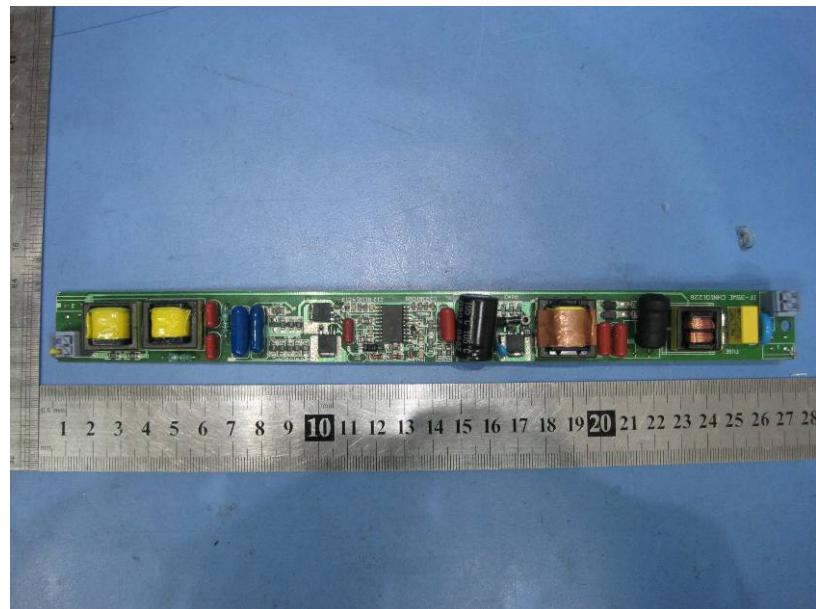

9.4 PCB - Back View

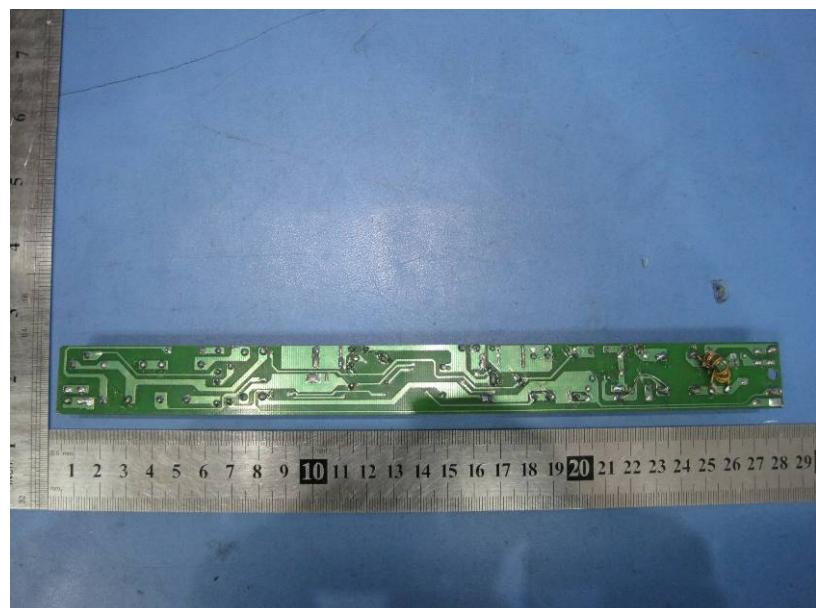

WALTEK SERVICES

Reference No.: WT10093841-N-E-F

Lumiversal, Inc.


FCC ID: X5ALUMT5-AX0DXX

10 FCC Label

This device complies with FCC PART 18: 2007 of the FCC Rules.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Top View/ proposed FCC Label Location

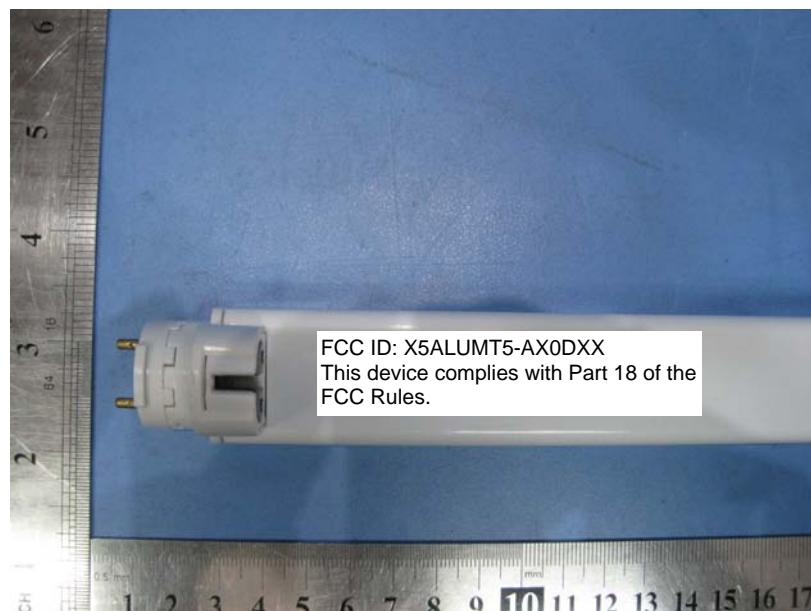

WALTEK SERVICES

Reference No.: WT10093841-N-E-F