

Shenzhen Huatongwei International Inspection Co., Ltd.

Keji S,12th, Road, Hi-tech Industrial Park, Shenzhen, Guangdong, China Phone:86-755-26748099 Fax:86-755-26748089 http://www.szhtw.com.cn







FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Compiled by

(position+printed name+signature)..: File administrators Tim Zhang

Supervised by

(position+printed name+signature)..: Test Engineer Eric Zhang

Approved by

(position+printed name+signature)..: Manager Wenliang Li

Date of issue...... Sep 21, 2011

Testing Laboratory Name Shenzhen Huatongwei International Inspection Co., Ltd

Address Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name...... Jetlun(ShenZhen)Corporation

Nanshan District Shenzhen China

Test specification:

Standard FCC Part 15.247: Operation within the bands 902-928 MHz,

2400-2483.5 MHz and 5725-5850 MHz Direct Sequence System

Master TRF...... Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Appliance Module, Appliance Gauge, ZigBee Extender

Trade Mark /

Model/Type reference...... RD77715

Modulation Type QPSK

Result..... Positive

TEST REPORT

| Test Report No. : | WE11080015 | Sep 21, 2011 |
|-------------------|------------|---------------|
| rest Report No | WE11000013 | Date of issue |

Appliance Module, Appliance Gauge, ZigBee Extender Equipment under Test

Model /Type RD77715

Listed Models RD77711,RD77721,LSM1E103T0

Applicant Jetlun(ShenZhen)Corporation

1008A Skyworth Building Gao-xin RD South High-tech Park Nanshan District Shenzhen China. Address

Manufacturer ZhuHai YueHua Electronic Co.,Ltd.

13, Pingdong Road4, NanPing Science&Technology Address

Industrial Garden, Zhuhai, China.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

| SUMMARY | 5 |
|---|----------|
| General Remarks | 5 |
| Equipment Under Test | 5 |
| Short description of the Equipment under Test (EUT) | 5 |
| EUT operation mode | 5 |
| EUT configuration Related Submittal(s) / Grant (s) | 6 6 |
| Modifications | 6 |
| NOTE | 6 |
| TEST ENVIRONMENT | 7 |
| Address of the test laboratory | 7 |
| Test Facility | 7 |
| Environmental conditions | 8 |
| Configuration of Tested System | 8 |
| Test Description | 8 |
| Statement of the measurement uncertainty | 8 |
| Equipments Used during the Test | 9 |
| TEST CONDITIONS AND RESULTS | 10 |
| AC Power Conducted Emission | 10 |
| Radiated Emission | 13 |
| Maximum Peak Output Power | 20 |
| Power Spectral Density | 23 |
| Band Edge Compliance of RF Emission | 26 |
| Spurious RF Conducted Emission 6dB Bandwidth | 29 34 |
| Antenna Requirement | 34 37 |
| TEST SETUP PHOTOS OF THE EUT | 38 |

V1.0 Page 4 of 43 Report No.: WE11080015

1. TEST STANDARDS

The tests were performed according to following standards:

<u>FCC Rules Part 15.247:</u> Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices

V1.0 Page 5 of 43 Report No.: WE11080015

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Aug 31, 2011

Testing commenced on : Aug 31, 2011

Testing concluded on : Sep 21, 2011

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : \bigcirc 120V / 60 Hz \bigcirc 115V / 60Hz

○ 12 V DC ○ 24 V DC

Other (specified in blank below)

AC 100V~240V 50Hz/60Hz

2.3. Short description of the Equipment under Test (EUT)

2.4GHz (Appliance Module, Appliance Gauge, ZigBee Extender (RD77715)) For more details, refer to the user's manual of the EUT. Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides AT command to control the EUT for staying in continous transmitting and receiving mode for testing. There are sixteen channels of EUT, and the test carried out at the channel 11(lowest), channel 18(middle) and channel 26 (highest) channels.

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 11 | 2405 MHz | 19 | 2445 MHz |
| 12 | 2410 MHz | 20 | 2450 MHz |
| 13 | 2415 MHz | 21 | 2455 MHz |
| 14 | 2420 MHz | 22 | 2460 MHz |
| 15 | 2425 MHz | 23 | 2465 MHz |
| 16 | 2430 MHz | 24 | 2470 MHz |
| 17 | 2435 MHz | 25 | 2475 MHz |
| 18 | 2440 MHz | 26 | 2480 MHz |

V1.0 Page 6 of 43 Report No.: WE11080015

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

supplied by the manufacturer

O - supplied by the lab

O Power Cable Length (m): /

Shield: /

Detachable: /

O Multimeter Manufacturer : /

Model No.: /

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID**: **X5QRD77715** filling to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.

2.8. NOTE

1. The EUT is an IEEE 802.15 ZigBee Standard type device, The functions of the EUT listed as below:

| | Test Standards | Reference Report |
|--------|--|------------------|
| Zigbee | FCC Part 15 Subpart C (Section15.247) | WE11080015 |
| Zigbee | MPE | WE11080016 |

2. The frequency bands used in this EUT are listed as follows:

| Frequency Band(MHz) | 2400-2483.5 | 5150-5350 | 5470-5725 | 5725-5850 |
|---------------------|--------------|-----------|-----------|-----------|
| Zigbee | \checkmark | _ | _ | _ |

3. The EUT provides one completed transmitter and receiver.

| Modulation Mode | TX Function |
|-----------------|-------------|
| Zigbee | 1TX |

V1.0 Page 7 of 43 Report No.: WE11080015

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar 30, 2009. Valid time is until Mar 29, 2012.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept 30, 2013.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jun 01, 2009.

IC-Registration No.: 5377

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on Jan 25, 2011. Valid time is until Jan 24, 2014

ACA

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025:2005 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the Authorization is valid through July 07, 2013.

VCCI

The 3m Semi-anechoic chamber $(12.2m \times 7.95m \times 6.7m)$ and Shielded Room $(8m \times 4m \times 3m)$ of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2006. Valid time is until December 20, 2012.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2006. Valid time is until December 19, 2012.

V1.0 Page 8 of 43 Report No.: WE11080015

DNV

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug 24, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

EUT

3.5. Test Description

| FCC PART 15 | | |
|---------------------------------|-------------------------------------|------|
| FCC Part 15.207 | AC Power Conducted Emission | PASS |
| FCC Part 15.247(a)(2) | 6dB Bandwidth | PASS |
| FCC Part 15.247(d) | Spurious RF Conducted Emission | PASS |
| FCC Part 15.247(b) | Maximum Peak Output Power | PASS |
| FCC Part 15.247(e) | Power Spectral Density | PASS |
| FCC Part 15.109/ 15.205/ 15.209 | Radiated Emissions | PASS |
| FCC Part 15.247(d) | Band Edge Compliance of RF Emission | PASS |
| FCC Part 15.203/15.247 (b) | Antenna Requirement | PASS |

Remark: The measurement uncertainty is not included in the test result.

3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods — Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

| Test | Range | Measurement Uncertainty | Notes |
|-----------------------|------------|----------------------------|-------|
| Radiated Emission | 30~1000MHz | 4.24 dB | (1) |
| Radiated Emission | 1~18GHz | 5.16 dB | (1) |
| Radiated Emission | 18-40GHz | 5.54 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 3.39 dB | (1) |

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.7. Equipments Used during the Test


| Test | euquipments | | | | |
|------|----------------------------|------------------------------|------------------------|--------------|------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. |
| 1 | ULTRA-BROADBAND ANTENNA | ROHDE & SCHWARZ | HL562 | 100015 | 2011/05/30 |
| 2 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESI 26 | 100009 | 2010/10/24 |
| 3 | Spectrum Analyzer | AGILENT | E4407B | MY44210775 | 2011/07/21 |
| 4 | RF TEST PANEL | ROHDE & SCHWARZ | TS / RSP | 335015/ 0017 | 2010/10/24 |
| 5 | TURNTABLE | ETS | 2088 | 2149 | 2010/10/24 |
| 6 | ANTENNA MAST | ETS | 2075 | 2346 | 2010/10/24 |
| 7 | EMI TEST SOFTWARE | ROHDE & SCHWARZ | ESK1 | N/A | 2010/10/24 |
| 8 | HORN ANTENNA | ROHDE &SCHWARZ | HF906 | 100039 | 2010/11/01 |
| 9 | HORN ANTENNA | SCHWARZBECK | BBHA9170 | 25841 | 2010/10/24 |
| 10 | Loop Antenna | ROHDE & SCHWARZ | HFH2-Z2 | 100020 | 2010/10/24 |
| 11 | Amplifer | Sonoma | 310N | E009-13 | 2010/10/24 |
| 12 | JS amplifer | ROHDE &SCHWARZ | JS4-00101800- 28-5A | F201504 | 2010/11/01 |
| 13 | High pass filter | Compliance Direction systems | BSU-6 | 34202 | 2010/10/24 |
| 14 | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 100106 | 2010/10/24 |
| 15 | Artificial Mains | ROHDE & SCHWARZ | ESH2-Z5 | 100028 | 2010/10/24 |
| 16 | Pulse Limiter | ROHDE & SCHWARZ | ESHSZ2 | 100044 | 2010/10/24 |
| 17 | EMI Test Software | ROHDE & SCHWARZ | ESK1 | N/A | 2010/10/24 |

V1.0 Page 10 of 43 Report No.: WE11080015

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

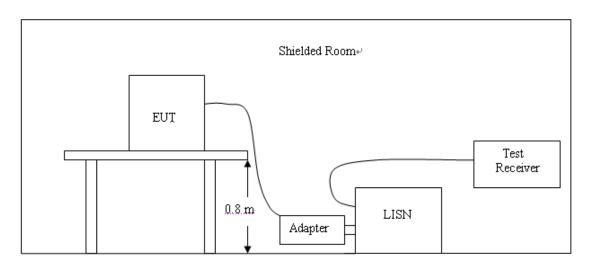

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2009
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
- 4 The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:


| Fundament | Maximum RF Line Voltage (dΒμV) | | | |
|--------------------|--------------------------------|------|--------|---------|
| Frequency (MHz) | CLASS A | | C | CLASS B |
| (111112) | Q.P. | Ave. | Q.P. | Ave. |
| 0.15 - 0.50 | 79 | 66 | 66-56* | 56-46* |
| 0.50 - 5.00 | 73 | 60 | 56 | 46 |
| 5.00 - 30.0 | 73 | 60 | 60 | 50 |

^{*} Decreasing linearly with the logarithm of the frequency

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

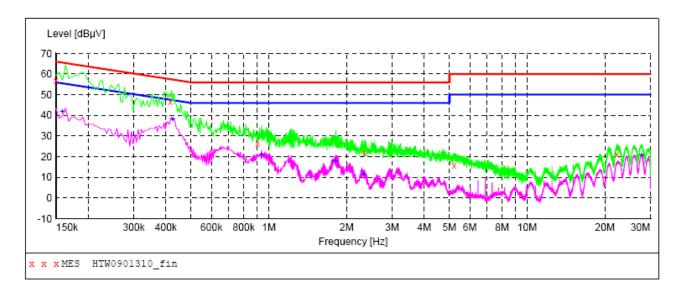

MEASUREMENT RESULT: "HTW0901310_fin"


| 9/1/2011 3 | 3:29PM | | | | | | |
|----------------|---------|--------------|---------------|--------------|----------|------|-----|
| Frequenc MF | - | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
| 0.15000 | 0 57.00 | 10.1 | 66 | 9.0 | QP | N | GND |
| 0.41550 | 0 46.60 | 10.1 | 58 | 10.9 | QP | N | GND |
| 0.90600 | 0 26.50 | 10.1 | 56 | 29.5 | QP | N | GND |
| 2.34600 | 0 21.90 | 10.2 | 56 | 34.1 | QP | N | GND |
| 5.21700 | 0 15.70 | 10.2 | 60 | 44.3 | QP | N | GND |
| 22.25400 | 0 21.10 | 10.5 | 60 | 38.9 | QP | N | GND |

MEASUREMENT RESULT: "HTW0901310_fin2"

| 9/1/2011 3:29 | PM | | | | | | |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
| 0.159000 | 41.70 | 10.1 | 56 | 13.8 | AV | N | GND |
| 0.424500 | 38.20 | 10.1 | 47 | 9.2 | AV | N | GND |
| 0.937500 | 20.90 | 10.1 | 46 | 25.1 | AV | N | GND |
| 1.810500 | 17.70 | 10.2 | 46 | 28.3 | AV | N | GND |
| 2.328000 | 11.50 | 10.2 | 46 | 34.5 | AV | N | GND |
| 27.757500 | 20.70 | 10.9 | 50 | 29.3 | AV | N | GND |

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

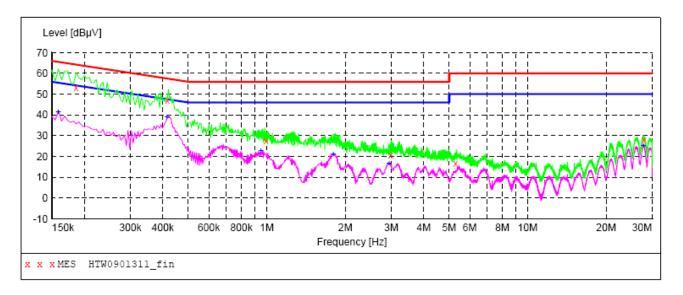

MEASUREMENT RESULT: "HTW0901311_fin"

| 9/ | 1/2011 3:33 | PM | | | | | | |
|----|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| | Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
| | 0.186000 | 53.00 | 10.1 | 64 | 11.2 | QP | L1 | GND |
| | 0.415500 | 46.90 | 10.1 | 58 | 10.6 | QP | L1 | GND |
| | 0.991500 | 27.40 | 10.2 | 56 | 28.6 | QP | L1 | GND |
| | 2.985000 | 20.80 | 10.2 | 56 | 35.2 | QP | L1 | GND |
| | 5.293500 | 16.50 | 10.2 | 60 | 43.5 | QP | L1 | GND |
| | 27.906000 | 27.80 | 10.9 | 60 | 32.2 | QP | L1 | GND |

MEASUREMENT RESULT: "HTW0901311_fin2"


| 9/1/2011 | 3:33P1 | М | | | | | | |
|----------|-------------|-----------------|--------------|---------------|--------------|----------|------|-----|
| Freque | ency MHz | Level ! dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE |
| 0.15 | 9000 | 41.40 | 10.1 | 56 | 14.1 | AV | L1 | GND |
| 0.41 | 5500 | 39.10 | 10.1 | 48 | 8.4 | AV | L1 | GND |
| 0.95 | 1000 | 22.80 | 10.1 | 46 | 23.2 | AV | L1 | GND |
| 1.80 | 1500 | 21.10 | 10.2 | 46 | 24.9 | AV | L1 | GND |
| 2.94 | 4500 | 16.50 | 10.2 | 46 | 29.5 | AV | L1 | GND |
| 27.75 | 7500 | 25.30 | 10.9 | 50 | 24.7 | AV | L1 | GND |

V1.0 Page 13 of 43 Report No.: WE11080015


4.2. Radiated Emission

TEST CONFIGURATION


(a) Radiated Emission Test Set-Up, Frequency below 1000MHz

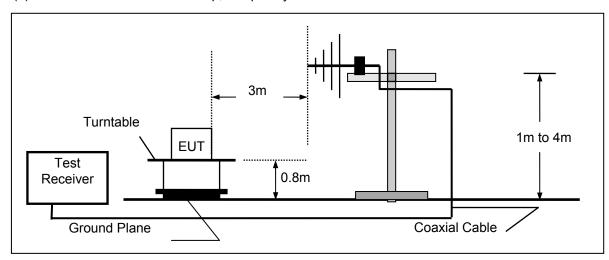

(b) Radiated Emission Test Set-Up, Frequency above 1000MHz

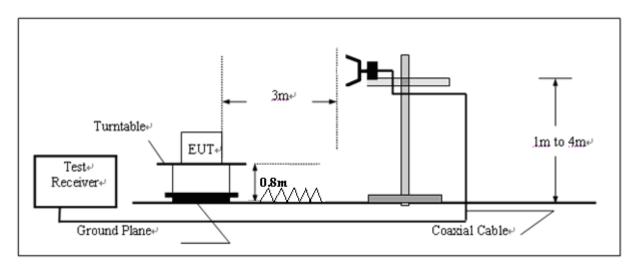

(c) Frequency range 9KHz - 30MHz

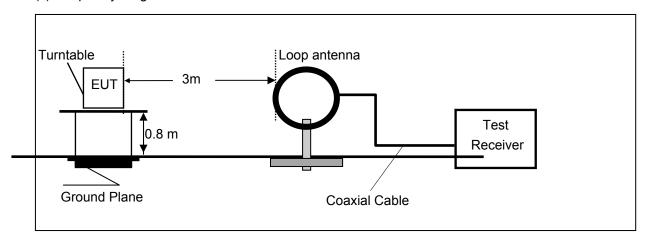

TEST PROCEDURE

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360°C to acquire the highest emissions from EUT
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measurements have been completed.
- 5. The operating frequency is 2.4GHz-2.4835GHz and the lowest crystal frequency is 32.768KHz, So the radiation emissions frequency range were tested from 9KHz to 25GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
|---------------------------|--|
| RA = Reading Amplitude | AG = Amplifier Gain |
| AF = Antenna Factor | |

For example

| Frequency | FS | RA | AF | CL | AG | Transd |
|-----------|----------|----------|------|------|-------|--------|
| (MHz) | (dBµV/m) | (dBµV/m) | (dB) | (dB) | (dB) | (dB) |
| 300.00 | 40 | 58.1 | 12.2 | 1.6 | 31.90 | |

Transd=AF +CL-AG

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

| Frequency (MHz) | Distance (Meters) | Radiated (dBµV/m) | Radiated (μV/m) |
|--------------------|----------------------|----------------------|--------------------|
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

TEST RESULTS


For 9KHz to 30MHz

| Frequency Range: 9K to 30MHz | | | | | | | | | | |
|------------------------------|------------------------------|------------------------------|----------------|----------|---------------------------|--------|--|--|--|--|
| Frequency (KHz) | Emssion Level (dBuV/m) | FCC Limit (dBµV/m) @3m | Margin (dB) | Detector | Antenna Height (cm) | Result | | | | |
| 40.62 | 57.26 | 75.43 | 18.17 | AV | 200 | Pass | | | | |
| 41.36 | 55.12 | 75.27 | 20.15 | AV | 200 | Pass | | | | |
| 265.12 | 36.24 | 59.14 | 22.90 | AV | 200 | Pass | | | | |
| 590.55 | 30.25 | 72.17 | 41.92 | QP | 200 | Pass | | | | |

For 30MHz to 1000MHz

SCAN TABLE: "test Field(30M-1G)QP"

Short Description: Field Strength(30M-1G)
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
30.0 MHz 1.0 GHz 60.0 kHz QuasiPeak 1.0 s 120 kHz HL562 10

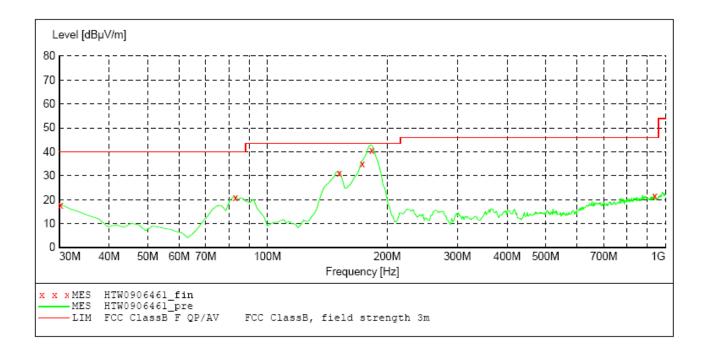

MEASUREMENT RESULT: "HTW0906461_fin"

| 9/6/2011 11:55AM | | | | | | | | | | |
|------------------|-----------------|-------|-----------------|--------------|------|--------------|----------------|--------------|--|--|
| Frequency MHz | Level dBµV/m | | Limit dBµV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization | | |
| 30.000000 | 18.40 | -22.2 | 40.0 | 21.6 | OP | 300.0 | 108.00 | HORIZONTAL | | |
| 82.484970 | 21.30 | -32.6 | 40.0 | 18.7 | ÕР | 300.0 | 149.00 | HORIZONTAL | | |
| 150.521042 | 31.80 | -33.7 | 43.5 | 11.7 | QP | 300.0 | 223.00 | HORIZONTAL | | |
| 171.903808 | 35.50 | -34.3 | 43.5 | 8.0 | QP | 300.0 | 244.00 | HORIZONTAL | | |
| 181.623246 | 38.40 | -33.3 | 43.5 | 5.1 | QP | 100.0 | 110.00 | HORIZONTAL | | |
| 933.907816 | 22.20 | -18.7 | 46.0 | 23.8 | QP | 300.0 | 311.00 | HORIZONTAL | | |

V1.0 Page 16 of 43 Report No.: WE11080015


SCAN TABLE: "test Field(30M-1G)QP"

Short Description: Field Strength(30M-1G)

Start Stop Step Detector Meas. IF Transducer

Frequency Frequency Width Time Bandw.

30.0 MHz 1.0 GHz 60.0 kHz QuasiPeak 1.0 s 120 kHz HL562

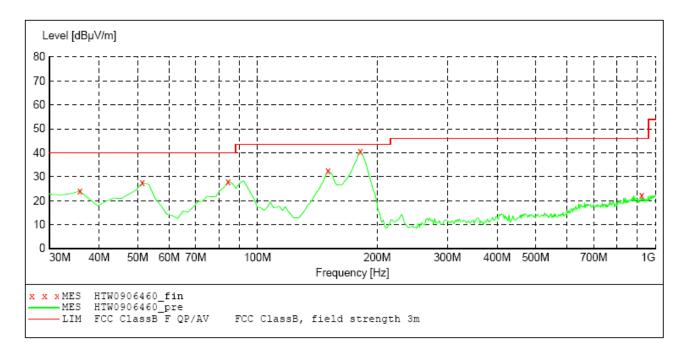

MEASUREMENT RESULT: "HTW0906460 fin"

| J/ U/ ZUII II. J | JAN | | | | | | | |
|------------------|-------|-------|------|--------------|----|--------------|----------------|--------------|
| Frequency MHz | | | | Margin dB | | Height cm | Azimuth deg | Polarization |
| 35.831663 | 24.00 | -25.1 | 40.0 | 16.0 | QP | 100.0 | 62.00 | VERTICAL |
| 51.382766 | 27.50 | -33.6 | 40.0 | 12.5 | QP | 100.0 | 36.00 | VERTICAL |
| 84.428858 | 28.00 | -32.1 | 40.0 | 12.0 | QP | 100.0 | 346.00 | VERTICAL |
| 150.521042 | 32.40 | -33.7 | 43.5 | 11.1 | QP | 100.0 | 286.00 | VERTICAL |
| 181.623246 | 40.50 | -33.3 | 43.5 | 3.0 | QP | 100.0 | 279.00 | VERTICAL |
| 924.188377 | 22.20 | -18.6 | 46.0 | 23.8 | QP | 100.0 | 131.00 | VERTICAL |

REMARKS:

- 1. * Undetectable
- 2. The IF bandwidth of EMI Test Receiver was 120KHz for measuring from 30 MHz to 1 GHz and 1 MHz for measuring above 1 GHz
- 3. The Transd=Cabel loss +Antenna factor -pre-amplifier factor
- 4. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.

Above 1G

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz,VBW=10Hz for Average Detector,Readings are both peak and average values. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Company | Jetlun(ShenZhen)Corporation | Test Date | 06/25/2011 |
|--------------|---|-------------------|----------------------|
| Test Mode | 2405MHz | Detector Function | Peak(PK)/Average(AV) |
| Product Name | Product Name Appliance Module, Appliance Gauge, ZigBee Extender | | Eric Zhang |
| Model Name | RD77715 | TEMP&Humidity | 25°C, 55% |

| | ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | | |
|-----|---|--------|------|----------|----------|---------|----------|--------|---------|--------|-----------|------------|
| | | Emss | sion | Limit | Margin | Antenna | Table | Raw | Antenna | Cable | Pre- | Correction |
| No. | Frequency | Lev | el | - | • | Height | Angle | Value | Factor | Factor | amplifier | Factor |
| | (MHz) | (dBu\ | //m) | (dBuV/m) | (m) (dB) | (m) | (Degree) | (dBuV) | (dB/m) | (dB) | (dB) | (dB/m) |
| 1 | *2405.00 | 102.56 | PK | | | 1.00 | 23 | 99.16 | 28.3 | 4.90 | -36.6 | -3.40 |
| 1 | *2405.00 | 100.65 | ΑV | | | 1.00 | 23 | 97.25 | 28.3 | 4.90 | -36.6 | -3.40 |
| 2 | 4810.00 | 57.65 | PK | 74.00 | 16.35 | 1.00 | 114 | 60.85 | 32.7 | 7.00 | -36.5 | 3.20 |
| 2 | 4810.00 | 46.22 | ΑV | 54.00 | 7.78 | 1.00 | 114 | 49.42 | 32.7 | 7.00 | -36.5 | 3.20 |
| 3 | 7215.00 | 53.48 | PK | 74.00 | 20.52 | 1.00 | 218 | 62.88 | 35.8 | 8.90 | -35.3 | 9.40 |
| 3 | 7215.00 | 42.35 | ΑV | 54.00 | 11.65 | 1.00 | 218 | 51.75 | 35.8 | 8.90 | -35.3 | 9.40 |
| 4 | 9620.00 | 55.93 | PK | 74.00 | 18.07 | 1.00 | 320 | 68.53 | 37.2 | 10.20 | -34.8 | 12.60 |
| 4 | 9620.00 | 44.08 | ΑV | 54.00 | 9.92 | 1.00 | 320 | 56.68 | 37.2 | 10.20 | -34.8 | 12.60 |

| | ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | | |
|-----|---|----------------------|-----|-------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| No. | Frequency (MHz) | Emss Lev (dBu\ | rel | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre- amplifier (dB) | Correction Factor (dB/m) |
| 1 | *2405.00 | 103.96 | PK | | | 1.0 | 335 | 100.56 | 28.3 | 4.90 | -36.6 | -3.40 |
| 1 | *2405.00 | 101.23 | AV | | | 1.0 | 335 | 97.83 | 28.3 | 4.90 | -36.6 | -3.40 |
| 2 | 4810.00 | 61.32 | PK | 74.00 | 12.68 | 1.0 | 178 | 64.52 | 32.7 | 7.00 | -36.5 | 3.20 |
| 2 | 4810.00 | 50.12 | ΑV | 54.00 | 3.88 | 1.0 | 178 | 53.32 | 32.7 | 7.00 | -36.5 | 3.20 |
| 3 | 7215.00 | 60.13 | PK | 74.00 | 13.87 | 1.0 | 265 | 69.53 | 35.8 | 8.90 | -35.3 | 9.40 |
| 3 | 7215.00 | 49.52 | ΑV | 54.00 | 4.48 | 1.0 | 265 | 58.92 | 35.8 | 8.90 | -35.3 | 9.40 |
| 4 | 9620.00 | 56.47 | PK | 74.00 | 17.53 | 1.0 | 98 | 69.07 | 37.2 | 10.20 | -34.8 | 12.60 |
| 4 | 9620.00 | 45.82 | AV | 54.00 | 8.18 | 1.0 | 98 | 58.42 | 37.2 | 10.20 | -34.8 | 12.60 |

REMARKS:

- 1. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB/m)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Pre-amplifier Factor
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Limit value- Emission level.
- 5. The limit value is defined as per 15.247
- 6. "* ": Fundamental frequency
- 7. The average measurement was not performed when the peak measured data under the limit of average detection.

| Company | Jetlun(ShenZhen)Corporation | Test Date | 06/25/2011 |
|--------------|--|-------------------|----------------------|
| Test Mode | 2440MHz | Detector Function | Peak(PK)/Average(AV) |
| Product Name | Appliance Module,Appliance Gauge, ZigBee Extender | Test By | Eric Zhang |
| Model Name | RD77715 | TEMP&Humidity | 25°C, 55% |

| | ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | | |
|-----|---|--------|------|----------|--------|---------|----------|--------|---------|--------|-----------|------------|
| | | Emss | sion | Limit | Margin | Antenna | Table | Raw | Antenna | Cable | Pre- | Correction |
| No. | Frequency | Lev | el e | _ | • | Height | Angle | Value | Factor | Factor | amplifier | Factor |
| | (MHz) | (dBu\ | //m) | (dBuV/m) | (dB) | (m) | (Degree) | (dBuV) | (dB/m) | (dB) | (dB) | (dB/m) |
| 1 | *2440.00 | 102.58 | PK | | | 1.00 H | 115 | 99.38 | 28.3 | 5.10 | -36.6 | -3.20 |
| 1 | *2440.00 | 100.41 | ΑV | | | 1.00 H | 115 | 97.21 | 28.3 | 5.10 | -36.6 | -3.20 |
| 2 | 4880.00 | 58.26 | PK | 74.00 | 15.74 | 1.00 H | 80 | 61.66 | 32.3 | 7.60 | -36.5 | 3.40 |
| 2 | 4880.00 | 48.55 | AV | 54.00 | 5.45 | 1.00 H | 80 | 51.95 | 32.3 | 7.60 | -36.5 | 3.40 |
| 3 | 7320.00 | 55.10 | PK | 74.00 | 18.90 | 1.00 H | 196 | 64.50 | 36.1 | 8.60 | -35.3 | 9.40 |
| 3 | 7320.00 | 44.71 | ΑV | 54.00 | 9.29 | 1.00 H | 196 | 54.11 | 36.1 | 8.60 | -35.3 | 9.40 |
| 4 | 9760.00 | 56.02 | PK | 74.00 | 17.98 | 1.00 H | 257 | 68.62 | 37.2 | 10.20 | -34.8 | 12.60 |
| 4 | 9760.00 | 46.58 | AV | 54.00 | 7.42 | 1.00 H | 257 | 59.18 | 37.2 | 10.20 | -34.8 | 12.60 |

| | ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | | |
|-----|---|-------------|------|-------------------|----------------|-------------------|----------------|--------------|-------------------|---------|-------------------|----------------------|
| No. | Frequency | Emss Lev | el | Limit (dBuV/m) | Margin (dB) | Antenna Height | Table Angle | Raw Value | Antenna Factor | 1 40101 | Pre- amplifier | Correction Factor |
| | (MHz) | (dBu\ | //m) | (4241111) | (42) | (m) | (Degree) | (dBuV) | (dB/m) | (dB) | (dB) | (dB/m) |
| 1 | *2440.00 | 103.71 | PK | | | 1.00 V | 121 | 100.51 | 28.3 | 5.10 | -36.6 | -3.20 |
| 1 | *2440.00 | 101.23 | AV | | | 1.00 V | 121 | 98.03 | 28.3 | 5.10 | -36.6 | -3.20 |
| 2 | 4880.00 | 61.57 | PK | 74.00 | 12.43 | 1.00 V | 136 | 64.97 | 32.3 | 7.60 | -36.5 | 3.40 |
| 2 | 4880.00 | 51.14 | AV | 54.00 | 2.86 | 1.00 V | 136 | 54.54 | 32.3 | 7.60 | -36.5 | 3.40 |
| 3 | 7320.00 | 62.44 | PK | 74.00 | 11.56 | 1.00 V | 260 | 71.84 | 36.1 | 8.60 | -35.3 | 9.40 |
| 3 | 7320.00 | 51.62 | AV | 54.00 | 2.38 | 1.00 V | 260 | 61.02 | 36.1 | 8.60 | -35.3 | 9.40 |
| 4 | 9760.00 | 56.94 | PK | 74.00 | 17.06 | 1.00 V | 322 | 69.54 | 37.2 | 10.20 | -34.8 | 12.60 |
| 4 | 9760.00 | 46.32 | AV | 54.00 | 7.68 | 1.00 V | 322 | 58.92 | 37.2 | 10.20 | -34.8 | 12.60 |

REMARKS:

- 1. Emission level (dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Pre-amplifier
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Limit value- Emission level.5. The limit value is defined as per 15.247

- 6. "* ": Fundamental frequency
 7. The average measurement was not performed when the peak measured data under the limit of average detection.

| _ | I II (OI = TI) | - . - . | 00/07/00/ |
|--------------|--|-----------------------|----------------------|
| Company | Jetlun(ShenZhen)Corporation | Test Date | 06/25/2011 |
| Test Mode | 2480MHz | Detector Function | Peak(PK)/Average(AV) |
| Product Name | Appliance Module,Appliance Gauge, ZigBee Extender | Test By | Eric Zhang |
| Model Name | RD77715 | TEMP&Humidity | 25°C, 55% |

| | ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | | |
|-----|---|-------|------|----------|--------|---------|----------|--------|---------|--------|-----------|------------|
| | | Emss | sion | Limit | Marain | Antenna | Table | Raw | Antenna | Cable | Pre- | Correction |
| No. | Frequency | Lev | el e | _ | Margin | Height | Angle | Value | Factor | Factor | amplifier | Factor |
| | (MHz) | (dBu\ | //m) | (dBuV/m) | (dB) | (m) | (Degree) | (dBuV) | (dB/m) | (dB) | (dB) | (dB/m) |
| 1 | *2480.00 | 92.32 | PK | | | 1.00 | 110 | 89.02 | 28.2 | 5.10 | 36.6 | -3.30 |
| 1 | *2480.00 | 89.42 | ΑV | | | 1.00 | 110 | 86.12 | 28.2 | 5.10 | 36.6 | -3.30 |
| 2 | 4960.00 | 50.69 | PK | 74.00 | 23.31 | 1.00 | 88 | 54.49 | 33.0 | 7.00 | 36.2 | 3.80 |
| 2 | 4960.00 | | ΑV | 54.00 | - | 1.00 | 88 | | 33.0 | 7.00 | 36.2 | 3.80 |
| 3 | 7340.00 | 53.13 | PK | 74.00 | 20.87 | 1.00 | 196 | 62.53 | 36.2 | 8.50 | 35.3 | 9.40 |
| 3 | 7340.00 | | ΑV | 54.00 | - | 1.00 | 196 | - | 36.2 | 8.50 | 35.3 | 9.40 |
| 4 | 10721.72 | 55.44 | PK | 74.00 | 18.56 | 1.00 | 257 | 72.04 | 38.0 | 11.30 | 32.7 | 16.6 |
| 4 | 10721.72 | 45.05 | ΑV | 54.00 | 8.95 | 1.00 | 257 | 61.65 | 38.0 | 11.30 | 32.7 | 16.6 |

| | ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | | |
|-----|---|----------------------|-----|-------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|---------------------------|--------------------------------|
| No. | Frequency (MHz) | Emss Lev (dBu) | rel | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre- amplifier (dB) | Correction Factor (dB/m) |
| 1 | *2480.00 | 98.89 | PK | | | 1.00 | 66 | 95.59 | 28.2 | 5.10 | 36.6 | -3.30 |
| 1 | *2480.00 | 89.75 | AV | | | 1.00 | 66 | 86.45 | 28.2 | 5.10 | 36.6 | -3.30 |
| 2 | 4960.00 | 53.05 | PK | 74.00 | 20.95 | 1.00 | 146 | 56.85 | 36.2 | 8.50 | 35.3 | 3.80 |
| 2 | 4960.00 | | ΑV | 54.00 | - | 1.00 | 146 | - | 36.2 | 8.50 | 35.3 | 3.80 |
| 3 | 7340.00 | 54.71 | PK | 74.00 | 19.29 | 1.00 | 312 | 64.11 | 37.4 | 10.10 | 34.8 | 9.40 |
| 3 | 7340.00 | 44.74 | ΑV | 54.00 | 9.26 | 1.00 | 312 | 54.14 | 37.4 | 10.10 | 34.8 | 9.40 |
| 4 | 10721.72 | 56.54 | PK | 74.00 | 17.46 | 1.00 | 125 | 73.14 | 38.0 | 11.30 | 32.7 | 16.6 |
| 4 | 10721.72 | 45.58 | ΑV | 54.00 | 8.42 | 1.00 | 125 | 62.18 | 38.0 | 11.30 | 32.7 | 16.6 |


- REMARKS: 1. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB/m) 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Pre-amplifier Factor
 - 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.

 - 5. The limit value is defined as per 15.247
 - 6. " * ": Fundamental frequency
 - 7. The average measurement was not performed when the peak measured data under the limit of average detection.

V1.0 Page 20 of 43 Report No.: WE11080015

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum. Set the RBW=3MHz VBW=3MHz.

<u>LIMIT</u>

The Maximum Peak Output Power Measurement is 30dBm.


TEST RESULTS

| Company | Jetlun(ShenZhen)Corporation | Test Date | 06/28/2011 |
|--------------|--|---------------|------------|
| Product Name | Appliance Module, Appliance Gauge, ZigBee Extender | Test By | Eric Zhang |
| Model Name | RD77715 | TEMP&Humidity | 25°C, 55% |


| Channel Frequency (MHz) | Peak Power Output (dBm) | Peak Power Limit (dBm) | Pass / Fail |
|-------------------------------|-------------------------------|------------------------------|-------------|
| 2405 | 19.39 | 30 | PASS |
| 2440 | 19.65 | 30 | PASS |
| 2480 | 3.451 | 30 | PASS |

Note: The test results including the cable lose.


Low channel

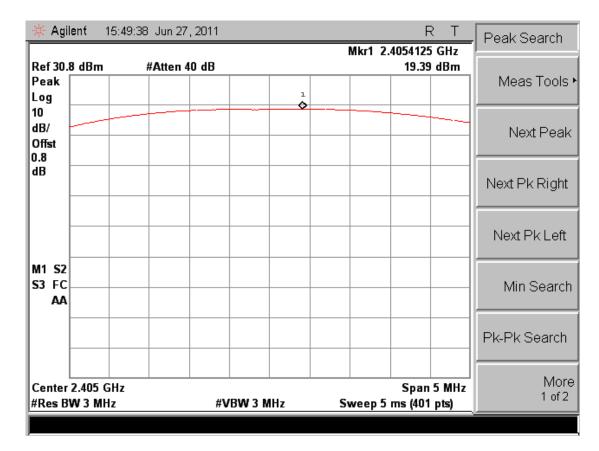

Middle channel

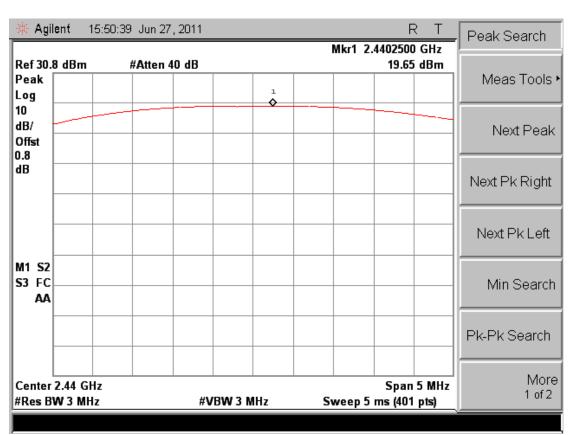

High channel

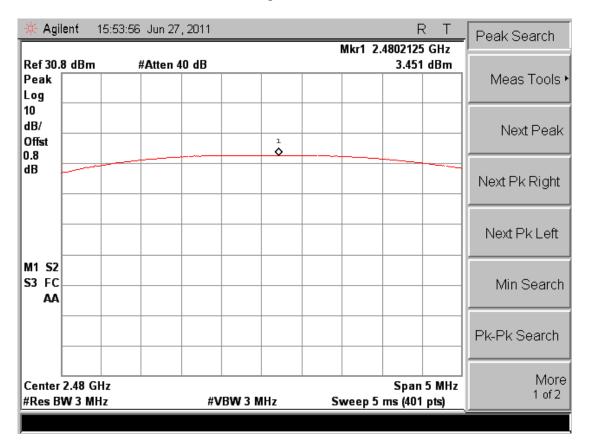

V1.0 Page 23 of 43 Report No.: WE11080015

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

- 1. Set CENTER FREQUENCY = Frequency from Power Spectral Density Test Matrix
- 2. Set SPAN = 20 MHz (For devices with a nominal 40 MHz BW, 50 MHz span will be needed)
- 3. Set REFERENCE LEVEL = 20 dBm
- 4. Set ATTENUATION = 0 dB (add attenuation, if necessary)
- 5. Set SWEEP TIME = Coupled
- 6. Set RBW = 3 kHz
- 7. Set VBW = 10 kHz
- 8. Set DETECTOR = Peak
- 9. Set MKR = Center Frequency
- 10. Set TRACE = CLEAR WRITE

Place the radio in continuous transmit mode. Set the TRACE to MAX HOLD, and after the trace stabilizes, the TRACE to VIEW. Set the marker on the peak of the signal and then adjust the center frequency of the spectrum analyzer to the marker frequency. After viewing the EUT waveform on the spectrum analyzer, perform the following spectrum analyzer functions to capture the trace:

- 11. Set SPAN = 300 kHz
- 12. Set SWEEP TIME = 100 s
- 13. Set TRACE = MAX HOLD
- 14. Set MKR = PEAK SEARCH
- 15. Record the marker level for the particular mode. Repeat these steps for other device modes.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS


| Company | Jetlun(ShenZhen)Corporation | Test Date | 06/28/2011 |
|--------------|--|---------------|------------|
| Product Name | Appliance Module,Appliance Gauge, ZigBee Extender | Test By | Eric Zhang |
| Model Name | RD77715 | TEMP&Humidity | 25°C, 55% |

| CHANNEL NUMBER | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3 KHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|-------------------|-------------------------------|--|---------------------------|-----------|
| 11 | 2405 | 4.297 | 8 | PASS |
| 18 | 2440 | 4.689 | 8 | PASS |
| 26 | 2480 | -11.43 | 8 | PASS |


Note: The test results including the cable lose.

Photos of Power Spectral Density Measurement


Low Channel

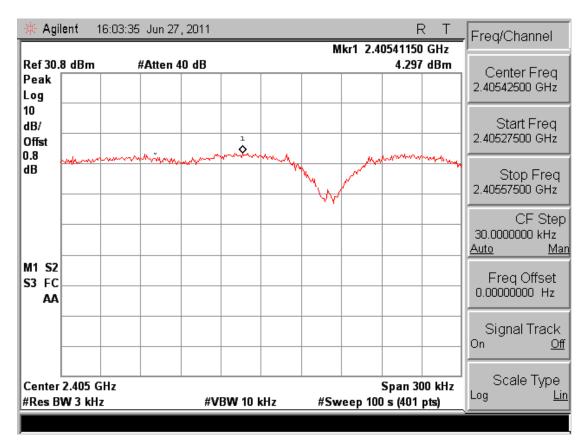

Middle Channel

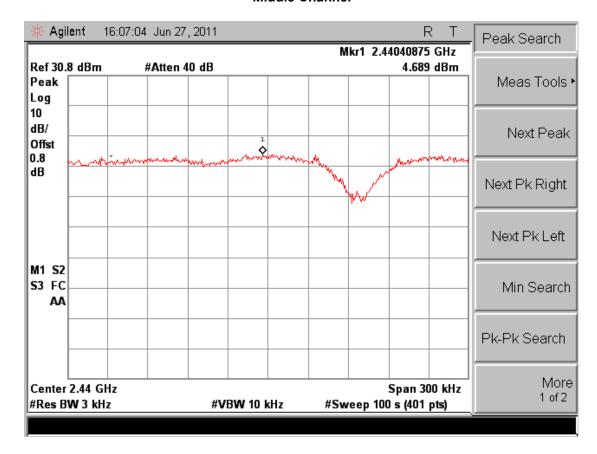


High Channel

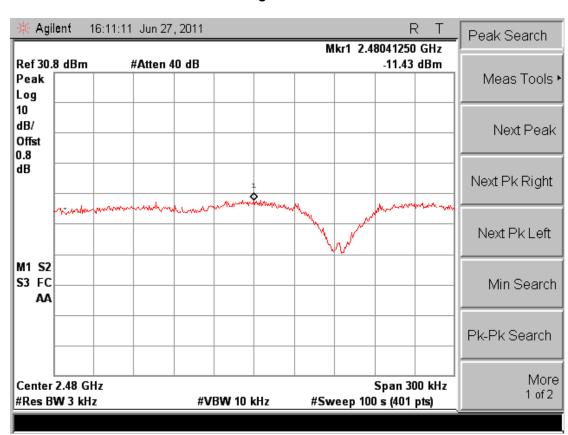

V1.0 Page 26 of 43 Report No.: WE11080015

4.5. Band Edge Compliance of RF Emission

TEST CONFIGURATION

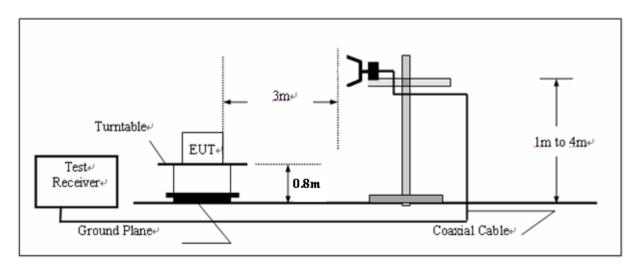

TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10:2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=1MHz and VBM= 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.


<u>LIMIT</u>

Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209(see Section 15.205(c)).

| Frequency (MHz) | Limit Average (dBuv/m) | Limit Peak (dBuv/m) |
|----------------------------|------------------------|---------------------|
| Below 2390 or Above 2483.5 | 54 | 74 |


TEST RESULTS

Photos of Band Edge Measurement

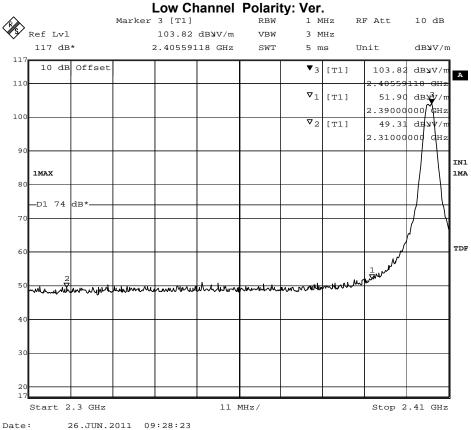

| | Marker 3 [T1] | RBW | 1 MHz | RF Att | 10 dB |
|---------------|---------------|--------------------|---------------------|----------|----------------|
| Ref Lvl | 101.38 dB | VBW VBW | 10 Hz | | |
| 117 dB* | 2.40515030 | GHz SWT | 28 s | Unit | dbyv/ |
| 10 dB Offs | et | | ▼ ₃ [T1] | 101.38 | db y v/ |
| | | | ▽ 1 [T1] | I | dв у v/ |
| | | | ∇ ₂ [T1] | | dBW/ |
| | | | | | |
| 1MAX | | | | | |
| | | | | | |
| | | | | | |
| _D1 54 dB*_ | | | | | |
| | | | | | |
| 2 V | | | | 1 | |
| | | | | | |
| | | | | | |
| 7 | | - - | | + | |

Date: 26.JUN.2011 09:29:12

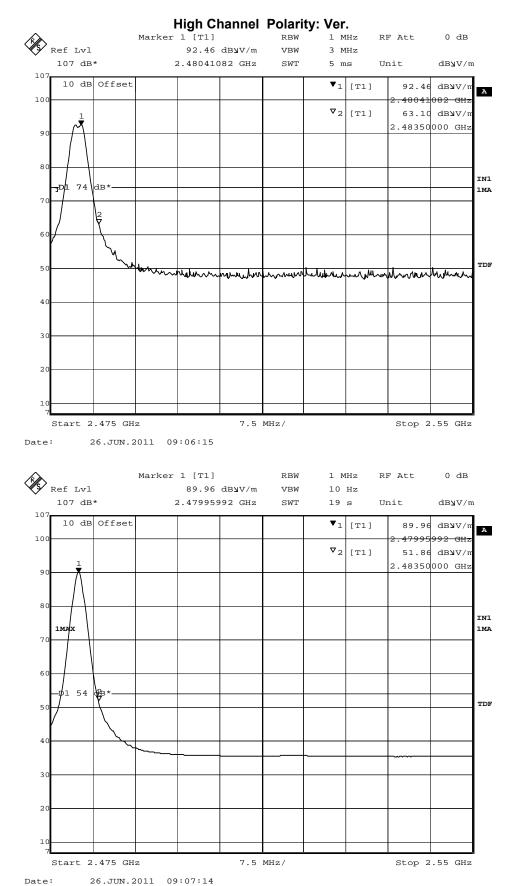

Note: The pre-test have done for both polarization and found the worst emission at Vertical. The worst case data is recorded.

V1.0 Page 29 of 43 Report No.: WE11080015

4.6. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The unlicensed wireless device antenna port connected to the spectrum analyzer, If a second antenna port is available, it shall be tested at one frequency to verify it has similar output characteristics as the fully-tested port.Set the sepectrum RBW=100KHz,RBW=300KHz.


LIMIT


The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that con-tains the highest level of the desired power.

TEST RESULTS


Photo of Spurious RF Conducted Emission Measurement


Low channel

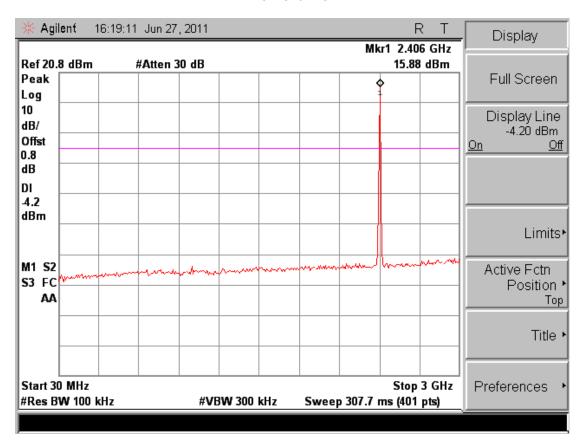

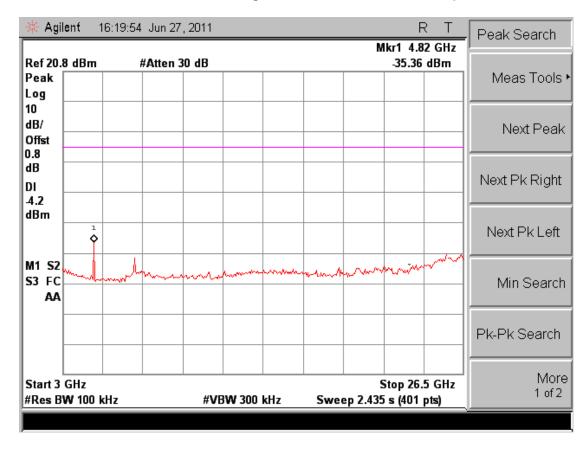



Middle Channel

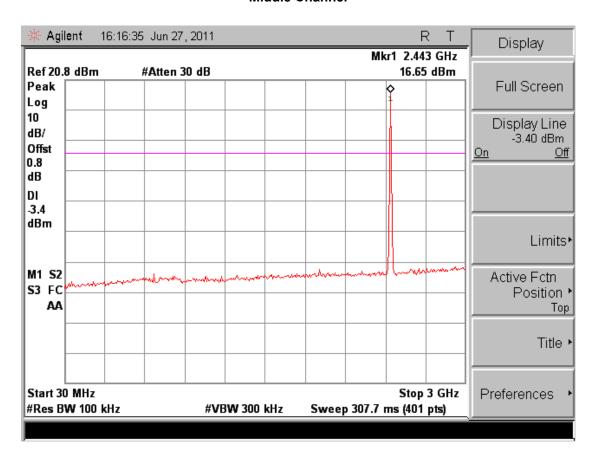

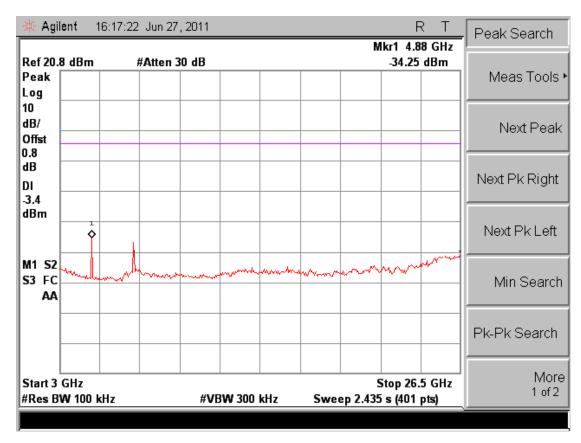


High channel

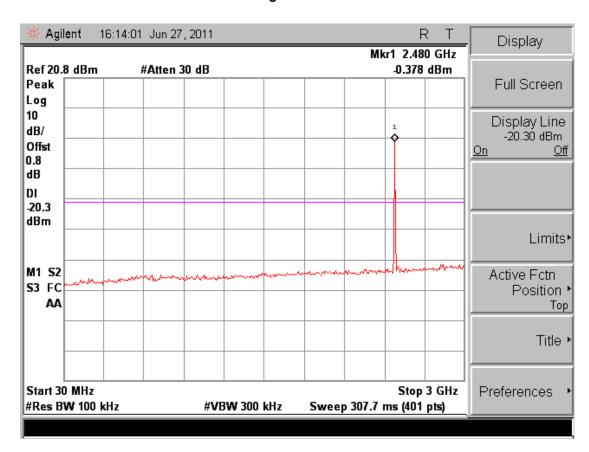


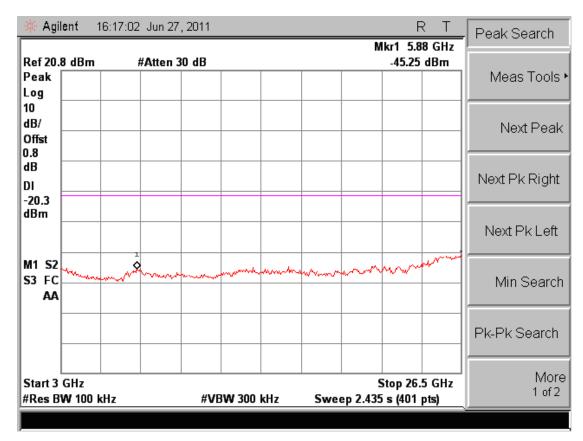

| Frequency | Delta peak to band emission | Limit(dBc) |
|-----------|-----------------------------|------------|
| 2400MHz | 41.250 | 20 |
| 2483.5MHz | 42.726 | 20 |



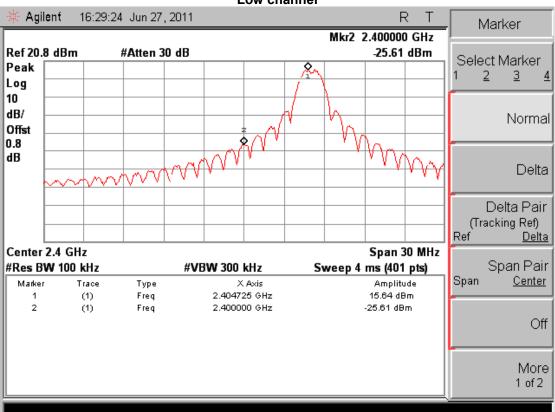

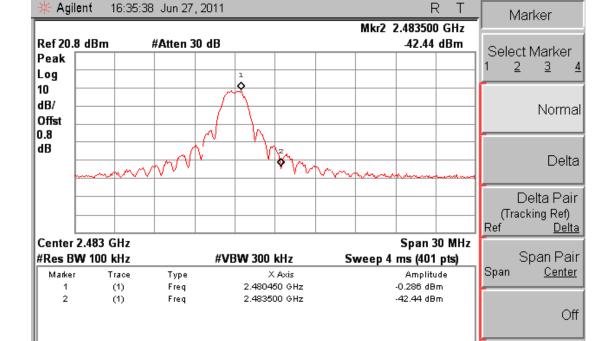


More 1 of 2

High channel

V1.0 Page 34 of 43 Report No.: WE11080015

4.7. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300KHz VBW.

The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS


| Company | Jetlun(ShenZhen)Corporation | Test Date | 06/28/2011 |
|--------------|--|---------------|------------|
| Product Name | Appliance Module,Appliance Gauge, ZigBee Extender | Test By | Eric Zhang |
| Model Name | RD77715 | TEMP&Humidity | 25°C, 55% |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6 dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS/FAIL |
|---------|-------------------------------|-------------------------|---------------------------|-----------|
| 11 | 2405 | 1.582 | 0.5 | PASS |
| 18 | 2440 | 1.592 | 0.5 | PASS |
| 26 | 2480 | 1.611 | 0.5 | PASS |


V1.0 Page 35 of 43 Report No.: WE11080015

Photos of 6dB Bandwidth Measurement


Low Channel

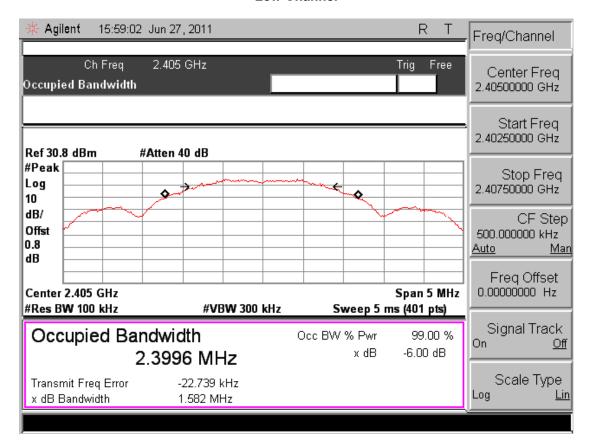

Middle Channel

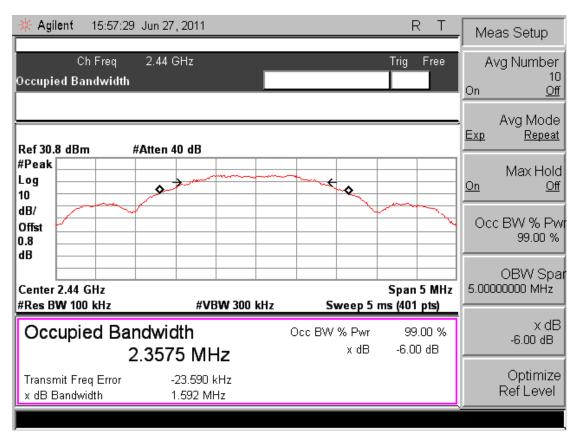

High Channel

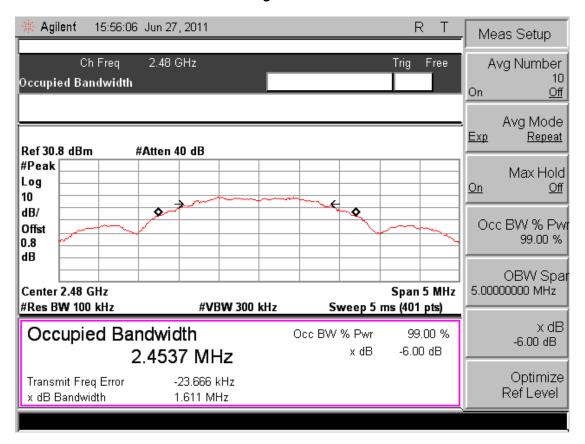

V1.0 Page 37 of 43 Report No.: WE11080015

4.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction


The antenna used in this product is a PIFA Antenna .The maximum Gain of the antenna only 3.0dBi. Detial please see the photos as following:




Antenna

5. Test Setup Photos of the EUT



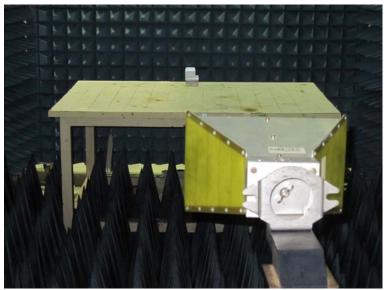



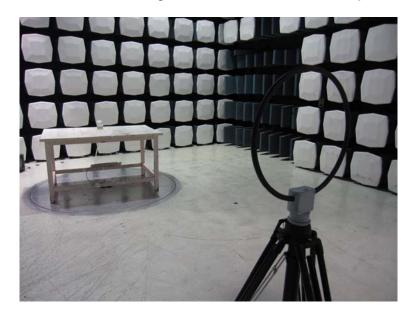

V1.0 Page 40 of 43 Report No.: WE11080015

6. External and Internal Photos of the EUT

External Photos








Internal Photos



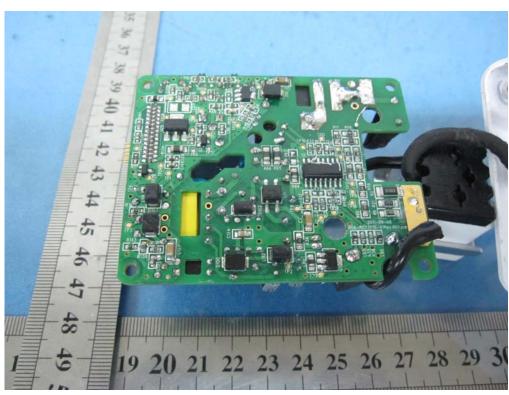





V1.0 Page 43 of 43 Report No.: WE11080015





.....End of Report.....