

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan  
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM120700400901  
Page: 1 of 27

## FCC REPORT

<b>Application No. :</b>	SZEM1207004009RF
<b>Applicant:</b>	Pixel Enterprise Limited
<b>Manufacturer:</b>	Pixel Enterprise Limited
<b>Product Name:</b>	KING
<b>Model No.(EUT):</b>	N-32
<b>FCC ID:</b>	X5SKINGN-32TX
<b>Standards:</b>	47 CFR Part 15, Subpart C (2012)
<b>Date of Receipt:</b>	2012-07-23
<b>Date of Test:</b>	2012-08-15 to 2013-08-16
<b>Date of Issue:</b>	2013-10-24

<b>Test Result:</b>	<b>PASS *</b>
---------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2009)	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	N/A
<b>Field Strength of the Fundamental Signal</b>	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2009)	PASS
<b>Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2009)	PASS
<b>Band Edge (Radiated Emission)</b>	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2009)	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2009)	PASS

### **3 Contents**

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>4</b>
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF EUT .....	4
4.3 TEST ENVIRONMENT AND MODE.....	6
4.4 DESCRIPTION OF SUPPORT UNITS .....	6
4.5 TEST LOCATION.....	6
4.6 TEST FACILITY.....	7
4.7 DEVIATION FROM STANDARDS.....	7
4.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
4.10 EQUIPMENT LIST .....	8
<b>5 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>10</b>
5.1 ANTENNA REQUIREMENT .....	10
5.2 RADIATED EMISSION .....	11
5.3 BAND EDGE (RADIATED EMISSION) .....	19
5.4 20DB BANDWIDTH.....	25-27

## 4 General Information

### 4.1 Client Information

Applicant:	Pixel Enterprise Limited
Address of Applicant:	Rm1228, 12/F, One Grand Tower, 639 Nathan Road, Mong K, Hong Kong
Manufacturer:	Pixel Enterprise Limited
Address of Manufacturer:	Rm1228, 12/F, One Grand Tower, 639 Nathan Road, Mong K, Hong Kong

### 4.2 General Description of EUT

Product Name:	KING
Model No.:	N-32
Frequency Range:	2411MHz-2462MHz
Modulation Type:	FSK
Number of Channels:	7 (declared by the client)
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	0dBi
PowerSupply:	3.0V DC (1.5V * 2"AA" Size Batteries) for TX 3.0V DC (1.5V * 2"AA" Size Batteries) for RX
Test Voltage:	DC 3.0V
PC-3.5 Connecting Cable :	160 cm
PC-1/4 Connecting Cable (6.35mm):	160 cm

<b>Operation Frequency each of channel</b>			
Channel	Frequency	Channel	Frequency
1CH	2411.0MHz	5CH	2445.0MHz
2CH	2419.5MHz	6CH	2453.5MHz
3CH	2428.0MHz	7CH	2462.0MHz
4CH	2436.5MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH1)	2411.0MHz
The Middle channel(CH4)	2436.5MHz
The Highest channel(CH7)	2462.0MHz

### 4.3 Test Environment and Mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1010 mbar
<b>Test mode:</b>	
Transmitting mode:	Keep the EUT transmitting continuous with modulation test signal at the special channel.

### 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Digital cameras	Nikon	D80
SPEEDLIGHT	Nikon	SB-900

### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,  
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

## 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

None.

## 4.9 Other Information Requested by the Customer

None.

## 4.10 Equipment List


RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
13	Band filter	Amindeon	82346	SEL0094	2014-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
16	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2013-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04

RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16
8	Band filter	amideon	82346	SEL0094	2014-05-16
9	POWER METER	R & S	NRVS	SEL0144	2013-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24

Note: The calibration interval is one year, all the instruments are valid.

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

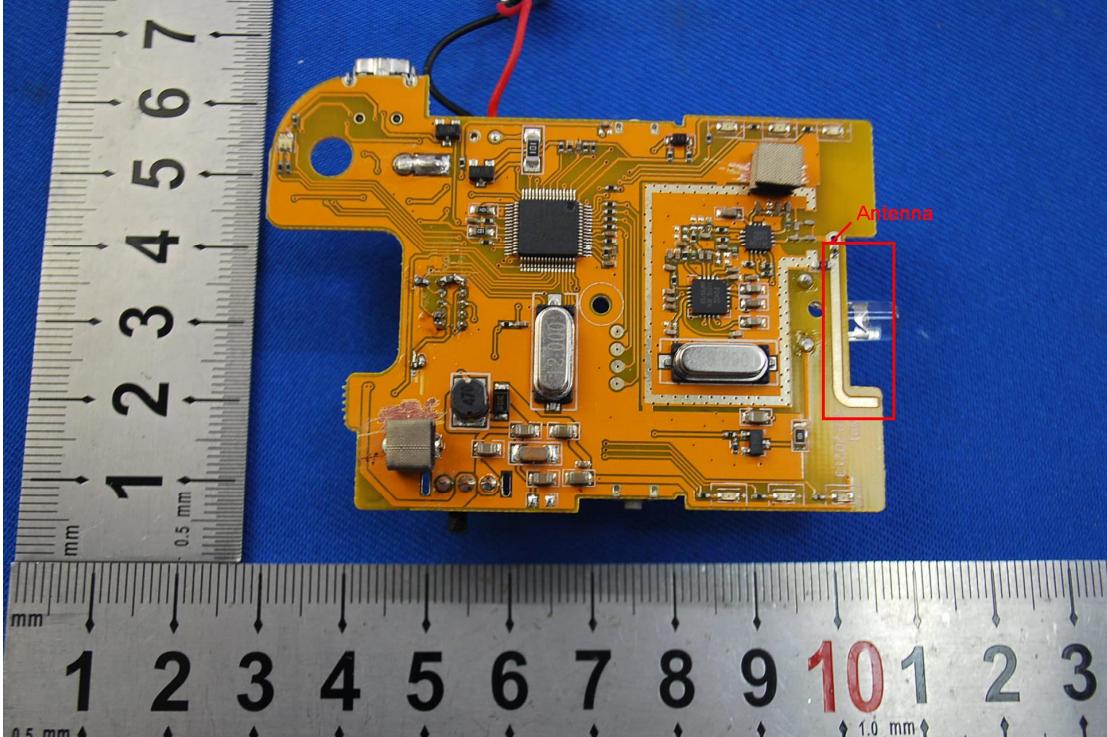Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement:	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.	
	



## 5.2 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209				
Test Method:	ANSI C63.10: 2009				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz		94.0	Average Value	
			114.0	Peak Value	

Test Setup:	

Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

Figure 3. Above 1 GHz

**Test Procedure:**

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

	<ul style="list-style-type: none"><li>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>g. Test the EUT in the lowest channel, the middle channel, the Highest channel</li><li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which is worse case, only the test worst case mode is recorded in the report.</li><li>i. Repeat above procedures until all frequencies measured was complete.</li></ul>
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**Measurement Data****5.2.1.1 Field Strength Of The Fundamental Signal**

Peak value:


Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2411.0	2.99	32.54	39.86	70.69	66.36	114.00	-47.64	Horizontal
2411.0	2.99	32.54	39.86	72.95	68.62	114.00	-45.38	Vertical
2436.5	3.00	32.61	39.89	70.93	66.65	114.00	-47.35	Horizontal
2436.5	3.00	32.61	39.89	69.72	65.44	114.00	-48.56	Vertical
2462.0	3.02	32.64	39.91	70.89	66.64	114.00	-47.36	Horizontal
2462.0	3.02	32.64	39.91	74.61	70.36	114.00	-43.64	Vertical

Remark:

As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

**5.2.1.2 Spurious Emissions**

<b>30MHz~1GHz</b>		
Test mode:	Transmitting	Vertical

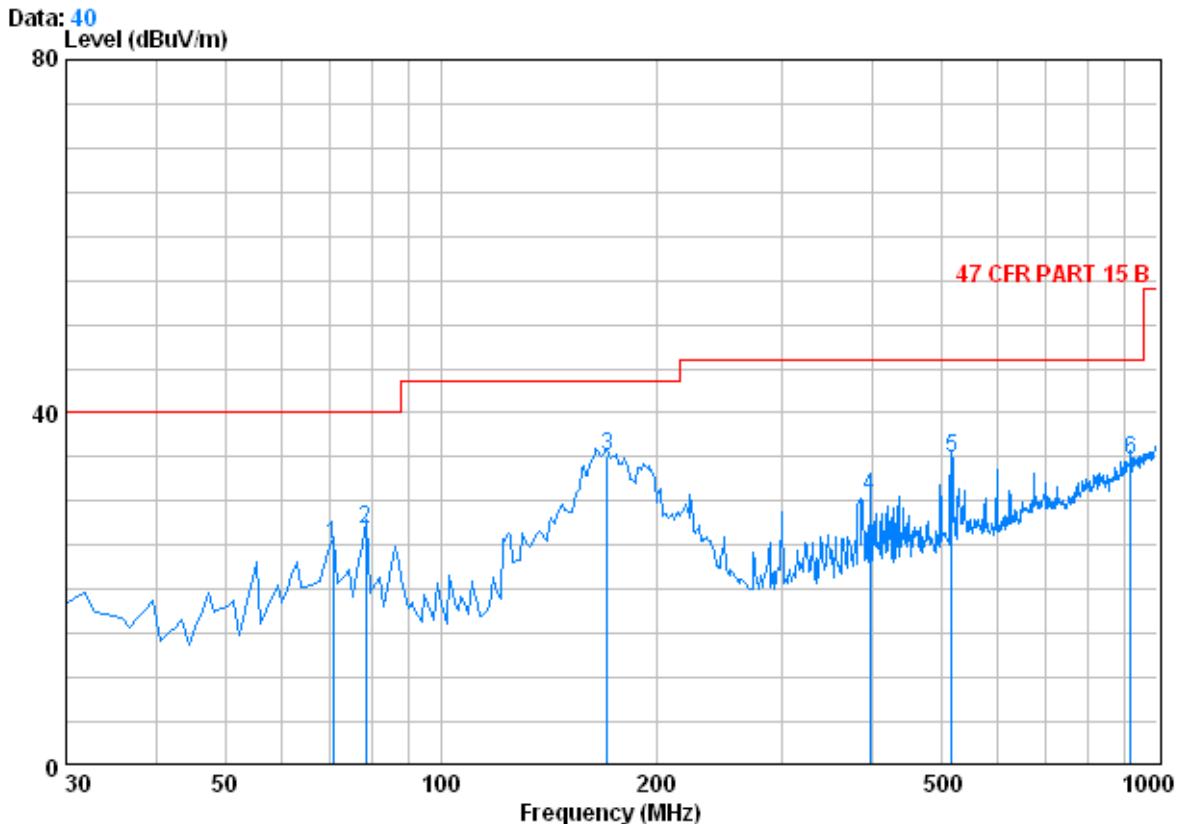


Condition : 47 CFR PART 15 B 3m 3142C VERTICAL

Job No. : 4009RF

Mode : TX mode

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	70.740	0.82	6.97	27.25	44.43	24.97	40.00	-15.03
2	78.500	1.05	7.59	27.23	45.47	26.88	40.00	-13.12
3	170.650	1.35	9.53	26.81	50.95	35.02	43.50	-8.48
4	397.630	2.19	16.27	27.11	39.20	30.55	46.00	-15.45
5	516.940	2.62	18.28	27.67	41.53	34.77	46.00	-11.23
6	917.550	3.62	23.28	26.68	34.46	34.67	46.00	-11.33

Test mode:	Transmitting	Horizontal
------------	--------------	------------

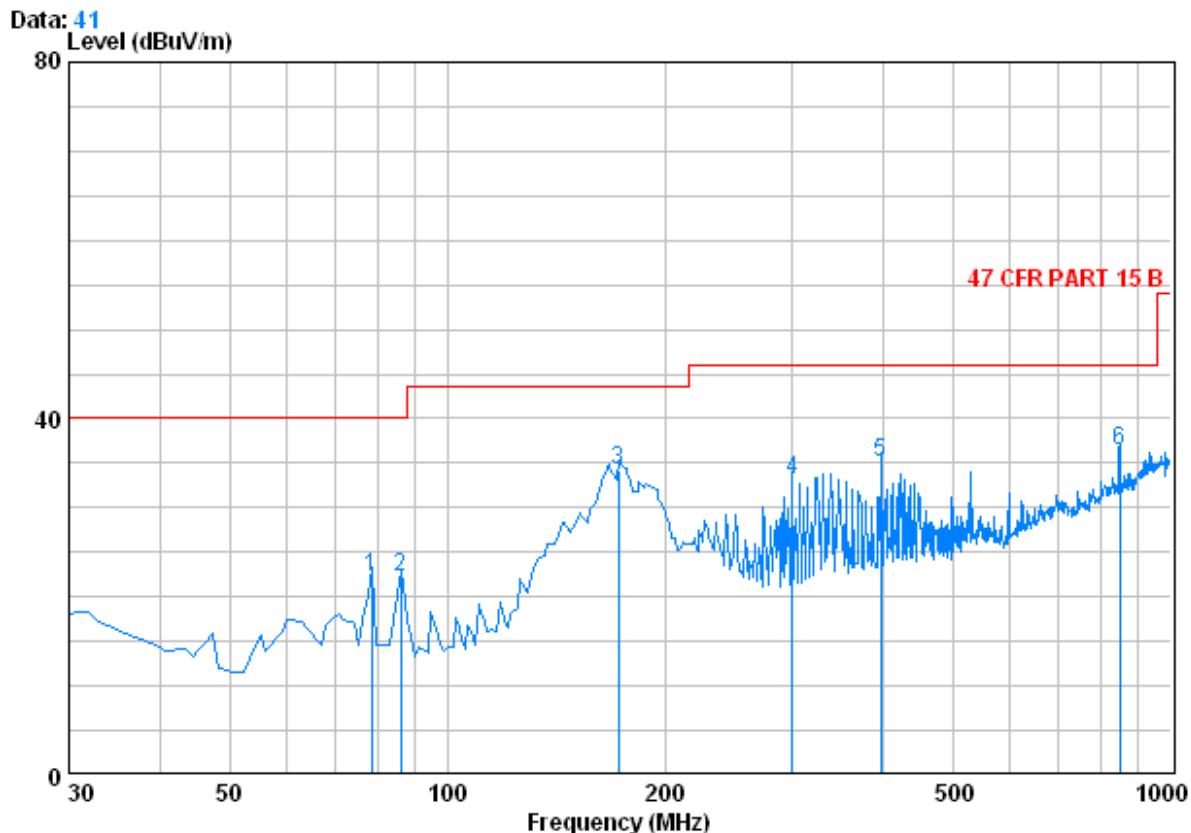

Condition : 47 CFR PART 15 B 3m 3142C HORIZONTAL

Job No. : 4009RF

Mode : TX mode

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	78.500	1.05	7.59	27.23	40.83	22.24	40.00	-17.76
2	86.260	1.10	8.36	27.22	39.89	22.13	40.00	-17.87
3	172.590	1.36	9.61	26.81	50.17	34.33	43.50	-9.17
4	299.660	1.90	13.85	26.41	43.71	33.05	46.00	-12.95
5	397.630	2.19	16.27	27.11	43.83	35.18	46.00	-10.82
6	850.620	3.41	22.40	27.02	37.51	36.30	46.00	-9.70



Above 1GHz								
Test mode:		Transmitting	Test channel:	Lowest	Remark:		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2604.185	3.10	32.84	40.00	47.91	43.85	74	-30.15	Vertical
3709.691	3.91	33.45	40.83	48.59	45.12	74	-28.88	Vertical
4821.757	4.70	34.68	41.64	55.54	53.28	74	-20.72	Vertical
6156.505	5.17	35.88	40.79	49.32	49.58	74	-24.42	Vertical
8355.943	6.19	36.14	38.88	47.91	51.36	74	-22.64	Vertical
10453.950	6.09	38.24	37.64	46.22	52.91	74	-21.09	Horizontal
3143.979	3.44	33.34	40.41	48.77	45.14	74	-28.86	Horizontal
3709.691	3.91	33.45	40.83	48.63	45.16	74	-28.84	Horizontal
4821.757	4.70	34.68	41.64	55.12	52.86	74	-21.14	Horizontal
6347.466	5.22	36.12	40.63	49.23	49.94	74	-24.06	Horizontal

Test mode:		Transmitting	Test channel:	Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1680.831	2.63	29.46	39.43	45.76	38.42	74	-35.58	Vertical
2726.283	3.16	33.03	40.10	47.17	43.26	74	-30.74	Vertical
3225.037	3.50	33.31	40.47	47.36	43.70	74	-30.30	Vertical
4871.103	4.72	34.59	41.68	40.15	37.78	54	-16.22	Vertical
4871.103	4.72	34.59	41.68	57.49	55.12	74	-18.88	Vertical
6851.185	5.39	35.96	40.18	48.01	49.18	74	-24.82	Horizontal
9204.600	6.10	36.85	38.14	45.68	50.49	74	-23.51	Horizontal
1495.101	2.51	28.10	39.35	46.25	37.51	74	-36.49	Horizontal
2868.674	3.24	33.21	40.20	47.66	43.91	74	-30.09	Horizontal
3662.775	3.87	33.41	40.79	48.88	45.37	74	-28.63	Horizontal

Test mode:		Transmitting	Test channel:		Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1706.700	2.65	29.70	39.44	48.93	41.84	74	-32.16	Vertical
3208.660	3.49	33.32	40.45	48.24	44.60	74	-29.40	Vertical
4107.316	4.23	34.13	41.12	47.97	45.21	74	-28.79	Vertical
4920.955	4.74	34.51	41.71	59.04	56.58	74	-17.42	Vertical
4920.955	4.74	34.51	41.71	38.10	35.64	54	-18.36	Vertical
6561.030	5.27	36.25	40.43	49.19	50.28	74	-23.72	Horizontal
8882.347	6.16	36.51	38.42	46.95	51.20	74	-22.80	Horizontal
1698.033	2.64	29.58	39.44	50.45	43.23	74	-30.77	Horizontal
3120.061	3.41	33.35	40.40	48.32	44.68	74	-29.32	Horizontal
4065.707	4.21	33.99	41.08	48.28	45.40	74	-28.60	Horizontal

**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

### 5.3 Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205																					
Test Method:	ANSI C63.10: 2009																					
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																					
Limit(Band Edge):	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. <table border="1" data-bbox="589 729 1475 1033"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td> </tr> <tr> <td>74.0</td><td>Peak Value</td> </tr> </tbody> </table>		Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																				
30MHz-88MHz	40.0	Quasi-peak Value																				
88MHz-216MHz	43.5	Quasi-peak Value																				
216MHz-960MHz	46.0	Quasi-peak Value																				
960MHz-1GHz	54.0	Quasi-peak Value																				
Above 1GHz	54.0	Average Value																				
	74.0	Peak Value																				
Test Setup:																						

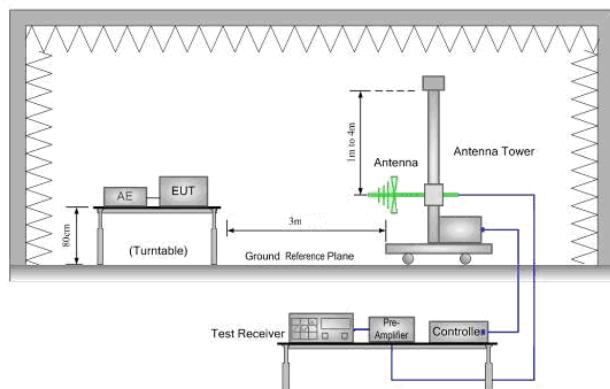


Figure 1. 30MHz to 1GHz

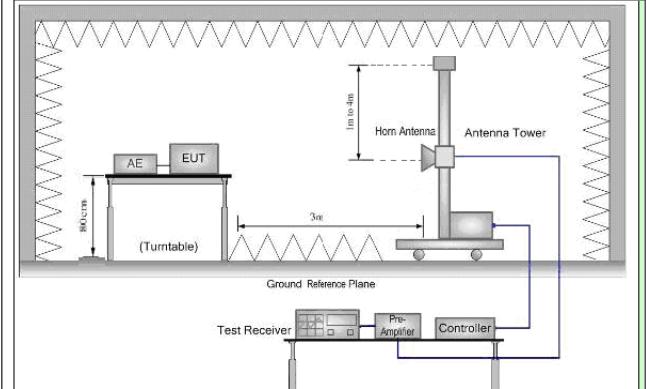



Figure 2. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"><li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li><li>g. Test the EUT in the lowest channel , the Highest channel</li><li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.</li><li>i. Repeat above procedures until all frequencies measured was complete.</li></ol>
Instruments Used:	Refer to section 4.10 for details
Test Mode:	Transmitter mode
Test Results:	Pass




**Test plot as follows:**

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Horizontal
------------	--------------	---------------	--------	---------	------------

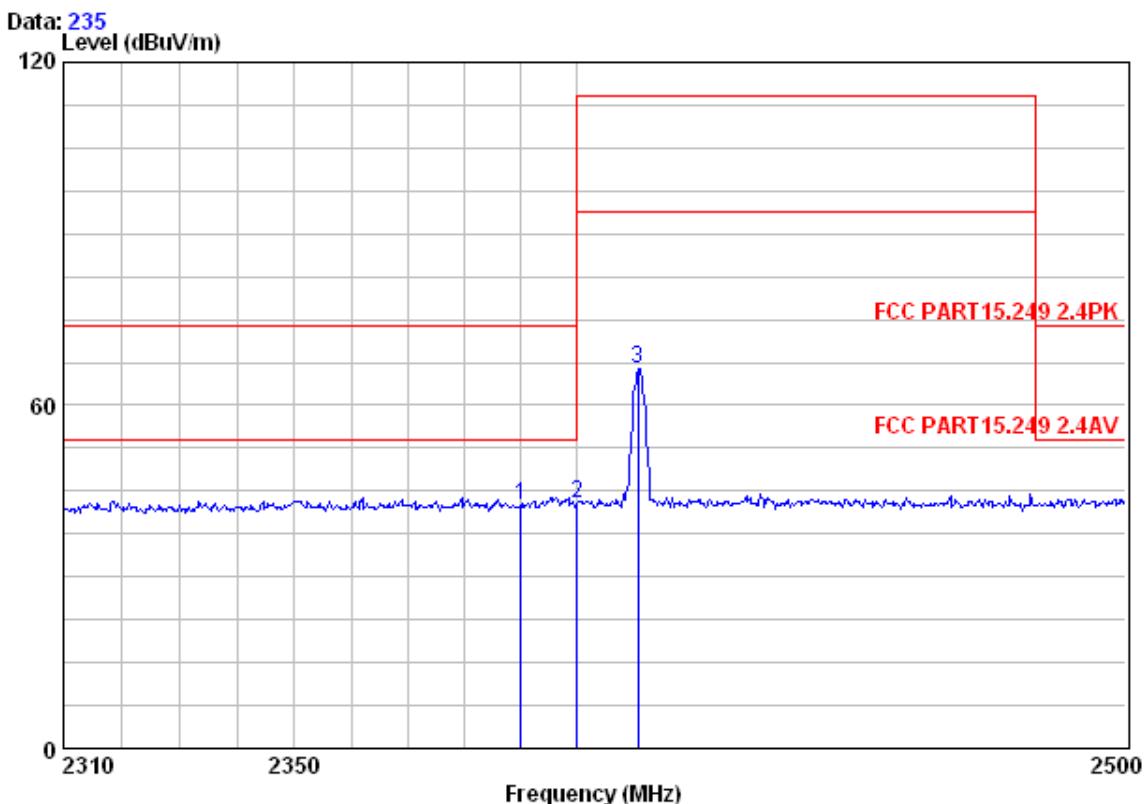

Freq	Cable		Antenna	Preamp	Read	Limit	Line	Over	Remark
	Loss	Factor	Factor	Level	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	47.01	42.66	74.00	-31.34	Peak
2	2400.000	2.98	32.51	39.86	47.04	42.67	74.00	-31.33	Peak
3	2410.890	2.99	32.54	39.86	70.68	66.36	114.00	-47.64	Peak

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Vertical
------------	--------------	---------------	--------	---------	----------

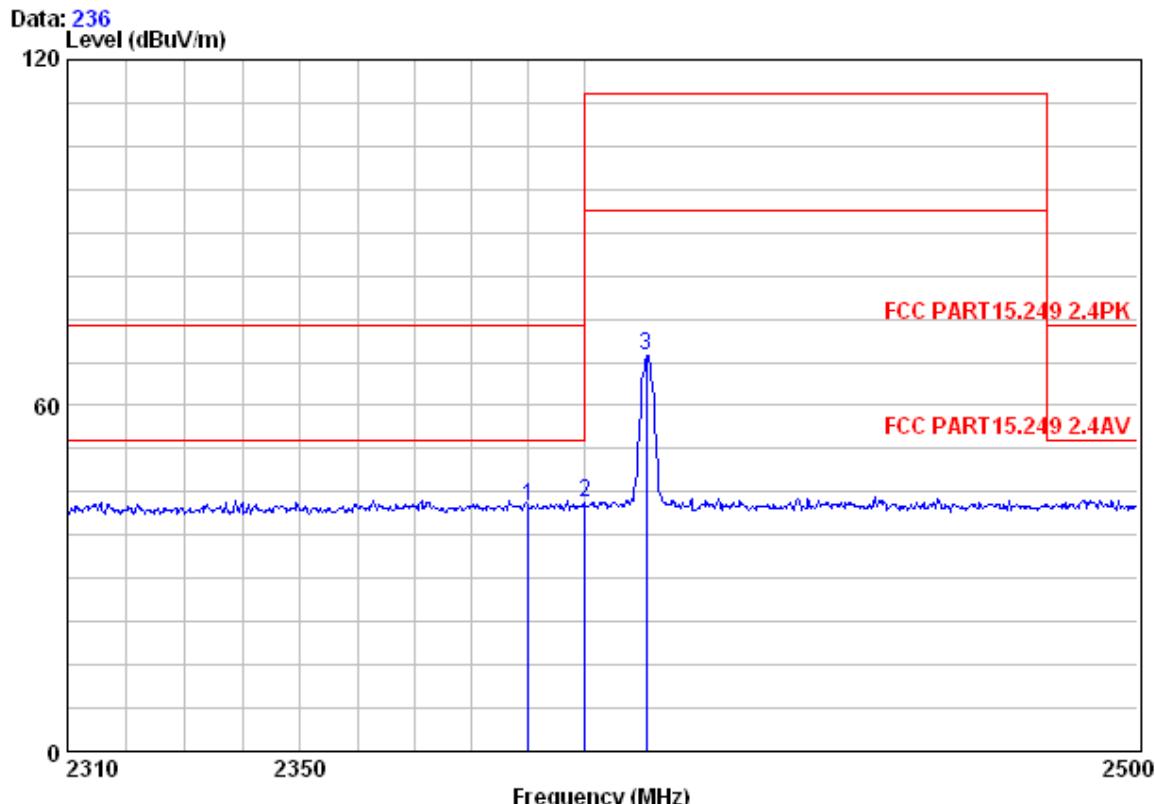


Condition : FCC PART15.249 2.4PK 3m VERTICAL

Job No. : 4009RF

Mode : 2411MHz Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	46.98	42.62	74.00	-31.38	Peak
2	2400.000	2.98	32.51	39.86	47.62	43.25	74.00	-30.75	Peak
3	2410.890	2.99	32.54	39.86	72.94	68.62	114.00	-45.38	Peak

Test mode:	Transmitting	Test channel:	Highest	Remark:	Horizontal
------------	--------------	---------------	---------	---------	------------

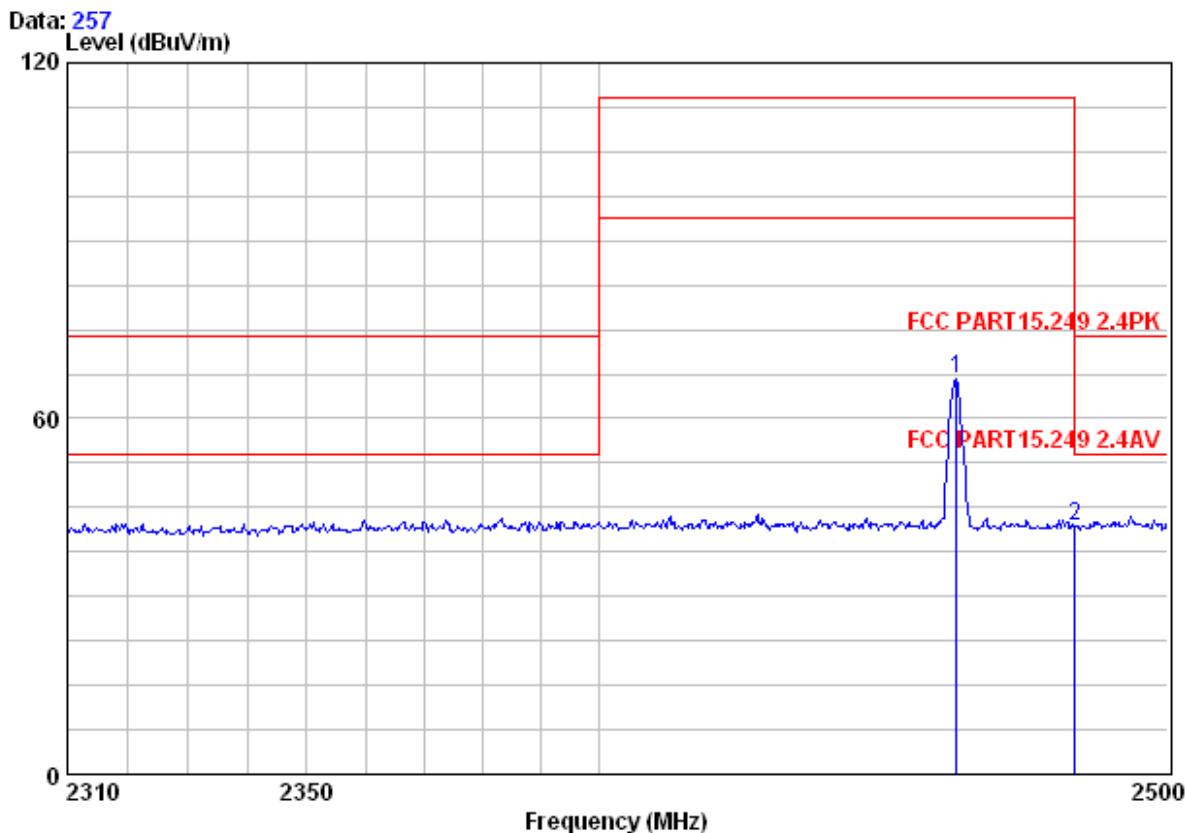


Condition : FCC PART15.249 2.4PK 3m HORIZONTAL

Job No. : 4008RF

Mode : 2462MHz Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2462.380	3.02	32.64	39.91	70.89	66.64	114.00	-47.36
2	2483.500	3.03	32.67	39.92	46.06	41.84	74.00	-32.16

Test mode:	Transmitting	Test channel:	Highest	Remark:	Vertical
------------	--------------	---------------	---------	---------	----------

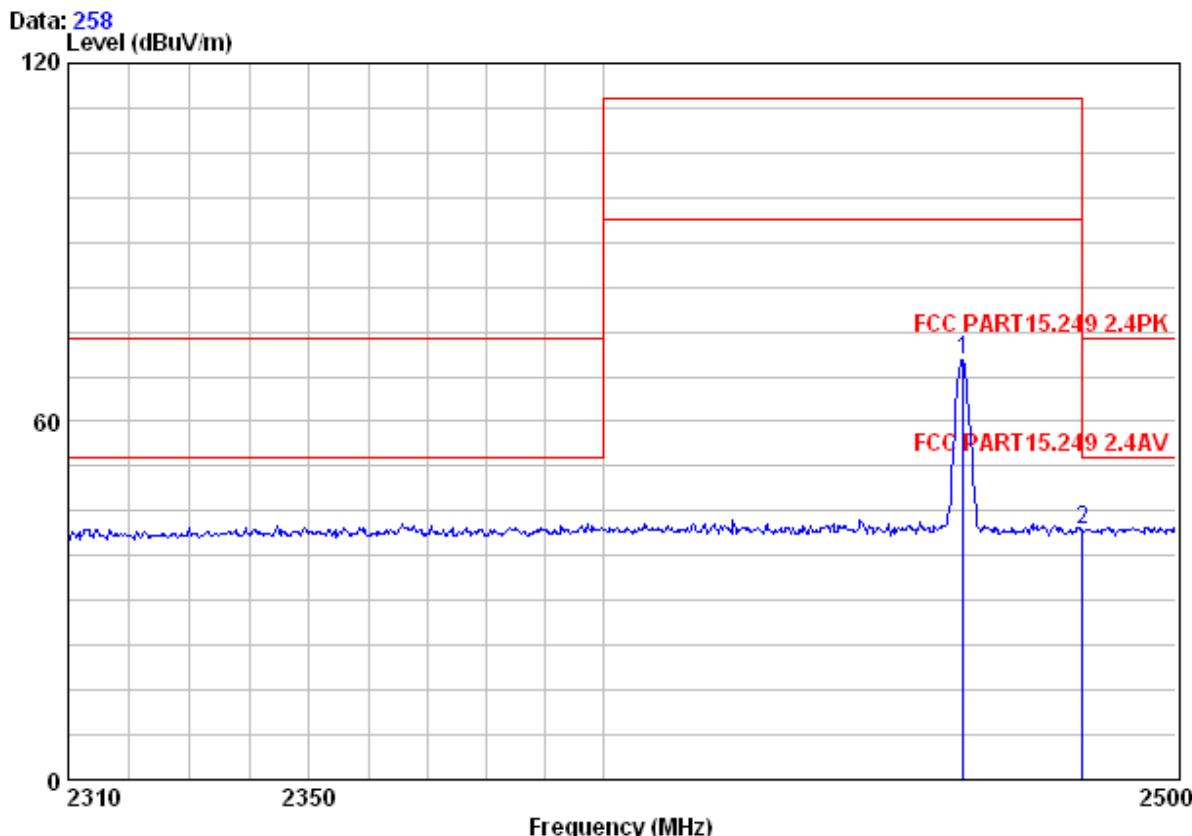

Condition : FCC PART15.249 2.4PK 3m VERTICAL

Job No. : 4008RF

Mode : 2462MHz Bandedge

	Freq	Cable	Antenna	Preamp	Read	Limit	Line	Over
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2462.380	3.02	32.64	39.91	74.61	70.36	114.00	-43.64
2	2483.500	3.03	32.67	39.92	46.00	41.78	74.00	-32.22


**Note:**

*The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:*

*Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor*

As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 5.4 20dB Bandwidth

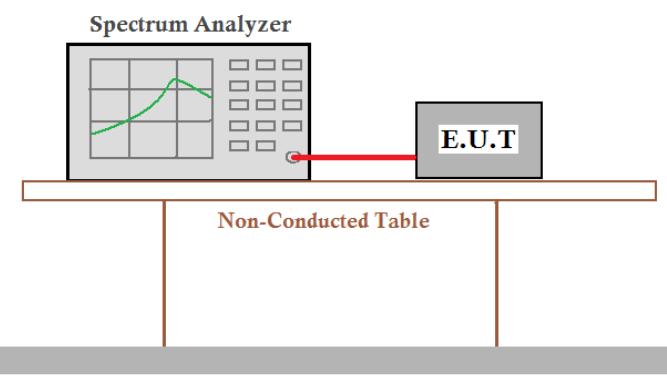
Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2009
Test Setup:	
Test Mode:	Transmitter mode
Limit:	N/A
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

### Measurement Data


Test Channel	20dB bandwidth (kHz)	Results
Lowest	91.826923077	Pass
Middle	91.346153846	Pass
Highest	89.903846154	Pass

**Test plot as follows:**

Test channel:	Lowest
---------------	--------

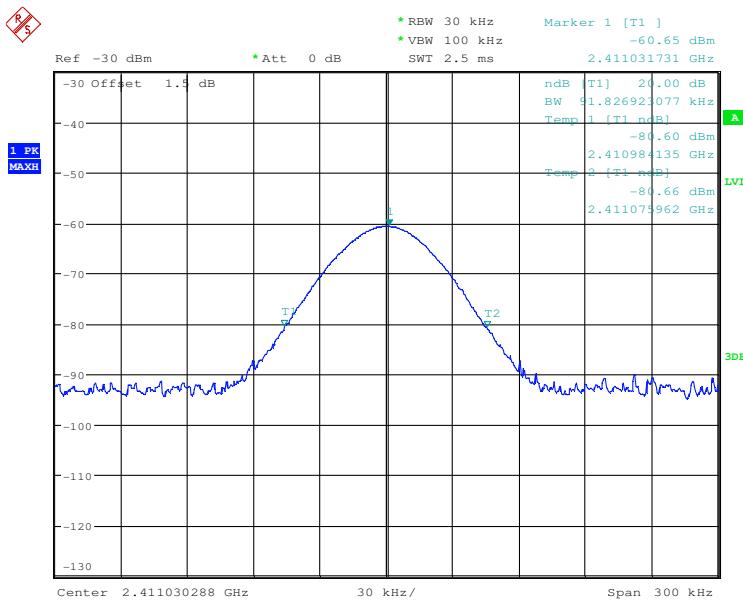

Test channel:	Middle
---------------	--------

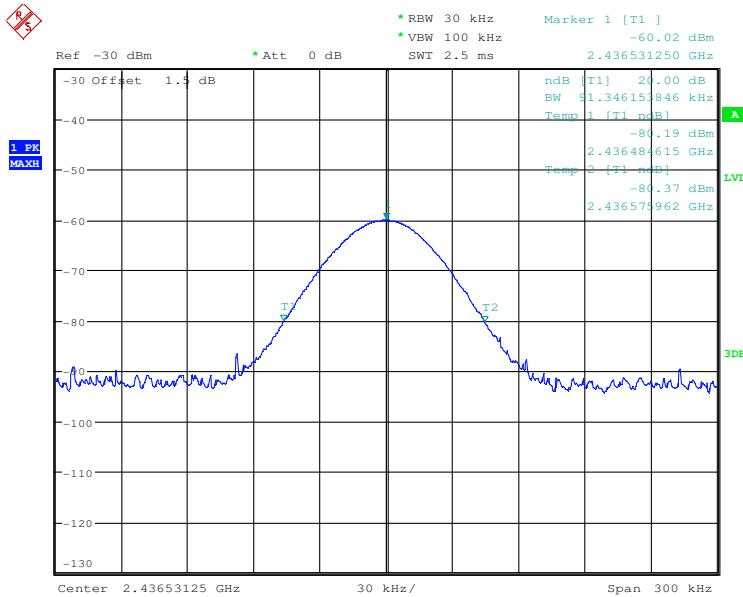

Test channel:	Highest
---------------	---------

