



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: sgs_internet_operations@sgs.com

Report No.: SZEMO11030130001

Page : 1 of 21

FCC REPORT

Application No. : SZEMO110301300RF

Applicant: PIXEL ENTERPRISE LIMITED

Product Name: Soldier and Pawn

Operation Frequency: 2401.9MHz-2476.9MHz

FCC ID: X5SPAURNSOLDIER-TX

Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249: 2009

Date of Receipt: 2011-03-28

Date of Test: 2011-03-30 to 2011-04-06

Date of Issue: 2011-04-13

Test Result :	PASS *
----------------------	--------

* In the configuration tested, the EUT complied with the standards specified above.

Remark:

Complete product formed by TF-361TX and TF-361RX, only the test result of TF-361TX is recorded in this report.

Authorized Signature:

Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 2 of 21

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 TEST SUMMARY	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF E.U.T	4
4.3 E.U.T OPERATION MODE	5
4.4 TEST FACILITY	5
4.5 TEST LOCATION	5
4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	5
4.7 TEST INSTRUMENTS LIST:.....	6
5 TEST RESULTS AND MEASUREMENT DATA.....	7
5.1 ANTENNA REQUIREMENT:	7
5.2 RADIATED EMISSION	8
5.2.1 <i>Field Strength Of The Fundamental Signal</i>	10
5.2.2 <i>Spurious Emissions</i>	11
5.2.3 <i>Band edge (Radiated Emission)</i>	15
5.2.4 <i>20dB Bandwidth</i>	19-21

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 3 of 21

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a)/15.209	Pass
Band edge (Radiated Emission)	15.249(a)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 4 of 21

4 General Information

4.1 Client Information

Applicant:	PIXEL ENTERPRISE LIMITED
Manufacturer/ Factory:	PIXEL ENTERPRISE LIMITED
Address of Applicant:	RM1228, 12/F, ONE GRAND TOWER, 639 NATHAN RD, MONGKOK, KOWLOON, HONG KONG
Address of Manufacturer/ Factory:	PRM1228, 12/F, ONE GRAND TOWER, 639 NATHAN RD, MONGKOK, KOWLOON, HONG KONG

4.2 General Description of E.U.T.

Product Name:	Soldier and Pawn
Model No.:	TF-361, TF-362, TF-363, TF-364, TF-371, TF-372, TF-373, TF-374
	Only the model No. TF-361 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above items. Only the model number and color are different.
Operation Frequency:	2401.9MHz-2476.9MHz
Channel numbers:	16
Modulation type:	FSK
Antenna Type:	Integral
Antenna gain:	0dBi
Power supply:	CR 2032 DC 3V *1=3.0V

Channel number	Frequency(MHz)	Channel number	Frequency(MHz)
CH 00	2401.9	CH 08	2444.9
CH 01	2406.4	CH 09	2446.4
CH 02	2409.2	CH 10	2451.4
CH 03	2418.4	CH 11	2459.9
CH 04	2420.9	CH 12	2461.9
CH 05	2429.4	CH 13	2469.4
CH 06	2435.4	CH 14	2470.9
CH 07	2438.4	CH 15	2476.9

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2401.9MHz
The middle channel	2444.9MHz
The highest channel	2476.9MHz

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 5 of 21

4.3 E.U.T Operation mode

Operating Environment:

Temperature: 24.0 °C
Humidity: 52 % RH
Atmospheric Pressure: 1008 mbar

Test mode:

Transmitter mode: The EUT transmitted the continuous modulation test signal at the low , middle and high channels.

4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.6 Other Information Requested by the Customer

None.

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 6 of 21

4.7 Test Instruments list:

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2010-06-17	2011-06-17
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2010-11-05	2011-11-05
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2010-11-09	2011-11-09
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2010-11-09	2011-11-09
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2010-11-09	2011-11-09
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2010-06-02	2011-06-02
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2010-10-27	2011-10-27
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	2010-06-04	2011-06-04
11	Band filter	Amindeon	82346	SEL0094	2010-06-02	2011-06-02

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	The antenna is integrated on the main PCB and no consideration of replacement. The maximum gain of the antenna is 0dBi.

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 8 of 21

5.2 Radiated Emission



Test Requirement:	FCC Part15 C Section 15.249 and 15.209																								
Test Method:	ANSI C63.10: 2009																								
Test Frequency Range:	30MHz to 25000MHz																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	Peak	1MHz	10Hz	Average Value																					
Limit: (Field strength of the fundamental signal)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>2400MHz-2483.5MHz</td> <td>94.0</td> <td>Average Value</td> </tr> <tr> <td></td> <td>114.0</td> <td>Peak Value</td> </tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	2400MHz-2483.5MHz	94.0	Average Value		114.0	Peak Value											
Frequency	Limit (dBuV/m @3m)	Remark																							
2400MHz-2483.5MHz	94.0	Average Value																							
	114.0	Peak Value																							
Limit: (Spurious Emissions)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	74.0	Peak Value																							
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.																								
Test Procedure:	<ol style="list-style-type: none"> a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis 																								

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 9 of 21

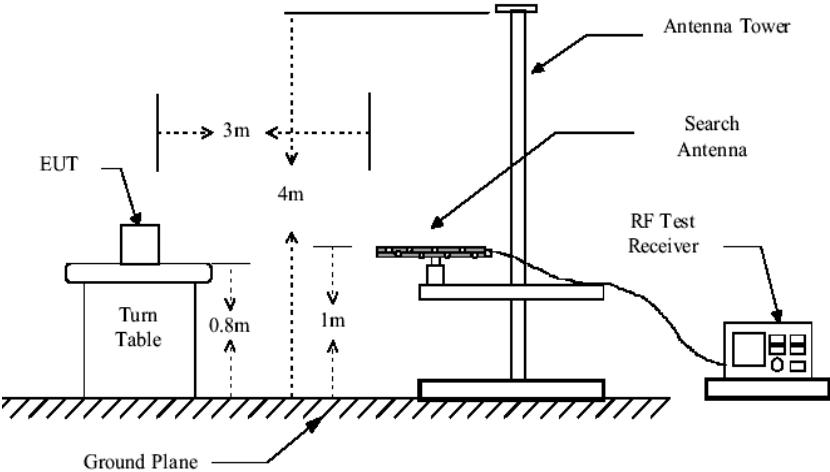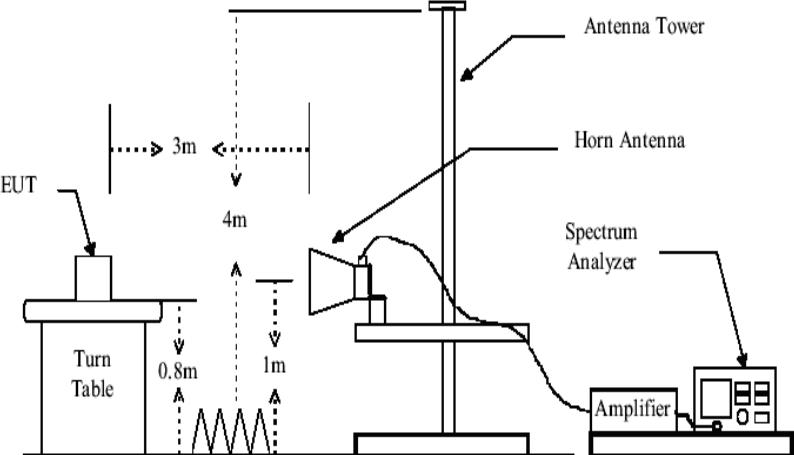	positioning. Only the worst case is shown in the report.
Test Instruments:	Refer to section 4.7 for details
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p> 
Test mode:	Transmitter mode
Test results:	Pass

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 10 of 21

Measurement Data

5.2.1 Field Strength Of The Fundamental Signal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Peak Level (dBuV/m)	Average Limit Line (dBuV/m)	Over Limit (dB)	polarization
2401.900	2.98	32.51	39.86	81.84	77.47	94.00	-16.53	Horizontal
2401.900	2.98	32.51	39.86	80.32	75.95	94.00	-18.05	Vertical
2444.900	3.01	32.61	39.89	78.13	73.86	94.00	-20.14	Horizontal
2444.900	3.01	32.61	39.89	79.17	74.90	94.00	-19.10	Vertical
2476.900	3.03	32.67	39.92	78.02	73.80	94.00	-20.20	Horizontal
2476.900	3.03	32.67	39.92	77.29	73.07	94.00	-20.93	Vertical

Note:

Peak Level (Final Level)= Reading Level + Antenna Factor + Cable Loss - Preamp Factor

Remark:

As shown in this section, for field strength of the fundamental signal measurements, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

SGS-CSTC Standards Technical Services Ltd.


Report No.: SZEMO11030130001

Page : 11 of 21

5.2.2 Spurious Emissions

30MHz~1GHz

Test mode: Transmitting Vertical

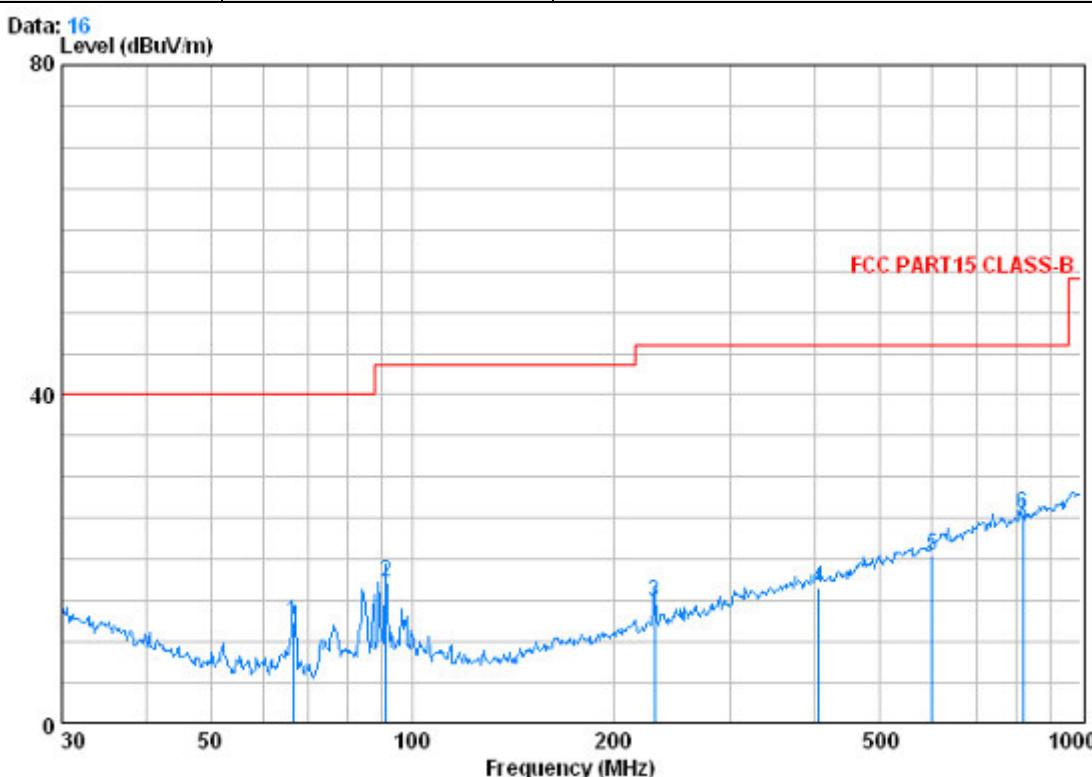


	Cable Freq	Antenna Loss	Preamplifier Factor	Readout Factor	Level	Line Limit	Over Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	66.499	0.80	7.00	27.25	31.82	12.36	40.00	-27.64
2	91.495	1.12	8.77	27.21	34.66	17.33	43.50	-26.17
3	230.907	1.58	11.70	26.59	28.18	14.86	46.00	-31.14
4	406.088	2.23	16.33	27.17	25.23	16.61	46.00	-29.39
5	599.321	2.70	19.74	27.54	25.65	20.55	46.00	-25.45
6	818.834	3.28	22.33	27.20	27.09	25.50	46.00	-20.50

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 12 of 21

Test mode:	Transmitting	Horizontal
------------	--------------	------------

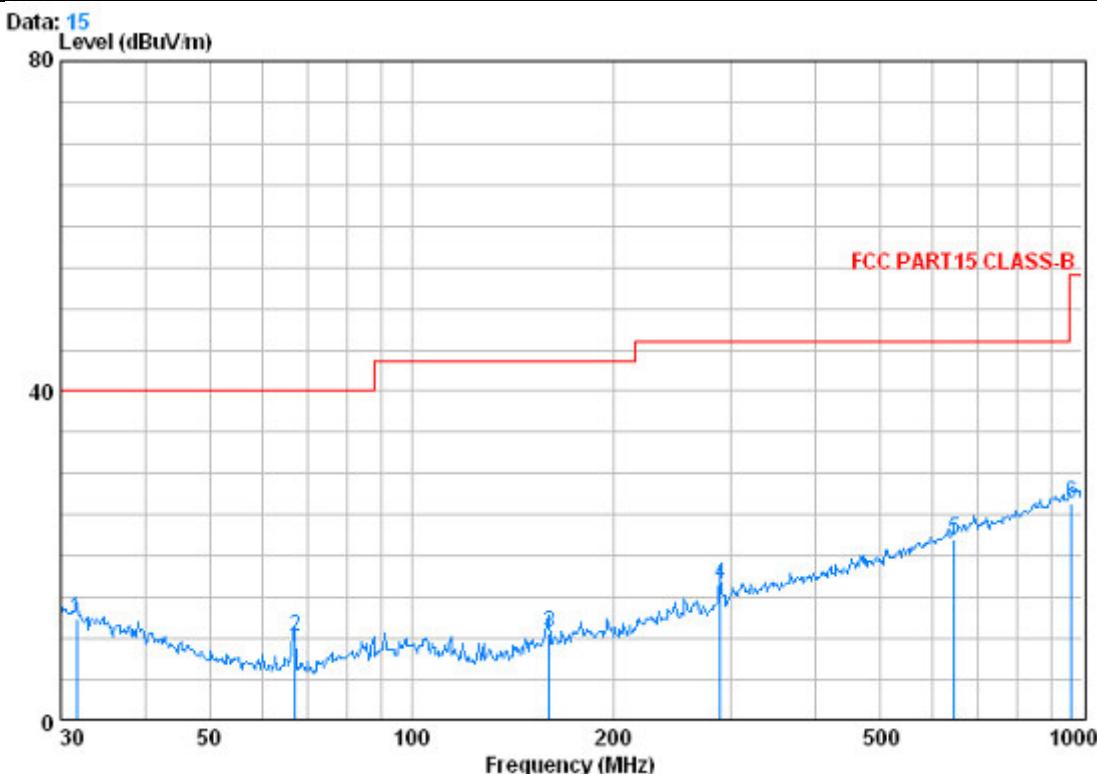

Freq	Cable Loss		Antenna Factor		Preamp Factor		Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	31.620	0.60	14.41	27.35	24.69	12.35	40.00	-27.65		
2	67.202	0.80	6.98	27.25	29.81	10.34	40.00	-29.66		
3	160.346	1.34	9.59	26.86	26.70	10.77	43.50	-32.73		
4	289.002	1.85	13.40	26.43	27.71	16.53	46.00	-29.47		
5	645.120	2.80	20.58	27.48	26.19	22.09	46.00	-23.91		
6	965.542	3.67	23.70	26.47	25.39	26.29	54.00	-27.71		

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 13 of 21

Above 1GHz

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak			
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4936.250	4.75	34.48	41.72	49.30	46.81	74.00	-27.19	Vertical
6287.500	5.20	36.04	40.68	49.71	50.27	74.00	-23.73	Vertical
7521.250	6.15	36.00	39.61	49.68	52.22	74.00	-21.78	Vertical
8766.750	6.17	36.41	38.52	47.24	51.30	74.00	-22.70	Vertical
9906.500	5.98	37.61	37.53	45.99	52.05	74.00	-21.95	Vertical
11093.250	6.24	38.48	37.90	45.82	52.64	74.00	-21.36	Vertical
4889.250	4.73	34.57	41.70	49.92	47.52	74.00	-26.48	Horizontal
6475.500	5.25	36.26	40.51	50.15	51.15	74.00	-22.85	Horizontal
7568.250	6.19	36.00	39.56	49.50	52.13	74.00	-21.87	Horizontal
8637.500	6.17	36.31	38.64	48.45	52.29	74.00	-21.71	Horizontal
10059.250	5.99	37.78	37.47	45.39	51.69	74.00	-22.31	Horizontal
11269.500	6.29	38.45	37.97	46.24	53.01	74.00	-20.99	Horizontal

Test mode:	Transmitting	Test channel:	Middle	Remark:	Peak			
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
5030.250	4.78	34.43	41.76	49.86	47.31	74.00	-26.69	Vertical
6005.500	5.13	35.70	40.92	50.25	50.16	74.00	-23.84	Vertical
7991.250	6.21	36.00	39.20	49.83	52.84	74.00	-21.16	Vertical
8649.250	6.17	36.32	38.62	48.93	52.80	74.00	-21.20	Vertical
9871.250	5.98	37.58	37.57	46.98	52.97	74.00	-21.03	Vertical
11234.250	6.28	38.45	37.96	46.60	53.37	74.00	-20.63	Vertical
4748.250	4.66	34.81	41.58	50.41	48.30	74.00	-25.70	Horizontal
5218.250	4.85	34.62	41.60	51.67	49.54	74.00	-24.46	Horizontal
6475.500	5.25	36.26	40.51	50.46	51.46	74.00	-22.54	Horizontal
7791.500	6.22	36.00	39.38	49.92	52.76	74.00	-21.24	Horizontal
9542.250	6.00	37.23	37.85	47.17	52.55	74.00	-21.45	Horizontal
11269.500	6.29	38.45	37.97	46.36	53.13	74.00	-20.87	Horizontal

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 14 of 21

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak			
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4560.250	4.53	35.12	41.44	49.46	47.67	74.00	-26.33	Vertical
5770.500	5.05	35.34	41.12	50.02	49.29	74.00	-24.71	Vertical
6910.250	5.45	35.89	40.13	49.20	50.41	74.00	-23.59	Vertical
7615.250	6.23	36.00	39.52	49.38	52.09	74.00	-21.91	Vertical
10188.500	6.02	37.92	37.53	45.39	51.80	74.00	-22.20	Vertical
11610.250	6.37	38.50	38.11	46.09	52.85	74.00	-21.15	Vertical
4689.500	4.62	34.90	41.54	49.66	47.64	74.00	-26.36	Horizontal
5641.250	5.00	35.12	41.24	49.87	48.75	74.00	-25.25	Horizontal
6487.250	5.25	36.28	40.50	49.53	50.56	74.00	-23.44	Horizontal
7979.500	6.21	36.00	39.21	49.21	52.21	74.00	-21.79	Horizontal
10047.500	5.98	37.76	37.47	45.83	52.10	74.00	-21.90	Horizontal
11657.250	6.39	38.56	38.13	46.21	53.03	74.00	-20.97	Horizontal

Remark:

As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 15 of 21

5.2.3 Band edge (Radiated Emission)

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Vertical
------------	--------------	---------------	--------	---------	----------

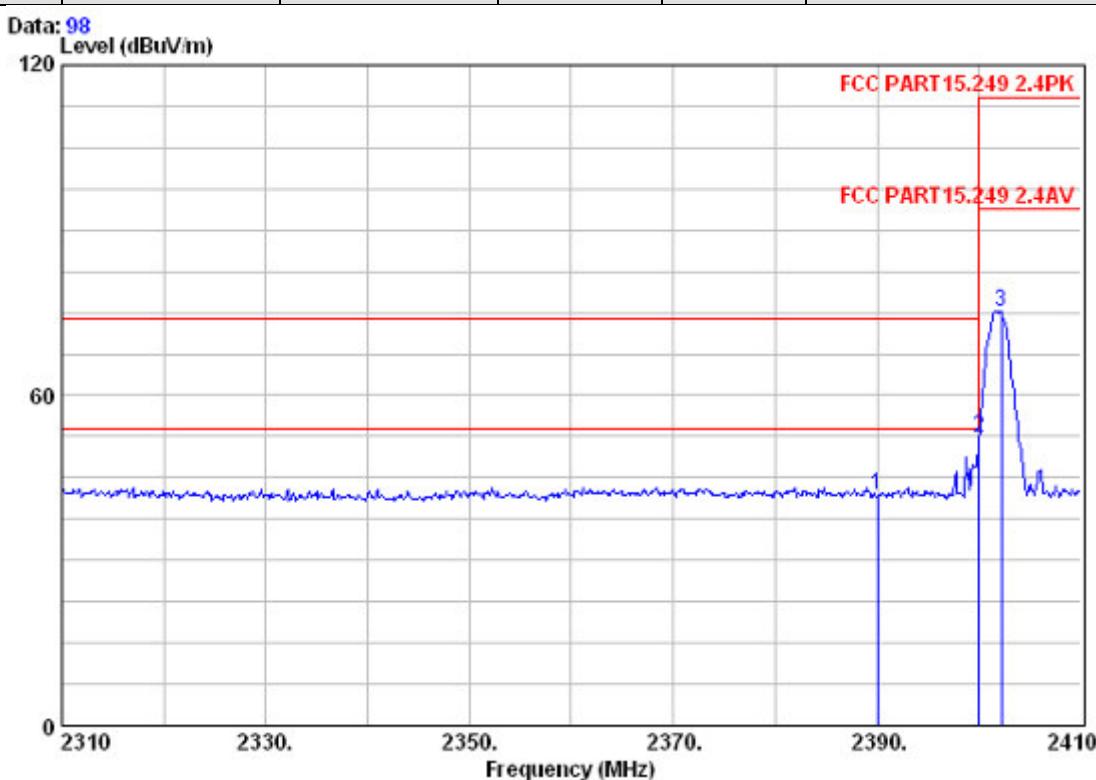

Freq	Cable			Antenna		Preamp	Read	Limit	Over
	Loss	Antenna	Preamp	Factor	Factor	Level	Level		
	MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	46.10	41.75	74.00	-32.25	
2	2400.000	2.98	32.51	39.86	56.61	52.25	74.00	-21.75	
3	2402.200	2.98	32.51	39.86	79.45	75.08	114.00	-38.92	

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 16 of 21

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Horizontal
------------	--------------	---------------	--------	---------	------------

Data: 97

Level (dBuV/m)

120

FCC PART15.249 2.4PK

100

FCC PART15.249 2.4AV

80

60

40

20

0

2310

2330.

2350.

2370.

2390.

2410

Frequency (MHz)


Freq	Cable	Antenna	Preamp	Read	Limit	Line	Over	
	Loss	Factor	Factor	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	47.41	43.05	74.00	-30.95
2	2400.000	2.98	32.51	39.86	56.00	51.63	74.00	-22.37
3	2401.500	2.98	32.51	39.86	81.57	77.20	114.00	-36.80

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 17 of 21

Test mode:	Transmitting	Test channel:	Highest	Remark:	Vertical
------------	--------------	---------------	---------	---------	----------

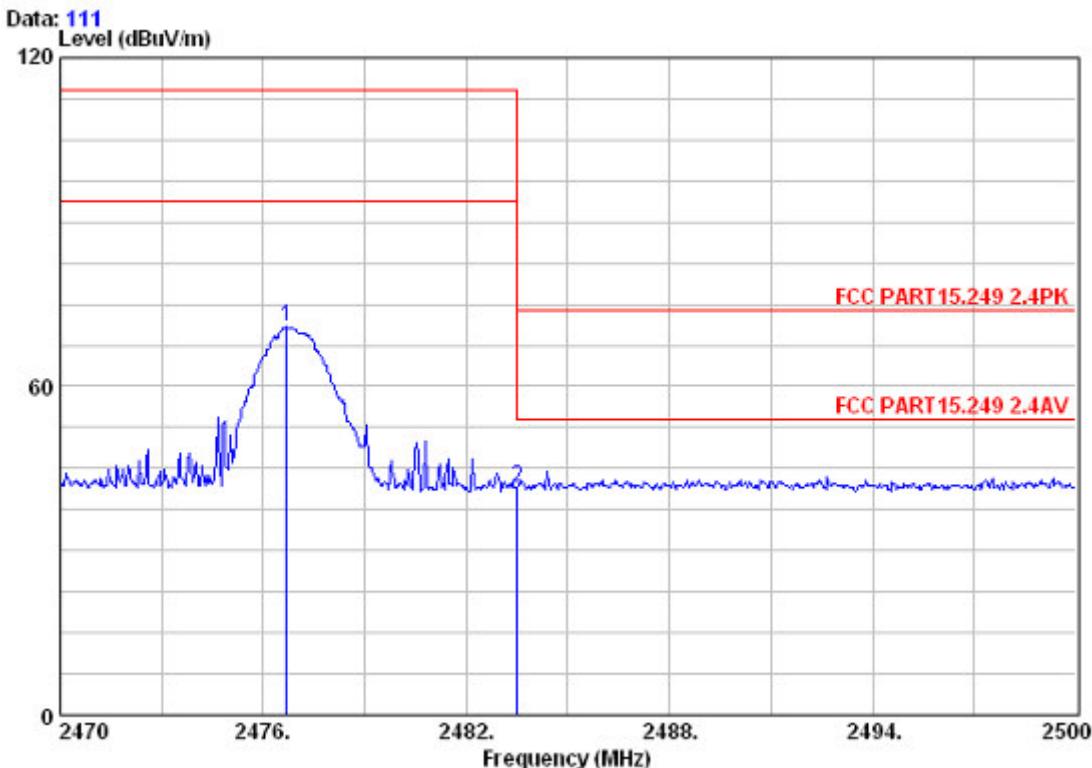


Freq	Cable\Antenna Preamp			Read Level	Limit Line	Over Limit		
	Freq	Loss	Factor					
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2476.690	3.03	32.67	39.92	75.03	70.81	114.00	-43.19
2	2483.500	3.03	32.67	39.92	45.83	41.61	74.00	-32.39

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 18 of 21

Test mode:	Transmitting	Test channel:	Highest	Remark:	Horizontal
------------	--------------	---------------	---------	---------	------------

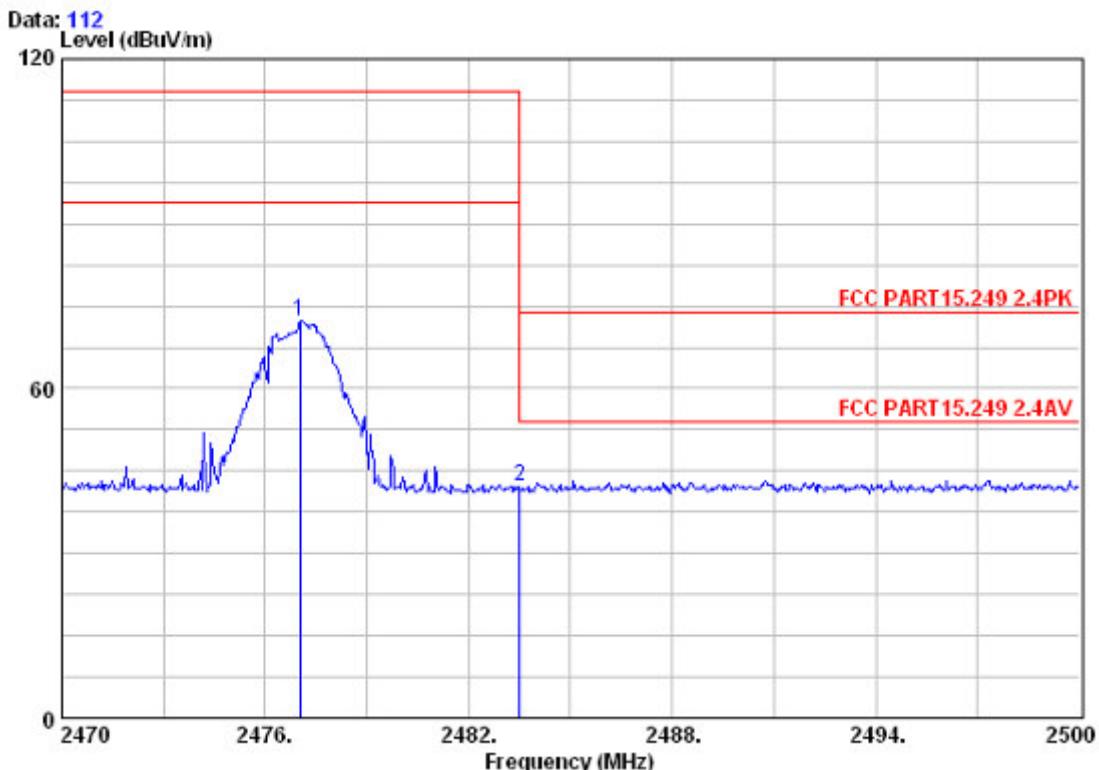

Freq	Cable	Antenna	Preamp	Read	Limit	Line	Over	
	Loss	Factor	Factor	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2477.020	3.03	32.67	39.92	76.56	72.34	114.00	-41.66
2	2483.500	3.03	32.67	39.92	46.34	42.12	74.00	-31.88

Remark:


As shown in this section, for radiated Band-edge measurements, the limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 19 of 21

5.2.4 20dB Bandwidth

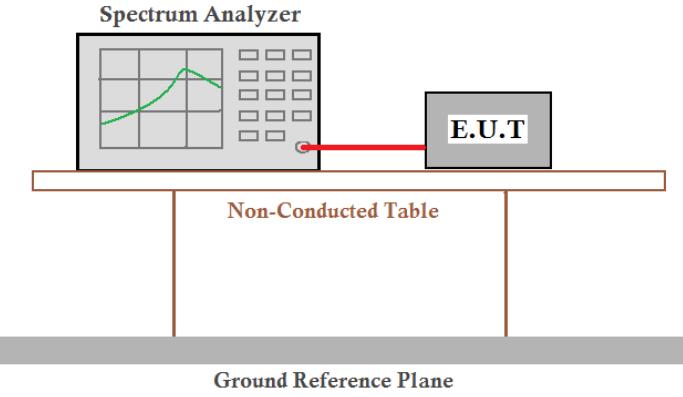Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2009
Receiver setup:	RBW=100KHz, VBW=300KHz, detector: Peak
Test Procedure:	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth.
Test setup:	
Test Instruments:	Refer to section 4.7 for details
Test results:	Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	0.870	----
Middle	0.930	----
Highest	0.910	----


SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001


Page : 20 of 21

Test plot as follows:

Test channel:	Lowest
---------------	--------

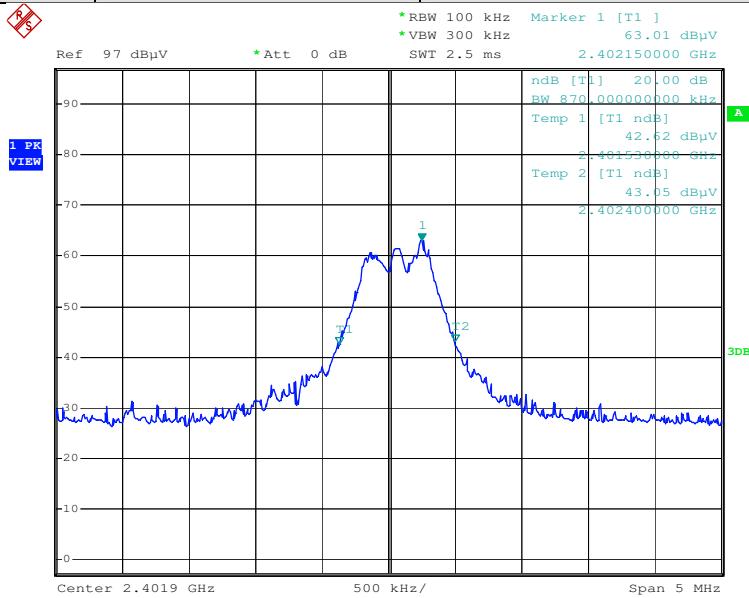


Test channel:	Middle
---------------	--------

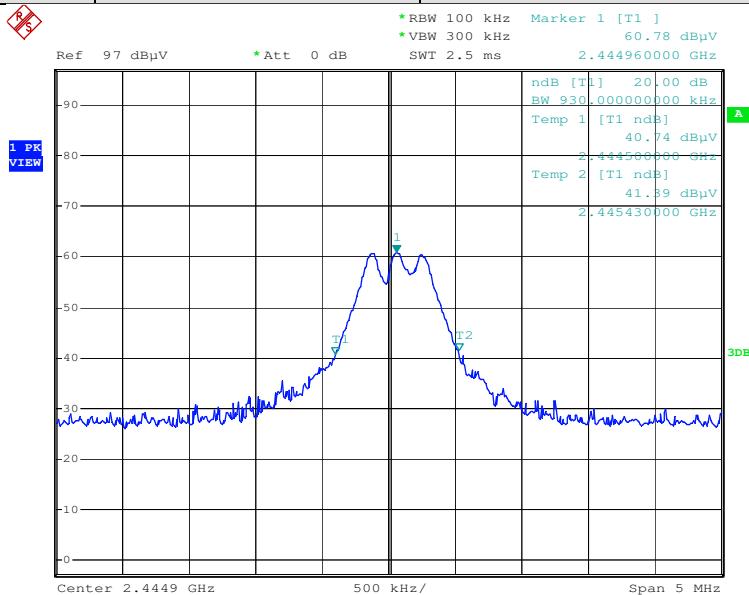

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO11030130001

Page : 21 of 21

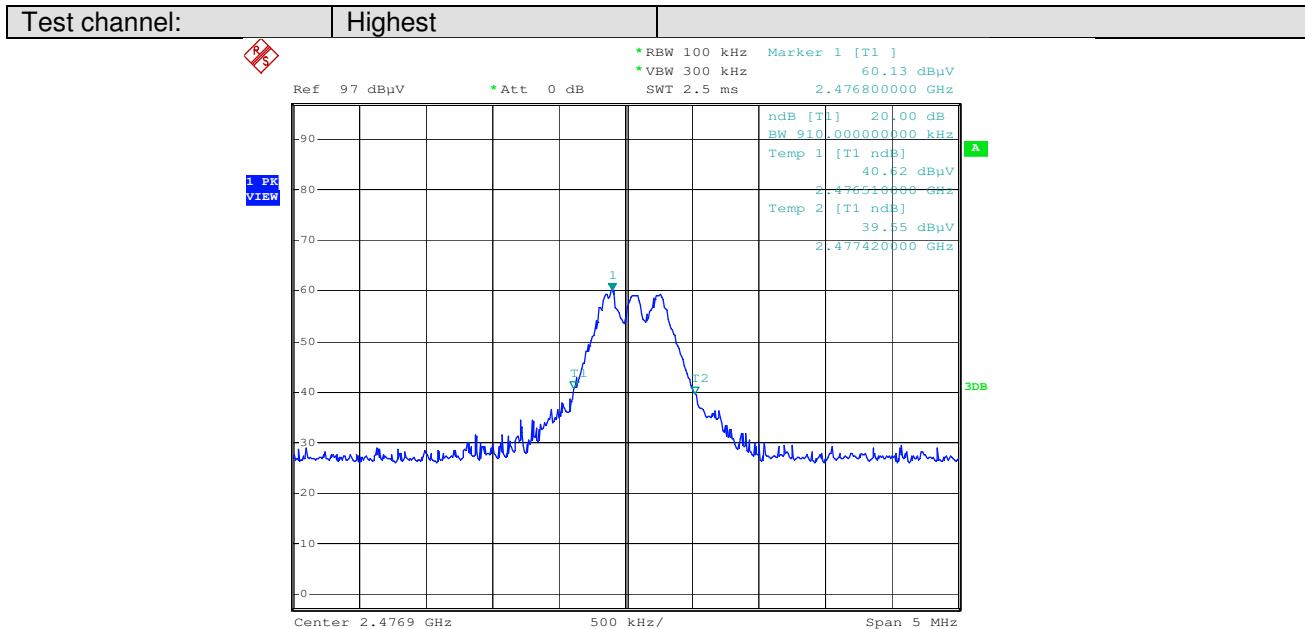

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."