



www.nemko.com

Nemko Italy S.p.A., Via del Carroccio 4, 20046, Biassono, Italy.

Report number: 152426TRFWL

Apparatus: RBS ECOS-D VHF A2T 110W 4W 48V

Applicant: SELEX Communications S.p.A.
Via Pieragostini, 80
Genova -16151 –Italy

FCC ID: X5YF567DHDE-HP

Test specification:

Title 47-Telecommunication
Chapter I - Federal Communications Commission
Subchapter D – Safety and special radio services
Part 90 – Private land mobile services

– **Subpart I – General technical standards**

Reviewed by: *Barbieri* 2010/07/13
Signature Date
P. Barbieri, Wireless/EMC Specialist

Tested by: *Curioni* 2010/07/13
Signature Date
G. Curioni, Wireless/EMC Specialist

Nemko S.p.A. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko S.p.A. accepts no responsibility for damages, if any suffered by any third party as a result of decisions made or actions based on this report.

This report shall not be reproduced except in full without the written approval of the testing laboratory.



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy.

Report Number: 152426TRFWL

Specification: FCC 90

Table of contents

Section 1: Report summary.....	3
Section 2: Equipment under test	4
2.1 Identification of equipment under test (EUT)	4
2.2 Accessories and support equipment.....	4
2.3 EUT description	5
2.4 Technical specifications of the EUT.....	5
2.5 EUT setup diagram	6
2.6 Operation of the EUT during testing	6
2.7 Modifications incorporated in the EUT	6
Section 3: Test conditions	7
3.1 Deviations from laboratory tests procedures.....	7
3.2 Test conditions, power source and ambient temperatures.....	7
3.3 Measurement uncertainty	8
3.4 Test equipment.....	8
Section 4: Result summary.....	9
4.1 FCC Part 90: Test results	9
Appendix A: Test results	10
Clause 90.205 Output power.....	10
Clause 90.207 Modulation characteristics	12
Clause 90.209 Occupied bandwidth	20
Clause 90.210 Spurious emissions at the antenna terminal	34
Clause 90.210 Field strength of spurious radiation.....	46
Clause 90.213 Frequency stability.....	51
Clause 90.214 Transient frequency behavior	54
Clause 90.219 Use of boosters	68
Appendix B: Block diagrams of test set-ups	69



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy.

Section 1: Report summary

Report Number: 152426TRFWL

Specification: FCC 90

Section 1: Report summary

This report contains an assessment of apparatus against specifications based upon tests carried out on samples submitted at Nemko Italy SpA.

Test specification:

FCC Part 90 Private land mobile services
Subpart I – General technical standards

Compliance status:	Complies
Exclusions:	None
Non-compliances:	None
Report release history:	Original release
Test location:	Nemko Italy S.p.A. Via del Carroccio 4, 20046, Biassono, Italy.
Registration number:	481407 (10 m Semi anechoic chamber)

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 90. Conducted measurements were performed in accordance with ANSI TIA-603-B-2002. Radiated tests were conducted in accordance with ANSI C63.4-2003.

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Italy's ISO/IEC 17025 accreditation.

Nemko Italy SpA. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Italy SpA. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy.

Section 2: Equipment under test

Report Number: 152426TRFWL

Specification: FCC 90

Section 2: Equipment under test

2.1 Identification of equipment under test (EUT)

The following information identifies the EUT under test:

Type of equipment:	VHF Radio Base Station
Product marketing name:	RBS ECOS-D VHF A2T 110W 4W 48V
P/N :	144-2010/01
Serial number:	--
FCC ID:	X5YF567DHDE -HP
Date of receipt:	2010-07-05

2.2 Accessories and support equipment

The following information identifies accessories used to exercise the EUT during testing:

Item # 1	
Type of equipment:	DC power supply
Brand name:	Zenone
Model name or number:	ALC 150-4,5 K-1
Serial number:	871
Nemko sample number:	4.244
Connection port:	DC
Cable length and type:	DC power 4 m two wires cable
Connection port:	21x AF I/O + 1x Ethernet 10/100 Base-T
Cable length and type:	22x UTP CAT. 5E Patch Ethernet 3 m cable



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy.

Section 2: Equipment under test

Report Number: 152426TRFWL

Specification: FCC 90

Section 2: Equipment under test, continued

2.3 EUT description

The EUT is VHF Radio Base Station provided of:


- A 110 W power amplifier module (PA);
- A Vectorial transceiver module (RTX) quipped with an I&Q modulator and demodulator;
- A power supply module (SWTICH) ;
- A RBS Simulator Controller module (CORE);
- A SYNChronization module (SYNC);
- A 5x Line Interface module (LIF).

2.4 Technical specifications of the EUT

Operating frequency:	136÷174 MHz (150÷174 MHz for US market)
Modulation type:	FM/PH
Occupied bandwidth:	16 kHz/11 kHz/8.50 kHz/8.16 kHz
Channellization:	12.5 kHz & 25 kHz
Emission designator:	16K0F3E/16K0G3E 11K0F3E/11K0G3E 8K10F1E/8K10F1D 7K60FXE/7K60FXD
Synchronization:	OCXO synchronized by GPS
Working modality:	Simplex/Duplex
Local oscillator:	45 MHz higher
Antenna type:	External Antenna
Temperature range:	-30 to 60°C
Power source	48 VDC external (35 ÷ 75 Vdc)

Section 2: Equipment under test, continued

2.5 EUT setup diagram

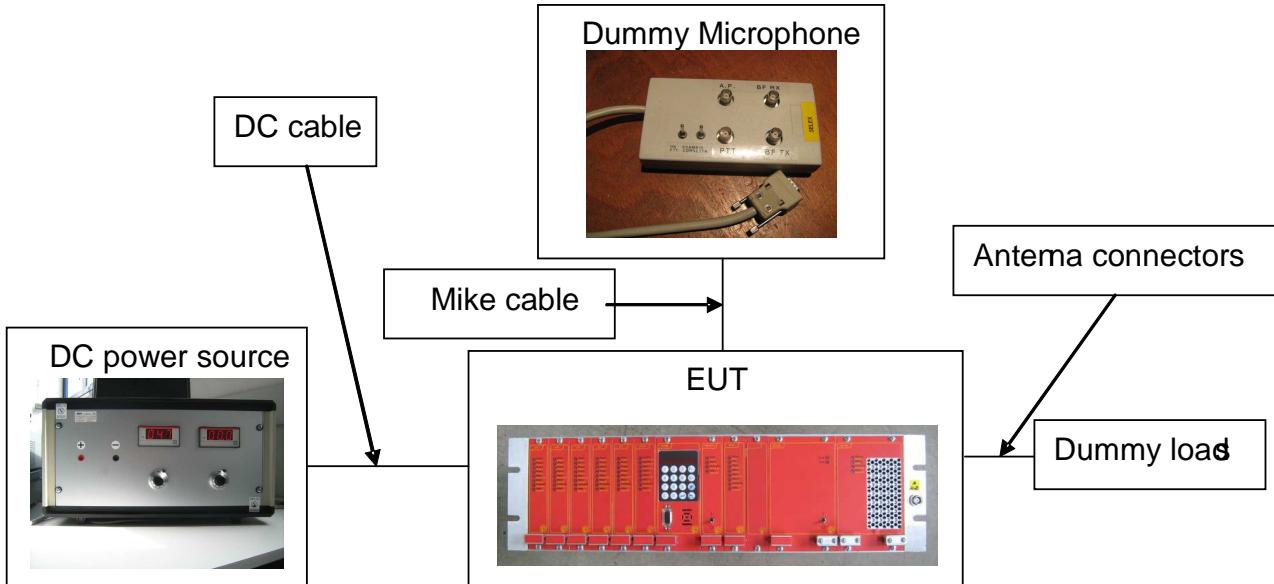

2.6 Operation of the EUT during testing

The EUT has been tested in TX mode, with the antenna connectors closed on a 50Ω dummy loads

2.7 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Section 3: Test conditions

Report Number: : 152426TRFWL

Specification: FCC 90

Section 3: Test conditions

3.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

3.2 Test conditions, power source and ambient temperatures

Normal temperature, humidity and air pressure test conditions	Temperature: 15–30 °C Relative humidity: 20–75 % Air pressure: 860–1060 hPa When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.
Power supply range:	The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Section 3: Test conditions

Report Number: : 152426TRFWL

Specification: FCC 90

Section 3: Test conditions, continued

3.3 Measurement uncertainty

Nemko S.p.A. measurement uncertainty has been calculated using the standard CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements". All calculations have been performed to provide a confidence level of 95 % and can be found in Nemko S.p.A. document WML1002.

3.4 Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Trilog Broad Band Antenna	Schwarzbeck	VULB 9168	VULB 9168-242	2010/08
EMI receiver 20 Hz ÷ 8 GHz	R&S	ESU8	100202	2010/12
EMI receiver 20 Hz ÷ 3 GHz	R&S	ESCI	100888	2010/12
Turn-table	R&S	HCT	835 803/03	NCR
Antenna mast	R&S	HCM	836 529/05	NCR
Controller	R&S	HCC	836 620/7	NCR
Spectrum Analyzer 9kHz-40GHz	R&S	FSEK	848255/005	2010/09
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	2010/08
Shielded room	Siemens	10m control room	1947	NCR
Attenuator	Bird	500-WA-MFN	0124	2011/03
Attenuator	Weinschel	83-30-11	450	2010/08
Attenuator	Weinschel	33-10-34	AP8906	2010/08
Dummy load	Celwave	AL030A	--	NCR
Notch Filter	Nemko	87-220	2.440	NCR
Power meter	R&S	NRVD	833 697/027	2011/03
Thermal Power Sensor	R&S	NRV-Z55	100301	2011/11
Oscilloscope	HP	54610B	3414A00612	2010/09
Radiocommunication Tester	R&S	CMT	883152/001	2010/08
Thermic shock chamber	Angelantoni	CST 320/2T	4056	2011/08
Frequencymeter	HP	53132A	3546A02411	2010/08
Frequencymeter Rubidium osc. + GPS system	Fluke	910R	985602	2011/12
DC Power supply	Zenone	ALC 150-4,5 K-1	871	NCR

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Section 4: Result summary

Report Number: : 152426TRFWL

Specification: FCC 90

Section 4: Result summary

4.1 FCC Part 90: Test results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N	No : not applicable / not relevant.
Y	Yes : Mandatory i.e. the apparatus shall conform to these tests.
N/T	Not Tested, mandatory but not assessed. (See report summary)

Part	Test method	Test description	Required	Result
§90.205	§2.1046	Output power	Y	Pass
§90.207	§2.1047	Modulation Characteristics	Y	Pass
§90.209	§2.1049	Occupied bandwidth	Y	Pass
§90.210	§2.1051	Spurious Emissions at the antenna terminal	Y	Pass
§90.210	§2.1053	Field strength of spurious radiation	Y	Pass
§90.213	§2.1055	Frequency stability	Y	Pass
§90.214	---	Transient Behaviour	Y	Pass
§90.219	---	Use of boosters	N	---

Notes: None



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Appendix A: Test results

Clause 90.205 Output power

Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation. Except where otherwise specifically provided for, the maximum power that will be authorized to applicants whose license applications for new stations are filed after August 18, 1995 is as follows in FCC Part 90.205 (a) through (r).

For measurements conducted pursuant to paragraphs (a) and (b) of § 2.1046, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

Test date: 2010/07/05

Test results: Pass

Test data

– Power supply used. 48 Vdc

Frequency [MHz]	Measured Output power [W]	Manufacturer's Rated Power [W]	LIMIT [W] (Manufacturer's rated Power + 20%)
150	110	110	132
162	105	110	132
174	98	110	132

The RF Power maintains unchanged from 35 to 75 Vdc at 20°C.





Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Set up photo

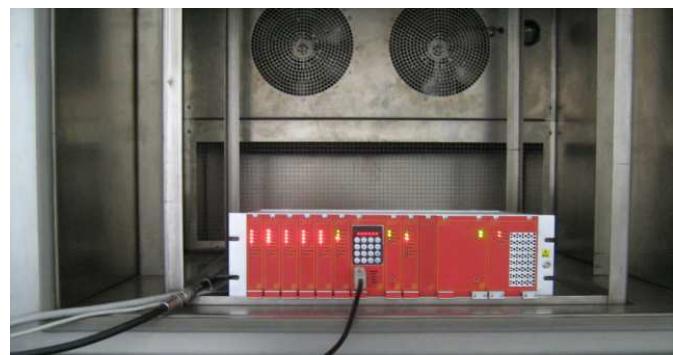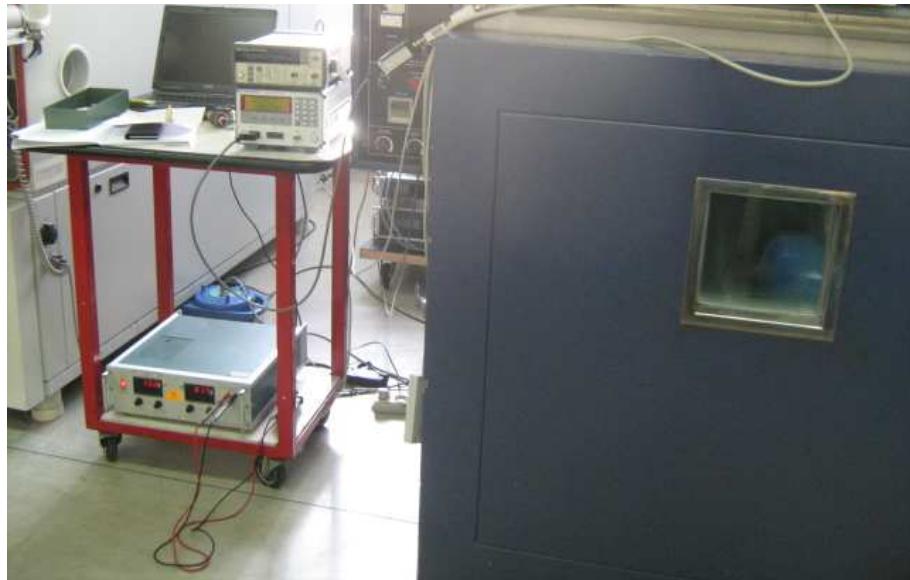



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Clause 90.207 Modulation characteristics

Unless specified elsewhere in this part, stations will be authorized emissions as provided for in paragraphs (b) through (n) of this section.

§ 2.1047 Measurements required: Modulation characteristics.

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

Test date: 2010/07/05

Test results: Pass




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Test data

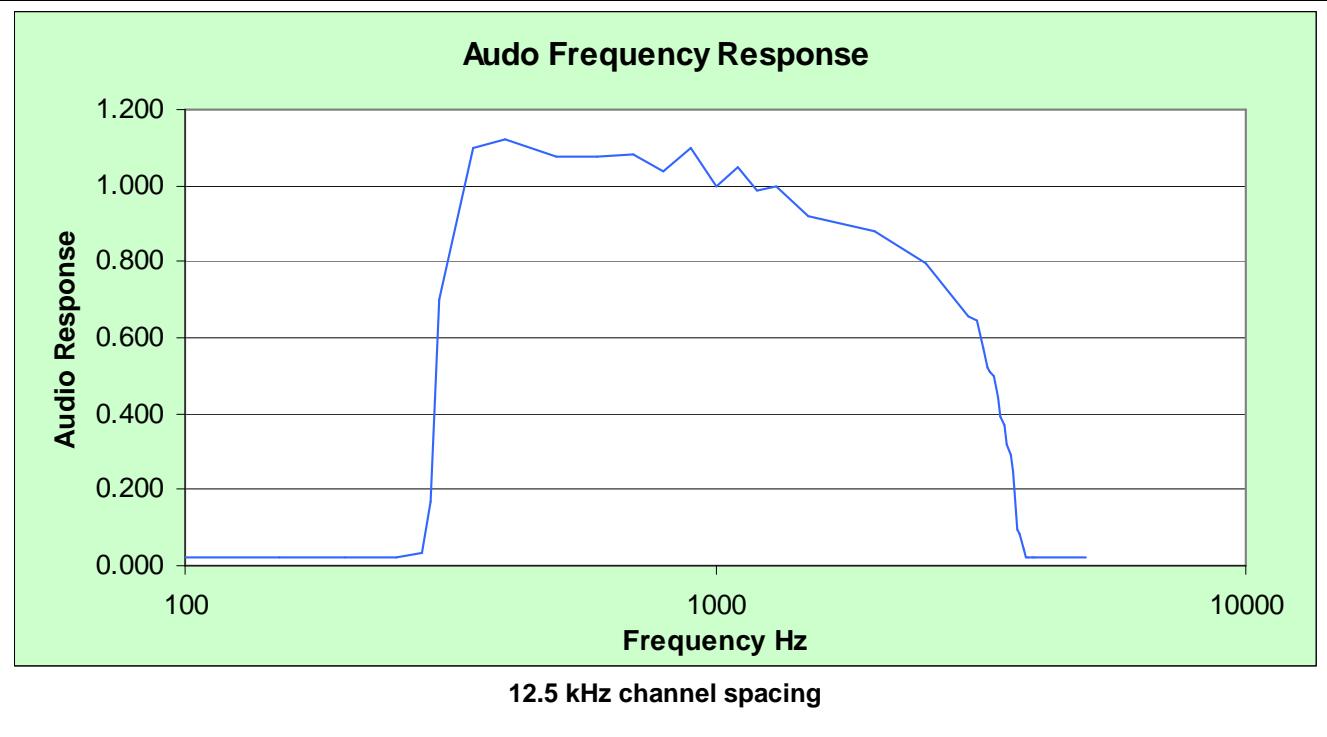



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Test data

12.5 kHz channel spacing		
Modulation Hz	Deviation dB	Audio response
100	-33.2	0.022
150	-34.0	0.020
200	-33.2	0.022
250	-34.0	0.020
280	-28.9	0.036
290	-15.6	0.166
300	-3.1	0.700
350	0.8	1.100
400	1.0	1.119
500	0.7	1.079
600	0.6	1.074
700	0.7	1.080
800	0.3	1.040
900	0.8	1.100
1000	0.0	1.000
1100	0.4	1.046
1200	-0.1	0.989
1300	0.0	0.997
1500	-0.7	0.918
2000	-1.1	0.878
2500	-2.0	0.794
3000	-3.6	0.658
3100	-3.8	0.646
3200	-4.8	0.574
3250	-5.6	0.524
3300	-5.9	0.510
3350	-6.1	0.498
3400	-7.1	0.444
3450	-8.2	0.390
3500	-8.6	0.372
3550	-9.9	0.320
3600	-10.8	0.290
3650	-12.3	0.244
3700	-20.4	0.096
3750	-21.5	0.084
3800	-27.1	0.044
3850	-32.3	0.024
3900	-33.2	0.022
3950	-33.2	0.022
4000	-34.0	0.020
5000	-34.0	0.020




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Test data

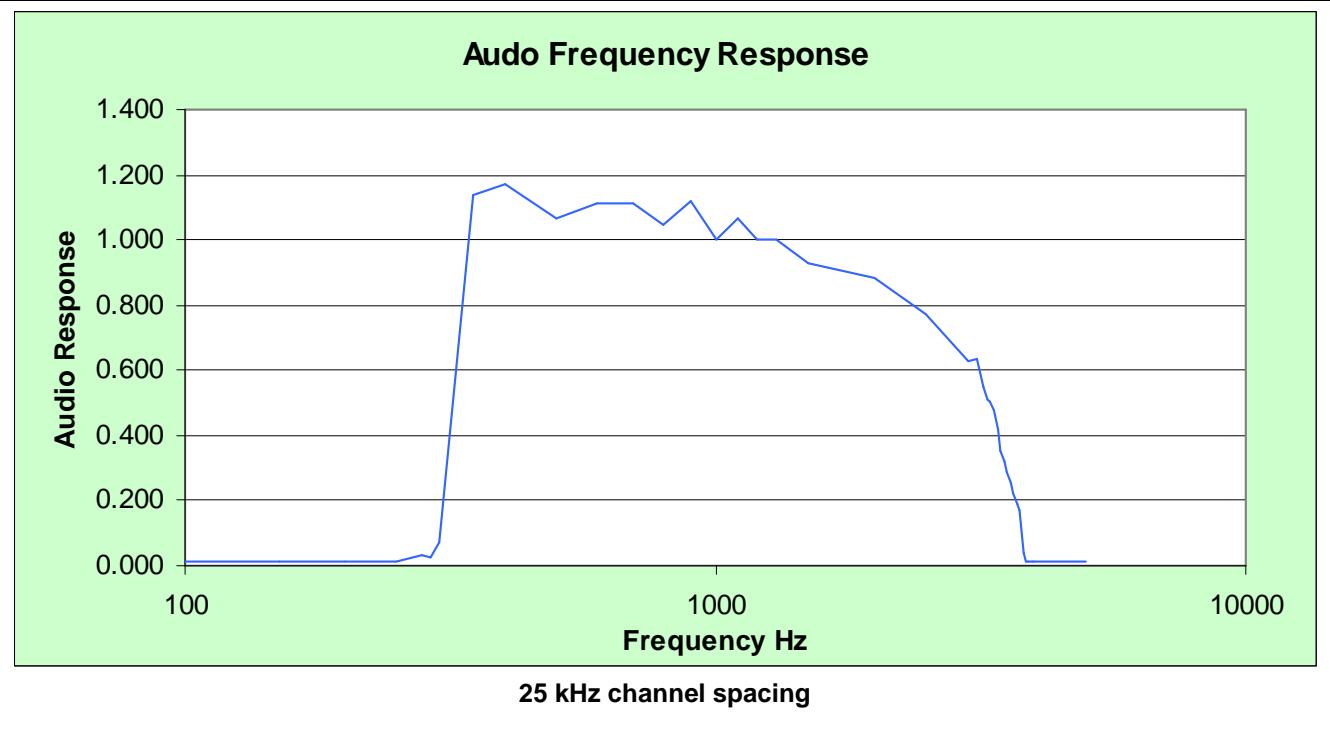



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Test data


25 kHz channel spacing		
Modulation	Deviation	Audio
Hz	dB	response
100	-37.1	0.014
150	-37.1	0.014
200	-37.1	0.014
250	-37.1	0.014
280	-29.6	0.033
290	-30.8	0.029
300	-23.0	0.071
350	1.1	1.140
400	1.4	1.169
500	0.6	1.069
600	0.9	1.109
700	0.9	1.109
800	0.4	1.050
900	1.0	1.119
1000	0.0	1.000
1100	0.6	1.069
1200	0.0	1.001
1300	0.0	1.002
1500	-0.6	0.930
2000	-1.1	0.880
2500	-2.3	0.770
3000	-4.0	0.630
3100	-3.9	0.635
3200	-5.2	0.550
3250	-5.8	0.511
3300	-6.0	0.501
3350	-6.5	0.475
3400	-7.5	0.420
3450	-9.1	0.352
3500	-9.8	0.323
3550	-10.8	0.290
3600	-11.8	0.257
3650	-13.2	0.220
3700	-14.4	0.190
3750	-15.4	0.170
3800	-27.7	0.041
3850	-36.5	0.015
3900	-37.1	0.014
3950	-37.1	0.014
4000	-37.1	0.014
5000	-37.1	0.014

Test data



12.5 kHz channel spacing			
Audio Level	Deviation (kHz)		
dBm	TONE 300 Hz	TONE 2500 Hz	TONE 3000 Hz
-80	0.04	0.10	0.04
-70	0.21	0.30	0.20
-65	0.36	0.40	0.33
-60	0.61	0.80	0.55
-50	1.44	1.90	1.65
-40	1.48	2.20	2.17
-30	1.76	2.11	2.19
-20	1.98	2.26	2.47
-10	2.27	2.30	2.48
0	2.24	2.36	2.47
10	2.10	2.35	2.45

Test data

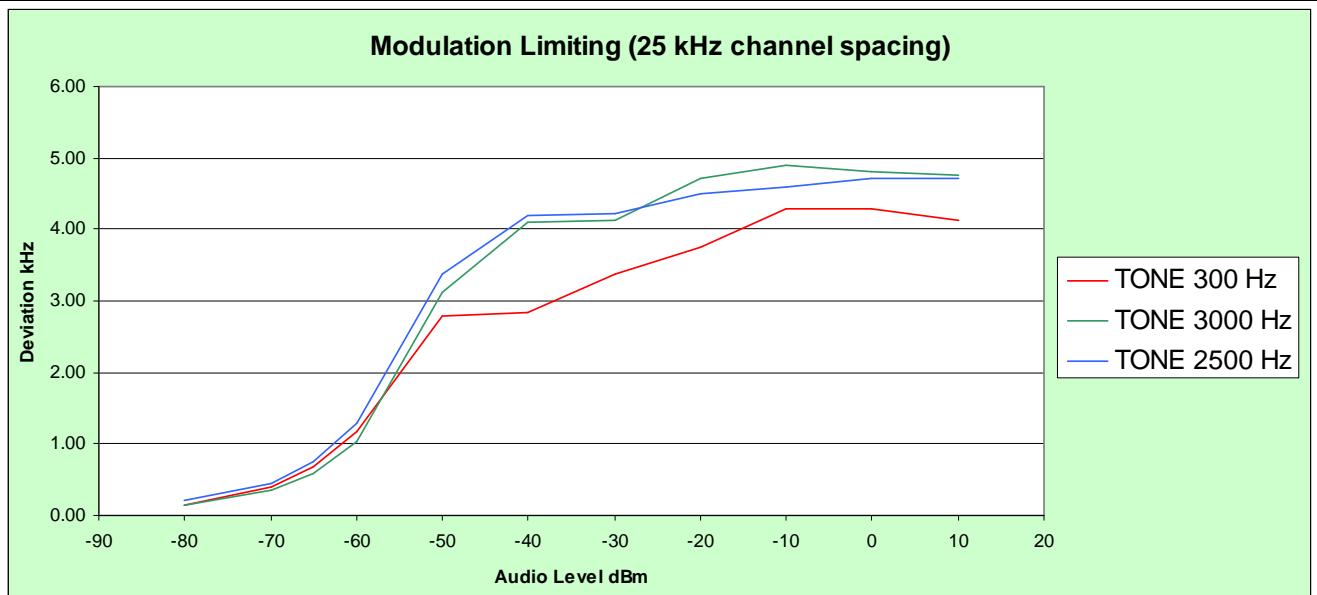

25 kHz channel spacing			
Audio Level	Deviation (kHz)		
dBm	TONE 300 Hz	TONE 2500 Hz	TONE 3000 Hz
-80	0.15	0.20	0.14
-70	0.40	0.45	0.35
-65	0.67	0.75	0.59
-60	1.18	1.30	1.04
-50	2.78	3.38	3.12
-40	2.84	4.20	4.09
-30	3.38	4.23	4.12
-20	3.74	4.50	4.70
-10	4.30	4.60	4.90
0	4.30	4.70	4.80
10	4.12	4.70	4.75




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Set up photo

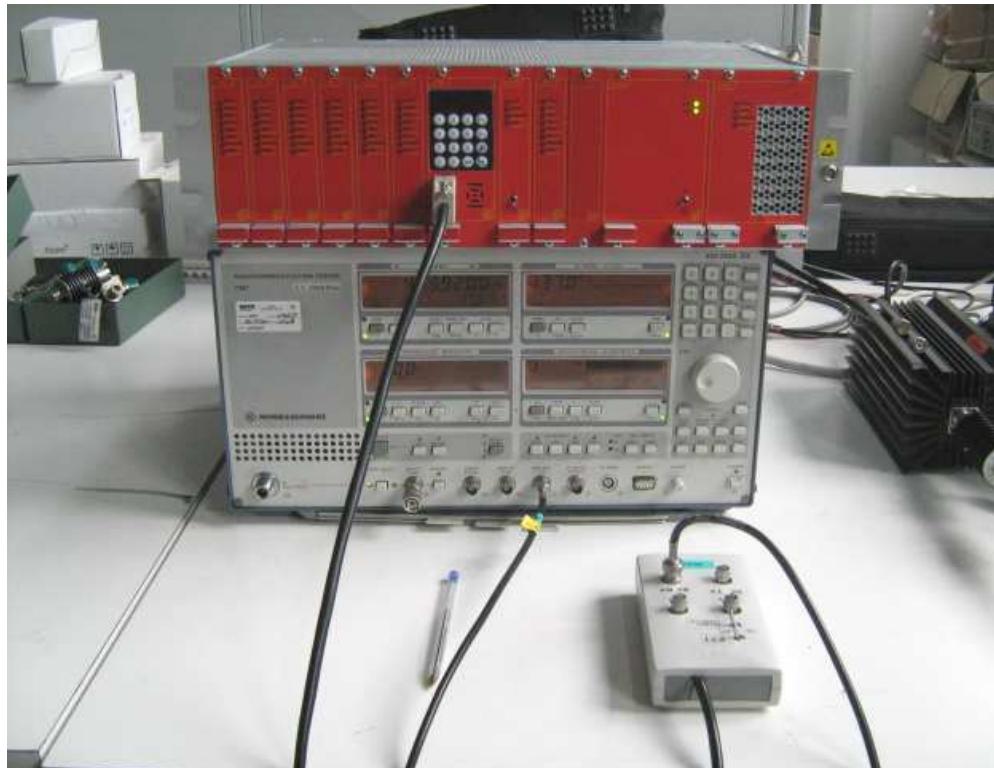



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Clause 90.209 Occupied bandwidth

Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following table:

Standard Channel Spacing/Bandwidth


Frequency Band (MHz)	Channel Spacing (kHz)	Authorized Bandwidth (kHz)
Below 25	—	—
25–50	20	20
72–76	20	20
150–174	7.5	20/11.25/6
216–220	6.25	20/11.25/6
220–222	5	4
406–512	6.25	20/11.25/6
806–809/851–854	12.5	20
809–824/854–869	25	20
896–901/935–940	12.5	13.6
902–928	—	—
929–930	25	20
1427–1432	12.5	12.5
2450–2483.5	—	—
Above 2500	—	—

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Test date: 2010/07/08


Test results: Pass

Test data

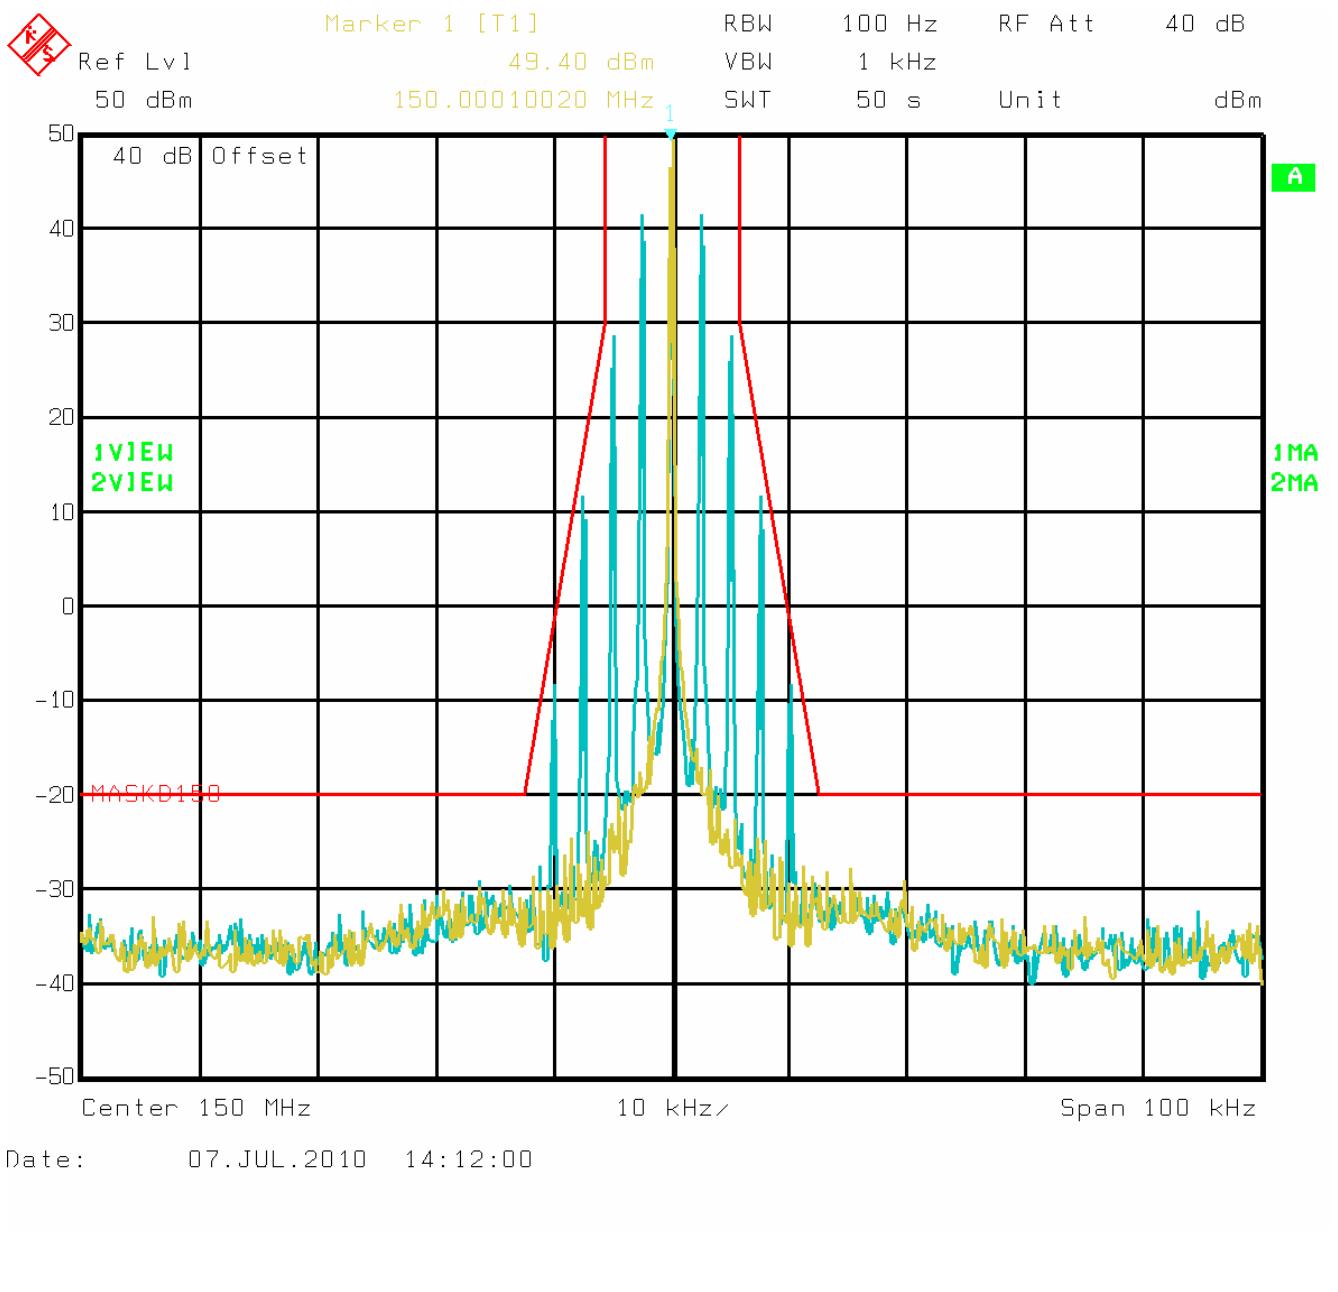

150 MHz, 110 W, 12.5 kHz, 2500 Hz Tone 16 dB above 50% Deviation

Test data

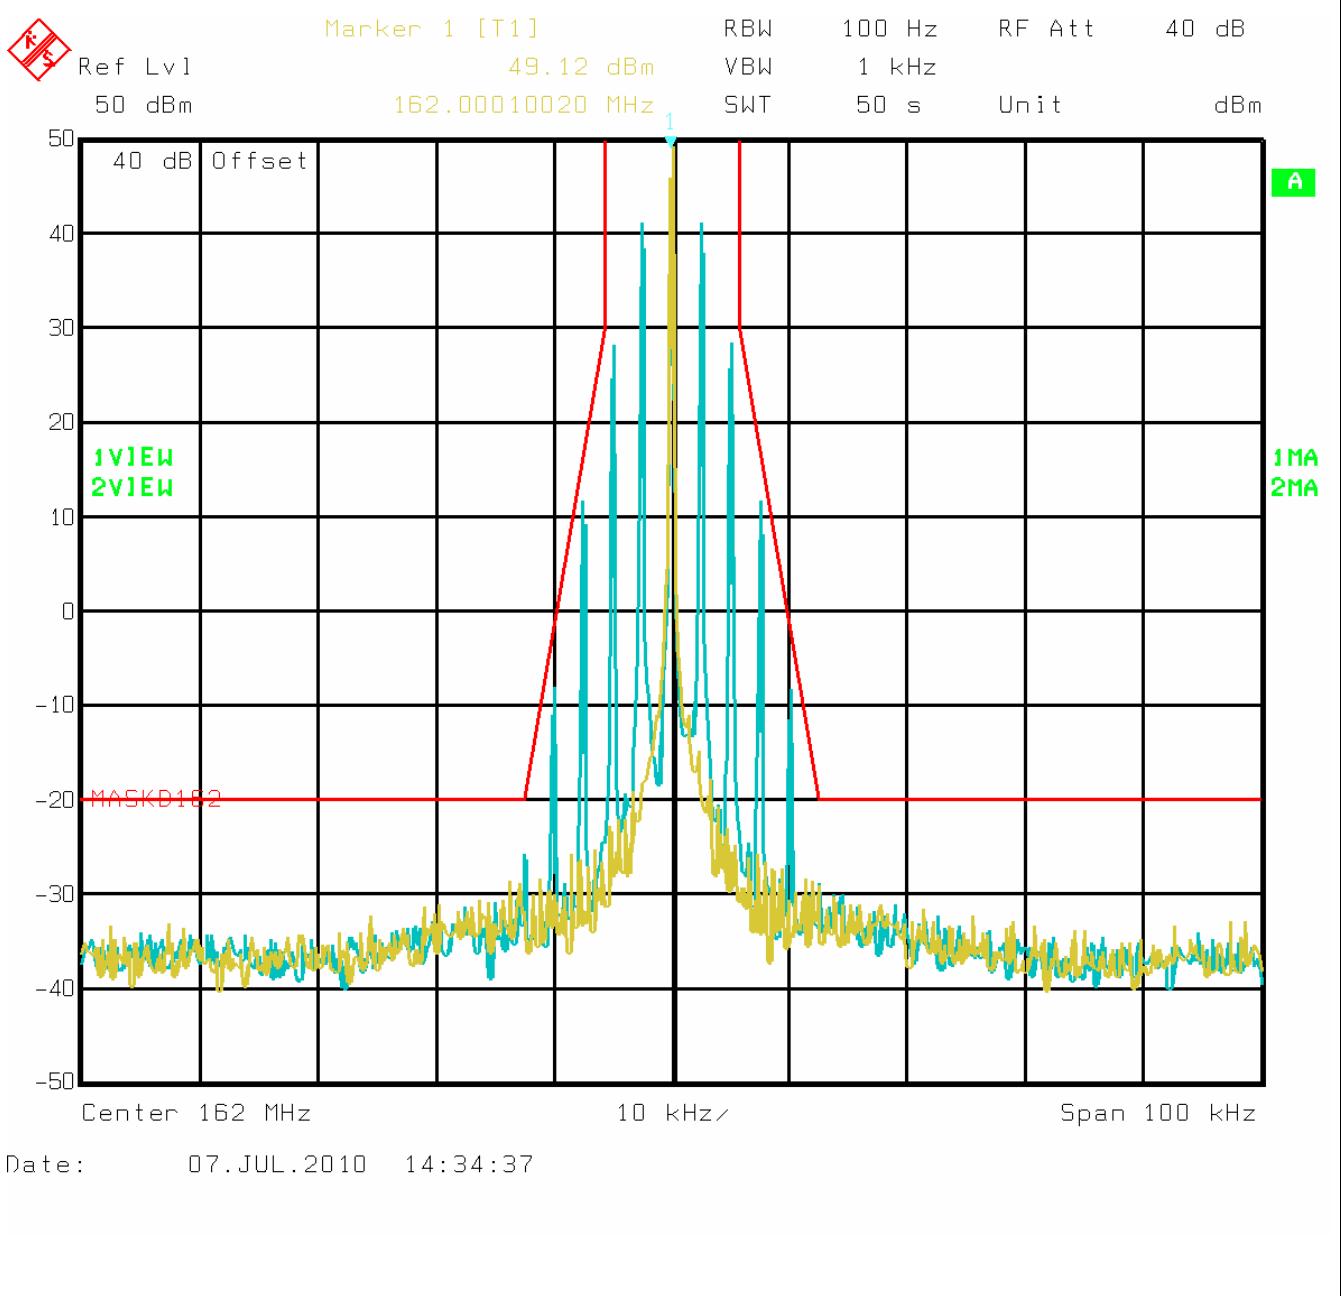

162 MHz, 110 W, 12.5 kHz, 2500 Hz Tone 16 dB above 50% Deviation




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL


Specification: FCC 90

Test data

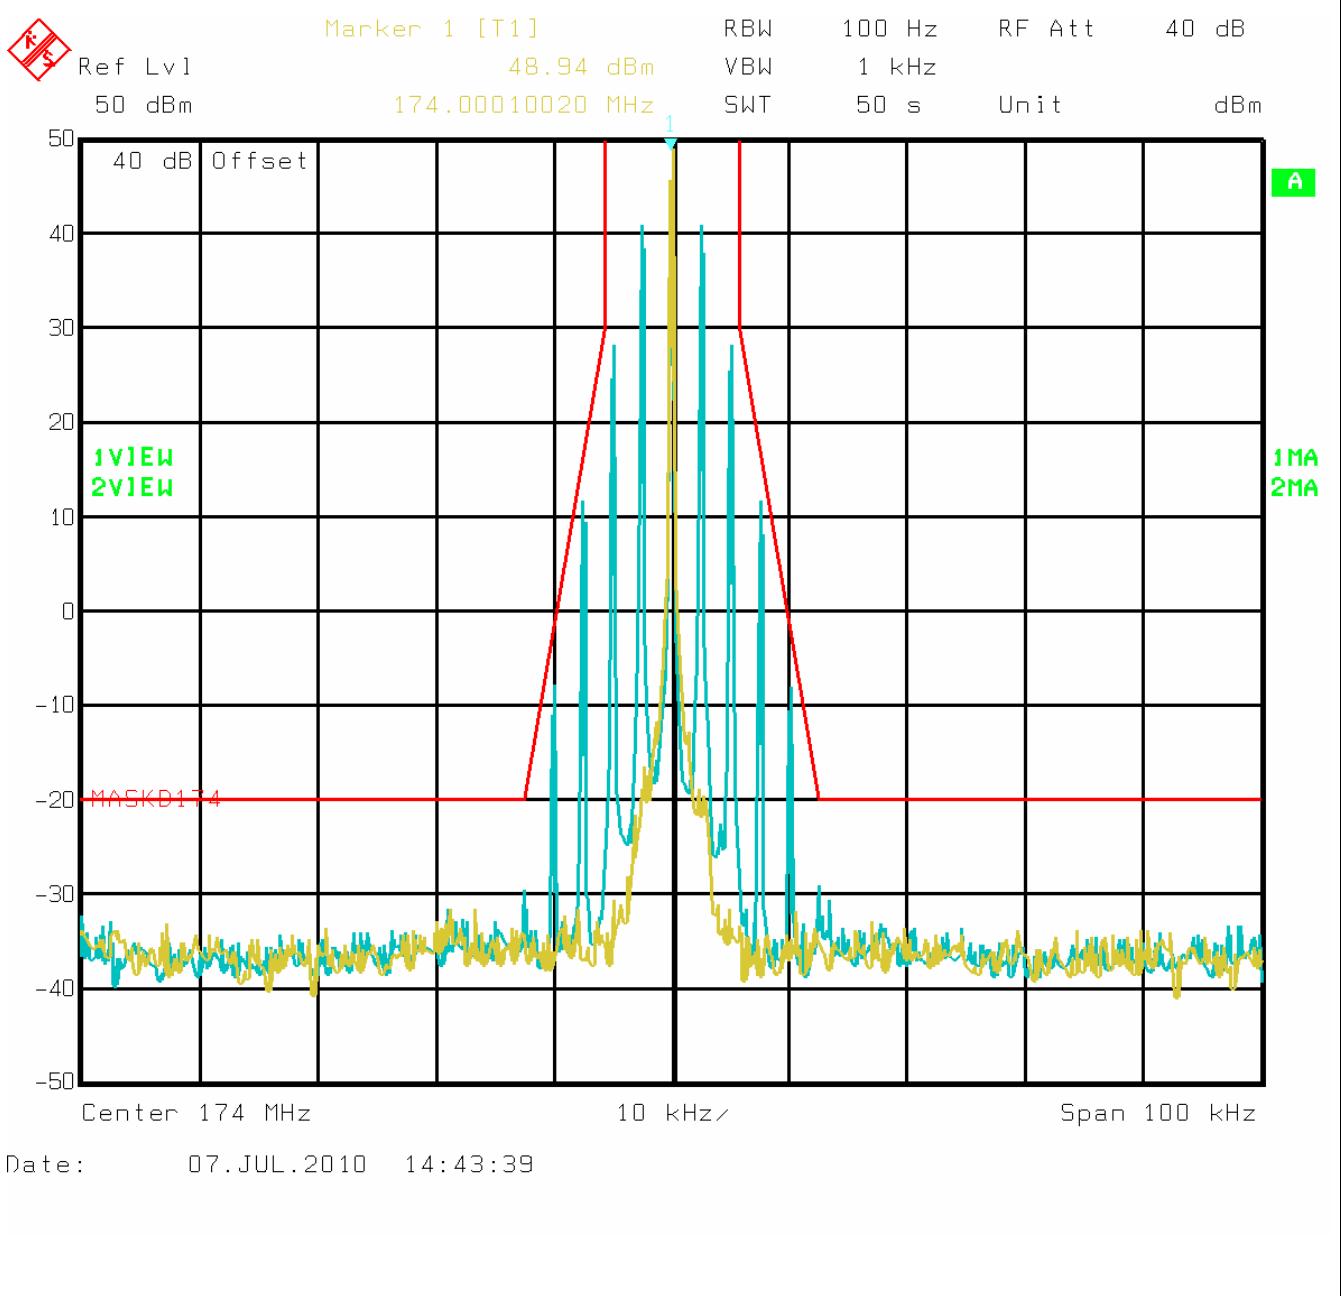

174 MHz, 110 W, 12.5 kHz, 2500 Hz Tone 16 dB above 50% Deviation

Test data

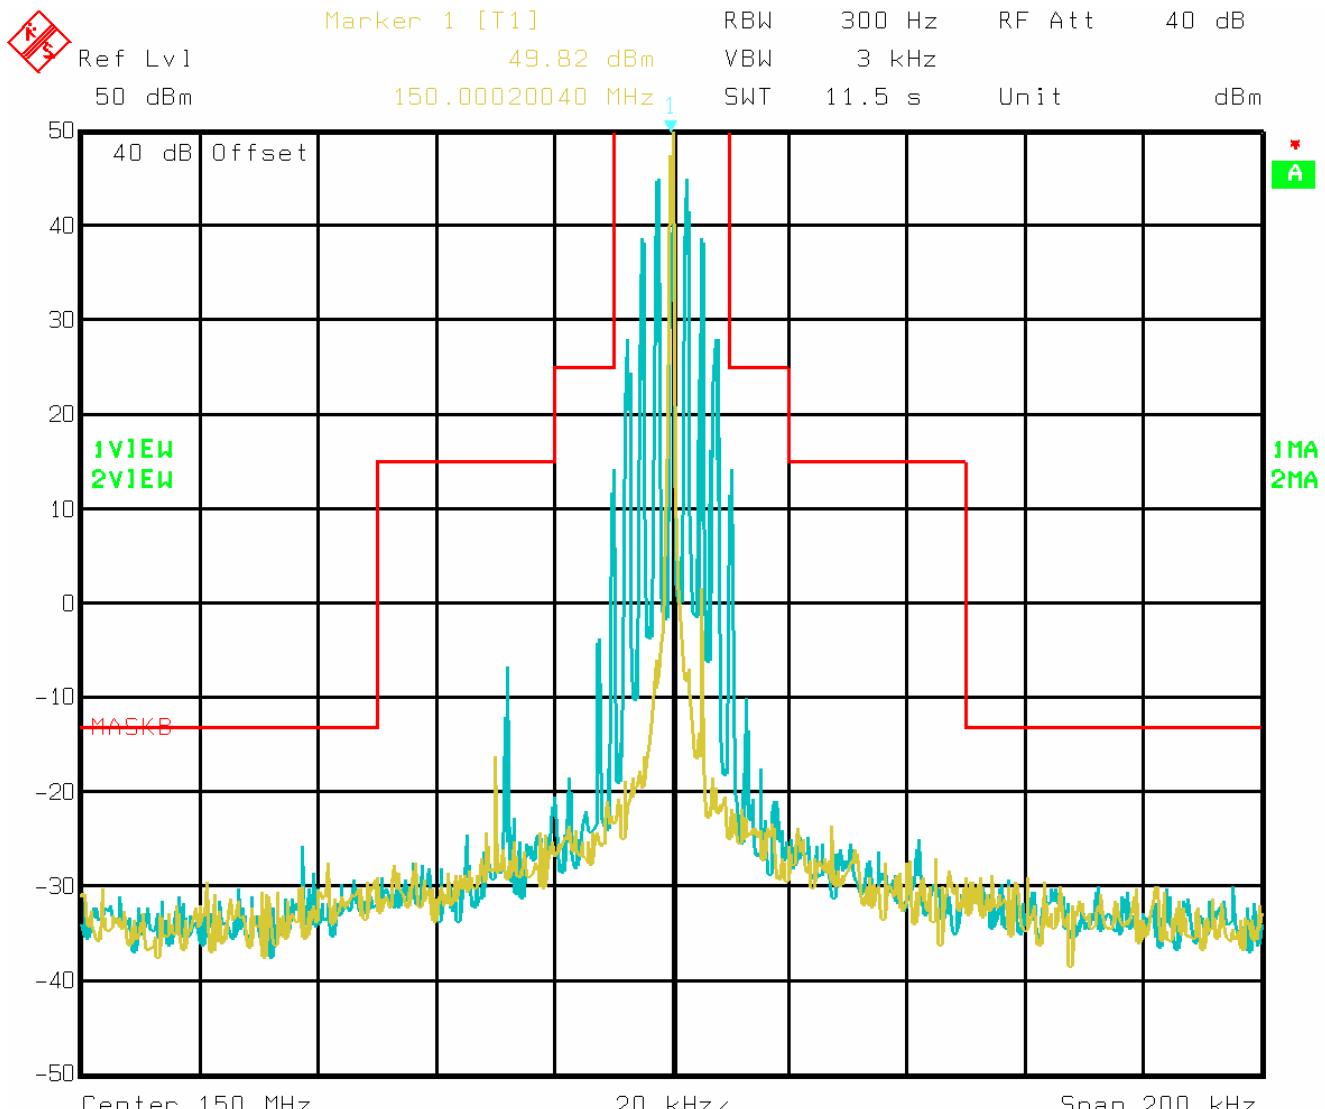

150 MHz, 110 W, 25 kHz, 2500 Hz Tone 16 dB above 50% Deviation




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

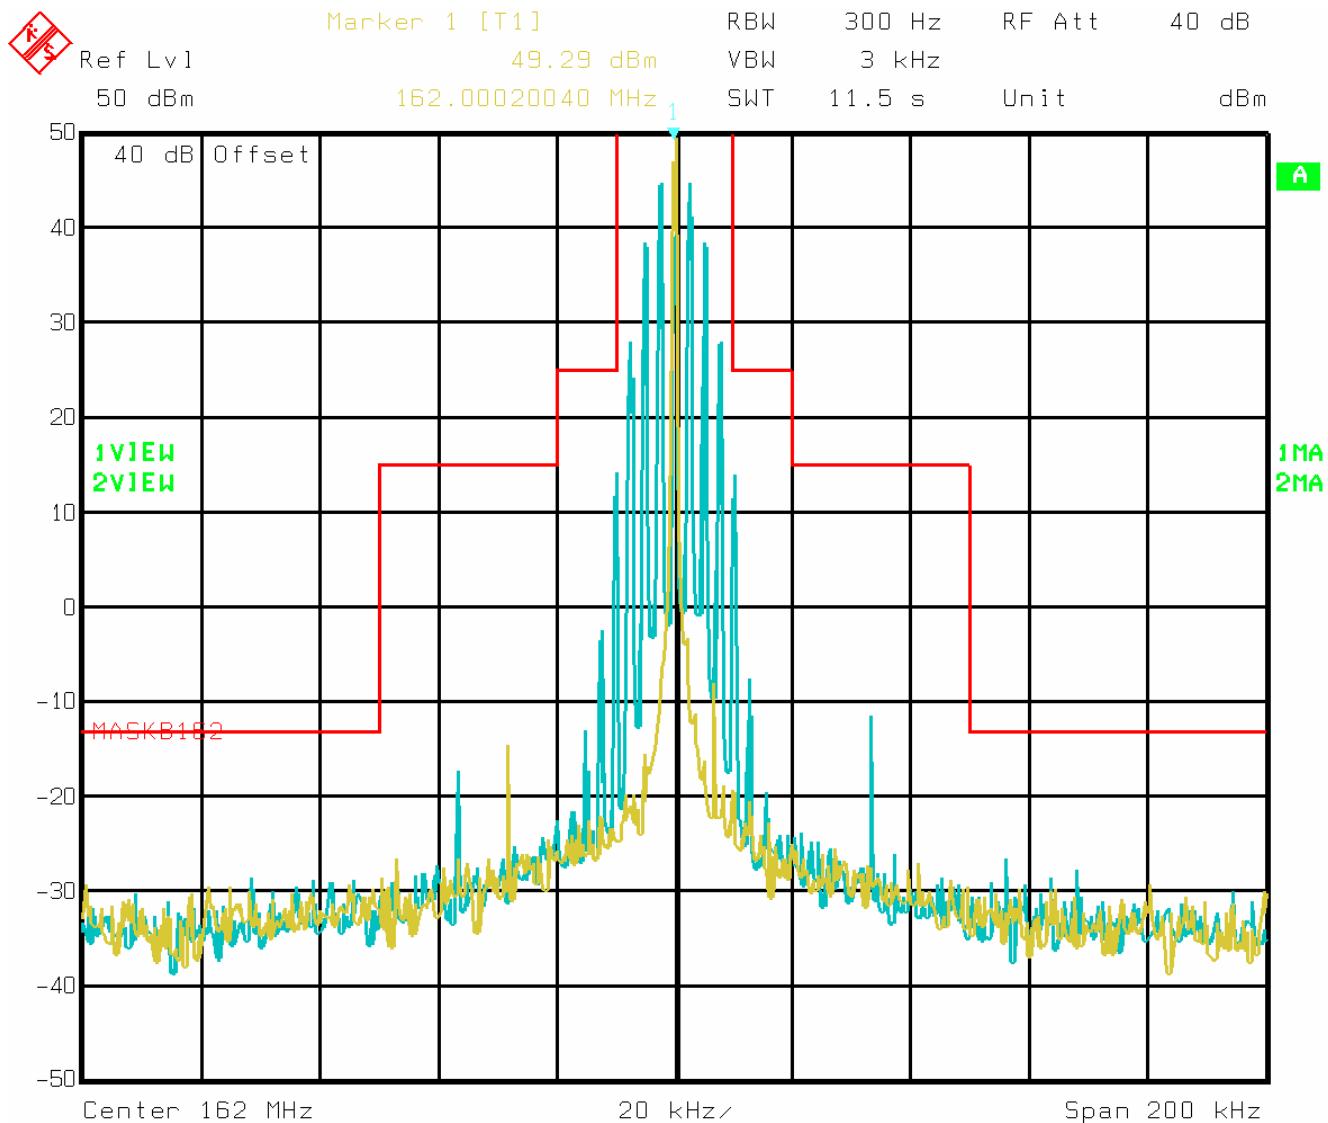

Date: 06.JUL.2010 11:41:52

162 MHz, 110 W, 25 kHz, 2500 Hz Tone 16 dB above 50% Deviation




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

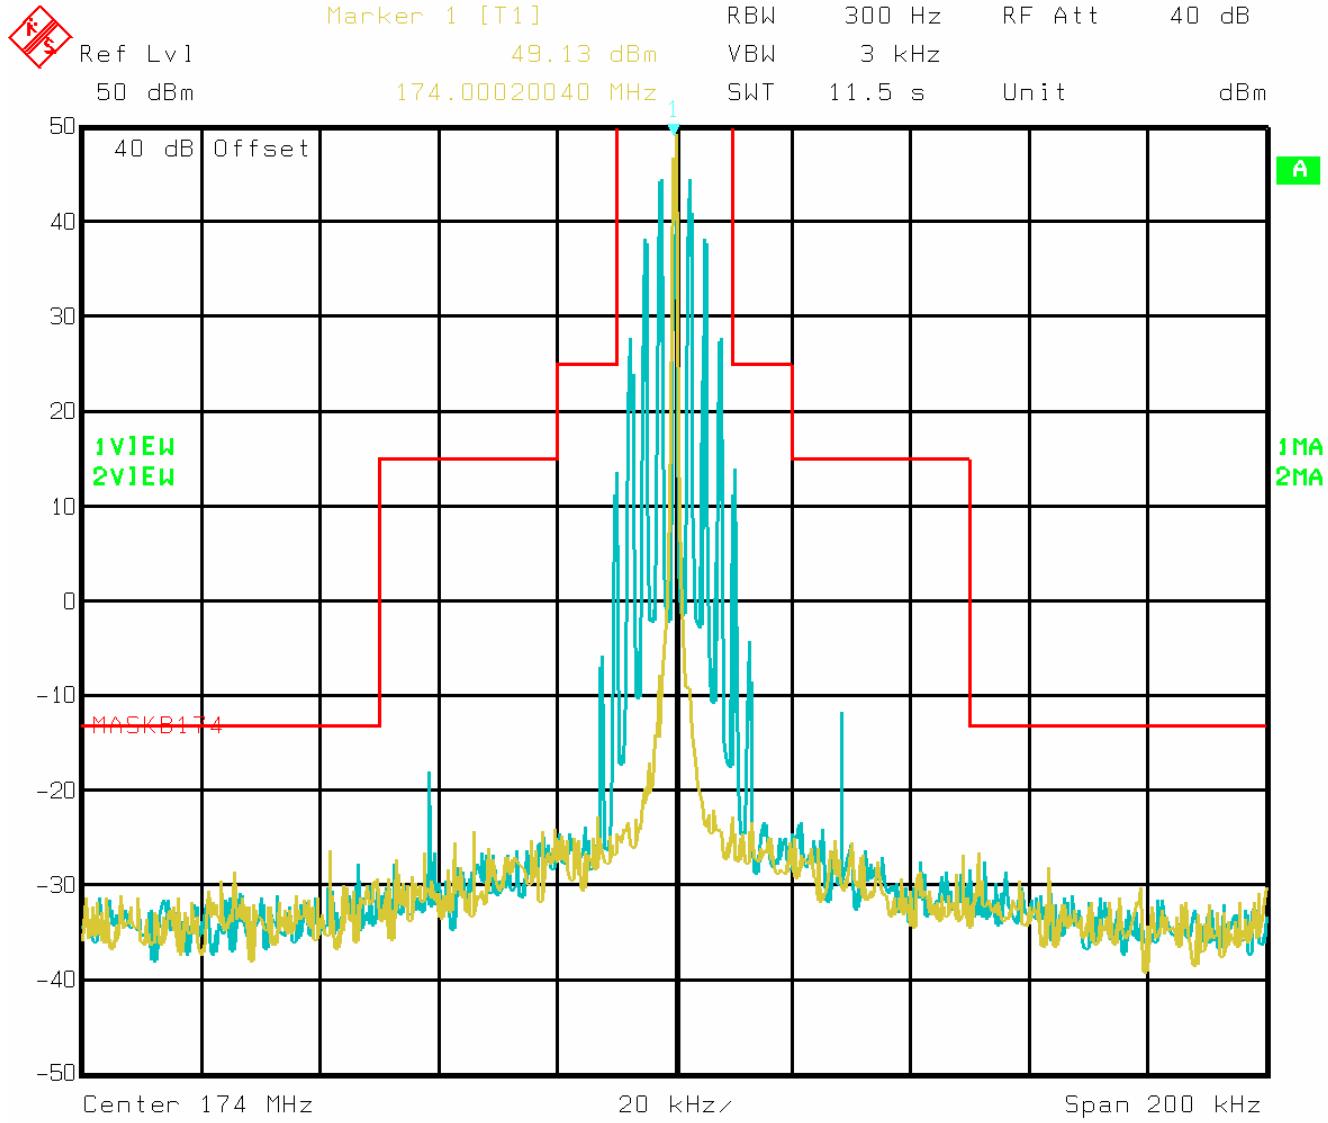

174 MHz, 110 W, 25 kHz, 2500 Hz Tone 16 dB above 50% Deviation




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

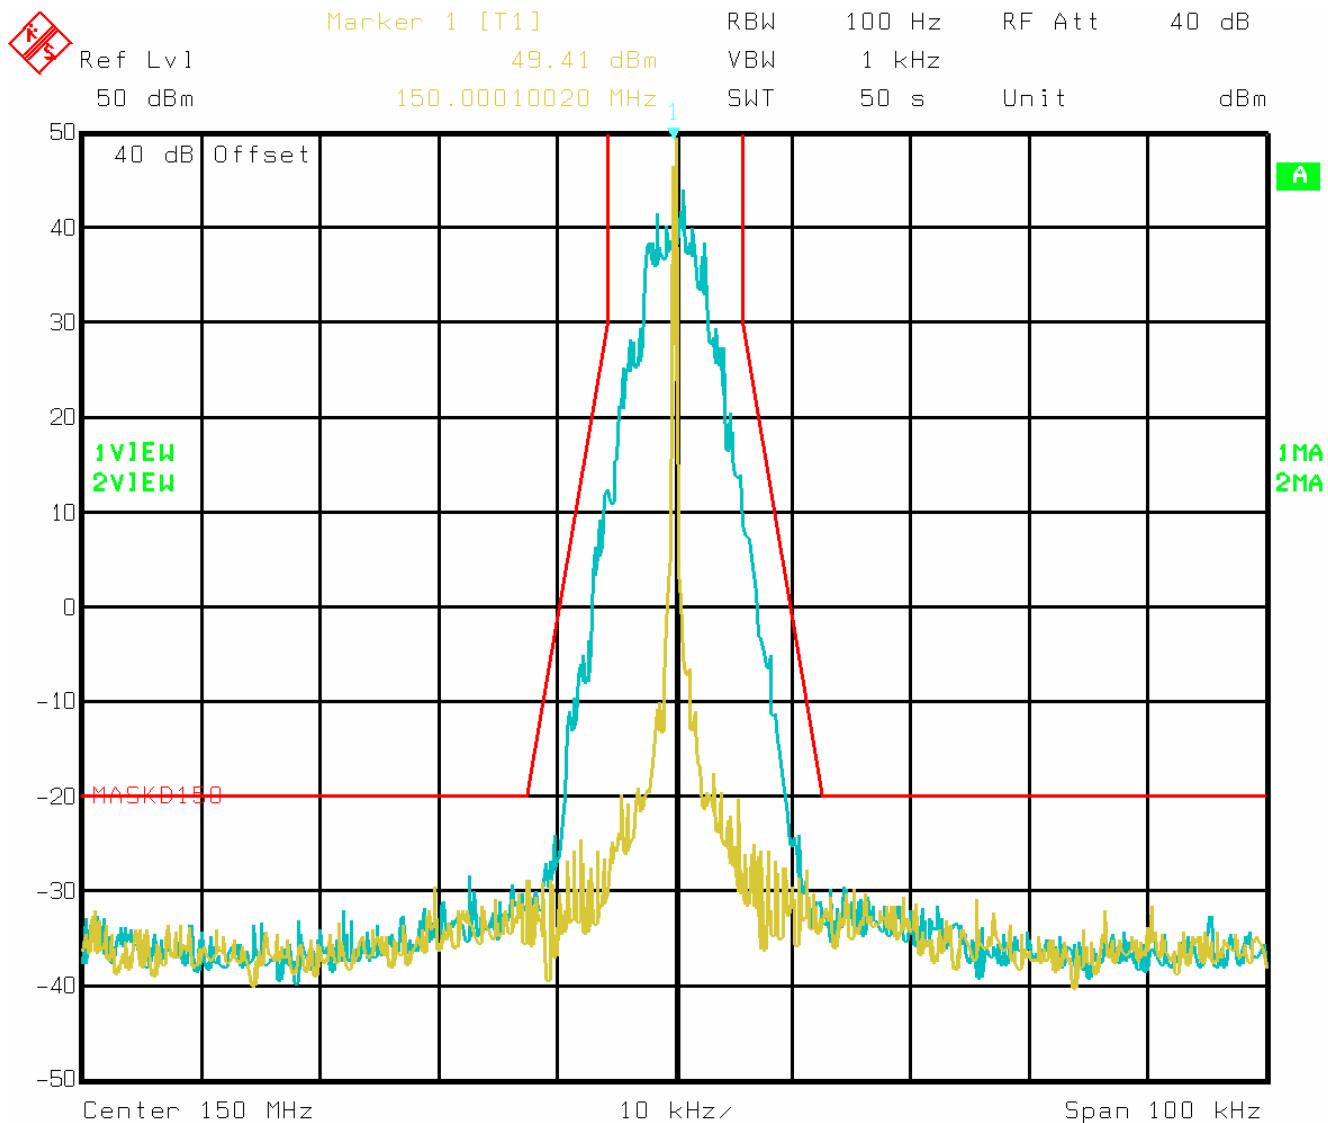

Date: 07.JUL.2010 16:07:52

150 MHz, 110 W, 12.5 kHz, 4FSK




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

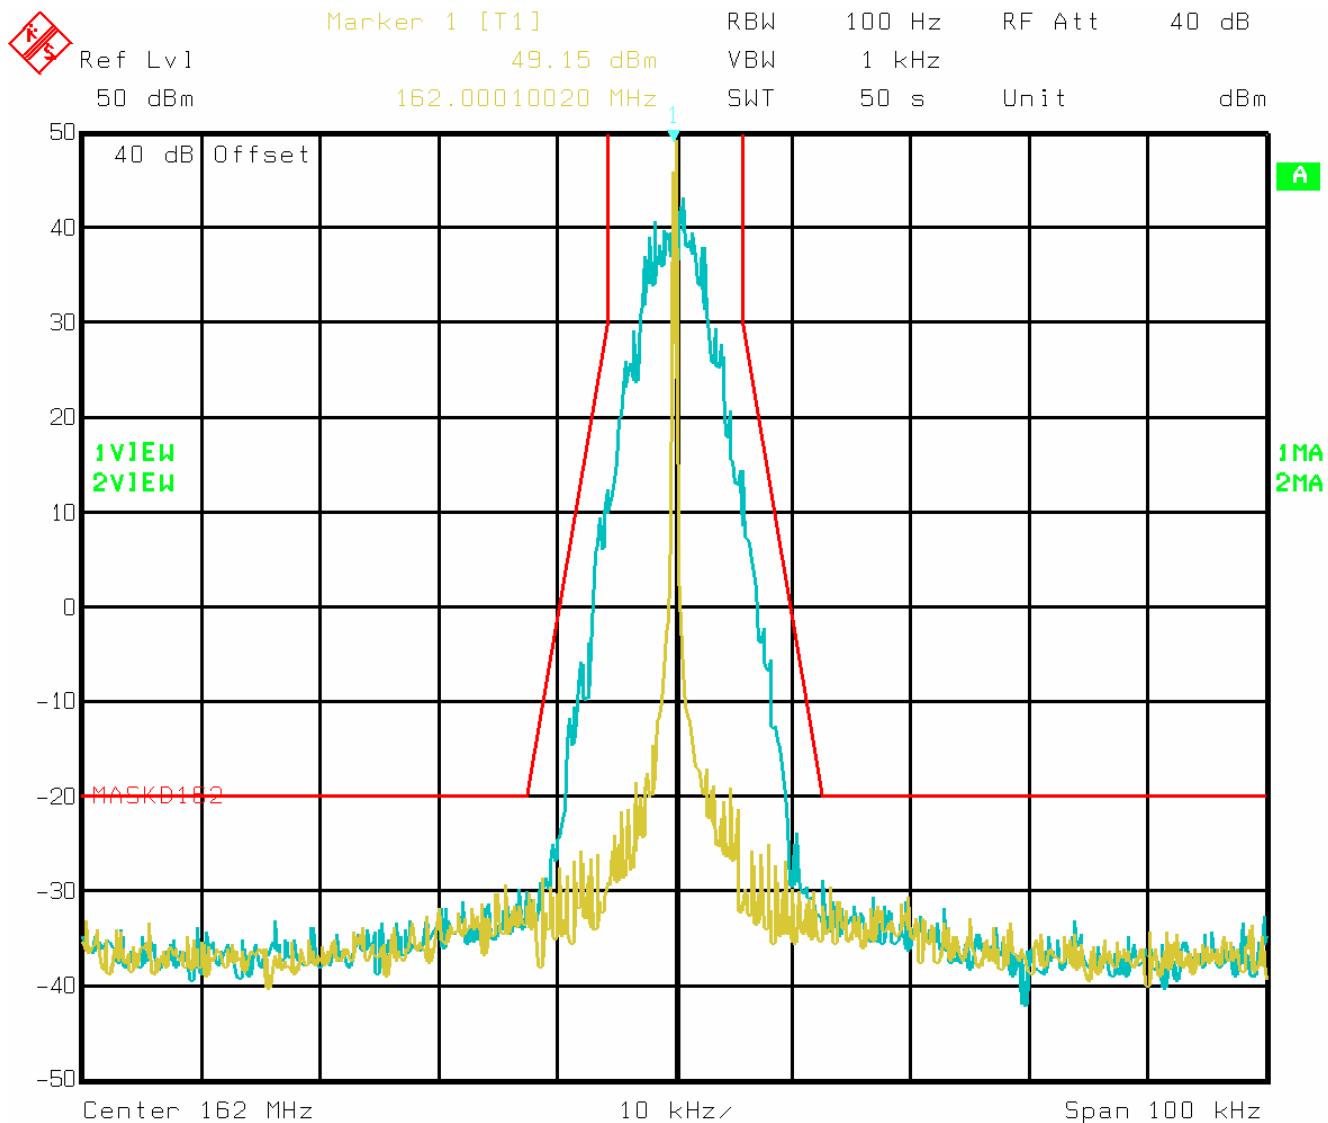

Date: 07.JUL.2010 15:46:19

162 MHz, 110 W, 12.5 kHz, 4FSK




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

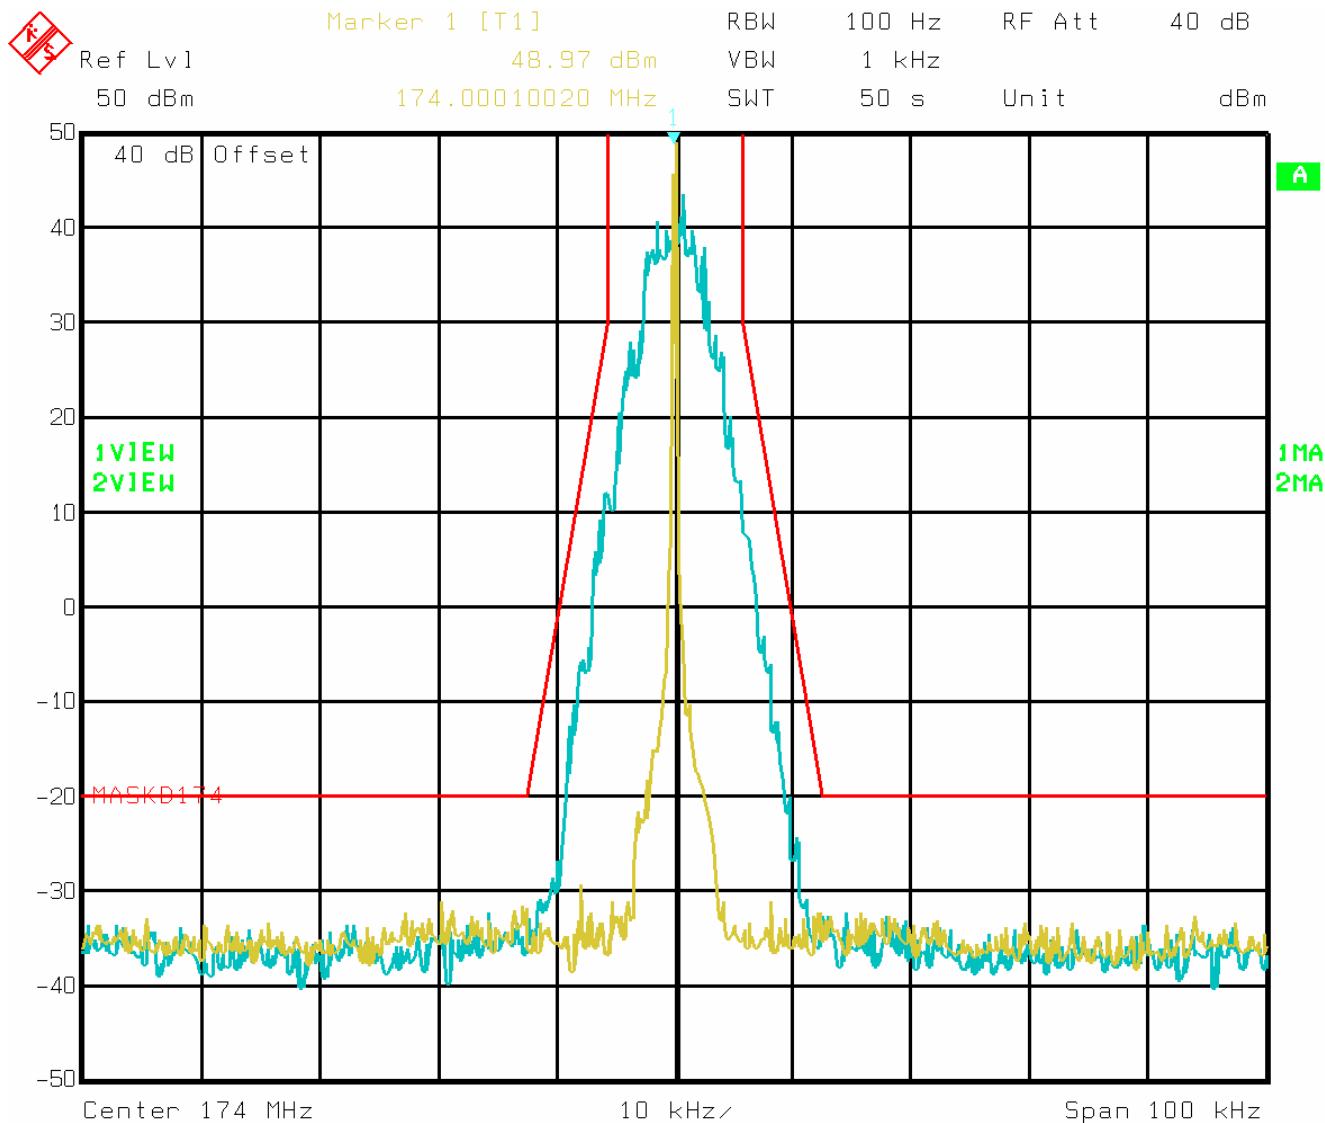

174 MHz, 110 W, 12.5 kHz, 4FSK




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

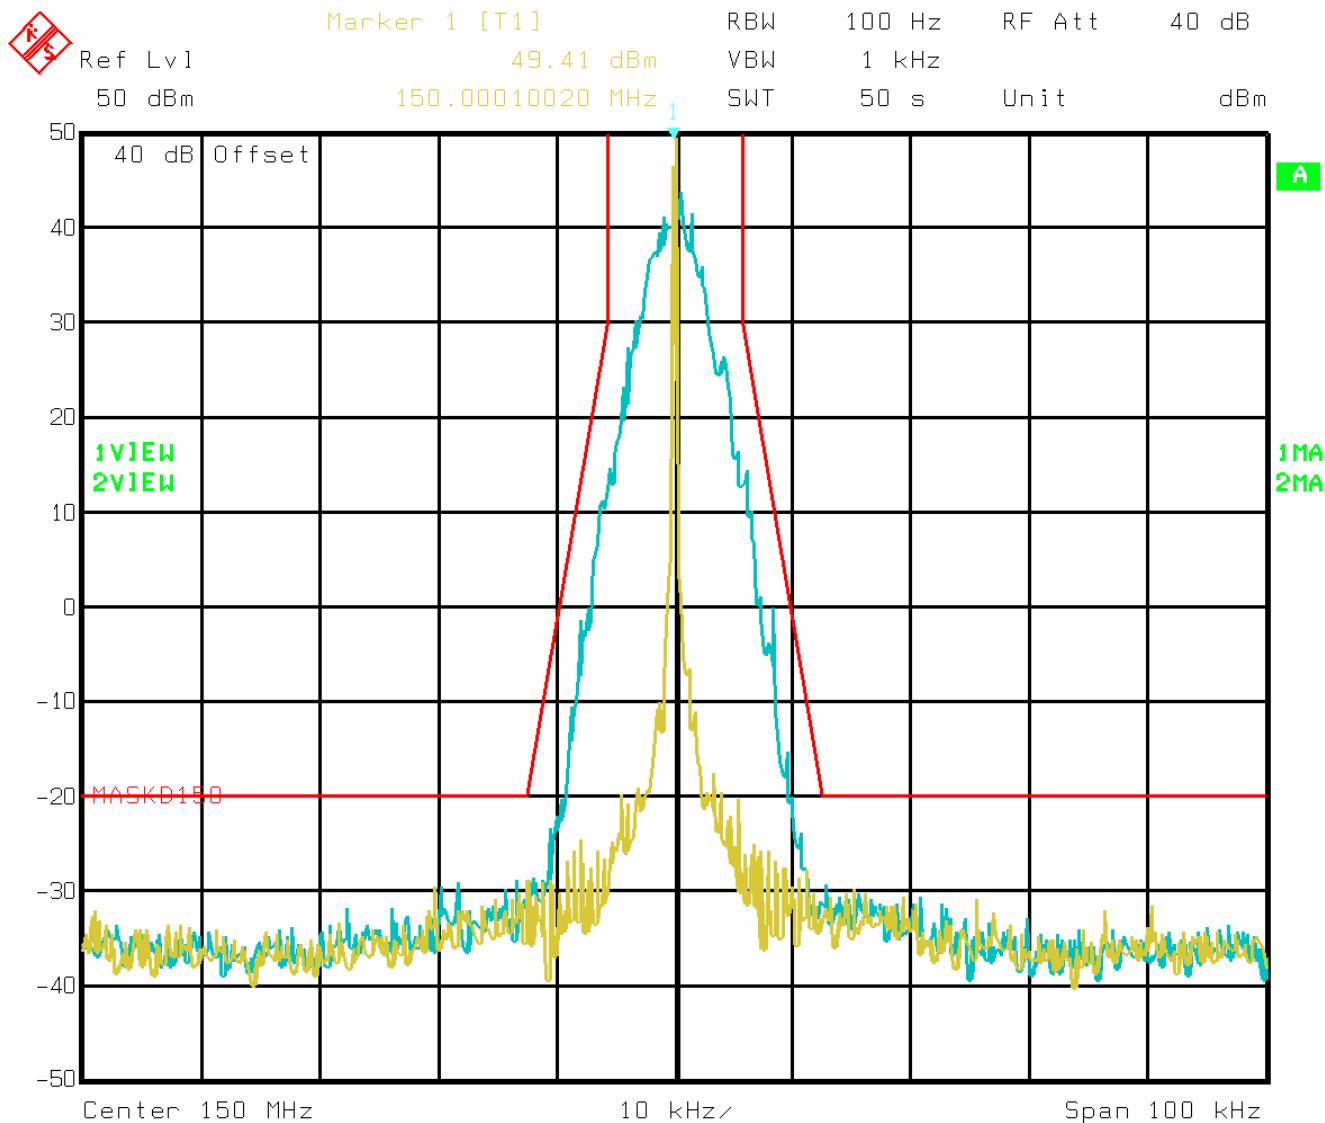

Date: 07.JUL.2010 16:01:19

150 MHz, 110 W, 12.5 kHz, C4FM




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

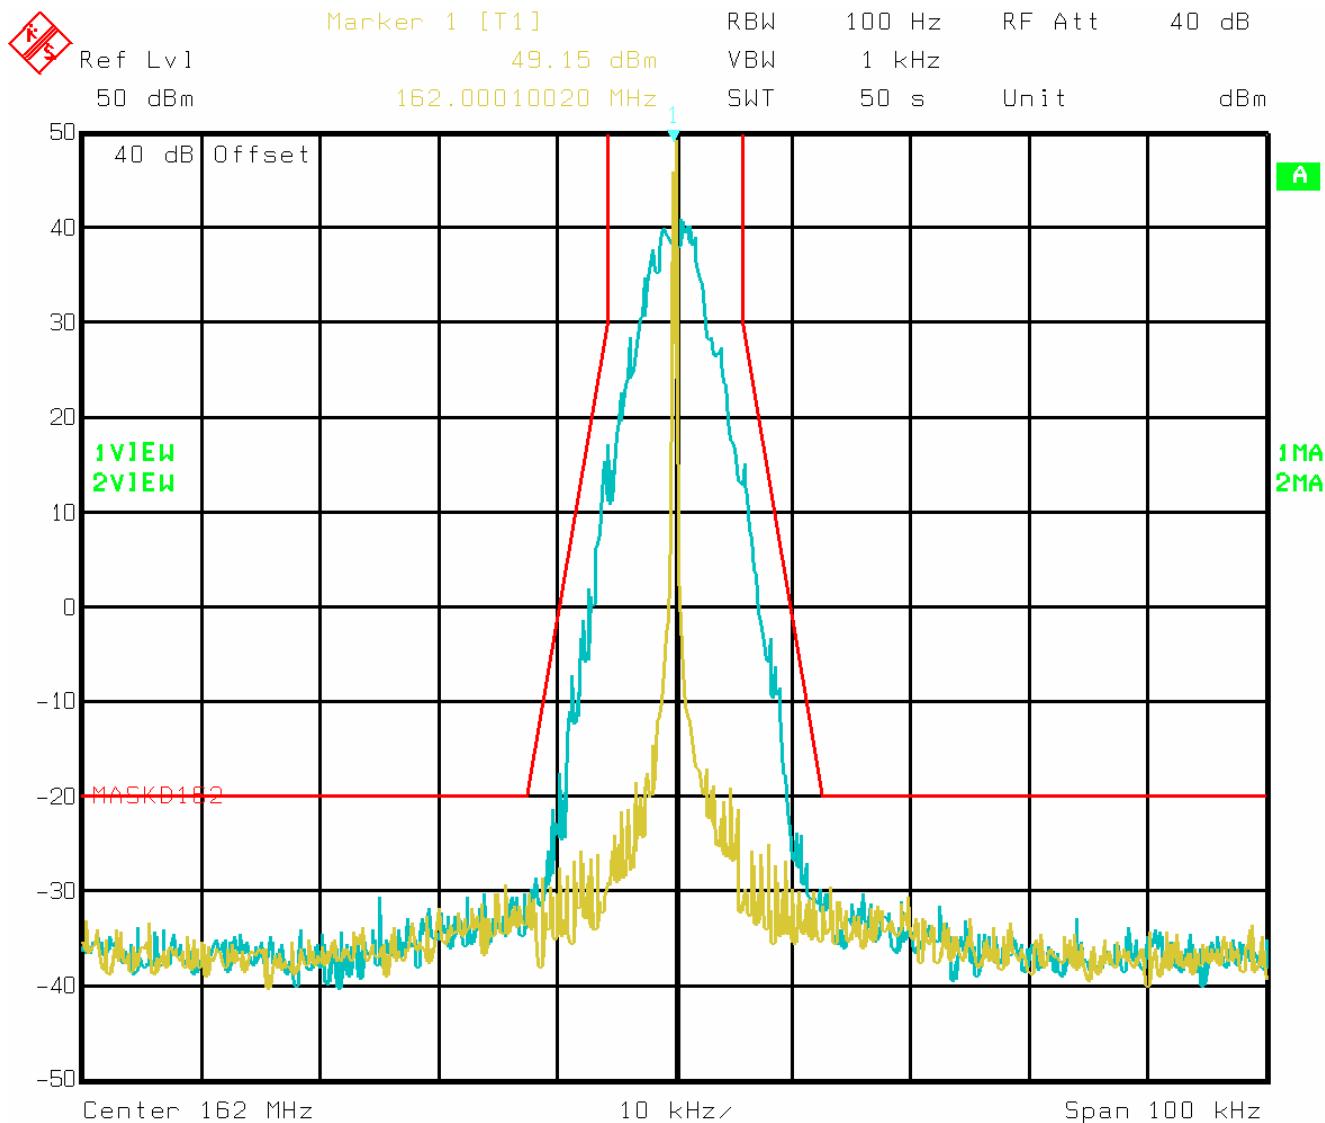

Date: 07.JUL.2010 15:35:58

162 MHz, 110 W, 12.5 kHz, C4FM




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

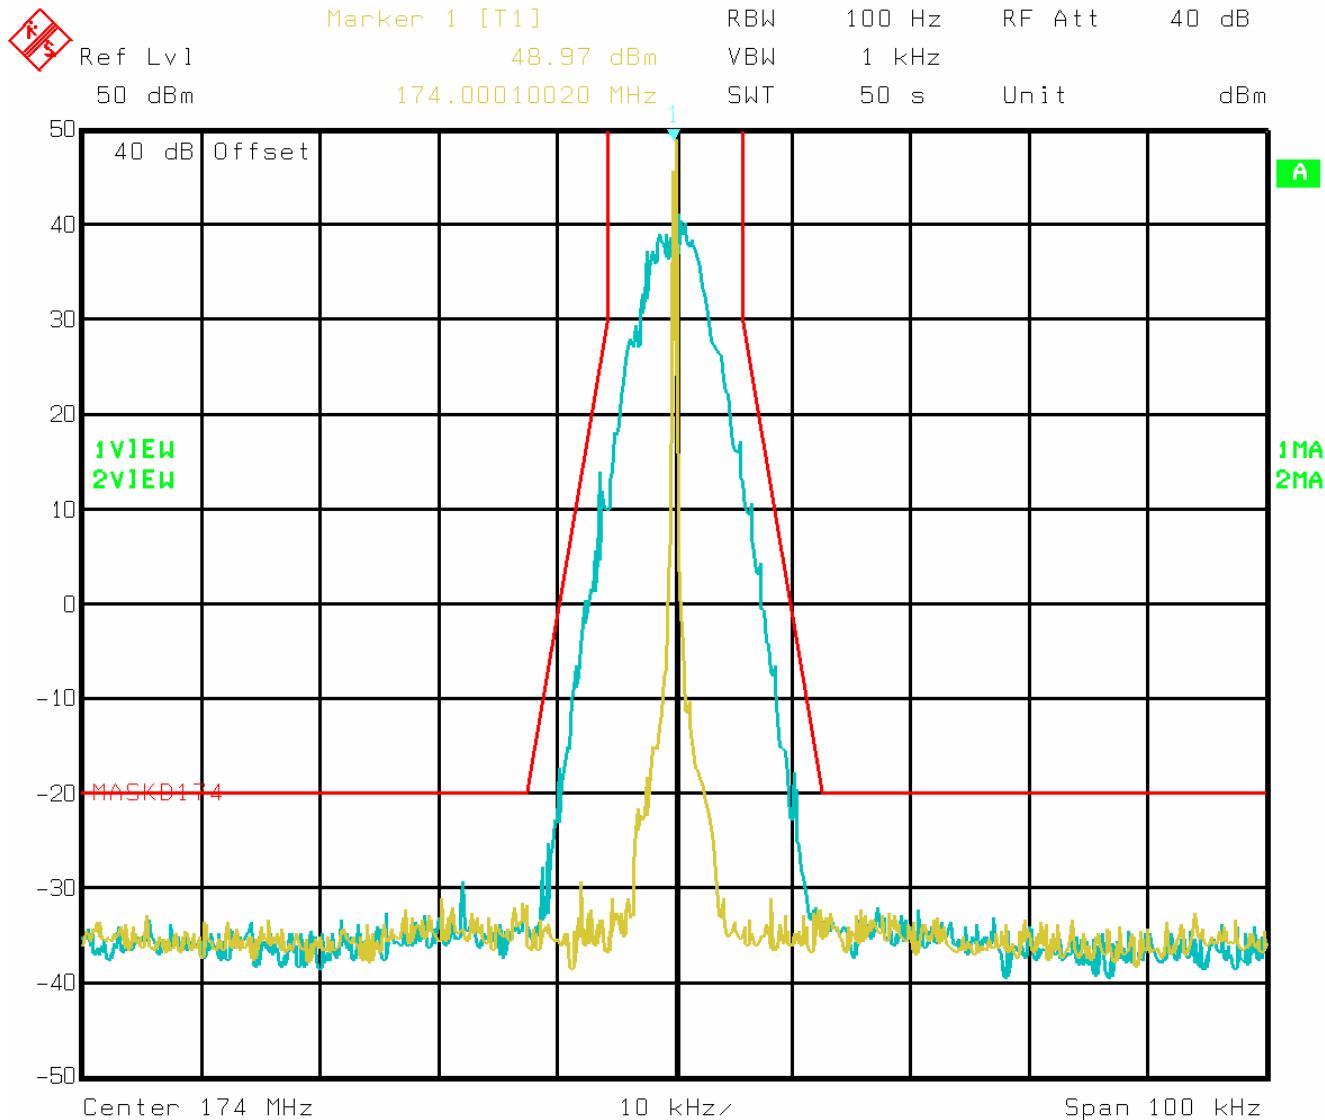

Date: 07.JUL.2010 15:09:08

174 MHz, 110 W, 12.5 kHz, C4FM




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : **152426TRFWL**

Specification: FCC 90

Set up photo

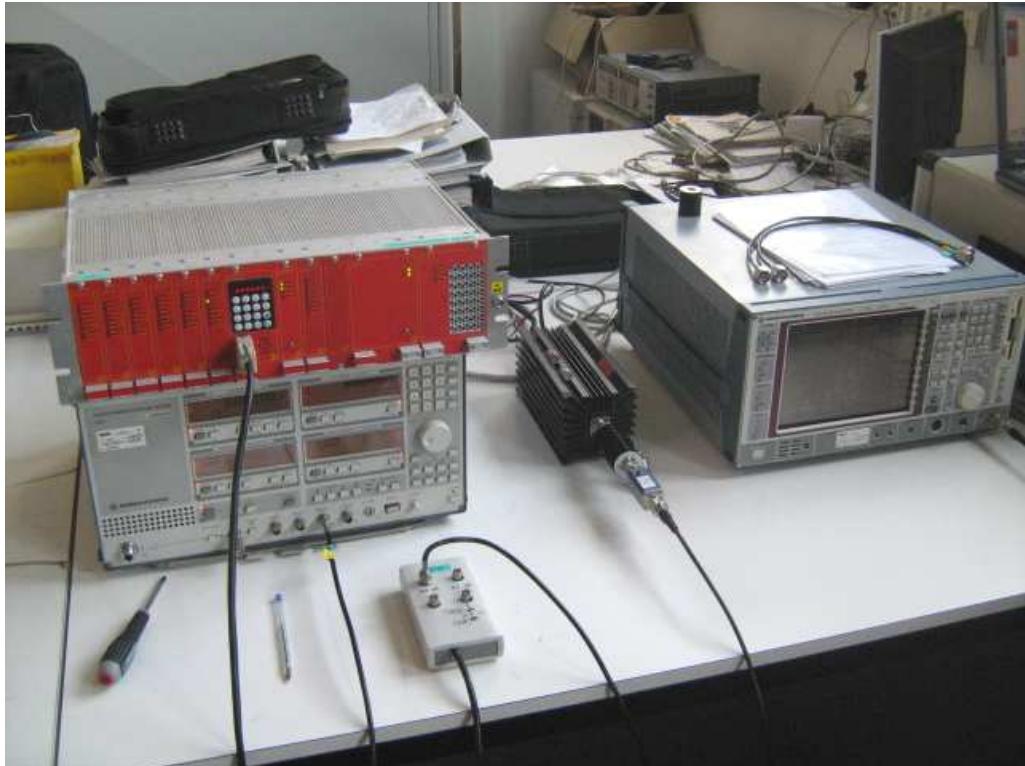



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Clause 90.210 Spurious emissions at the antenna terminal

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating in the frequency bands governed under this part.

Applicable Emission Masks:

Frequency band (MHz)	Mask for equipment with Audio low pass filter	Mask for equipment without audio low pass filter
Below 25	A or B	A or C
25–50	B	C
72–76	B	C
150–174	B, D, or E	C, D, or E
150 Paging-only	B	C
220–222	F	F
421–512	B, D, or E	C, D, or E
450 Paging-only	B	G
806–809/851–854	B	H
809–824/854–869	B	G
896–901/935–940	I	J
902–928	K	K
929–930	B	G
4940–4990	L or M	L or M.
5850–5925	–	–
All other bands	B	C

§ 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Test date: 2010/07/09

Test results: Pass



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : **152426TRFWL**

Specification: FCC 90

Special notes

Tunable RF NOTCH FILTER Was USED from 30 to 1000 MHz.

The following set-up was prepared getting a cascade connection from TX antenna connector to spectrum analyzer, in this way:

TX antenna connector, 40 dB through attenuator, tuned RF notch filter, spectrum analyzer




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

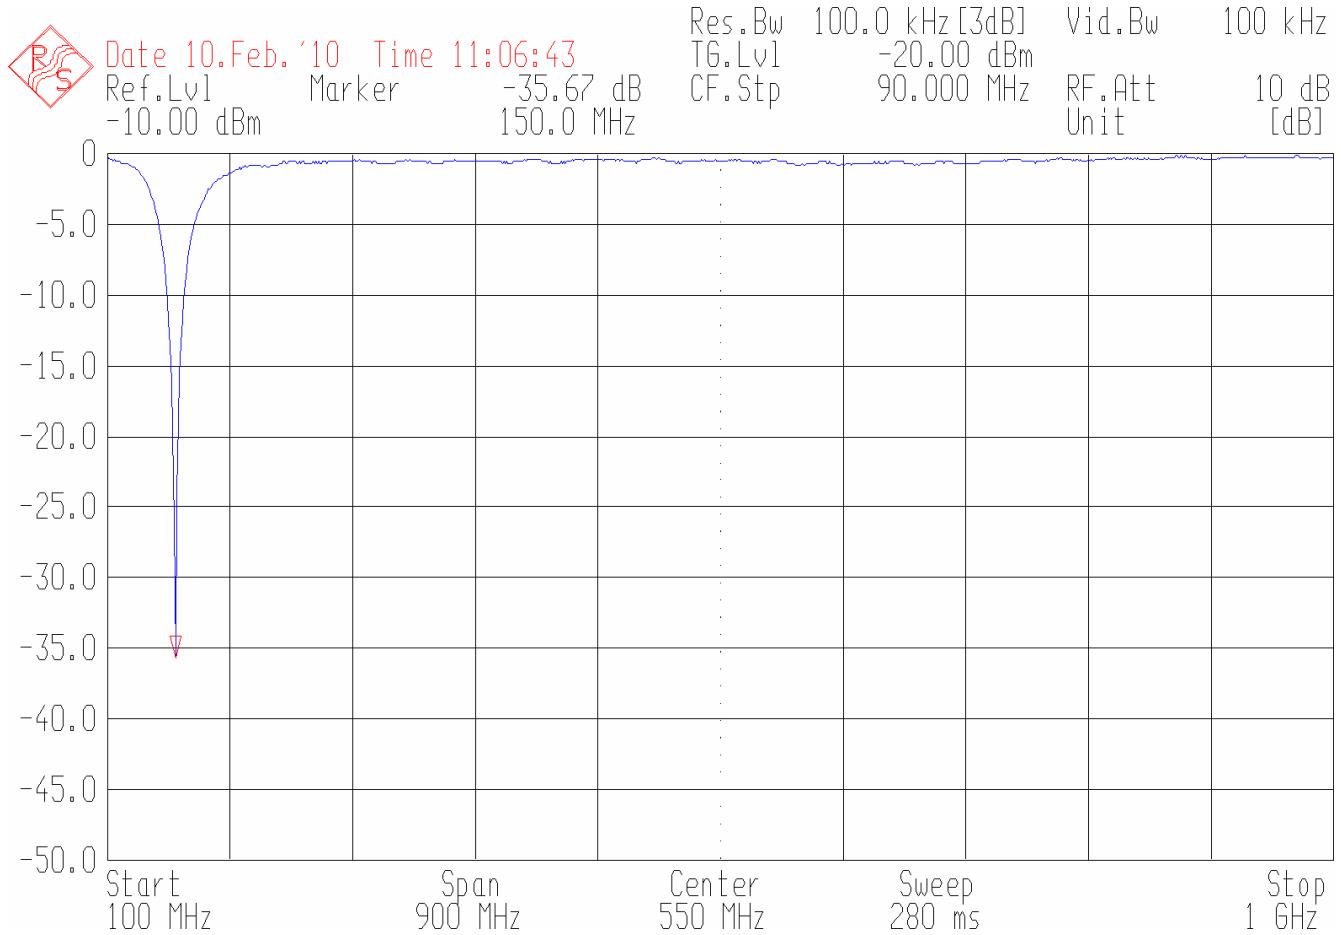

Notch Filter tuned 150 MHz




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

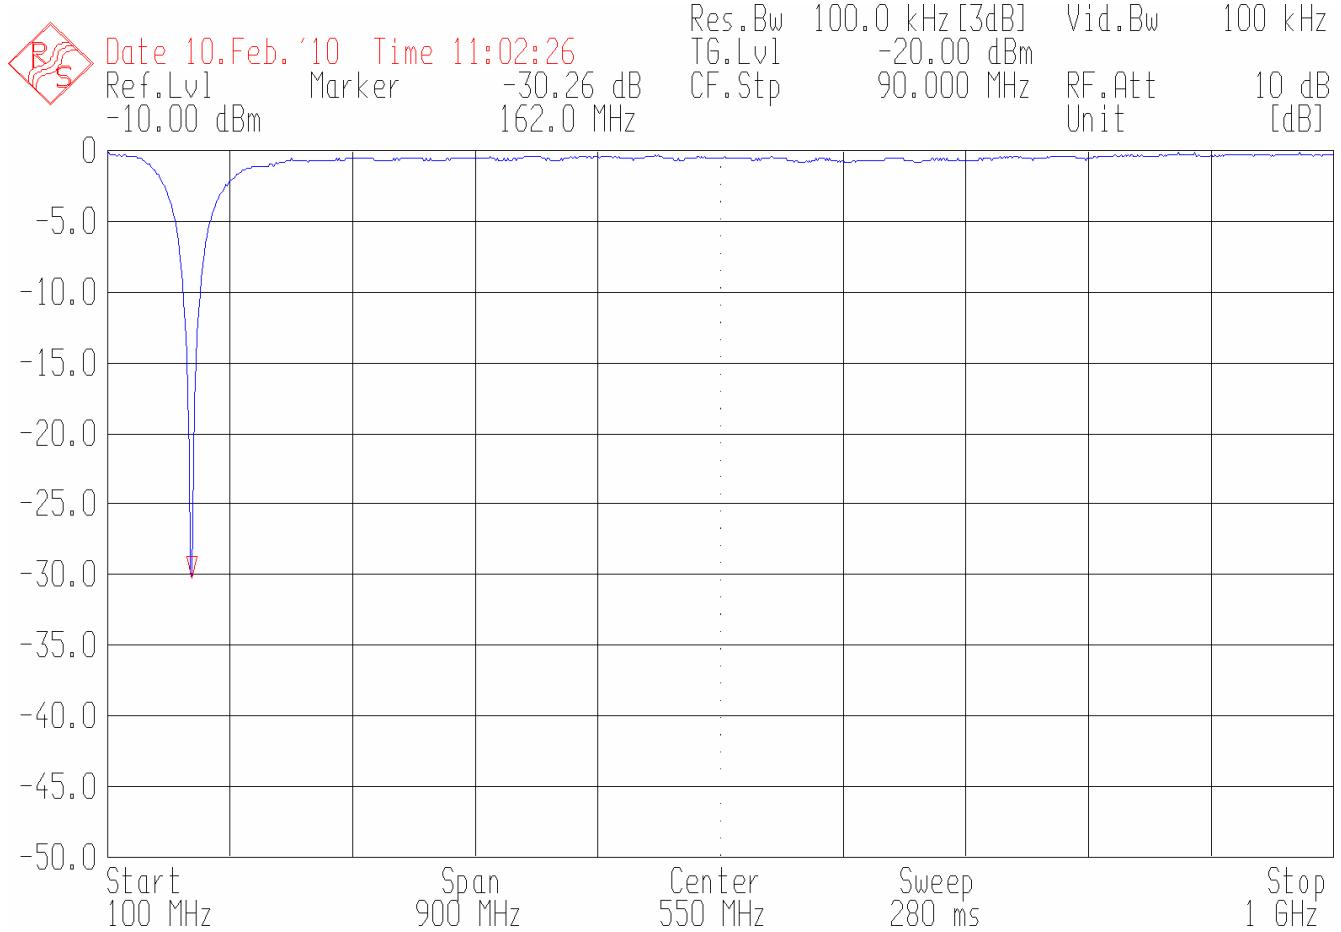

Notch Filter tuned 162 MHz



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90




Date 10.Feb.'10 Time 11:09:03

Ref.Lvl
-10.00 dBm


Marker

-30.91 dB
174.0 MHz

Res.Bw 100.0 kHz [3dB] Vid.Bw 100 kHz
T6.Lvl -20.00 dBm
CF.Stp 90.000 MHz RF.Att Unit 10 dB
[dB]

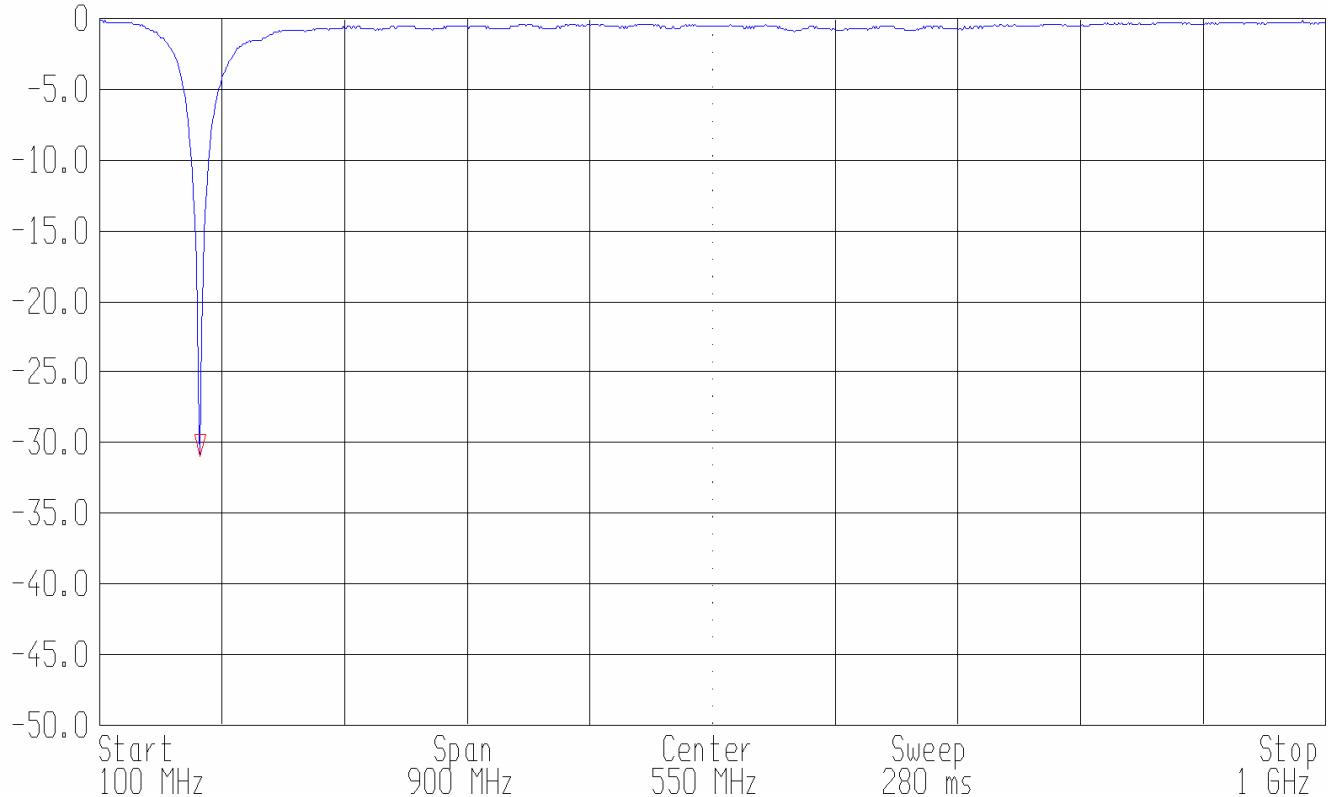

Notch Filter tuned 174 MHz

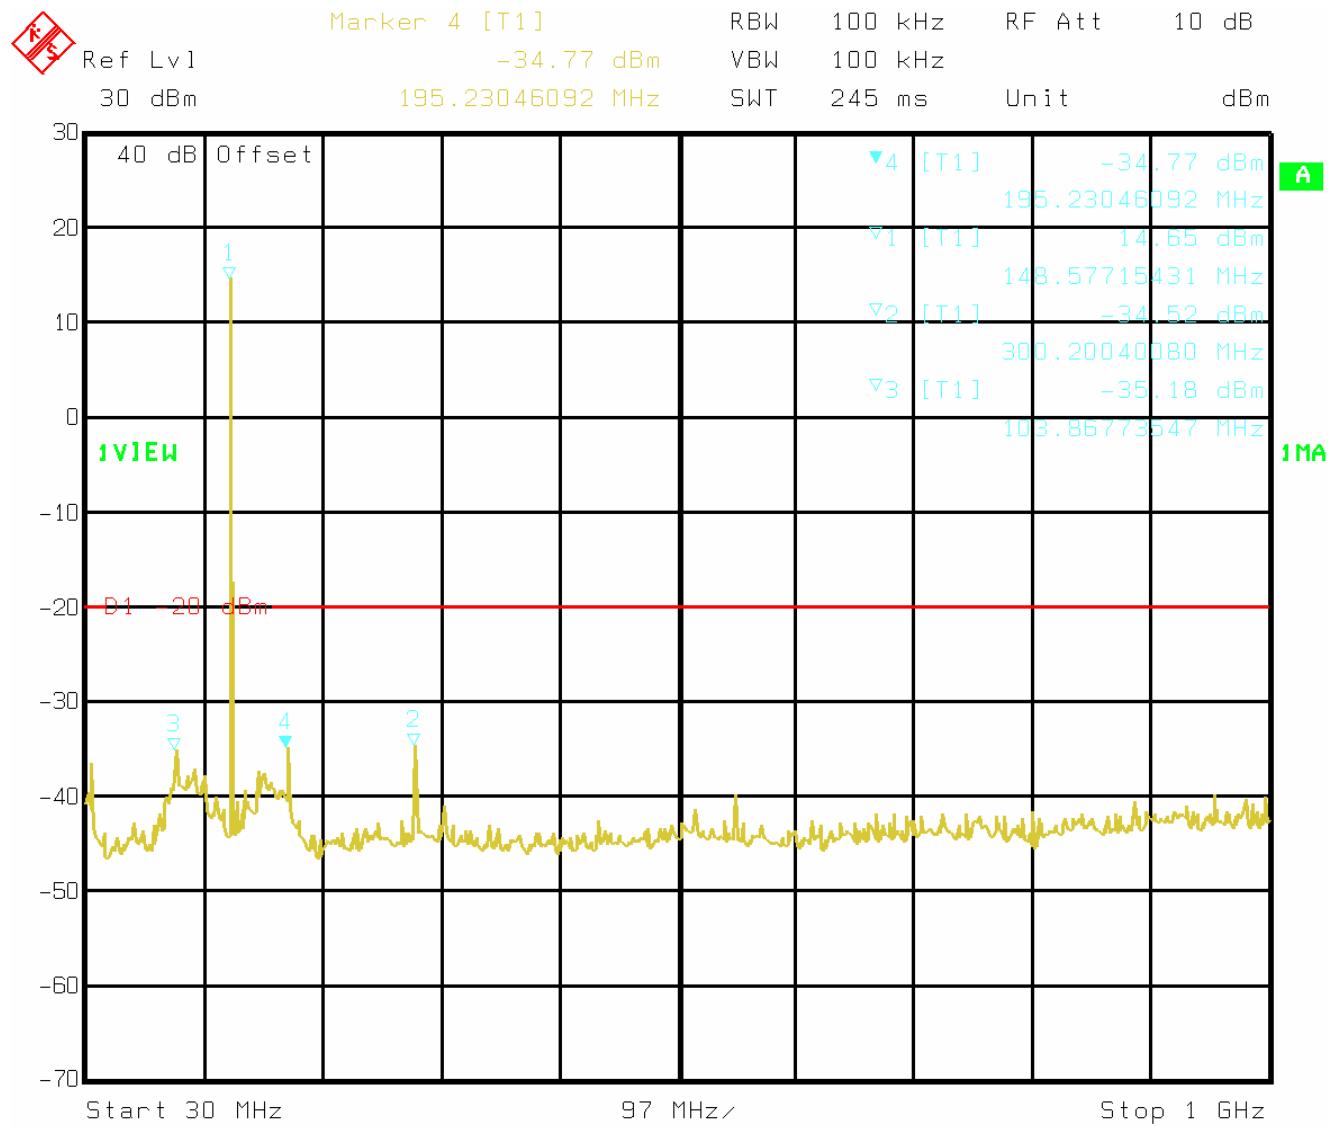

Date: 07.JUL.2010 09:30:41

150 MHz, 110 W, 12.5 kHz,

carrier level (marker 1) 14.65 dBm (40 dB through attenuator included)+ (tuned notch attenuation) 35.67 dB = 50.32 dBm (true carrier)




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

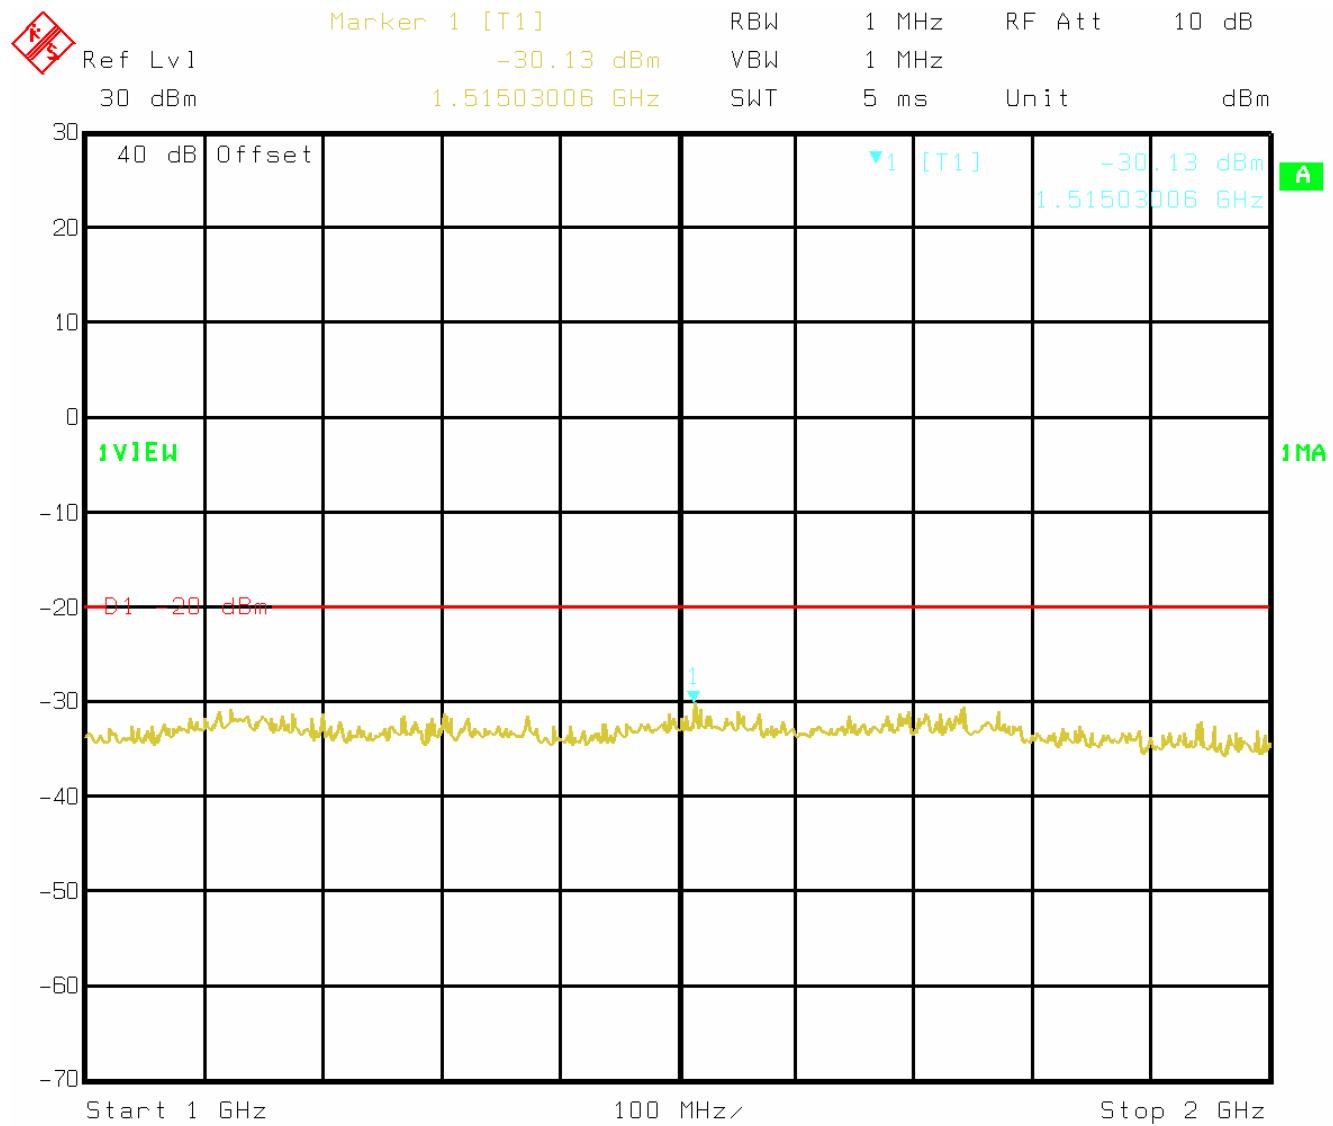

150 MHz, 110 W, 12.5 kHz, NO RF Notch Filter.




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : **152426TRFWL**

Specification: FCC 90

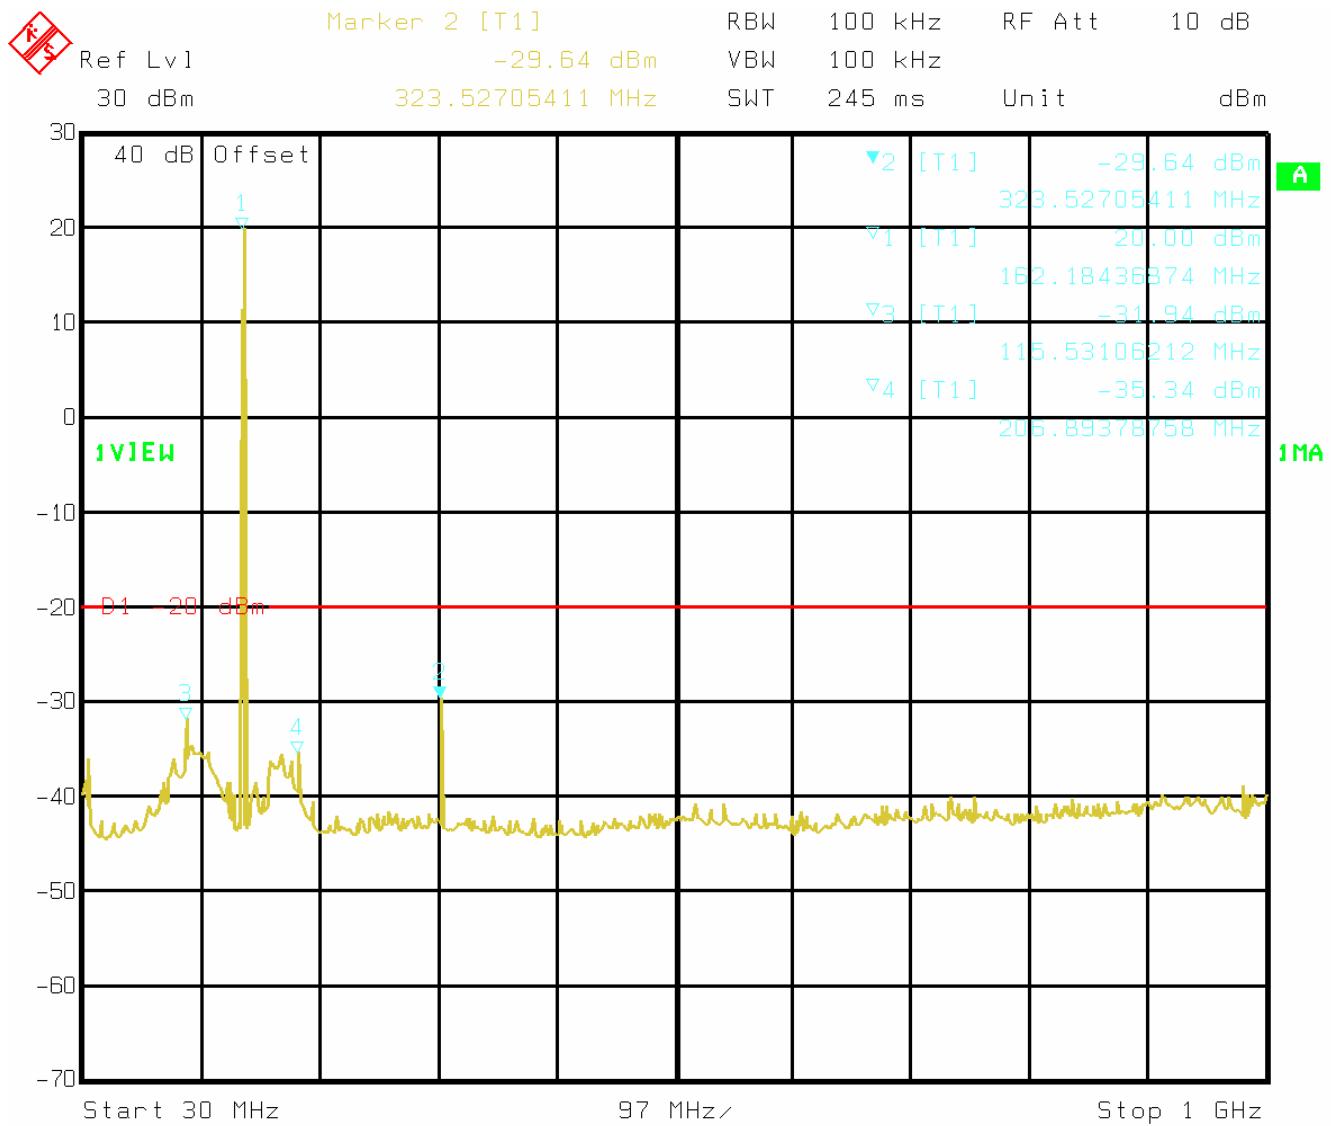

Date: 07.JUL.2010 10:56:10

162 MHz, 110 W, 12.5 kHz, carrier level 20.00 dBm + 30.26 dB = 50.26 dBm




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

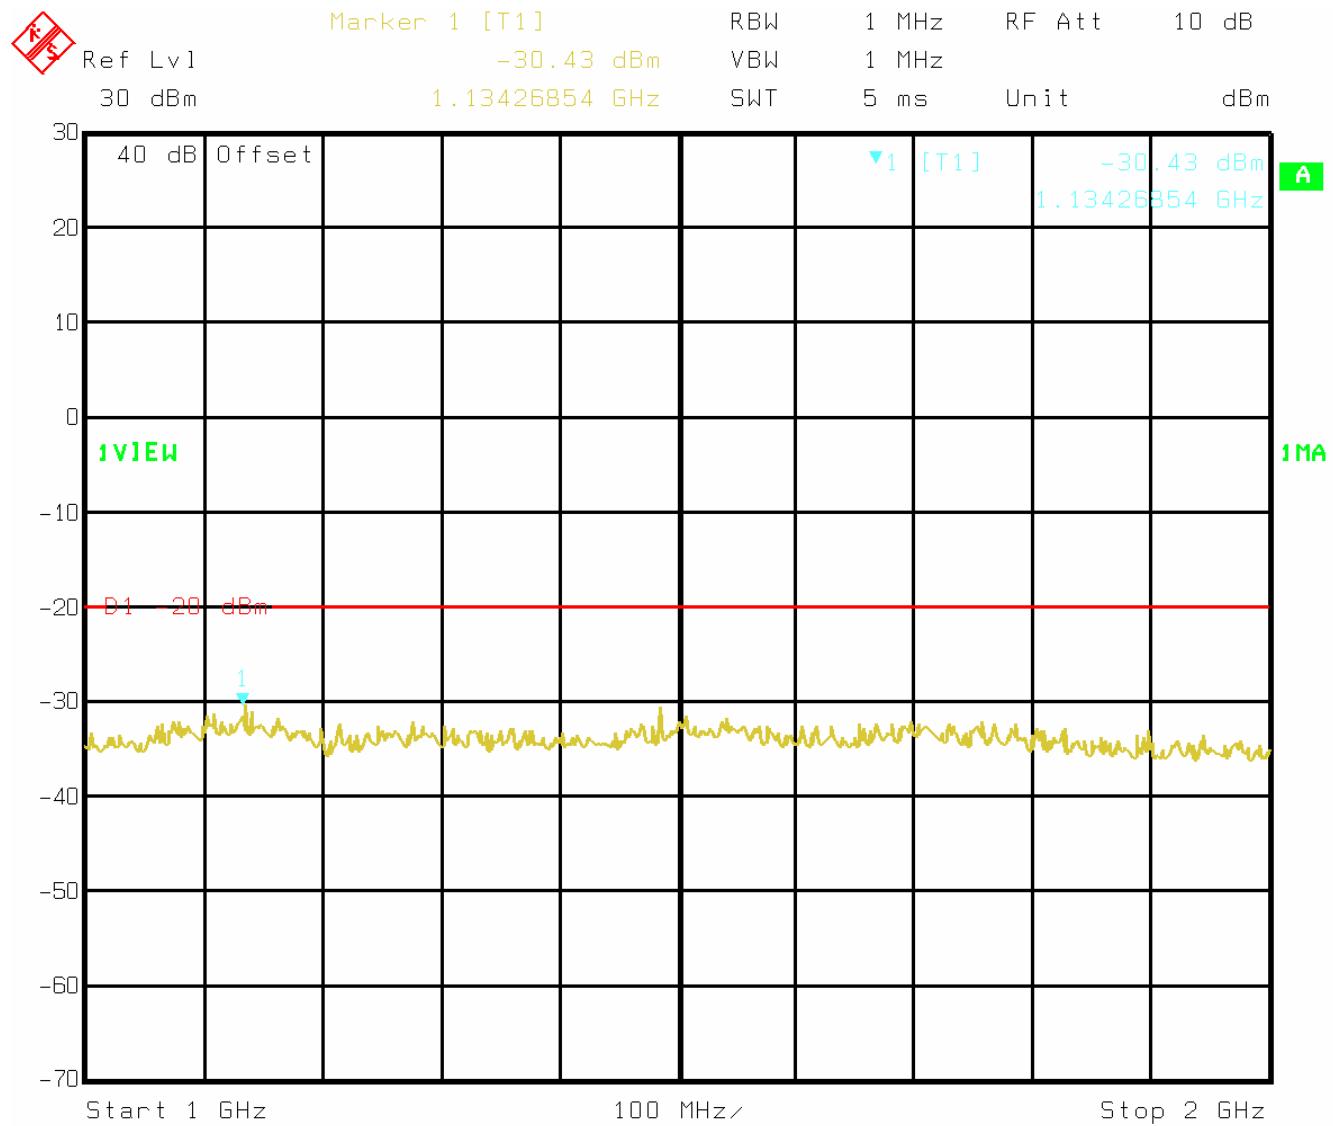

Date: 07.JUL.2010 11:34:20

162 MHz, 110 W, 12.5 kHz, NO RF Notch Filter.




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

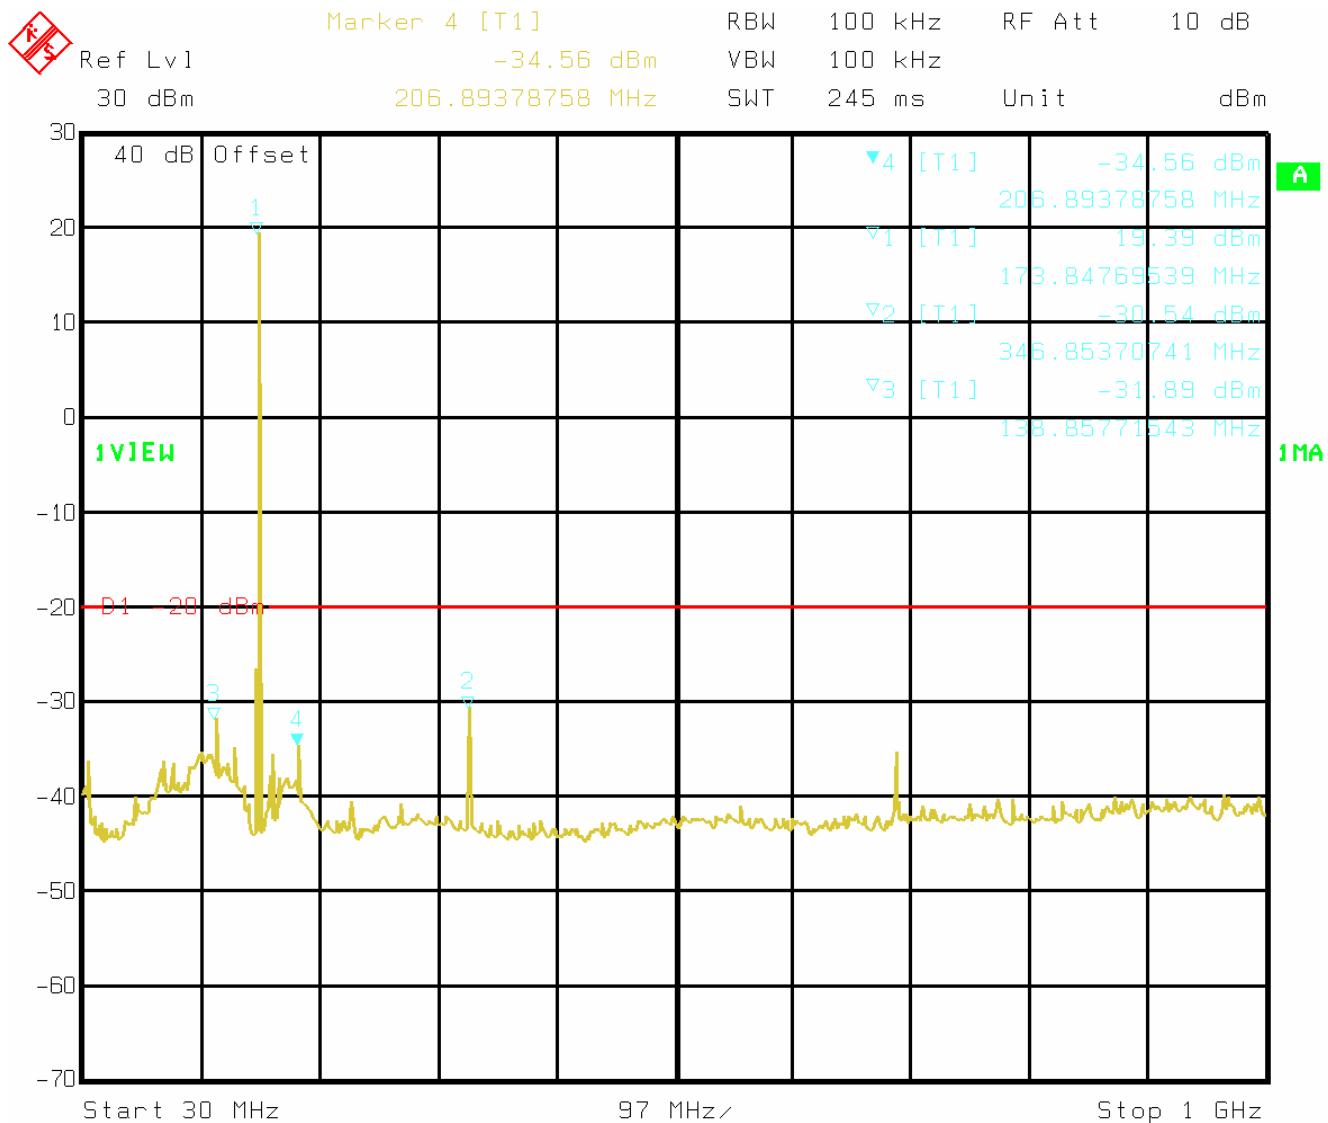

Date: 07.JUL.2010 11:13:36

174 MHz, 110 W, 12.5 kHz, carrier level 19.39 dBm + 30.91 dB = 50.30 dBm




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

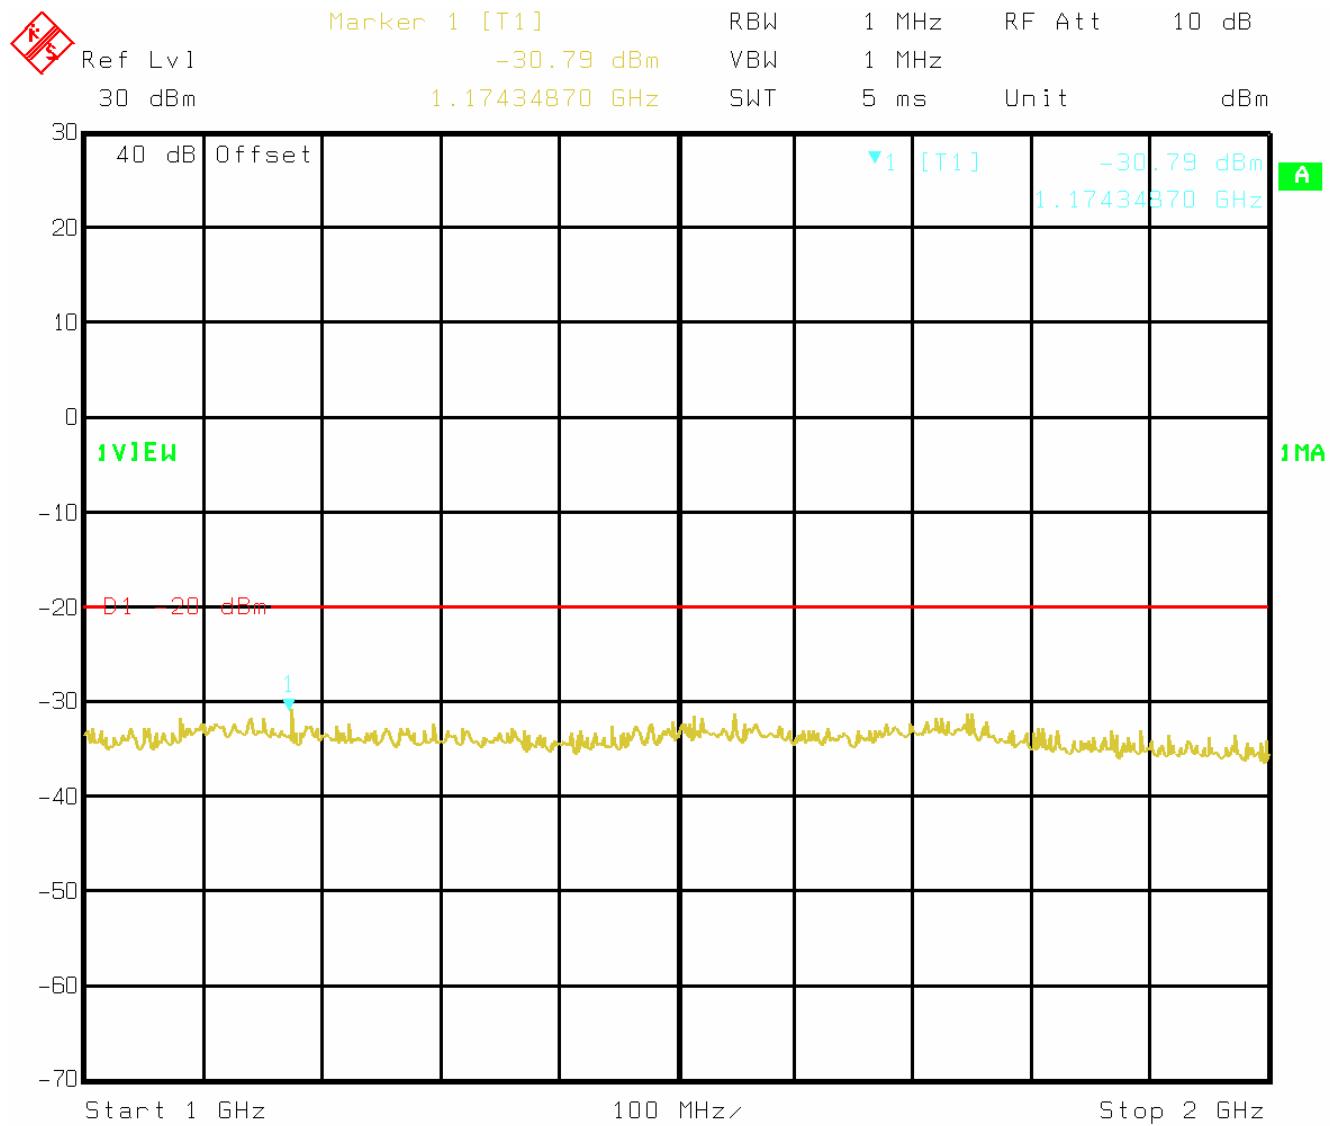

Date: 07.JUL.2010 11:24:35

174 MHz, 110 W, 12.5 kHz, NO RF Notch Filter.




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Set up photo

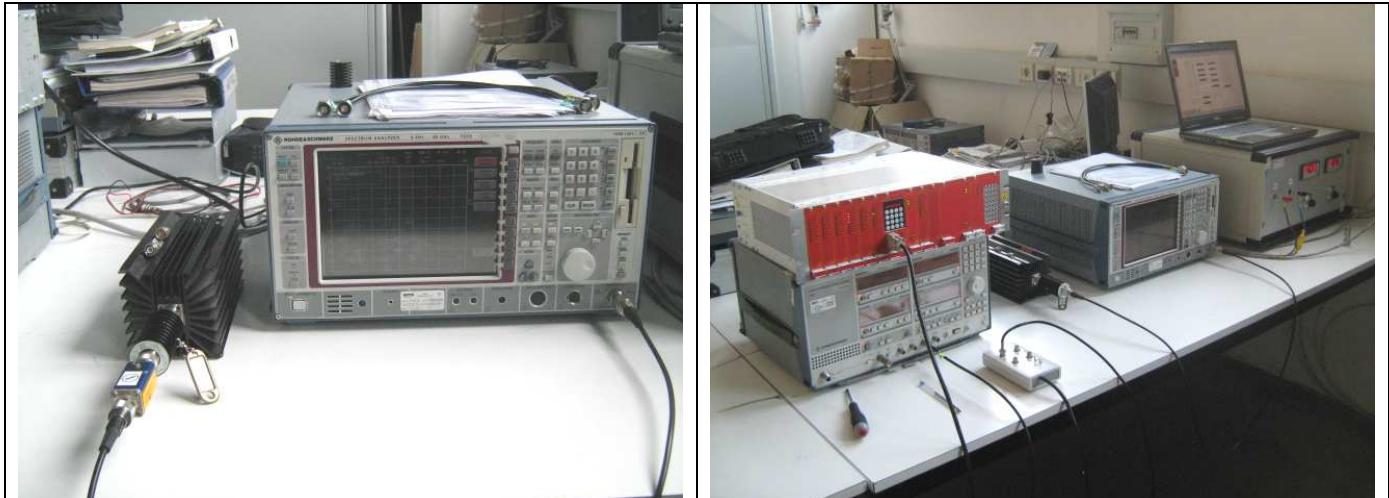



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Clause 90.210 Field strength of spurious radiation

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating in the frequency bands governed under this part.

§ 2.1053 Measurements required: Field strength of spurious radiation.

(a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

Test date: 2010/07/10

Test results: Pass

Special notes

- The spectrum was searched from 30 MHz to the 10th harmonic.
- The EUT was measured on two orthogonal axis.
- All measurements were performed at a distance of 3 m.
- Only the worst data presented in the test report.



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Clause 90.210 Field Strength of spurious radiation, continued

Test data

110 W, 12.5 kHz channel spacing, Limit -20 dBm (no difference changing modulation type)

150 MHz						
Frequency (MHz)	Level measured (dBm erp)	Antenna polarization (H/V)	Precalibration corrective factor (dB)	Spurious radiation (dBm erp)	RBW (kHz)	Detector
31.9	-64.5	V	-25.1	-39.3	100	Pk
33.9	-60.5	V	-25.0	-35.5	100	Pk
35.8	-58.2	V	-24.6	-33.6	100	Pk
37.8	-58.2	V	-24.4	-33.7	100	Pk
39.7	-60.5	V	-24.1	-36.4	100	Pk
41.6	-62.9	V	-24.4	-38.5	100	Pk
51.3	-63.7	V	-25.2	-38.6	100	Pk
53.3	-61.6	V	-24.8	-36.8	100	Pk
55.2	-62.7	V	-25.0	-37.7	100	Pk
57.2	-65.4	V	-26.2	-39.2	100	Pk
64.9	-64.9	V	-25.1	-39.8	100	Pk
66.9	-64.4	V	-24.7	-39.7	100	Pk
1198.0	-72.3	V	-39.5	-32.8	1000	Pk
1200.0	-68.1	V	-39.4	-28.7	1000	Pk
1500.0	-82.6	V	-42.8	-39.8	1000	Pk
1988.0	-84.5	V	-45.2	-39.3	1000	Pk
1198.0	-73.7	H	-39.5	-34.1	1000	Pk
1200.0	-70.0	H	-39.4	-30.6	1000	Pk
1500.0	-79.9	H	-42.3	-37.7	1000	Pk
1650.0	-83.2	H	-43.4	-39.8	1000	Pk
1984.0	-85.1	H	-45.1	-40.0	1000	Pk



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

162 MHz						
Frequency (MHz)	Level measured (dBm erp)	Antenna polarization (H/V)	Precalibration corrective factor (dB)	Spurious radiation (dBm erp)	RBW (kHz)	Detector
53.3	-63.7	V	-24.8	-38.9	100	Pk
55.2	-64.7	V	-25.0	-39.6	100	Pk
1132.0	-68.1	V	-39.2	-28.9	1000	Pk
1134.0	-66.0	V	-39.2	-26.7	1000	Pk
1296.0	-78.7	V	-40.4	-38.3	1000	Pk
1620.0	-80.9	V	-44.2	-36.7	1000	Pk
1622.0	-84.1	V	-44.2	-39.9	1000	Pk
1984.0	-85.2	V	-45.2	-39.9	1000	Pk
1986.0	-85.1	V	-45.2	-39.9	1000	Pk
1132.0	-60.2	H	-38.8	-21.4	1000	Pk
1134.0	-60.1	H	-38.8	-21.3	1000	Pk
1136.0	-75.2	H	-38.8	-36.4	1000	Pk
1294.0	-75.2	H	-40.0	-35.2	1000	Pk
1296.0	-67.3	H	-40.0	-27.3	1000	Pk
1298.0	-75.6	H	-40.0	-35.6	1000	Pk
1620.0	-83.9	H	-44.1	-39.8	1000	Pk

174 MHz						
Frequency (MHz)	Level measured (dBm erp)	Antenna polarization (H/V)	Precalibration corrective factor (dB)	Spurious radiation (dBm erp)	RBW (kHz)	Detector
51.3	-62.6	V	-25.2	-37.4	100	Pk
53.3	-62.6	V	-24.8	-37.8	100	Pk
55.2	-63.4	V	-25.0	-38.4	100	Pk
57.2	-66.2	V	-26.2	-40.0	100	Pk
1216.0	-76.2	V	-39.5	-36.7	1000	Pk
1218.0	-72.9	V	-39.5	-33.3	1000	Pk
697.4	-72.2	H	-35.1	-37.1	100	Pk
870.0	-77.7	H	-38.6	-39.2	100	Pk
872.0	-77.6	H	-38.6	-39.0	100	Pk
1216.0	-74.5	H	-39.5	-35.0	1000	Pk
1218.0	-70.7	H	-39.5	-31.2	1000	Pk



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results
Report Number: : 152426TRFWL
Specification: FCC 90

Test method

Set in an anechoic chamber the DUT (TX on) with antenna port $50\ \Omega$ terminated by a shielded dummy load.

Record all the radiated spurious (in dBm) (for instance) at 3 meter distance (without antenna factor for measure antenna) maximizing the spurious level, moving the measure antenna from 1 m. to 4 m. and the rotating table

By the pre-calibration method (a diagram of zero dBm erp radiated instead of DUT by some suitable antennas from 30 to 1000 MHz & from 1 to 18 GHz, using the same previous equipping and set-up)

Differentiating two by two the frequency levels we get the radiated spurious levels measured by dBm erp. Emitted from DUT.

(The pre-calibration method is an extension of the substitution method to a large frequency interval).





Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

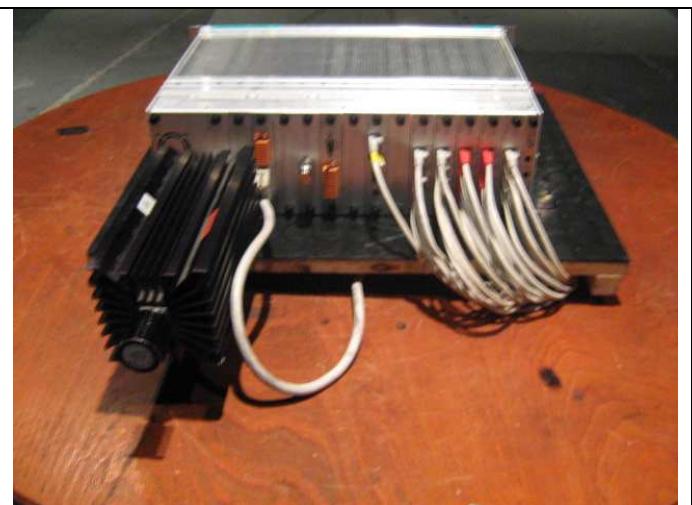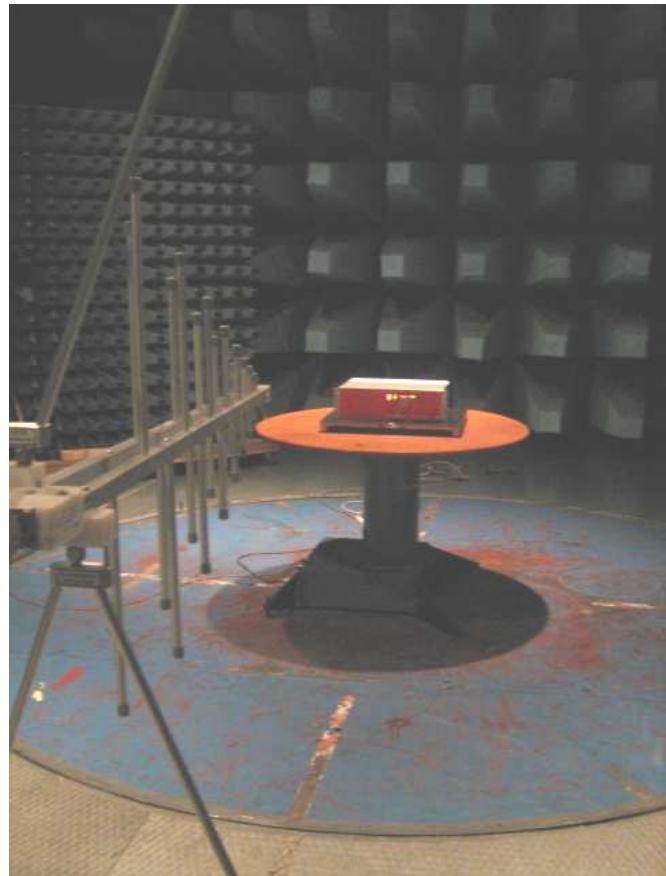



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Clause 90.213 Frequency stability

Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 W output power	2 W or less output power
Below 25	100	100	200
25–50	20	20	50
72–76	(5) 2.5	—	50
150–174	50	5	50
216–220	1.0	—	1.0
220–222	0.1	1.5	1.5
421–512	2.5	5	5
806–809	1.0	1.5	1.5
809–824	1.5	2.5	2.5
851–854	1.0	1.5	1.5
854–869	1.5	2.5	2.5
896–901	0.1	1.5	1.5
902–928	2.5	2.5	2.5
929–930	1.5	—	—
935–940	0.1	1.5	1.5
1427–1435	300	300	300
Above 2450	—	—	—

The units are in ppm

Test date: 2010/07/12

Test results: Pass

Special notes

None



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Clause 90.213 Frequency stability, continued

Test data, continued

Conditions	Frequency (MHz)	Offset (ppm)
+60 °C, Nominal power	162.000004551 *	+0.028093
+50 °C, Nominal power	162.000004910	+0.030309
+40 °C, Nominal power	162.000005233	+0.032302
+30 °C, Nominal power	162.000005471	+0.033772
+20 °C, +15 % power	75 Vdc *162.000005770	+0.035617
+20 °C, Nominal power	162.000005772	+0.035629
+20 °C, -15 % power	35 Vdc *162.000005769	+0.035611
+10 °C, Nominal power	162.000004217	+0.026031
0 °C, Nominal power	162.000002135	+0.013179
-10 °C, Nominal power	161.999999553	-0.002759
-20 °C, Nominal power	161.999997221	-0.017154
-30 °C, Nominal power	161.999995800	-0.025926

$$\text{Offset calculation: } \frac{F_{\text{Measured}} - F_{\text{reference}}}{F_{\text{reference}}} \times 1 \cdot 10^6$$

Reference Frequency: MHz: 162.000000000

* Manufacturer's larger declarations. OCXO synchronized by GPS.






Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Set up photo

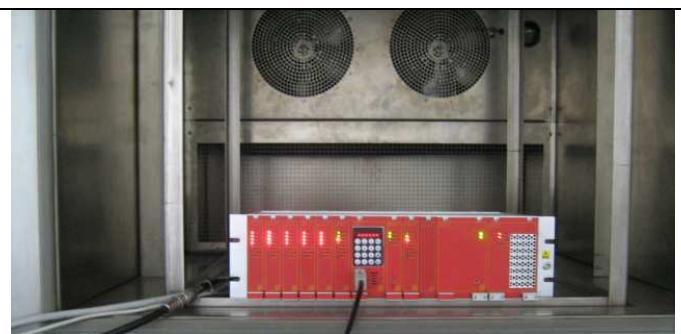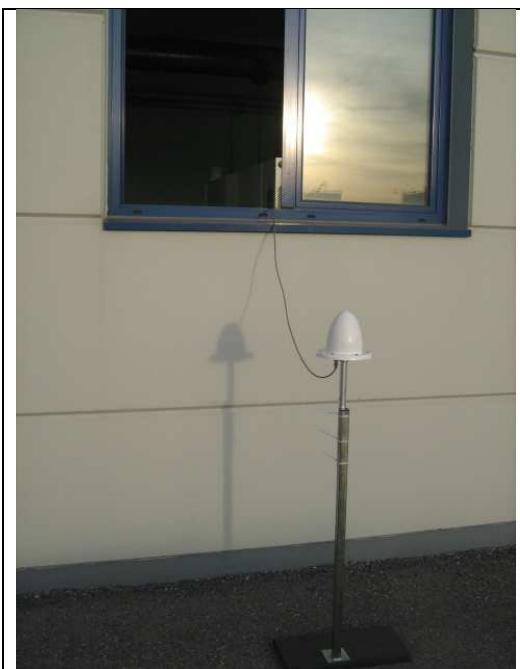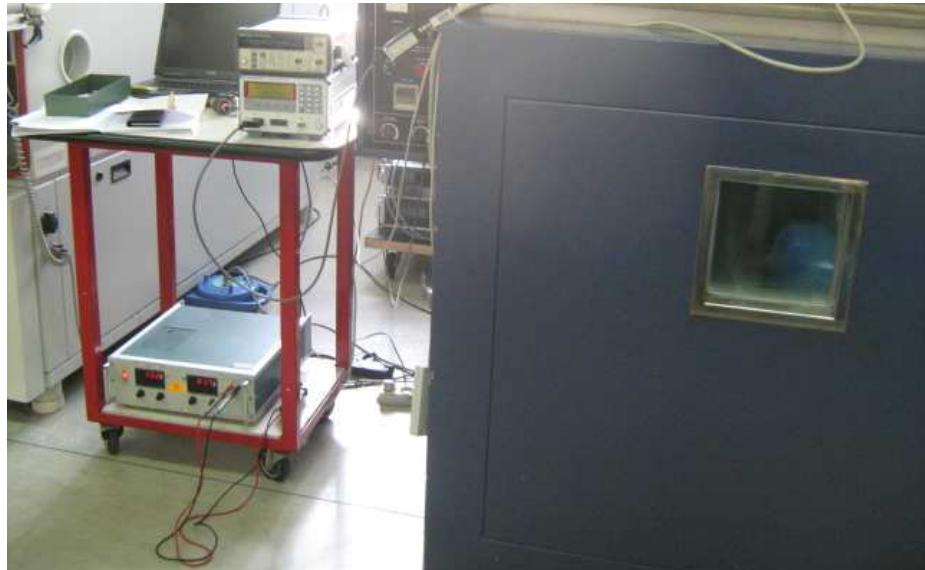



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Clause 90.214 Transient frequency behaviour

Transmitters designed to operate in the 150–174 MHz and 421–512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum frequency difference	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t1	±25.0 kHz	5.0 ms	10.0 ms
t2	±12.5 kHz	20.0 ms	25.0 ms
t3	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t1	±12.5 kHz	5.0 ms	10.0 ms
t2	±6.25 kHz	20.0 ms	25.0 ms
t3	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t1	±6.25 kHz	5.0 ms	10.0 ms
t2	±3.125 kHz	20.0 ms	25.0 ms
t3	±6.25 kHz	5.0 ms	10.0 ms

Test date: 2010/07/12

Test results: Pass

Special notes

None




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL


Specification: FCC 90

Switch on condition, $t_1=5$ ms, $t_2=20$ ms, 150 MHz, channel separation ± 12.5 kHz

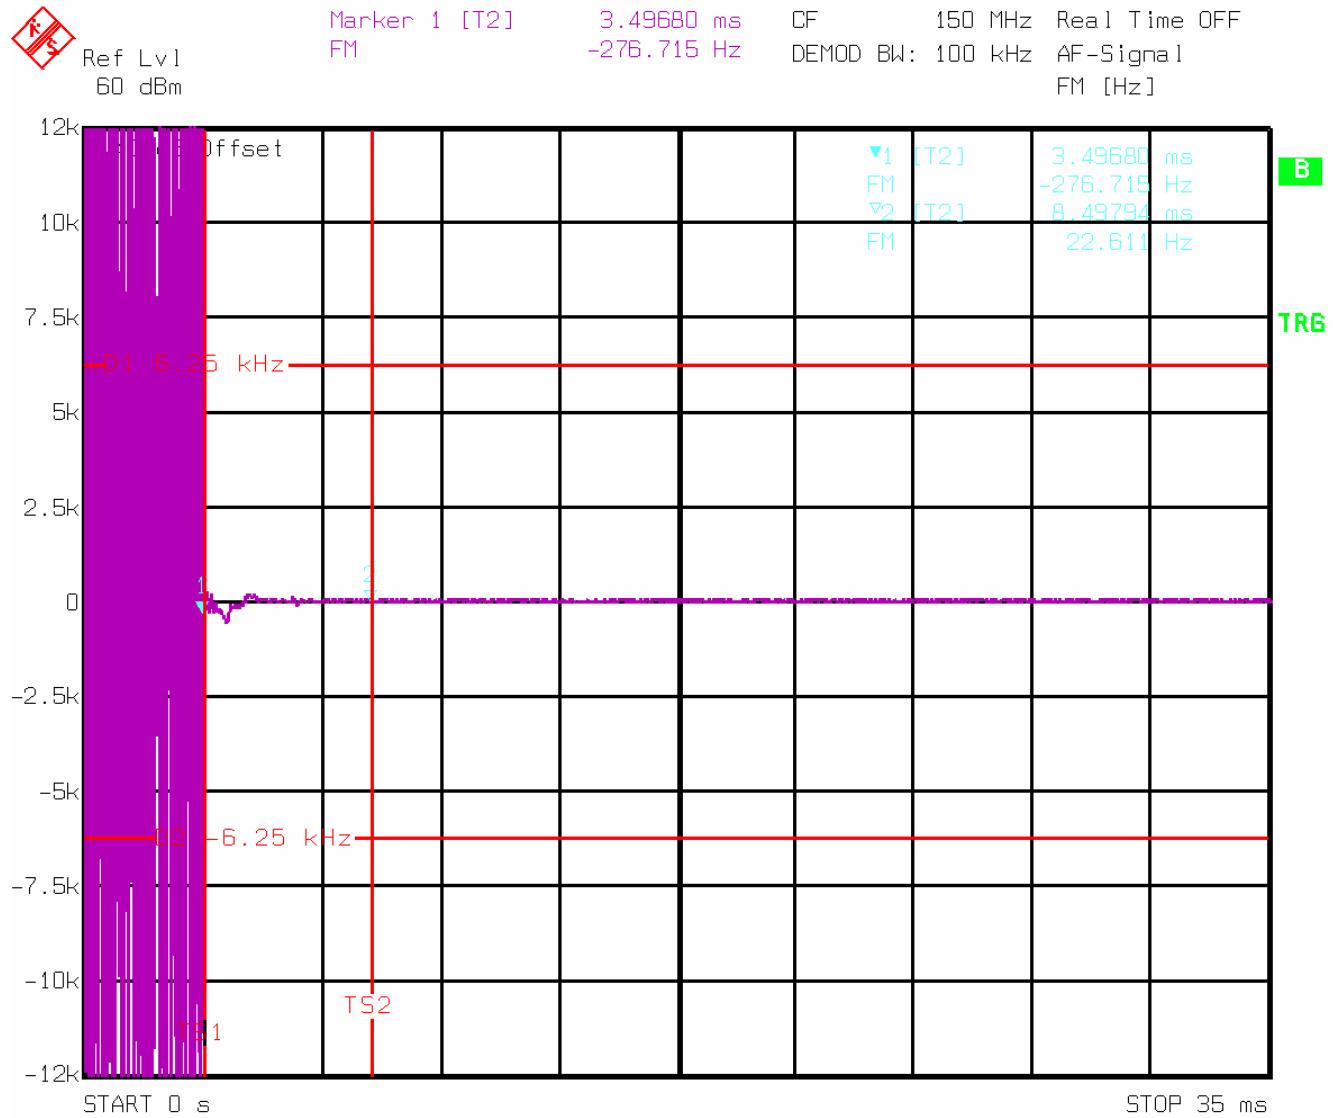


Date: 13. JUL. 2010 13:31:44

Switch on condition, $t_1=5$ ms, $t_2=20$ ms, 162 MHz, channel separation ± 12.5 kHz

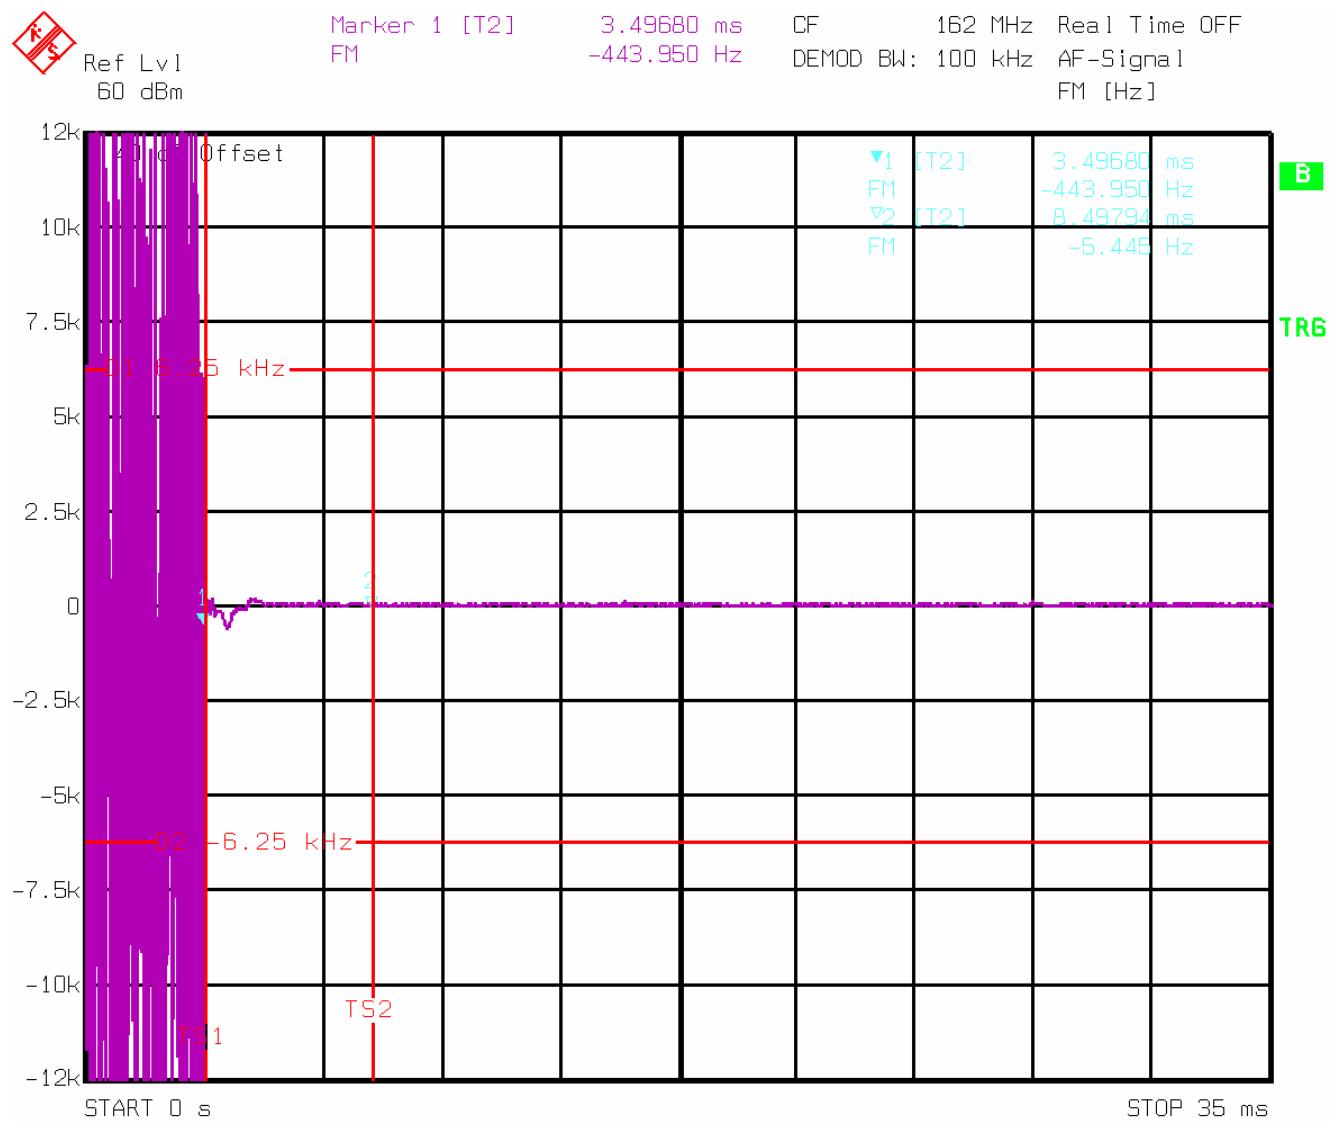

Date: 13.JUL.2010 13:48:06

Switch on condition, $t_1=5$ ms, $t_2=20$ ms, 174 MHz, channel separation ± 12.5 kHz

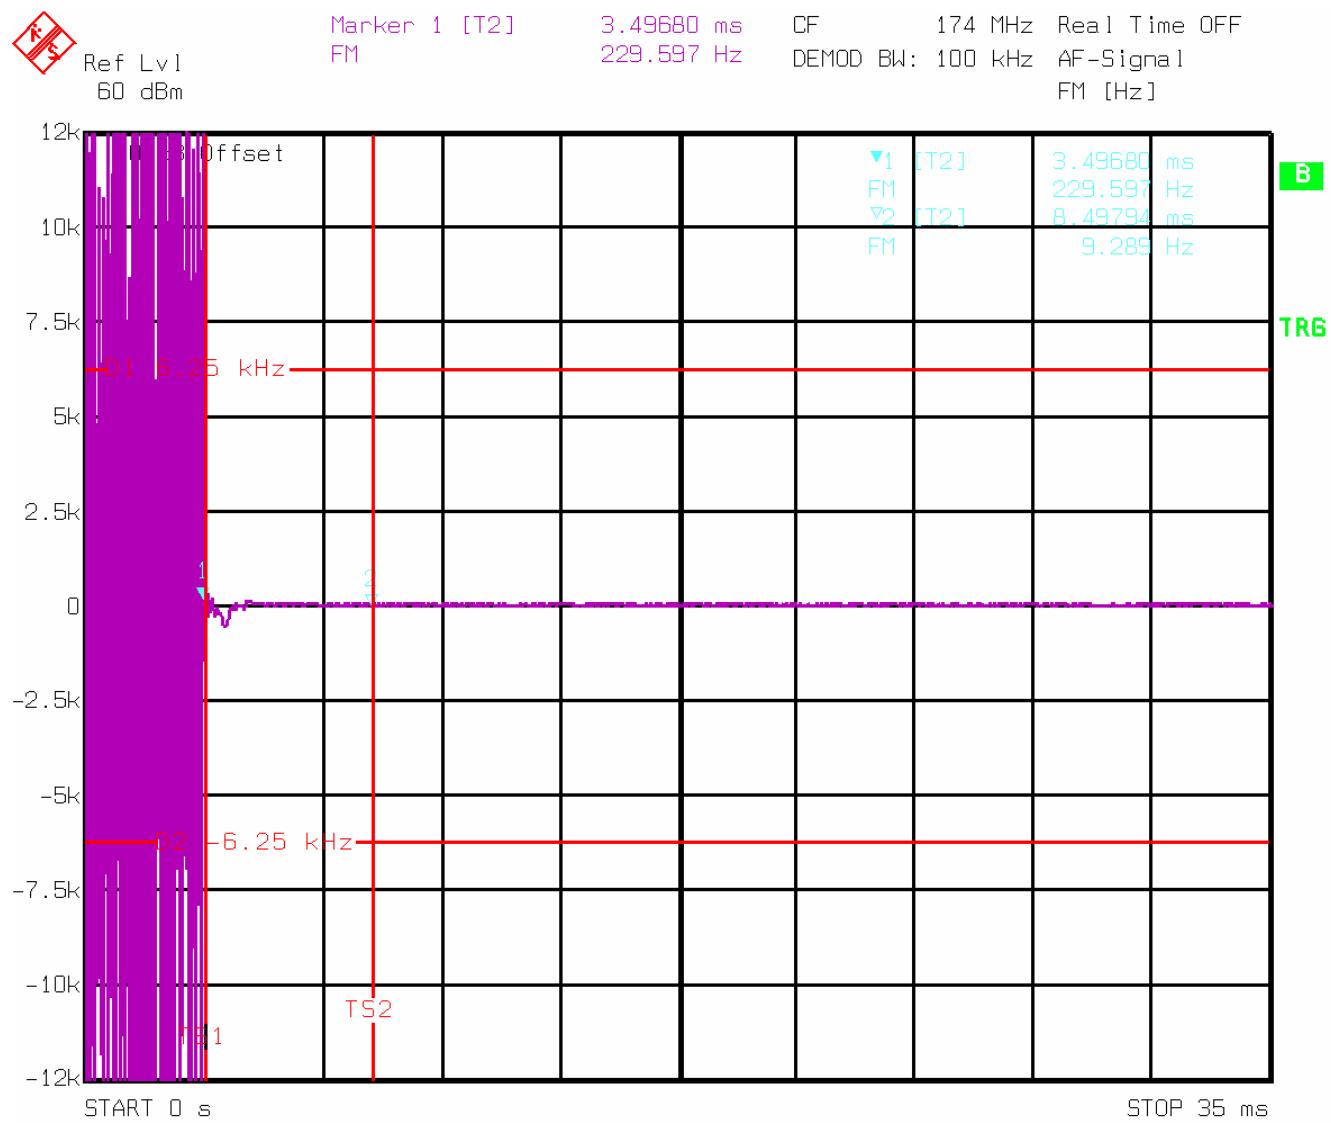

Date: 13.JUL.2010 13:50:12




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results


Report Number: : 152426TRFWL

Specification: FCC 90


Switch off condition, $t_3=5$ ms, 150 MHz, channel separation ± 12.5 kHz

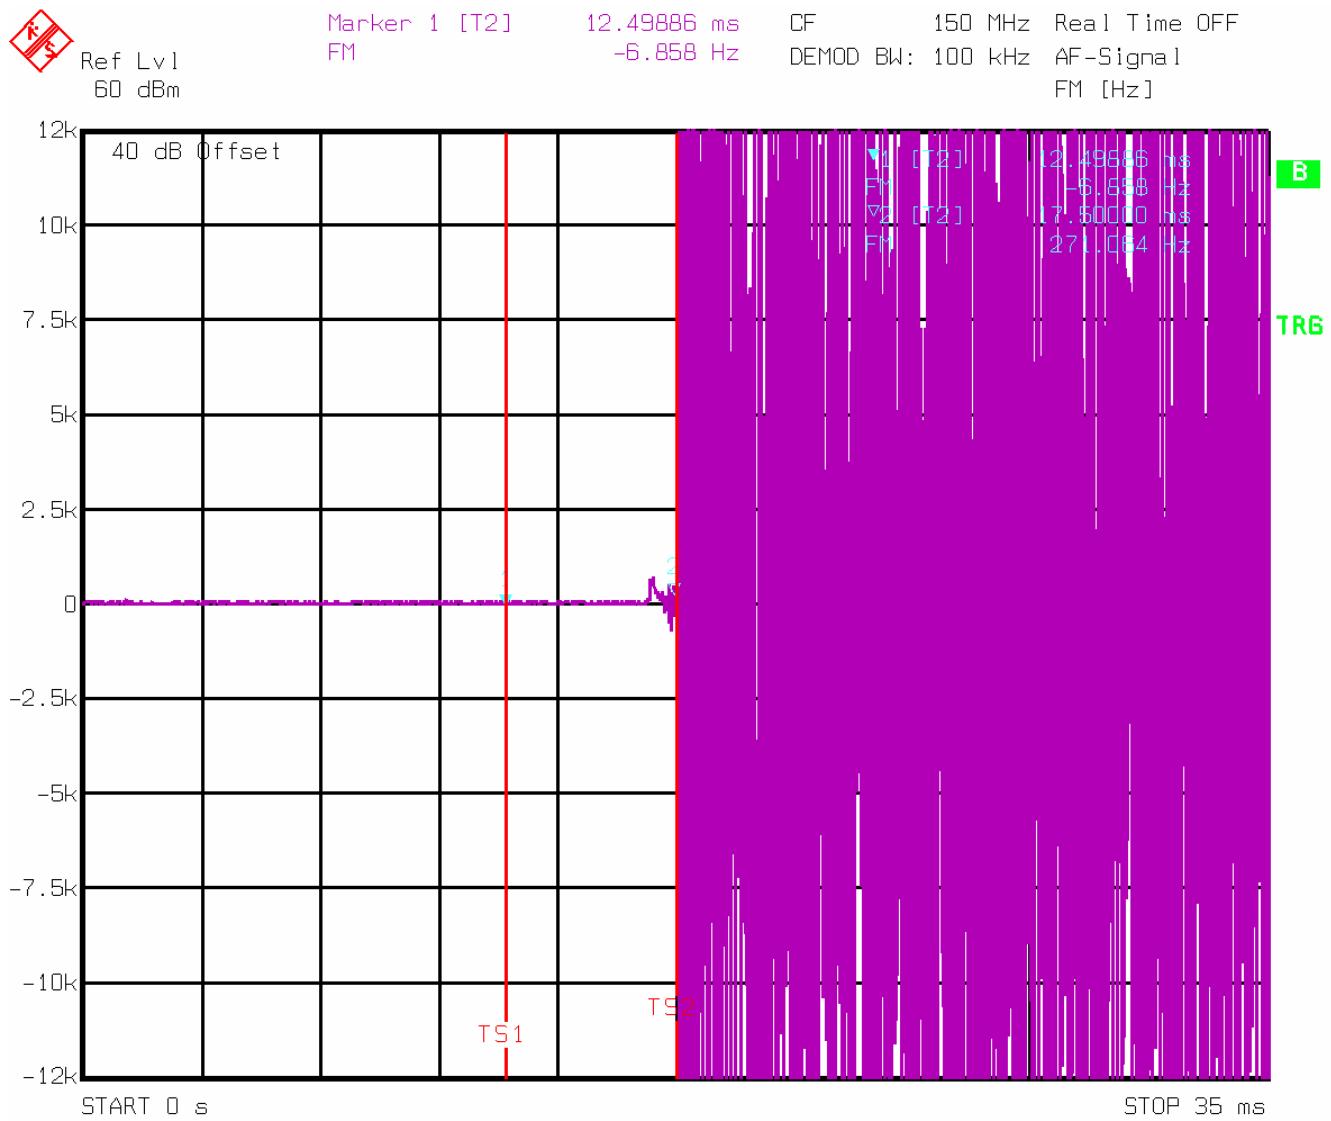

Date: 13.JUL.2010 14:58:34

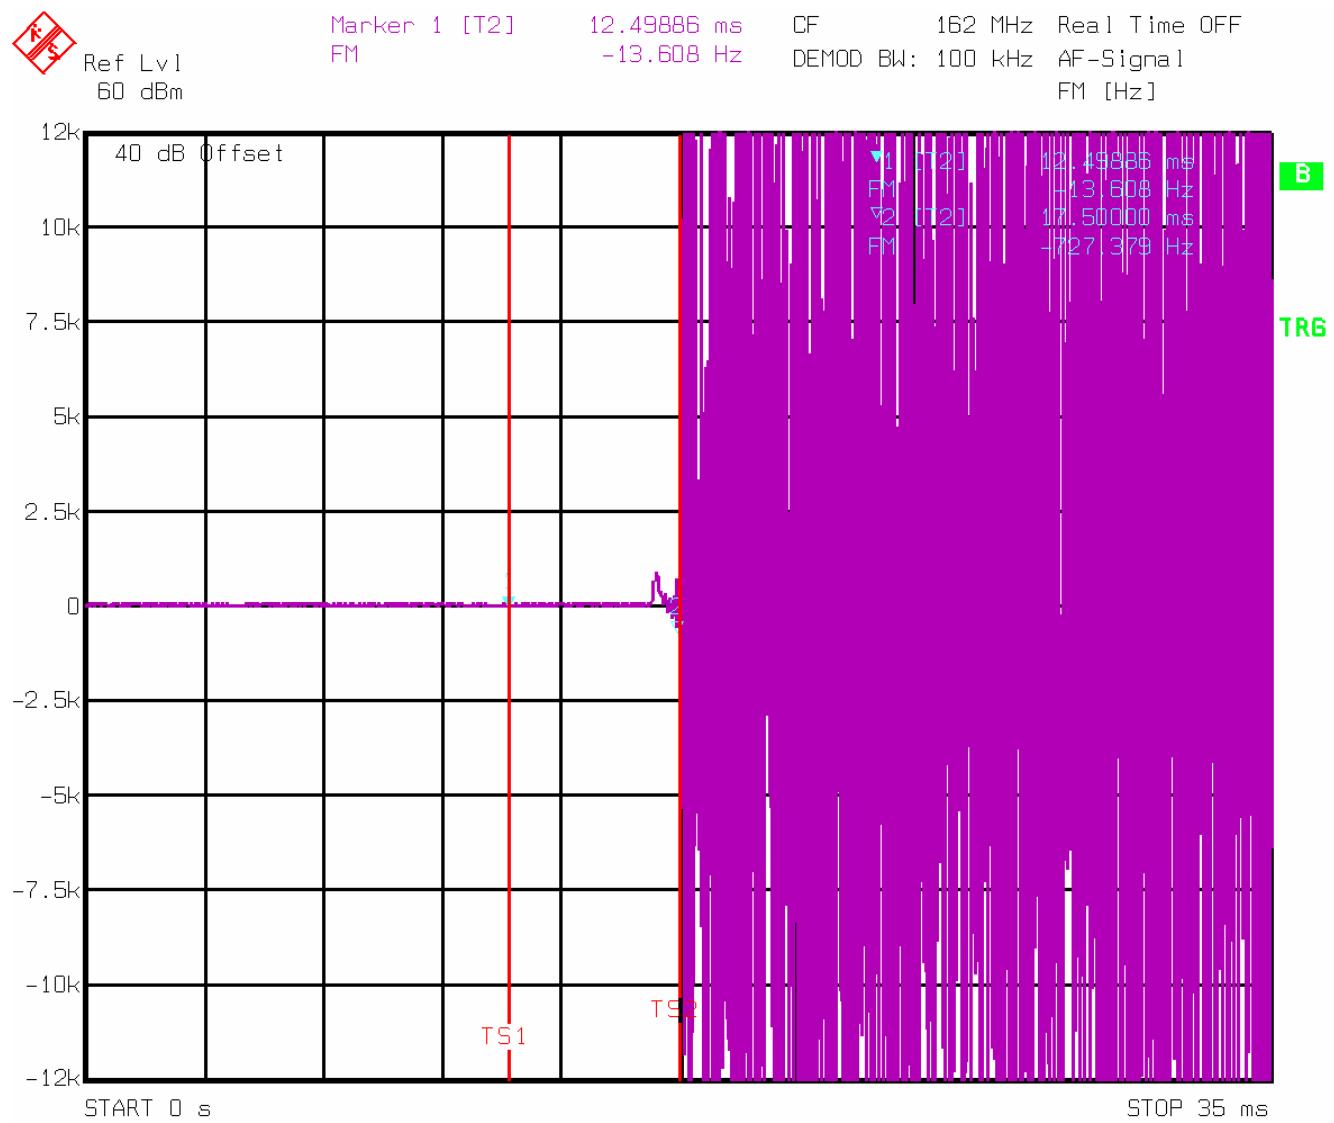Switch off condition, $t_3=5$ ms, 162 MHz, channel separation ± 12.5 kHz

Date: 13.JUL.2010 14:55:12

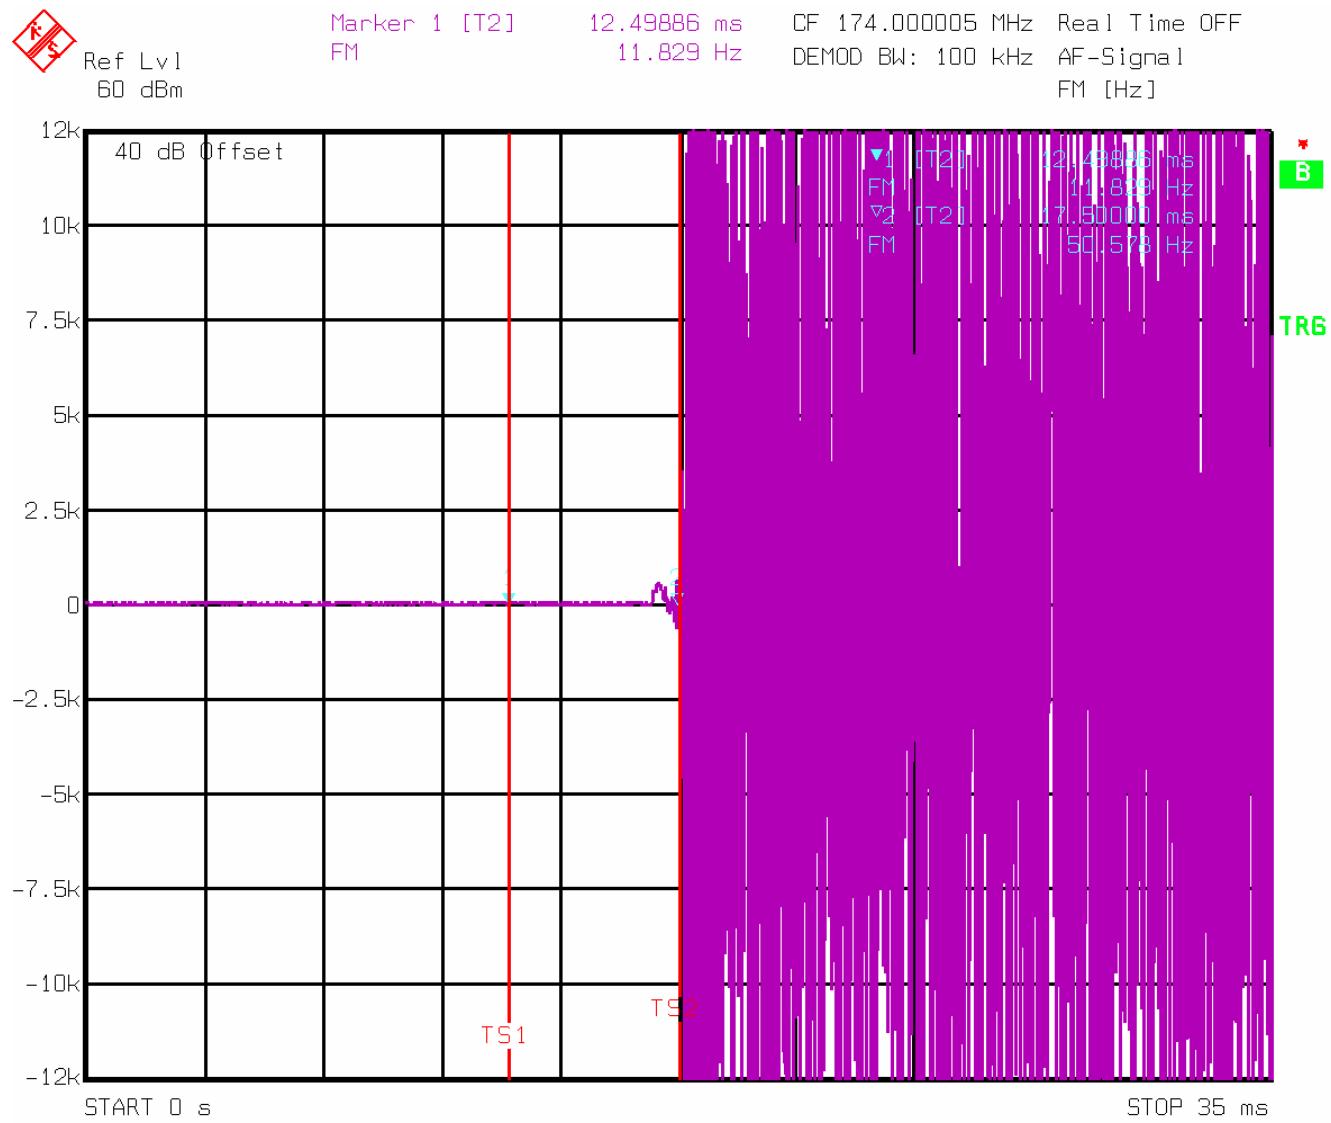Switch off condition, $t_3=5$ ms, 174 MHz, channel separation ± 12.5 kHz


Date: 13.JUL.2010 14:52:47




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Switch on condition, $t_1=5$ ms, $t_2=20$ ms, 150 MHz, channel separation ± 25 kHz

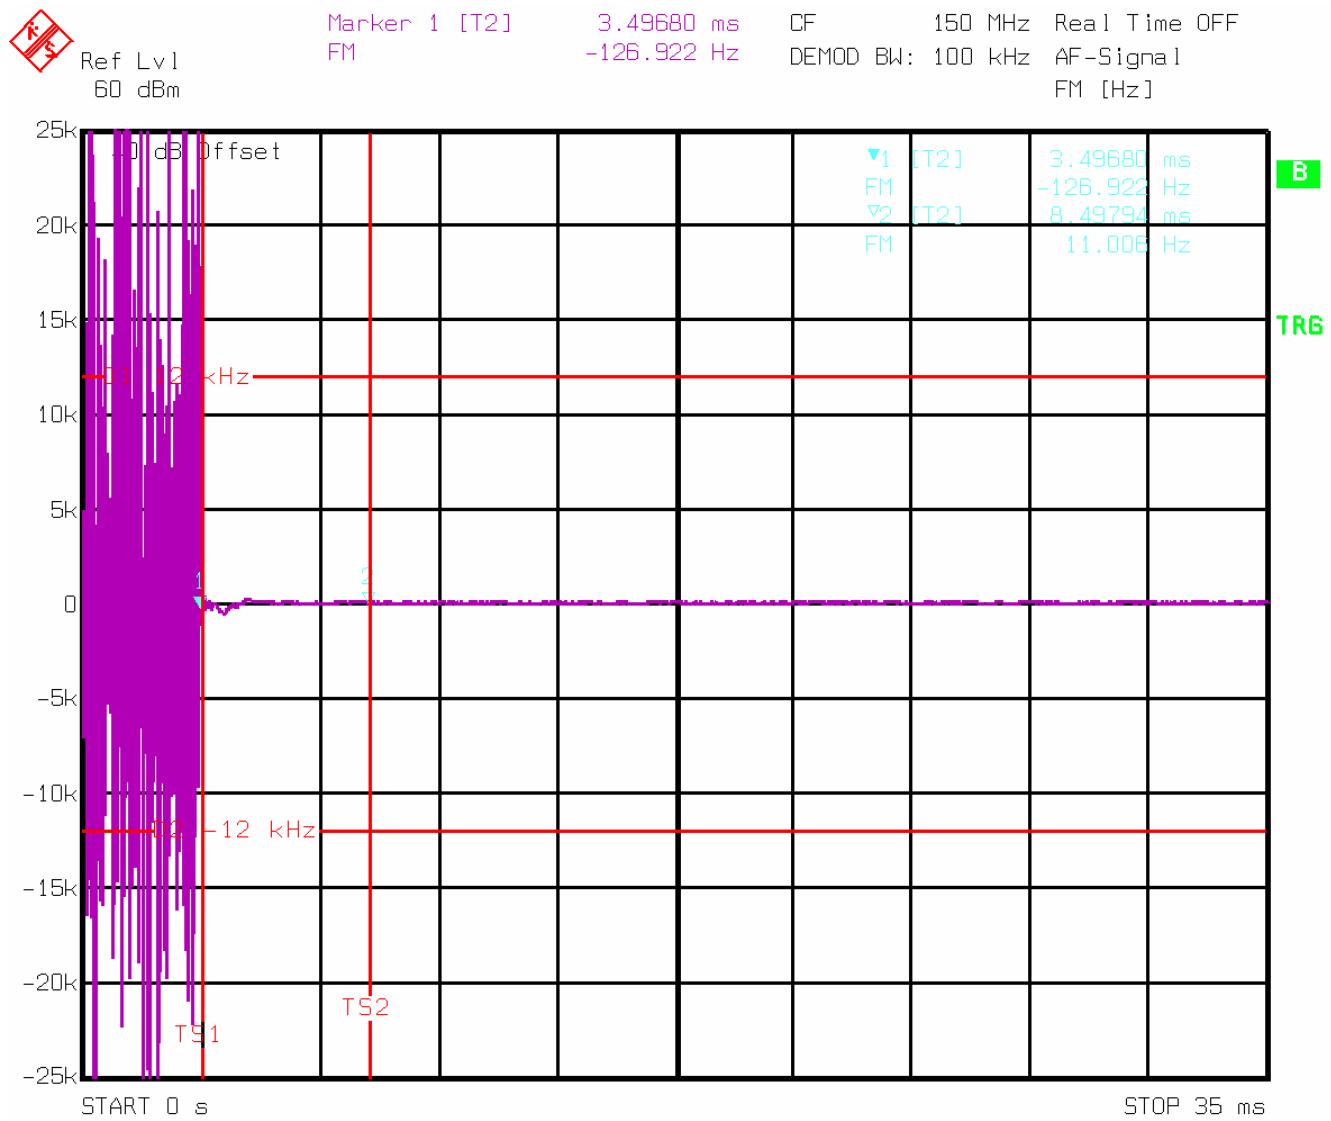

Date: 13.JUL.2010 15:39:25




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy


Appendix A: Test results

Report Number: : 152426TRFWL


Specification: FCC 90

Switch on condition, $t_1=5$ ms, $t_2=20$ ms, 162 MHz, channel separation ± 25 kHz

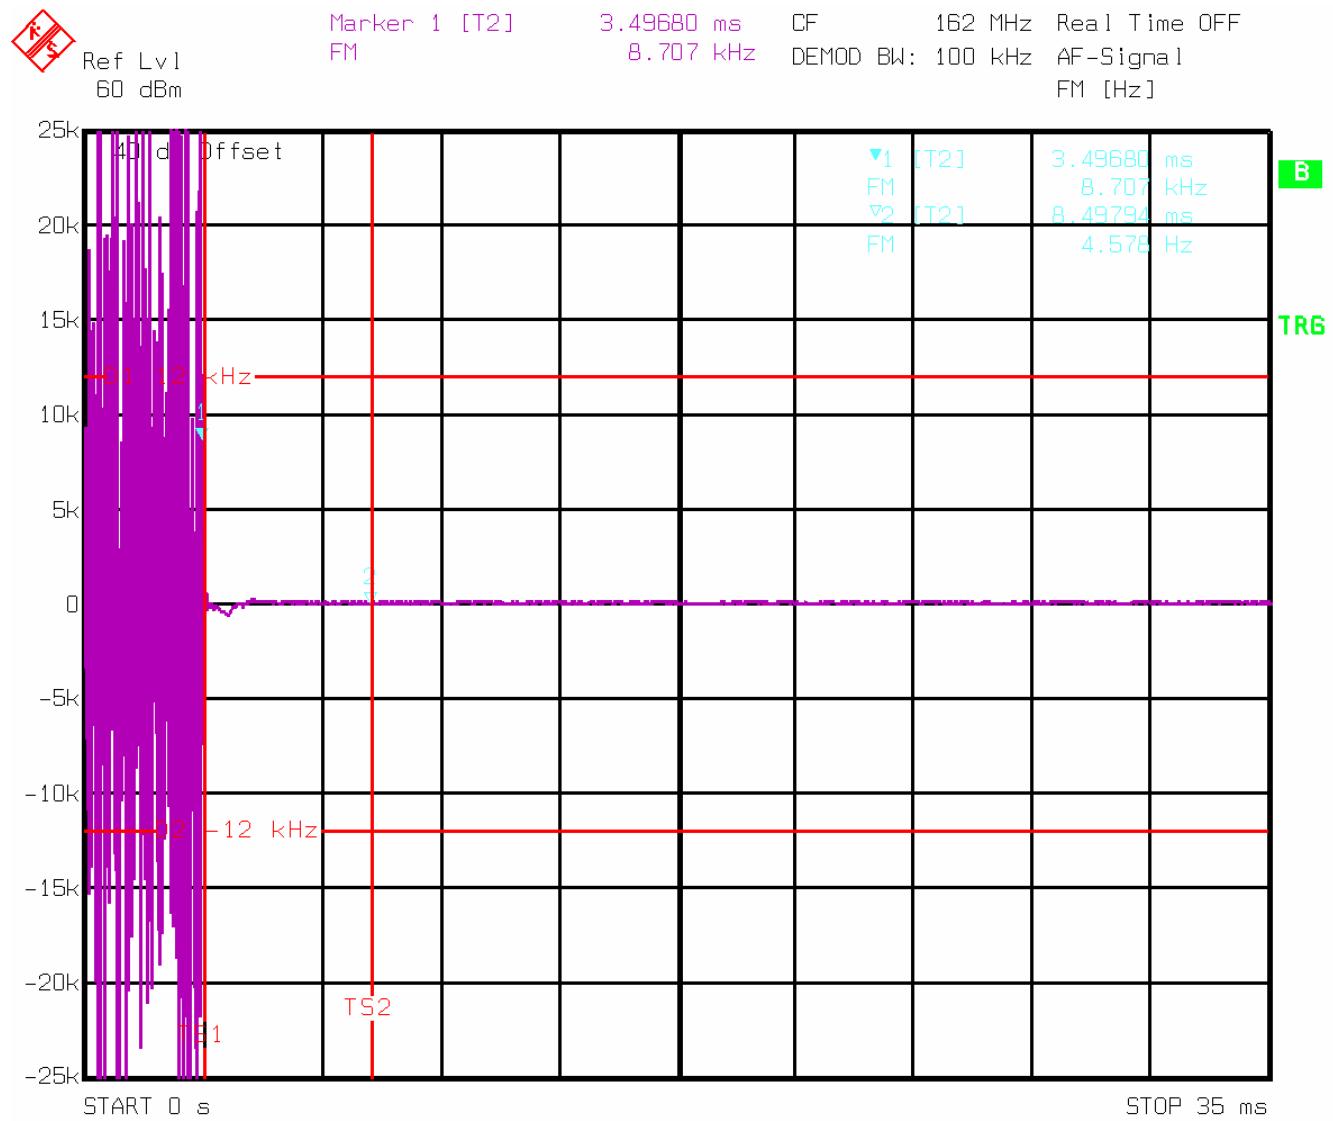


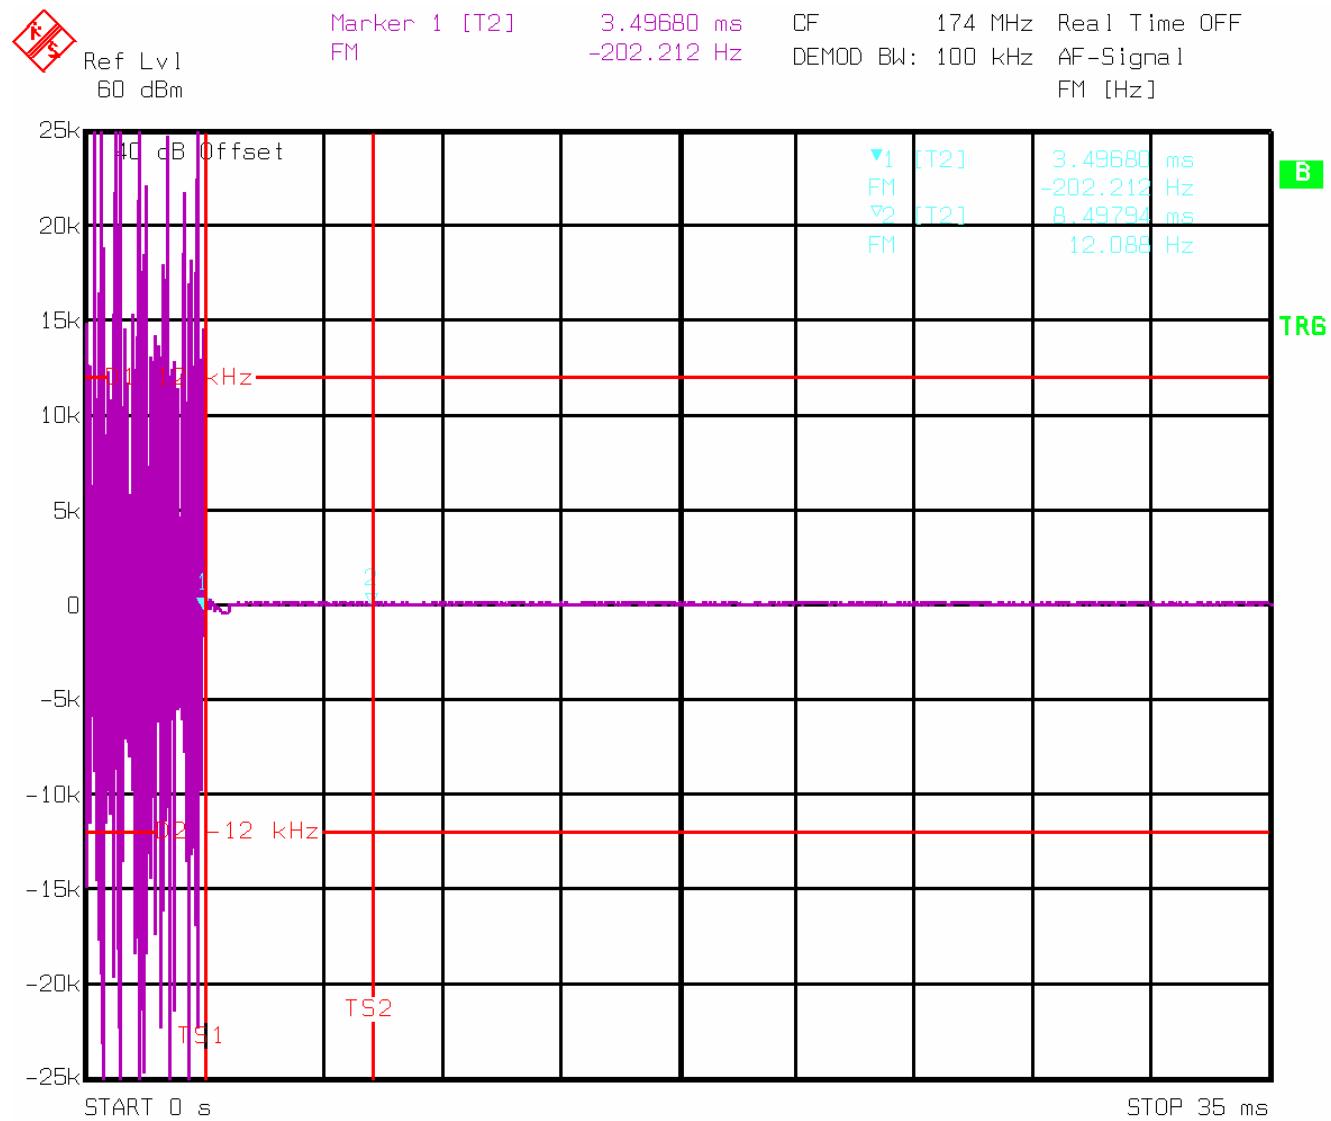Switch on condition, $t_1=5$ ms, $t_2=20$ ms, 174 MHz, channel separation ± 25 kHz


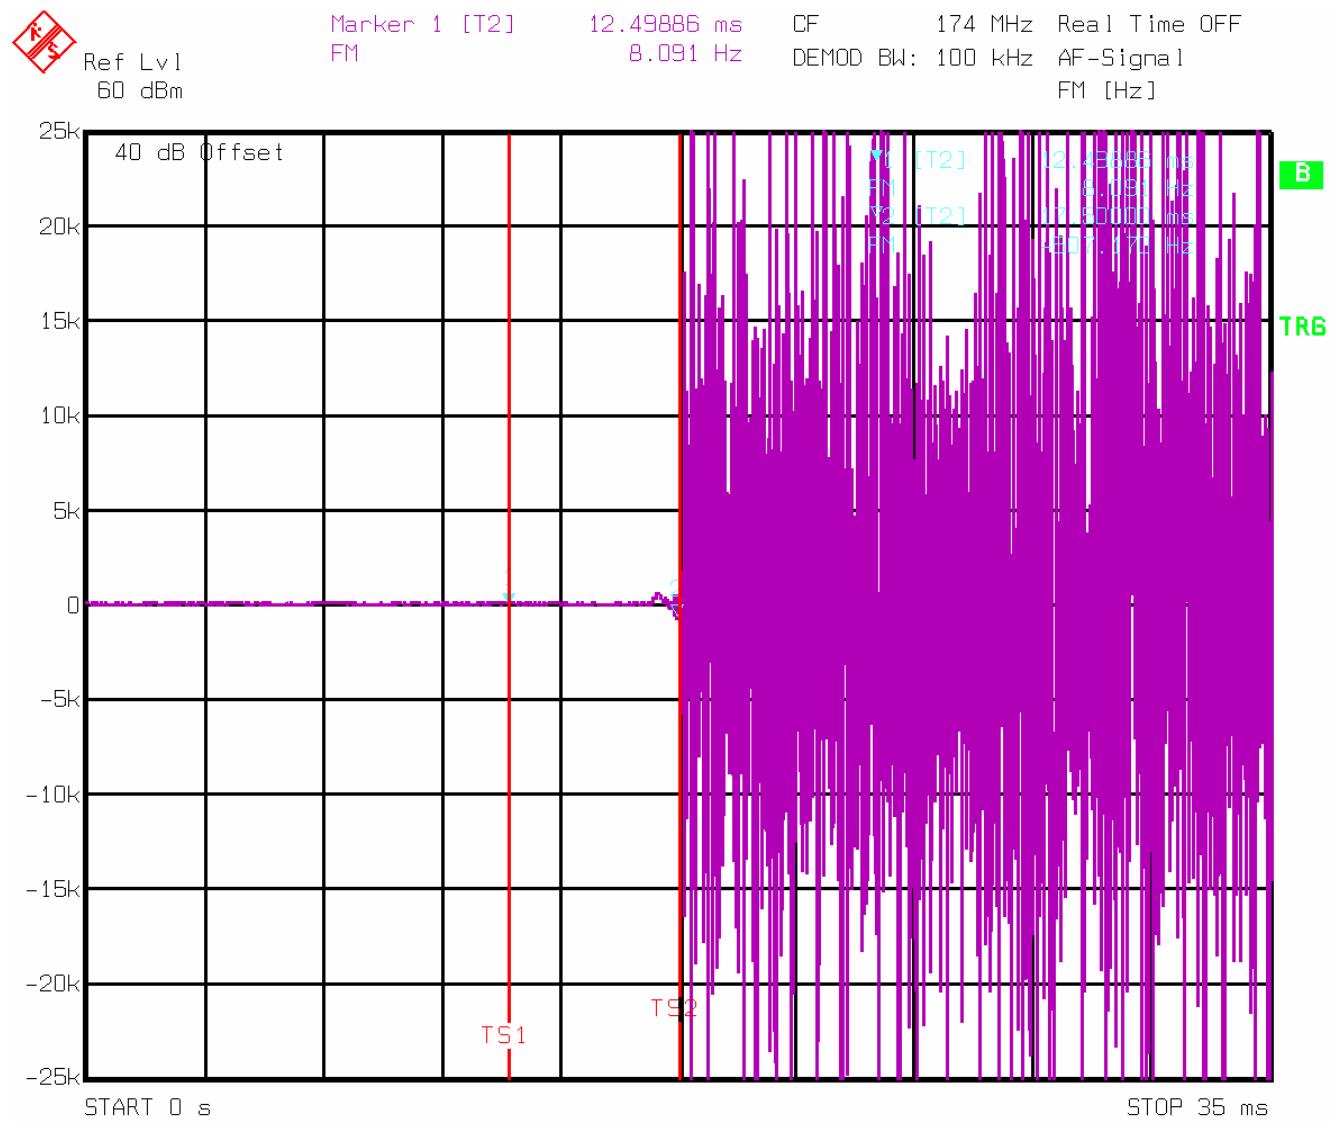
Date: 13. JUL. 2010 15:35:14

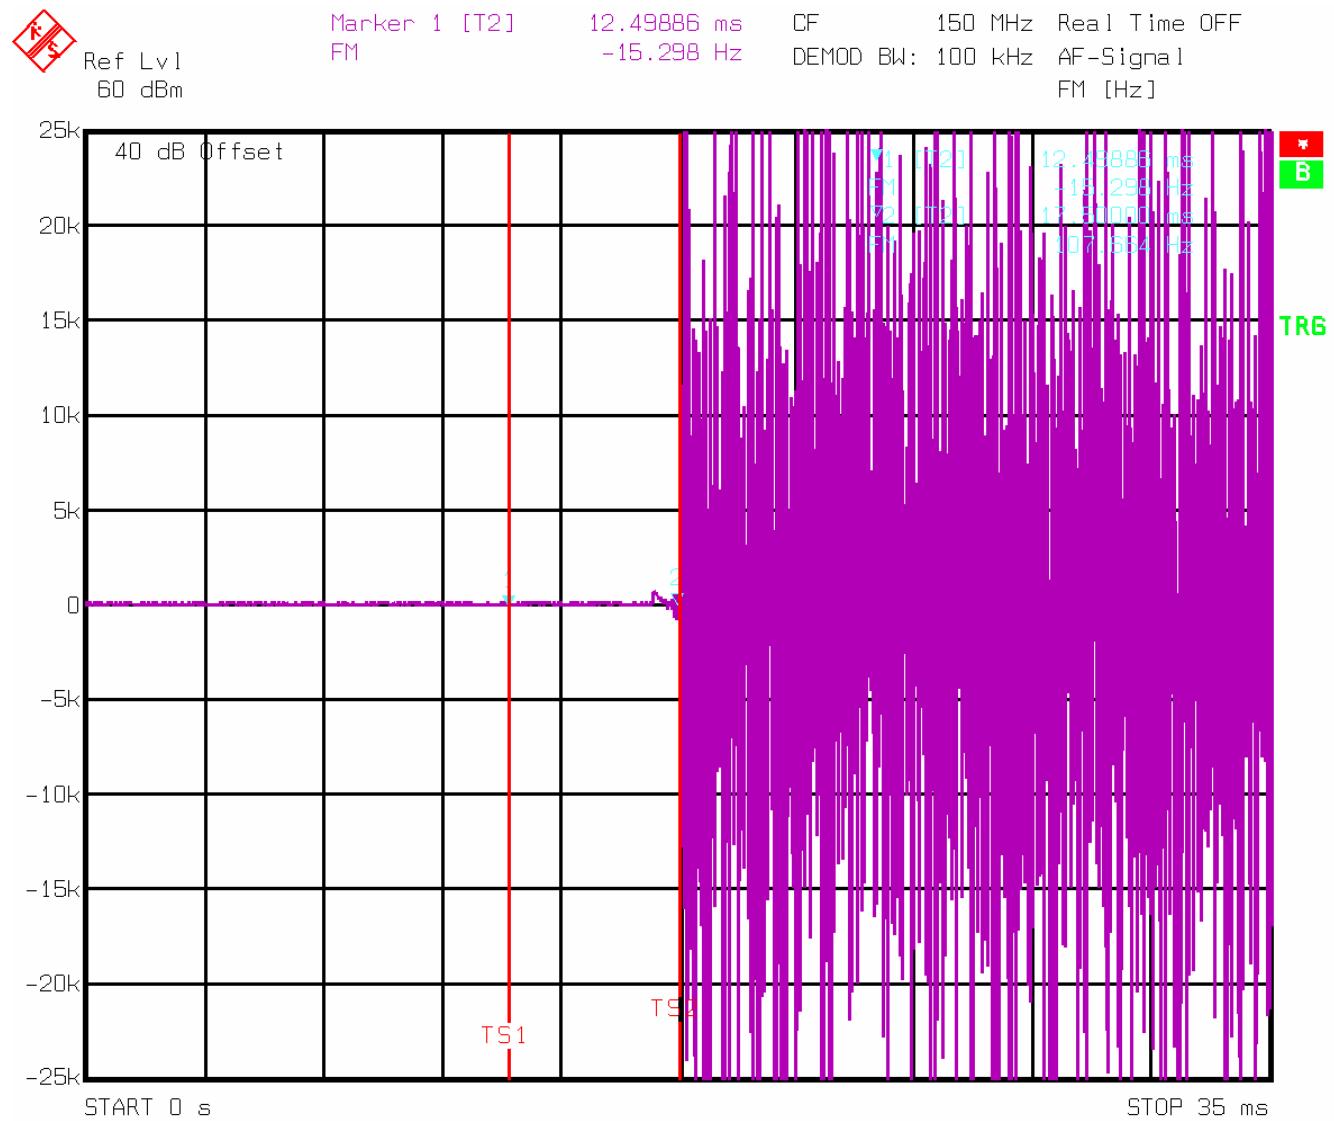Switch off condition, $t_3=5$ ms, 150 MHz, channel separation ± 25 kHz

Date: 13.JUL.2010 15:24:33

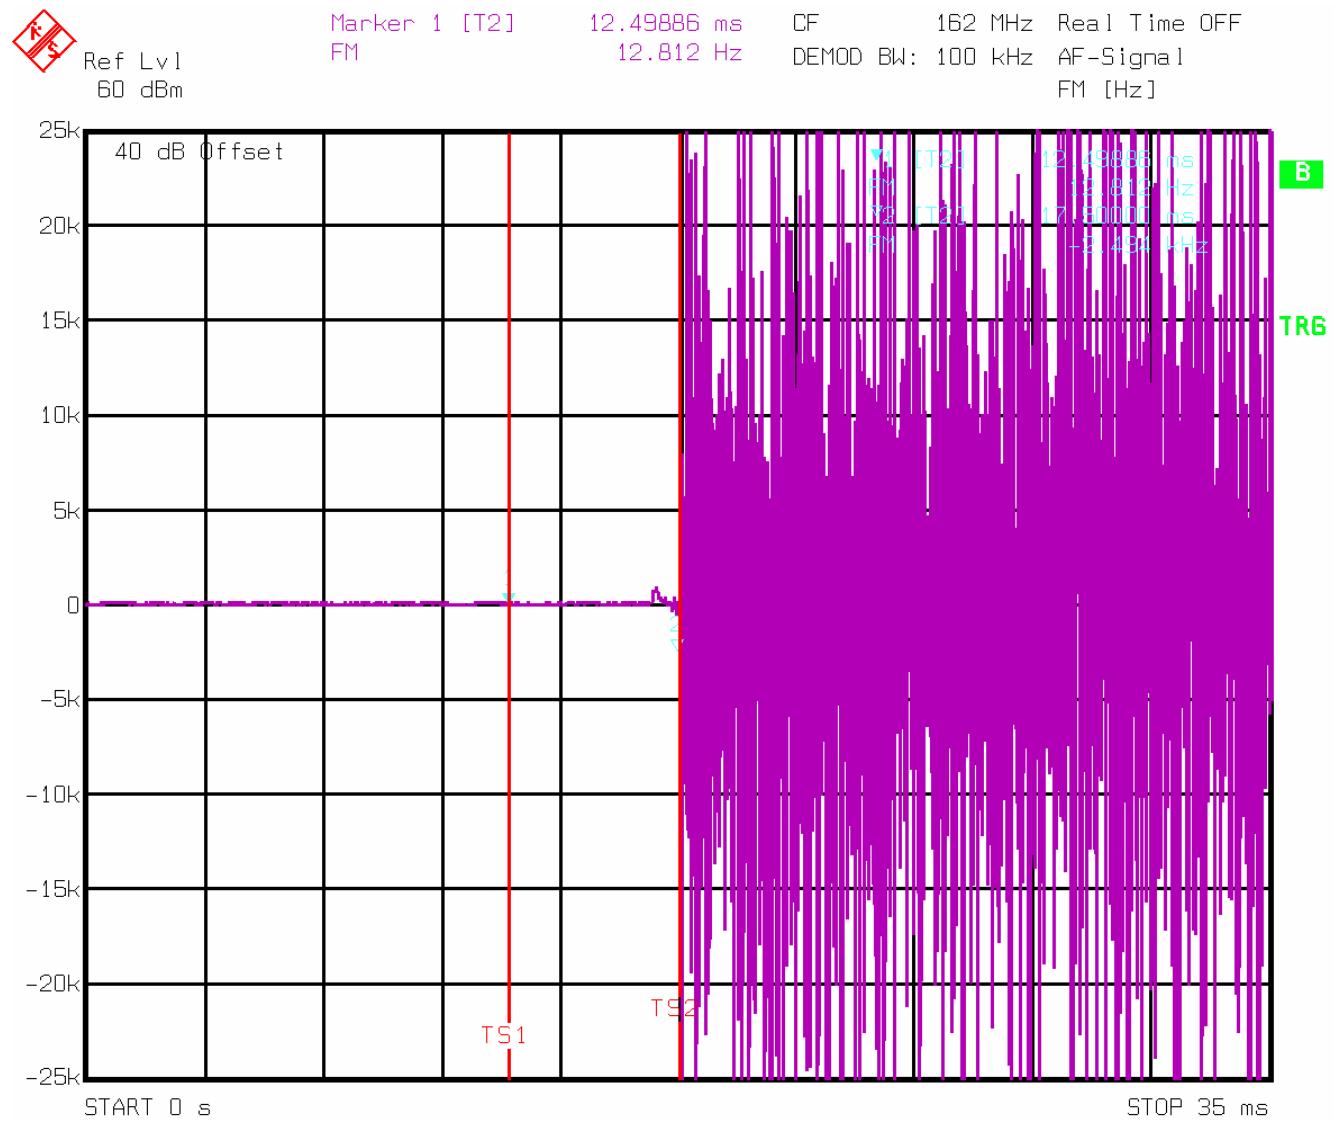Switch off condition, $t_3=5$ ms, 162 MHz, channel separation ± 25 kHz

Date: 13.JUL.2010 15:26:23

Switch off condition, $t_3=5$ ms, 174 MHz, channel separation ± 25 kHz

Date: 13. JUL. 2010 15:28:41




Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Set up photo

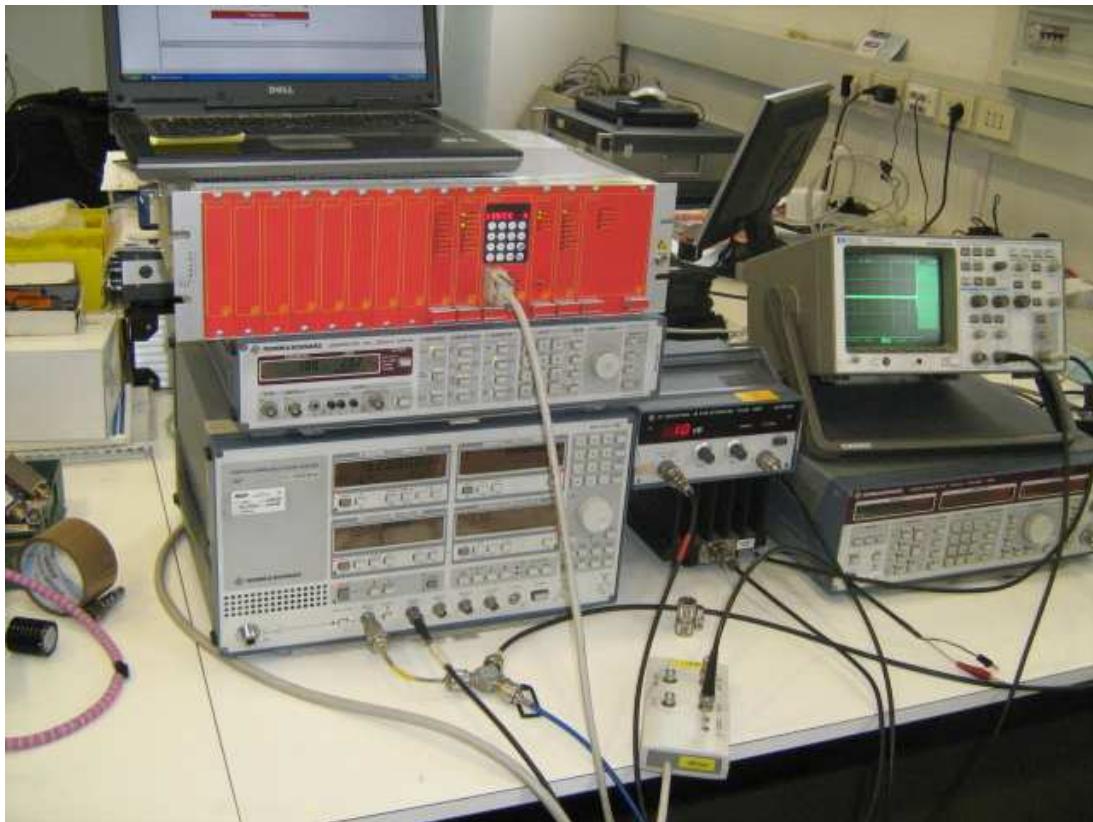



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy

Appendix A: Test results

Report Number: : 152426TRFWL

Specification: FCC 90

Clause 90.219 Use of boosters

Licensees authorized to operate radio systems in the frequency bands above 150 MHz may employ signal boosters at fixed locations in accordance with the following criteria:

- (a) The amplified signal is retransmitted only on the exact frequency(ies) of the originating base, fixed, mobile, or portable station(s). The booster will fill in only weak signal areas and cannot extend the system's normal signal coverage area.
- (b) Class A narrowband signal boosters must be equipped with automatic gain control circuitry which will limit the total effective radiated power (ERP) of the unit to a maximum of 5 W under all conditions. Class B broadband signal boosters are limited to 5 W ERP for each authorized frequency that the booster is designed to amplify.
- (c) Class A narrowband boosters must meet the out-of-band emission limits of §90.210 for each narrowband channel that the booster is designed to amplify. Class B broadband signal boosters must meet the emission limits of §90.210 for frequencies outside of the booster's designed passband.
- (d) Class B broadband signal boosters are permitted to be used only in confined or indoor areas such as buildings, tunnels, underground areas, etc., or in remote areas, i.e., areas where there is little or no risk of interference to other users.
- (e) The licensee is given authority to operate signal boosters without separate authorization from the Commission. Certificated equipment must be employed and the licensee must ensure that all applicable rule requirements are met.
- (f) Licensees employing either Class A narrowband or Class B broadband signal boosters as defined in §90.7 are responsible for correcting any harmful interference that the equipment may cause to other systems. Normal co-channel transmissions will not be considered as harmful interference. Licensees will be required to resolve interference problems pursuant to §90.173(b).

Test date: ---


Test results: N

Special notes

None

Appendix B: Block diagrams of test set-ups

Radiated emissions set-up

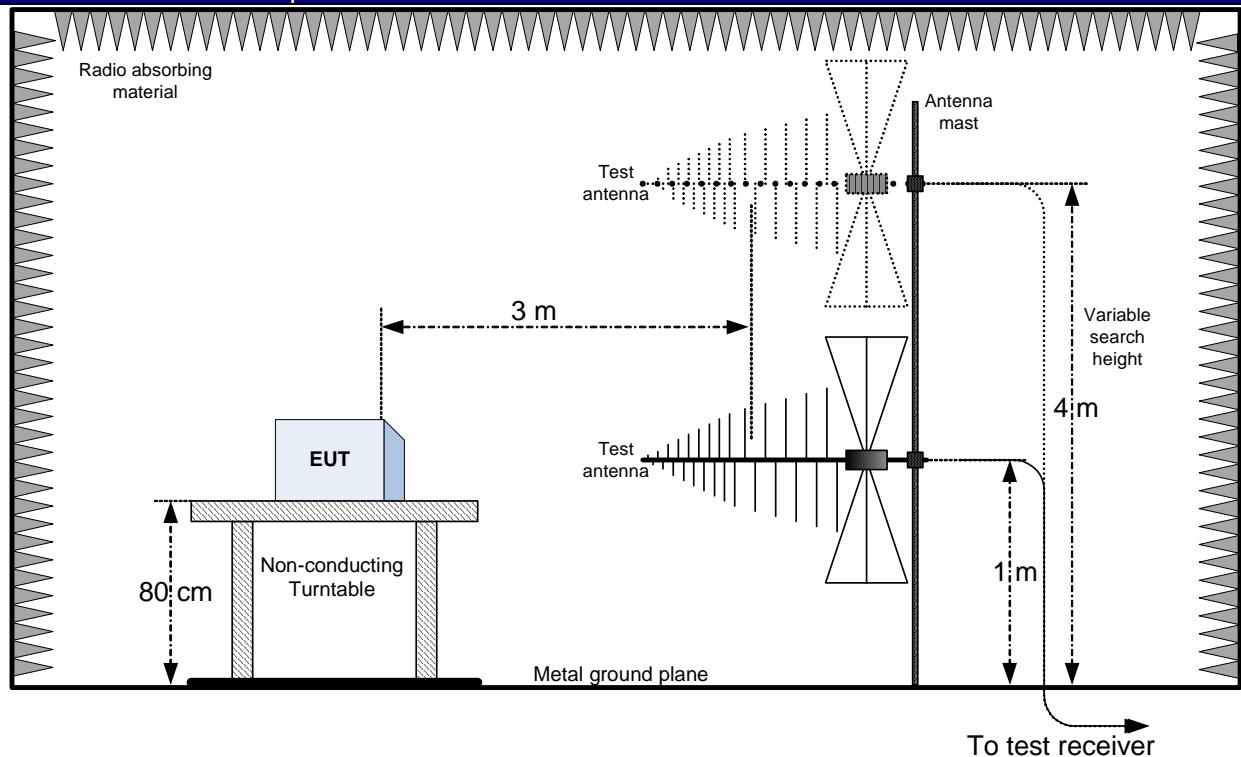



Nemko Italy S.p.A.
Via del Carroccio 4, 20046, Biassono, Italy.

Appendix B: Block diagrams

Report Number: Errore. L'origine
riferimento non è stata trovata.

Specification: FCC 90

Appendix C: EUT Photos

