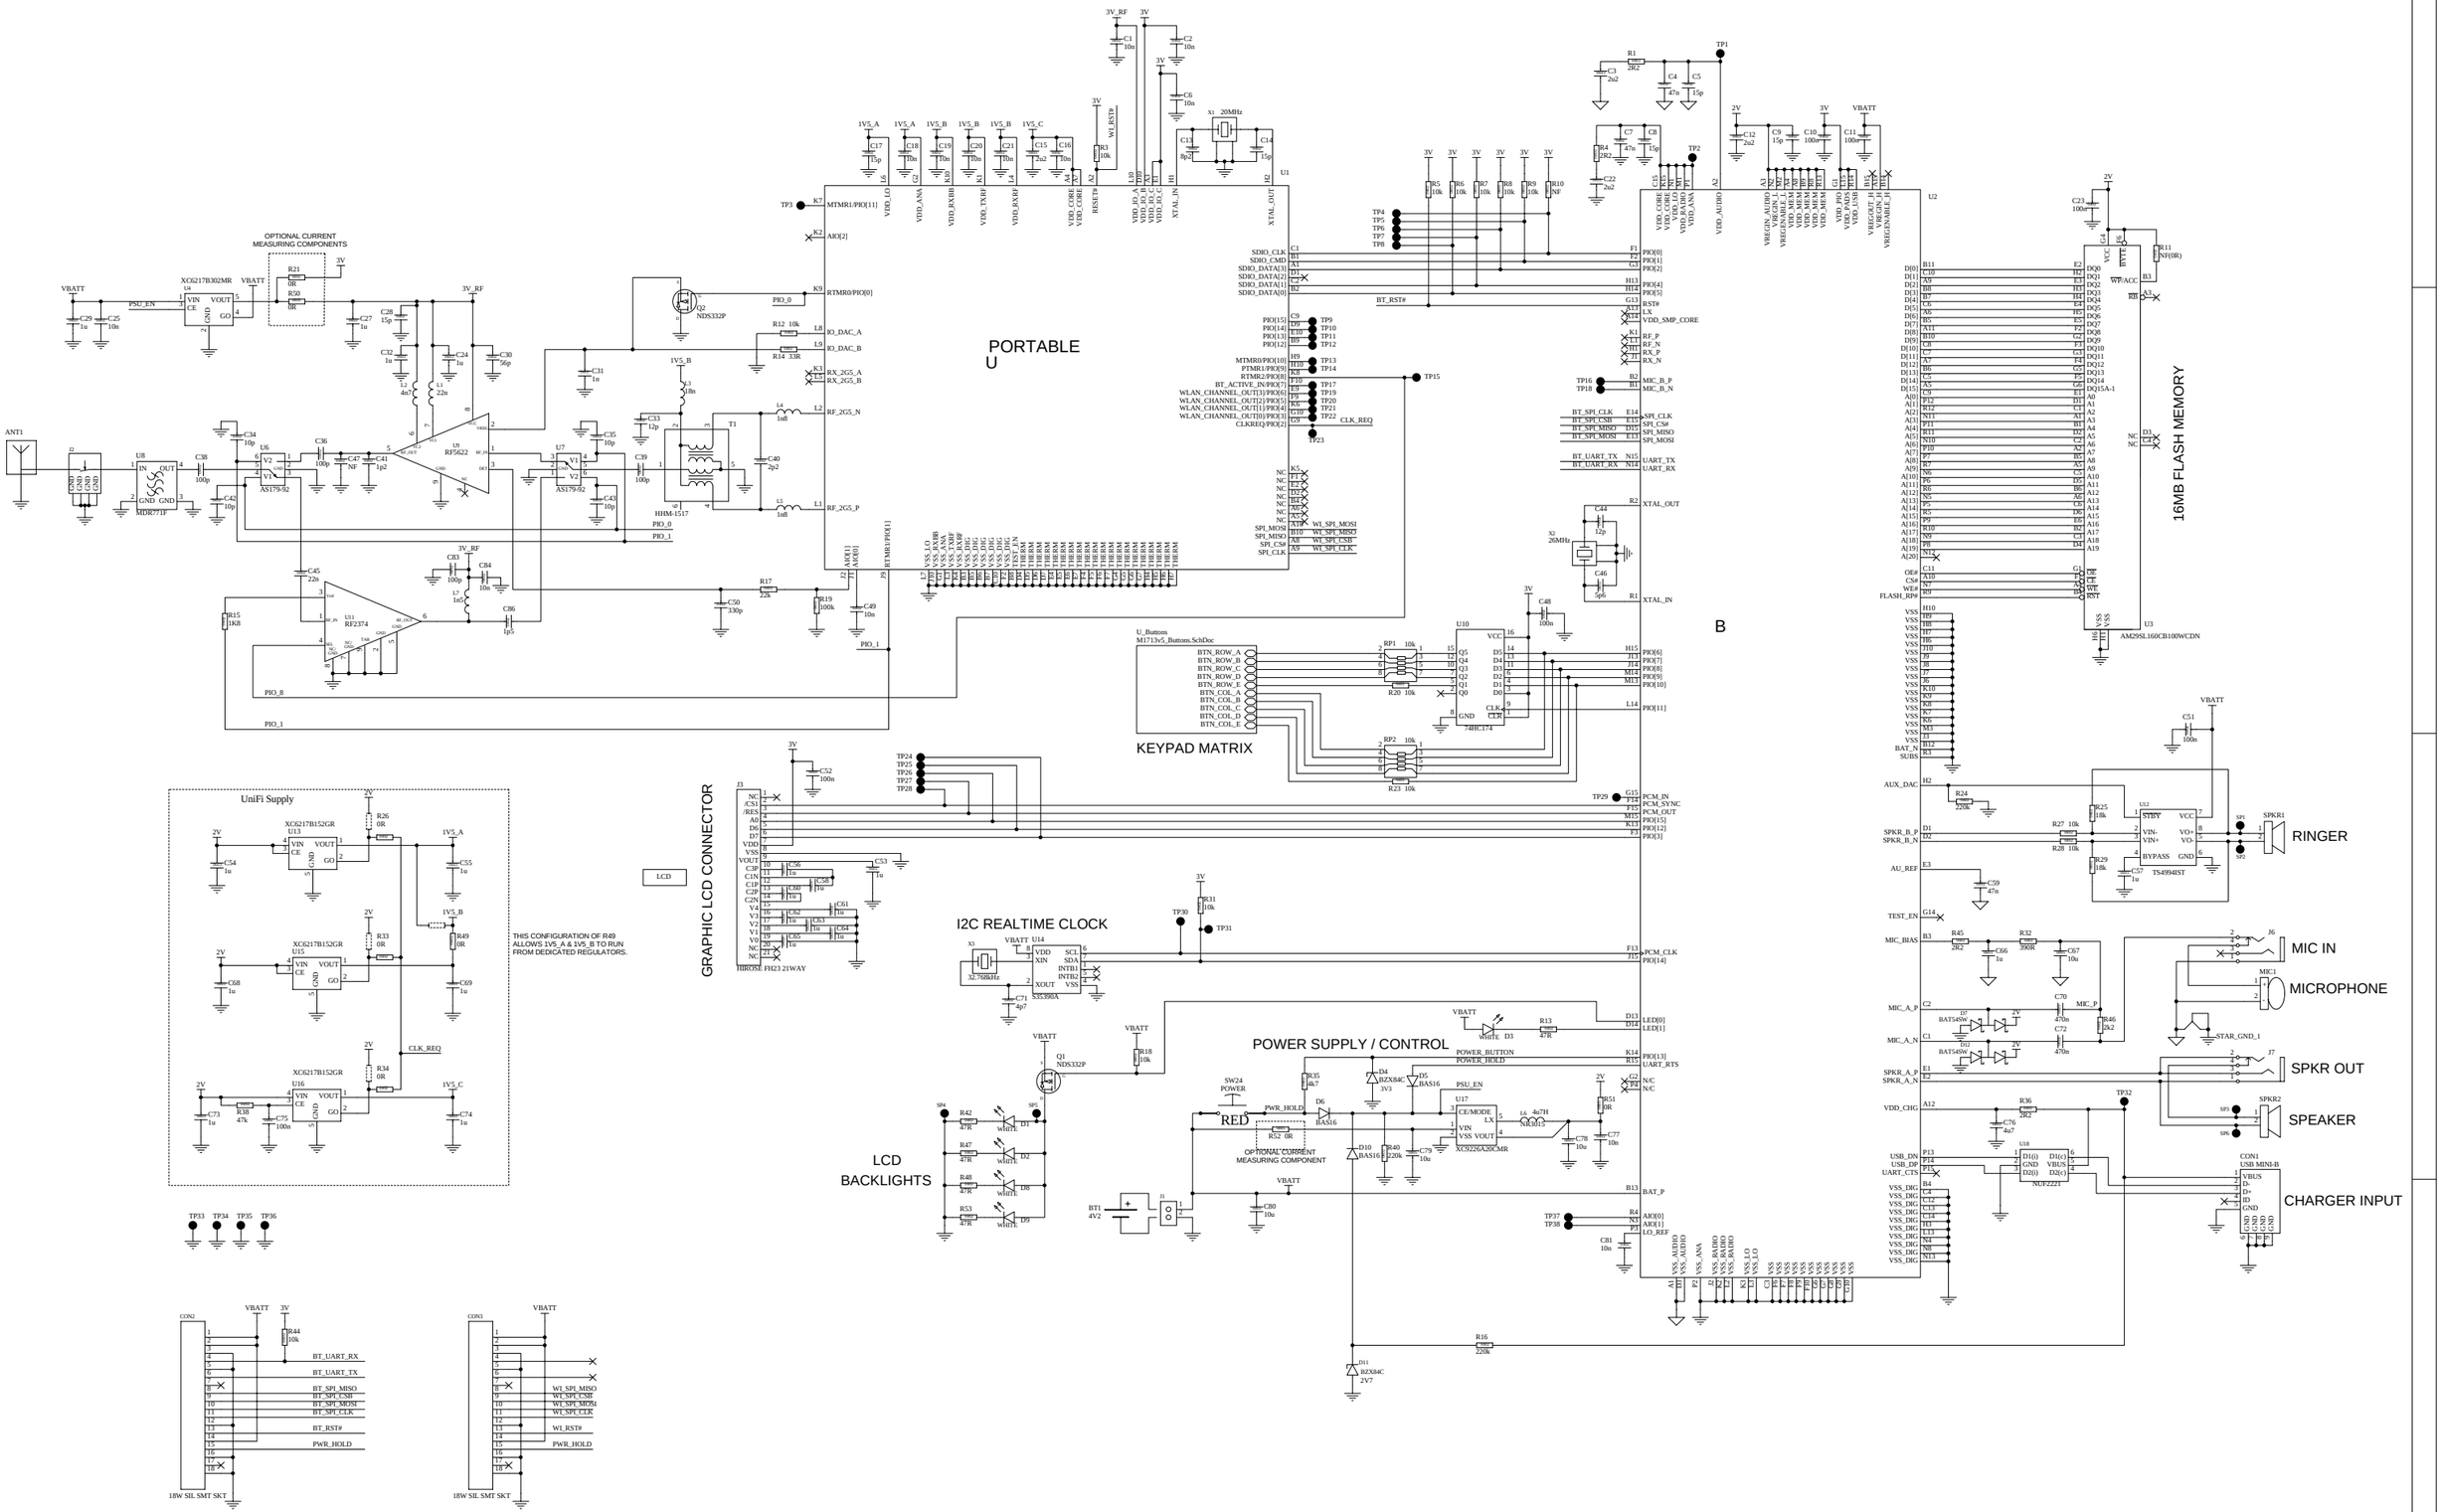
PORTABLE
U
B
16MB FLASH MEMORY
AM29SL160CB100WCDN
KEYPAD MATRIX
U_Buttons
M1713v5_Buttons.SchDoc
GRAPHIC LCD CONNECTOR
HIROSE FH23 21WAY
LCD
I2C REALTIME CLOCK
POWER SUPPLY / CONTROL
LCD
BACKLIGHTS
RED
OPTIONAL CURRENT
MEASURING COMPONENT
UniFi Supply
THIS CONFIGURATION OF R49
ALLOWS 1V5_A & 1V5_B TO RUN
FROM DEDICATED REGULATORS.
RINGER
MIC IN
MICROPHONE
SPKR OUT
SPEAKER
CHARGER INPUT
ANT1
MDR771F
RF5622
RF2374
HHM-1517
AS179-92
NDS332P
XC6217B302MR
XC6217B152GR
TS4994IST
BZX84C
BAS16
XC3226A25CMR
NUF2221
74HC174
S25390A
BAT540W
BZX84C
BAT_P
BT_UART_RX
BT_UART_TX
BT_SPI_MISO
BT_SPI_CSB
BT_SPI_MOSI
BT_SPI_CLK
BT_RST#
PWR_HOLD
WI_SPI_MISO
WI_SPI_CSB
WI_SPI_MOSI
WI_SPI_CLK
WI_RST#
18W SIL SMT SKT
BLANK PCB
MV5
Title:
Date:
File:

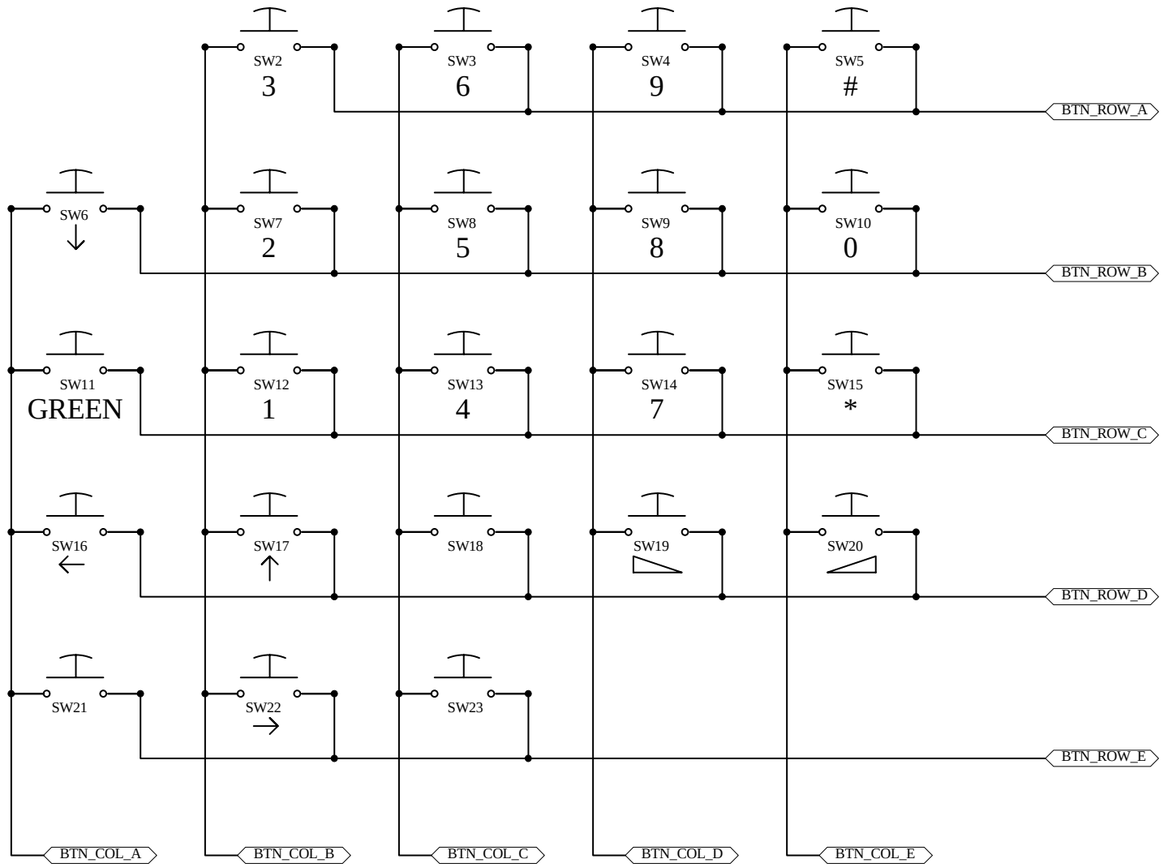
SW2
3
SW3
6
SW4
9
SW5
#
BTN_ROW_A
SW6
SW7
2
SW8
5
SW9
8
SW10
0
BTN_ROW_B
SW11
GREEN
SW12
1
SW13
4
SW14
7
SW15
*
BTN_ROW_C
SW16
SW17
SW18
SW19
SW20
BTN_ROW_D
SW21
SW22
SW23
BTN_ROW_E
BTN_COL_A
BTN_COL_B
BTN_COL_C
BTN_COL_D
BTN_COL_E

M

2 2