



FCC Radio TEST Report

FCC ID: X69GG4000XX

This report concerns (check one) : Original Grant Class II Change

Issued Date : Mar. 10, 2010

Project No. : 1001C192A

Equipment : Wireless FM Transmitter

Model Name : GG400002

Applicant : Gecko Gear Australia Pty Ltd

Address : First floor, 370 Darebin Road, Thornbury
Victoria, Australia

Manufacturer : TK Developing Inc


Address : 2F, building 1, An-le industry park, No.2
Guan-kou Rd, Nanshan district,
Shenzhen, Guangdong, China


Tested by:


Neutron Engineering Inc. EMC Laboratory

Data of Test:

Feb. 08, 2010 ~ Mar. 09, 2010

Testing Engineer : 
(Jeff Yang)

Technical Manager : 
(Vic Chiu)

Authorized Signatory : 
(Steven Lu)

NEUTRON ENGINEERING INC.

No. 132-1, Lane 329, Sec. 2, Palain Rd.,
Shijr City, Taipei, Taiwan
TEL : (02) 2646-5426 FAX : (02) 2646-6815





Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 MEASUREMENT INSTRUMENTS LIST	17
4.2.3 TEST PROCEDURE	17
4.2.4 DEVIATION FROM TEST STANDARD	17
4.2.5 TEST SETUP	18
4.2.6 EUT OPERATING CONDITIONS	19
4.2.7 TEST RESULTS (30~1000MHZ)	20
4.3 FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGE EMISSIONS	
MEASUREMENT	32
4.3.1 LIMITS OF FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGE EMISSIONS MEASUREMENT	32
4.3.2 MEASURING INSTRUMENTS AND SETTING	32
4.3.3 TEST PROCEDURE	32
4.3.4 TEST SETUP LAYOUT	32
4.3.5 TEST DEVIATION	32
5 . BANDWIDTH REQUIREMENT	45
5.1 LIMITS OF EMISSION BAND MEASUREMENT	45
5.1.1 MEASUREMENT INSTRUMENTS LIST	45



Table of Contents

	Page
5.1.2 TEST PROCEDURE	45
5.1.3 TEST SETUP LAYOUT	45
5.1.4 TEST DEVIATION	45
5.1.5 EUT OPERATION DURING TEST	45
5.1.6 TEST RESULT OF 20dB SPECTRUM BANDWIDTH	46
6 . EUT TEST PHOTO	48



1. CERTIFICATION

Equipment: Wireless FM Transmitter

Brand Name: Gecko

Model Name: GG400002

Applicant: Gecko Gear Australia Pty Ltd

Factory: TK Developing Inc

Address: 2F, building 1, An-le industry park, No.2 Guan-kou Rd, Nanshan district, Shenzhen, Guangdong, China

Date of Test: Feb. 08, 2010 ~ Mar. 09, 2010

Test Item: ENGINEERING SAMPLE

Standards: FCC Part15, Subpart C (15.239)/ ANCI C63.4 : 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1001C192A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards: (Antenna to EUT distance is 3 m)

FCC Part15, Subpart C				
Standard	Test Item	Limit	Frequency Range (MHz)	Judgment
15.207	Conducted Emission	Class B	0.15 - 30	N/A
15.209	Radiated Emission	Class B	30-1000	PASS
15.239	Radiated Emission	250 μ V/m (48dB μ V/m) @ 3m	88~108	PASS

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **CB03 (FCC R.N.: 319330)** at the No.3,Jinshagang 1st Road, ShiXia, Dalang Town,Dong Guan, China.523792

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** , providing a level of confidence of approximately **95 %** .

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
CB03	ANSI	30MHz ~ 200MHz	V	2.48	
		30MHz ~ 200MHz	H	2.16	
		200MHz ~ 1,000MHz	V	2.50	
		200MHz ~ 1,000MHz	H	2.66	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless FM Transmitter										
Brand Name	Gecko										
Model Name.	GG400002										
OEM Brand/Model No.	N/A										
Model Difference	N/A										
Product Description	<p>The EUT is a Wireless FM Transmitter</p> <table border="1"><tr><td>Operation Frequency:</td><td>88.1~107.9MHz</td></tr><tr><td>Modulation Type:</td><td>FM</td></tr><tr><td>Channel Separation:</td><td>200 KHz</td></tr><tr><td>Antenna Designation:</td><td>Printed antenna</td></tr><tr><td>Output Power:</td><td>47.84 dBuV/m(AV Max.)</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	88.1~107.9MHz	Modulation Type:	FM	Channel Separation:	200 KHz	Antenna Designation:	Printed antenna	Output Power:	47.84 dBuV/m(AV Max.)
Operation Frequency:	88.1~107.9MHz										
Modulation Type:	FM										
Channel Separation:	200 KHz										
Antenna Designation:	Printed antenna										
Output Power:	47.84 dBuV/m(AV Max.)										
Channel List	Please refer to Note 2.										
Power Source	DC Voltage supplied from Car Charger.										
Power Rating	DC 12V~24V										
Connecting I/O Port(s)	Please refer to the User's Manual										
Products Covered	N/A										
EUT Modification(s)	N/A										

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Frequency Band	Channel No.	Frequency
88.1~107.9MHz	1	88.1 MHz
	2	88.3 MHz
	:	:
	50	97.9 MHz
	51	98.1 MHz
	52	98.3 MHz
	:	:
	99	107.7 MHz
	100	107.9 MHz



3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX CH01 (88.1MHz) / 12V
Mode 2	TX CH51 (98.1MHz) / 12V
Mode 3	TX CH100 (107.9MHz) / 12V
Mode 4	TX CH01 (88.1MHz) / 24V
Mode 5	TX CH51 (98.1MHz) / 24V
Mode 6	TX CH100 (107.9MHz) / 24V

Test Items	Mode	Channel
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX of X Axis	01/51/100
Radiated Emissions 9kHz~30MHz	CTX of X Axis	01/51/100
Radiated Emissions 30MHz~10 th Harmonic	CTX of X Axis	01/51/100
Band Edge Emissions	CTX of X Axis	01/51/100



3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

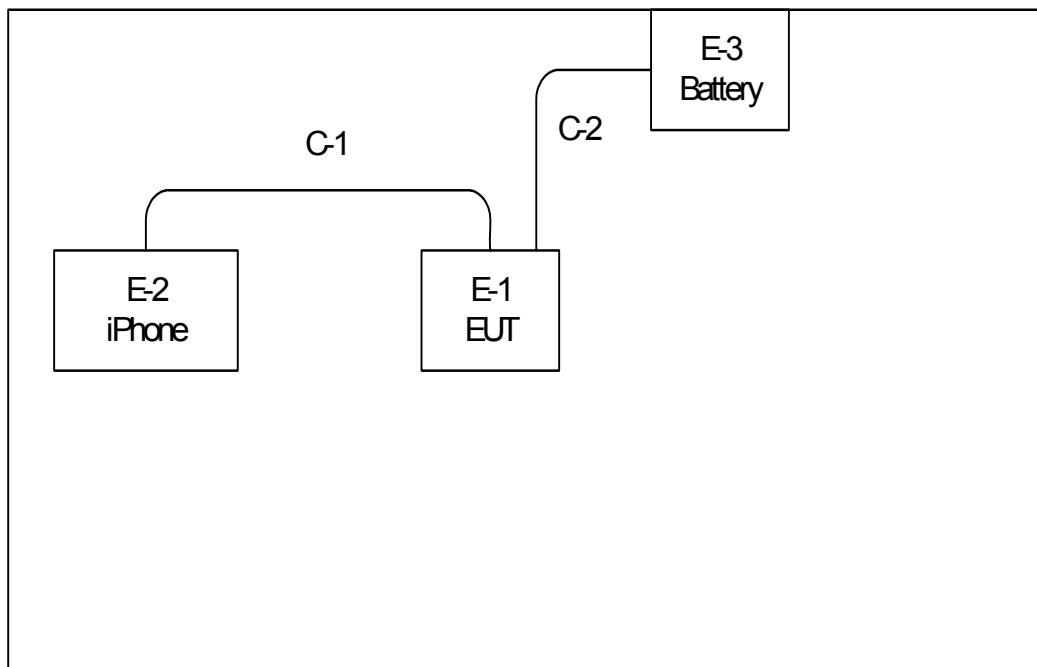

C-1: USB Cable

C-2: DC Cable



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Wireless FM Transmitter	N/A	GG400002	X69GG4000XX	N/A	EUT
E-2	iPhone	apple	A1303	N/A	N/A	
E-3	Battery	UNION	N100	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.5M	
C-2	NO	NO	1.0M	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	Feb-16	52765	Jun.01.2010
2	LISN	Rolf Heine	NNB-2-16Z	99044	Jun.01.2010
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Jun.01.2010
4	Transient Limiter	Agilent	11947A	3107A03668	Jun.01.2010
5	Test Cable	N/A	C-06_C03	N/A	Nov.16.2010
6	Test Receiver	R&S	ESCI	100382	Jun.02.2010

Remark: " N/A" denotes No Model Name , Serial No. or No Calibration specified.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

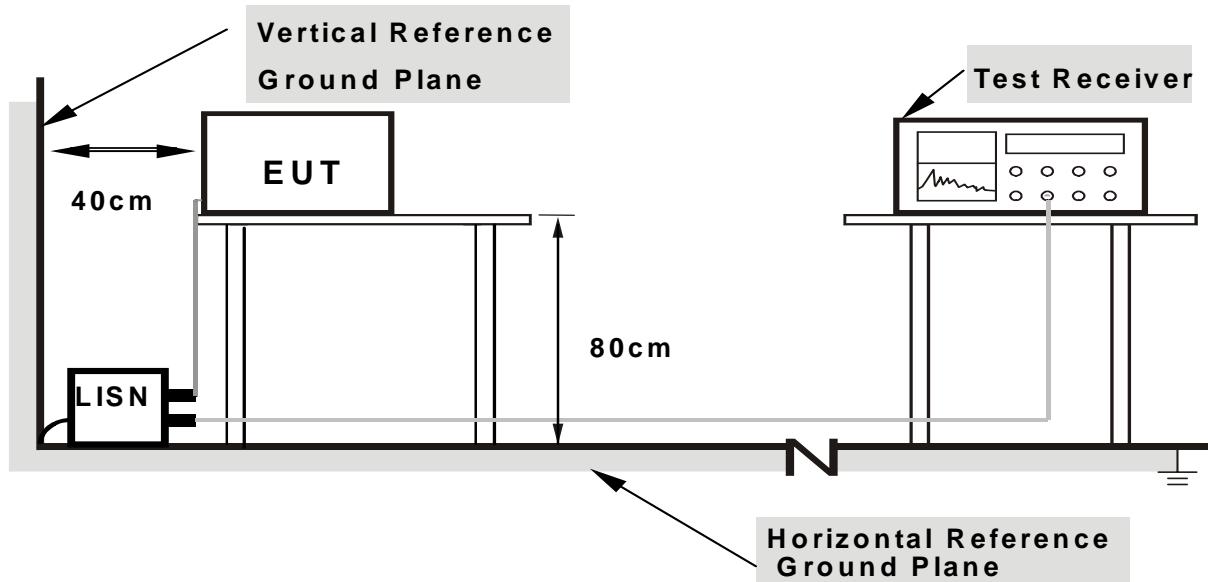

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.6 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The program contained on a PC hard disk and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:



4.1.7 TEST RESULTS

EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	23 °C	Relative Humidity :	50 %
Pressure :	1008 hPa	Test Power :	N/A
Test Mode :	" N/A" denotes test is not applicable in this Test Report.		

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) This EUT is excused from investigation of conducted emission, for it is powered by DC 12V/24V battery only. According to §15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz-1000MHz)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Notes:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).
- (3) A measuring distance of 3m is a primary used. However, either 3m or 10m (instead of 10m) distance may be allowed. If the distance is 3m, add 10dB to the QP-limit above. If the distance is 10m, subtract 10dB from the QP-limit above.

**4.2.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	ETS	3115	75789	May.13.2010
2	Amplifier	Agilent	8449B	3008A02274	Jun.01.2010
3	Spectrum	Agilent	E4408B	US39240143	Nov.16.2010
4	Test Cable	HUBER+SUHNE R	CB03 High Fre	N/A	May.04.2010
5	Antenna	Schwarbeck	VULB9160	9160-3232	Jun.01.2010
6	Amplifier	HP	8447D	2944A09673	Jun.01.2010
7	Test Receiver	R&S	ESCI	100895	Jun.02.2010
8	Test Cable	N/A	C-01_CB03	N/A	Jul.06.2010
9	Triple Loop Antenna	R&S	HFH2-Z2	830749/020	Jul.01.2010

Remark: " N/A" denotes No Model Name / Serial No. and No Calibration specified.

4.2.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter semi-anechoic chamber.. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

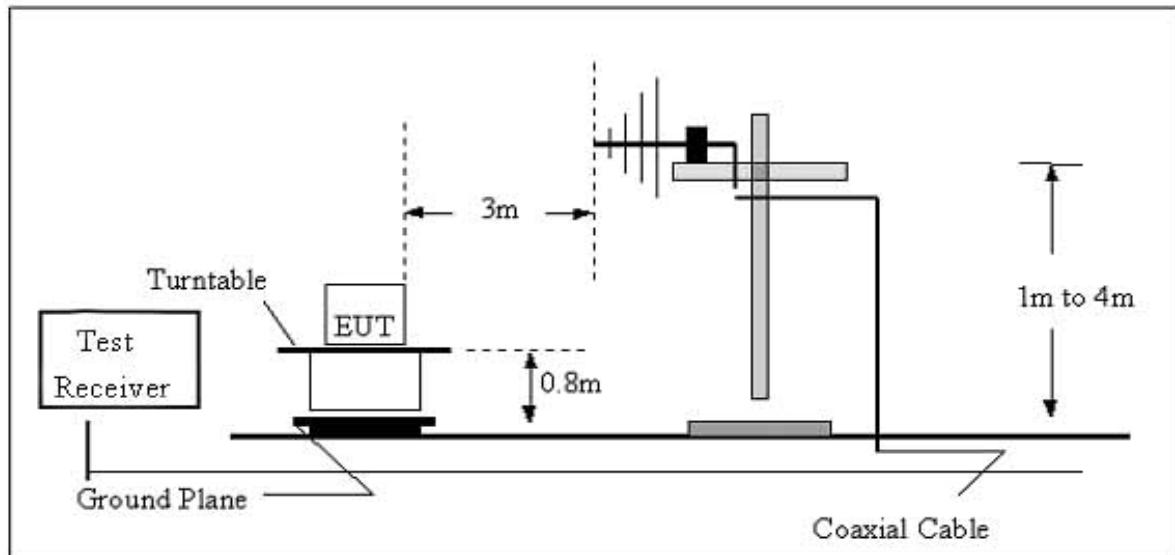

(B) Radiated Emission Test Set-UP Frequency Above 1 GHz

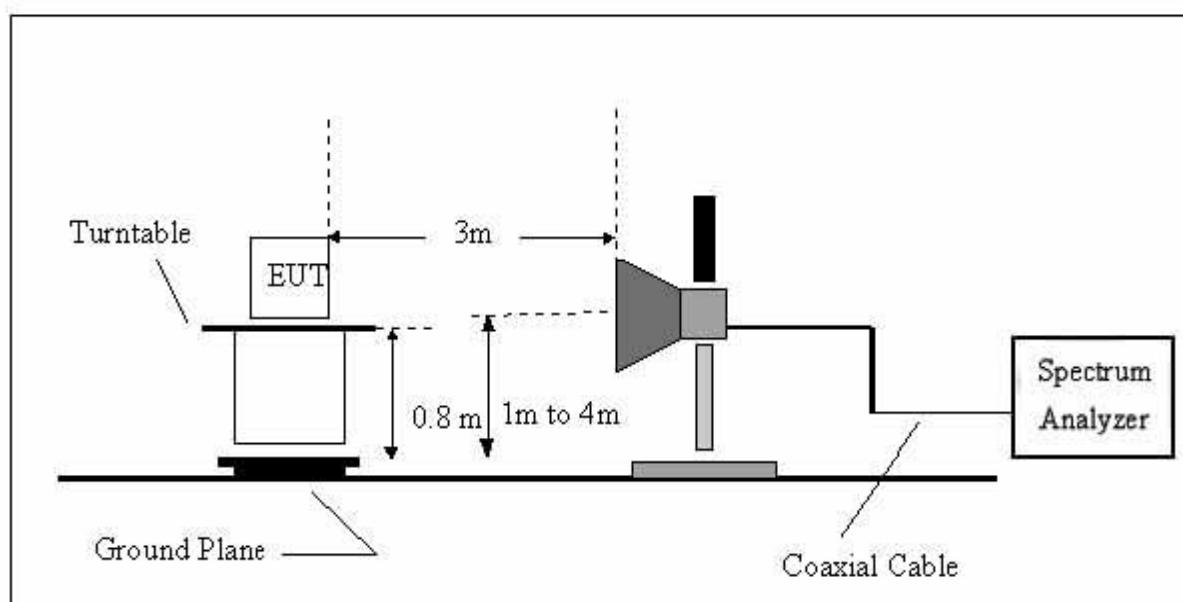



4.2.6 EUT OPERATING CONDITIONS

- (a) Only radiated testing was performed during the max. EMI emission evaluation. Conducted testing excepted because of the EUT is a battery operating device.
- (b) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.
- (c) The iPhone is playing typical MPS song and the iPhone Player is adjusted to maximum volume.


**4.2.7 TEST RESULTS (30~1000MHZ)**

EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 12V
Test Mode :	TX CH01 (88.1MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
175.50	V	51.73	-17.07	34.66	43.50	- 8.84	
183.26	V	45.56	-16.84	28.72	43.50	- 14.78	
366.59	V	37.19	-10.24	26.95	46.00	- 19.05	
498.51	V	28.43	-7.38	21.05	46.00	- 24.95	
575.14	V	28.94	-4.88	24.06	46.00	- 21.94	
724.52	V	28.63	-2.87	25.76	46.00	- 20.24	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

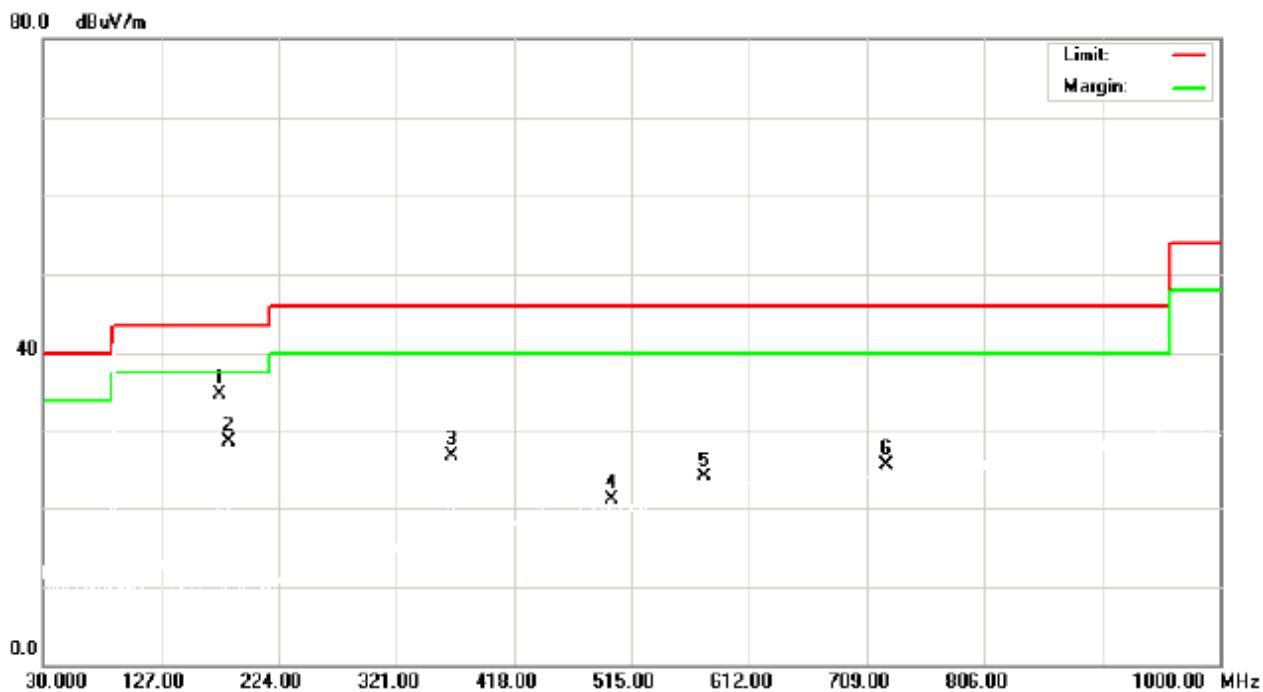



EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 12V
Test Mode :	TX CH01 (88.1MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
175.50	H	54.78	-17.07	37.71	43.50	- 5.79	
183.26	H	45.12	-16.84	28.28	43.50	- 15.22	
366.59	H	36.54	-10.24	26.30	46.00	- 19.70	
565.44	H	28.11	-5.11	23.00	46.00	- 23.00	
682.81	H	28.30	-3.23	25.07	46.00	- 20.93	
705.12	H	28.35	-3.11	25.24	46.00	- 20.76	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .






EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 12V
Test Mode :	TX CH51 (98.1MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
182.29	V	43.53	-16.86	26.67	43.50	- 16.83	
234.67	V	33.63	-15.41	18.22	46.00	- 27.78	
365.62	V	31.22	-10.27	20.95	46.00	- 25.05	
400.54	V	29.68	-9.01	20.67	46.00	- 25.33	
765.26	V	28.23	-2.35	25.88	46.00	- 20.12	
927.25	V	28.54	0.40	28.94	46.00	- 17.06	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

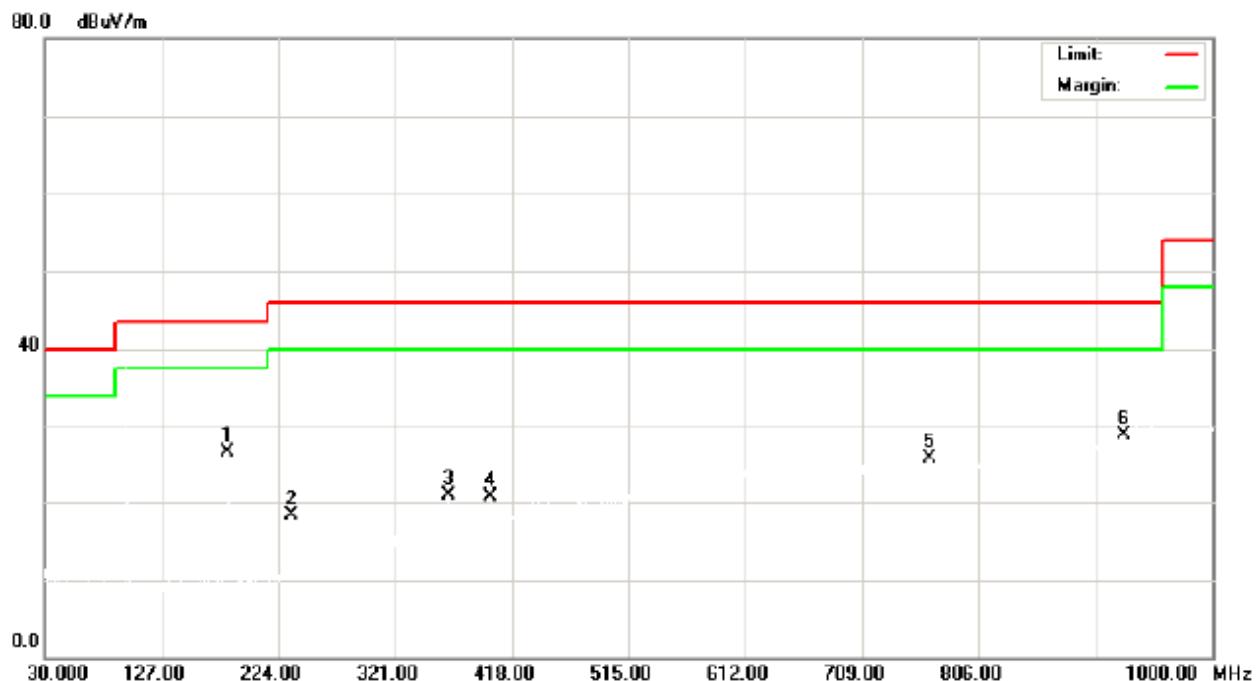




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 12V
Test Mode :	TX CH51 (98.1MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
182.29	H	45.71	-16.86	28.85	43.50	- 14.65	
195.87	H	39.33	-16.63	22.70	43.50	- 20.80	
365.62	H	31.27	-10.27	21.00	46.00	- 25.00	
595.51	H	28.01	-4.38	23.63	46.00	- 22.37	
647.89	H	28.47	-3.38	25.09	46.00	- 20.91	
727.43	H	29.72	-2.85	26.87	46.00	- 19.13	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

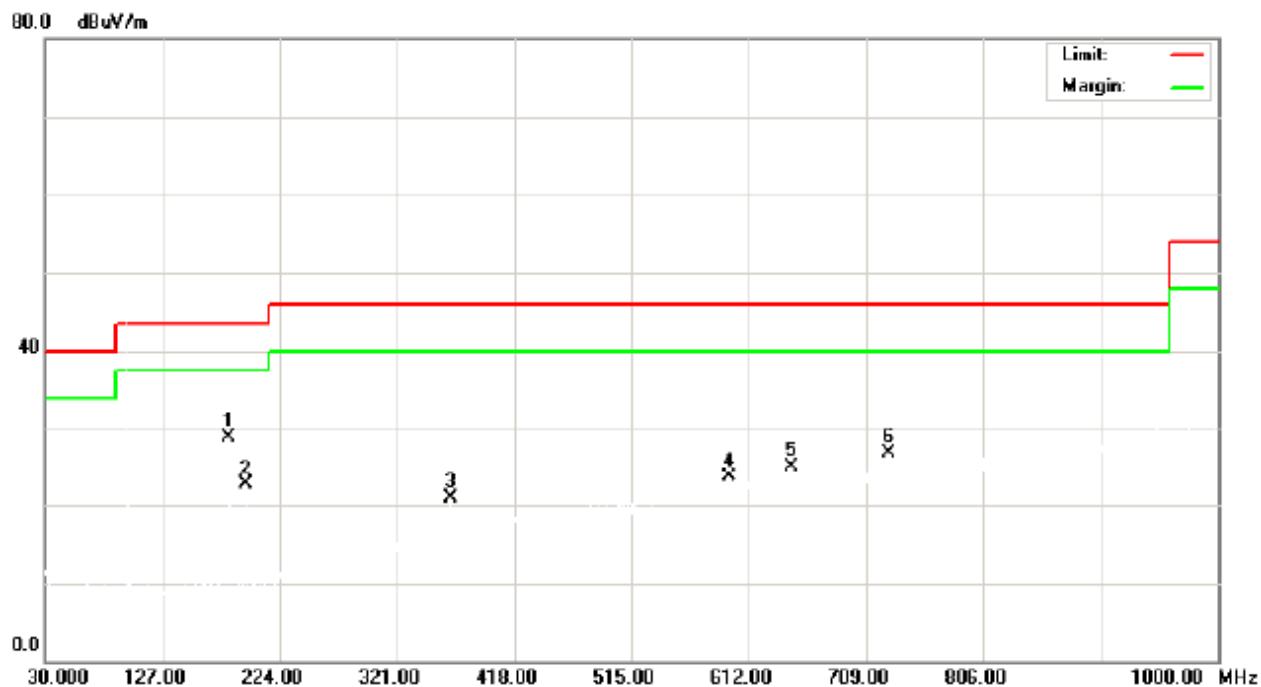




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 12V
Test Mode :	TX CH100 (107.9MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
182.29	V	44.89	-16.86	28.03	43.50	- 15.47	
365.62	V	34.62	-10.27	24.35	46.00	- 21.65	
538.28	V	28.41	-5.93	22.48	46.00	- 23.52	
661.47	V	28.48	-3.31	25.17	46.00	- 20.83	
735.19	V	28.65	-2.74	25.91	46.00	- 20.09	
914.64	V	28.76	0.18	28.94	46.00	- 17.06	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

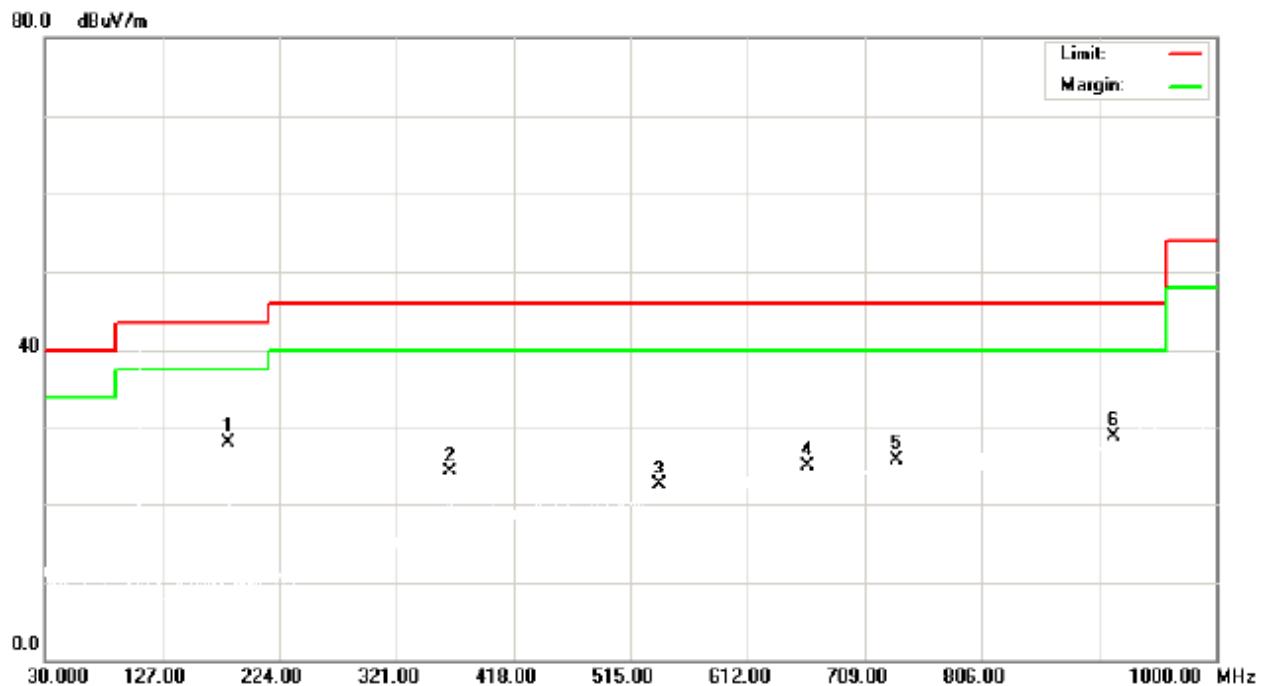




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 12V
Test Mode :	TX CH100 (107.9MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
183.26	H	49.34	-16.84	32.50	43.50	- 11.00	
366.59	H	34.53	-10.24	24.29	46.00	- 21.71	
551.86	H	28.57	-5.44	23.13	46.00	- 22.87	
678.93	H	28.60	-3.24	25.36	46.00	- 20.64	
836.07	H	28.47	-1.16	27.31	46.00	- 18.69	
949.56	H	29.86	0.79	30.65	46.00	- 15.35	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

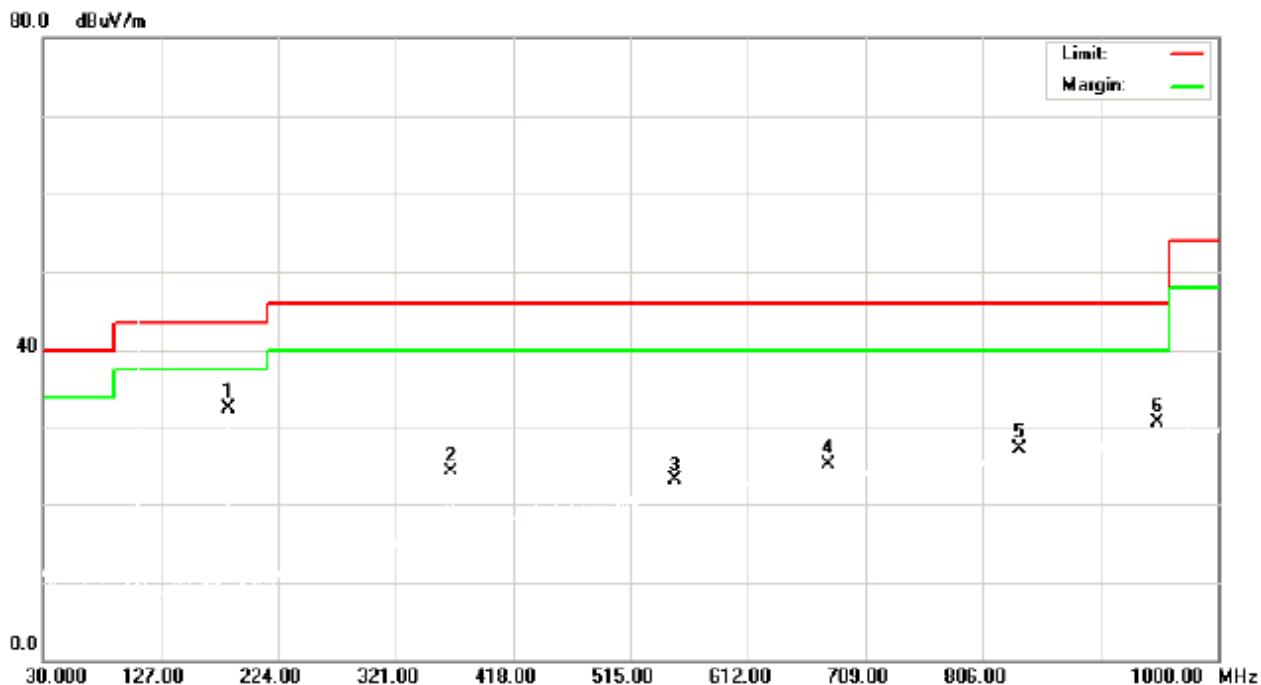




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 24V
Test Mode :	TX CH01 (88.1MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
175.50	V	52.73	-17.07	35.66	43.50	- 7.84	
183.26	V	45.56	-16.84	28.72	43.50	- 14.78	
366.59	V	37.69	-10.24	27.45	46.00	- 18.55	
575.14	V	29.44	-4.88	24.56	46.00	- 21.44	
731.31	V	29.45	-2.79	26.66	46.00	- 19.34	
952.47	V	29.90	0.85	30.75	46.00	- 15.25	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

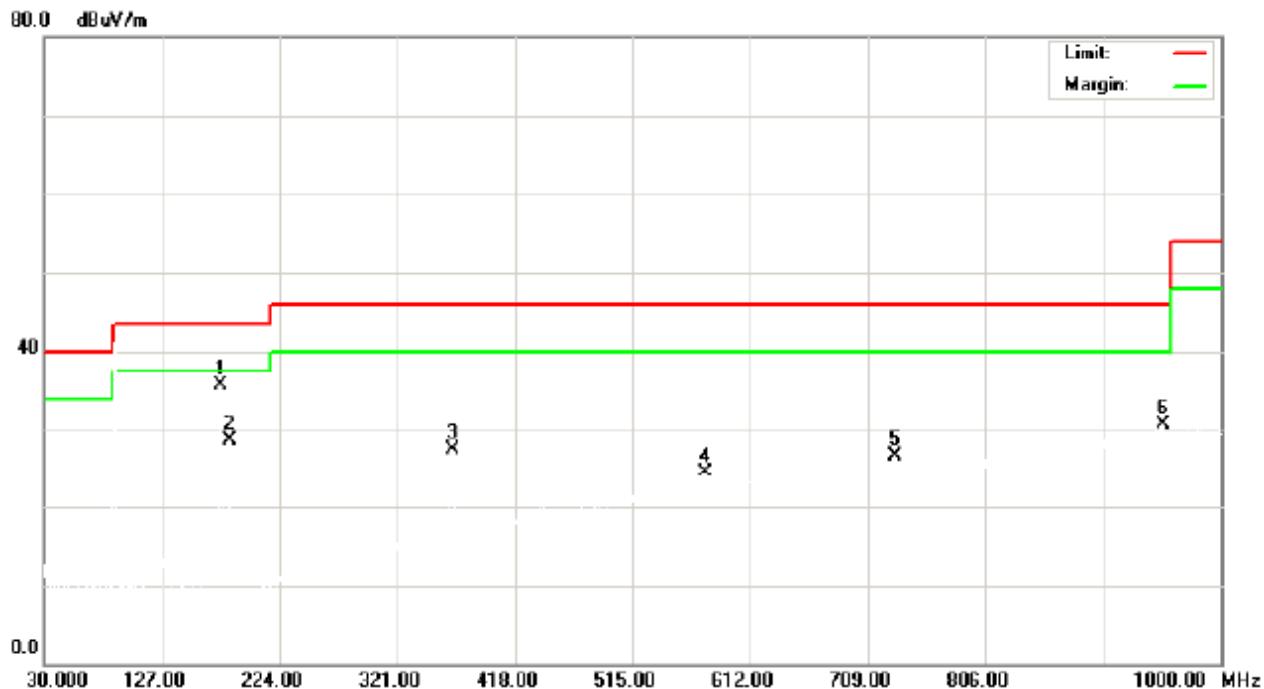




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 24V
Test Mode :	TX CH01 (88.1MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
175.50	H	54.78	-17.07	37.71	43.50	- 5.79	
183.26	H	45.12	-16.84	28.28	43.50	- 15.22	
366.59	H	36.54	-10.24	26.30	46.00	- 19.70	
565.44	H	28.11	-5.11	23.00	46.00	- 23.00	
682.81	H	28.30	-3.23	25.07	46.00	- 20.93	
705.12	H	28.35	-3.11	25.24	46.00	- 20.76	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

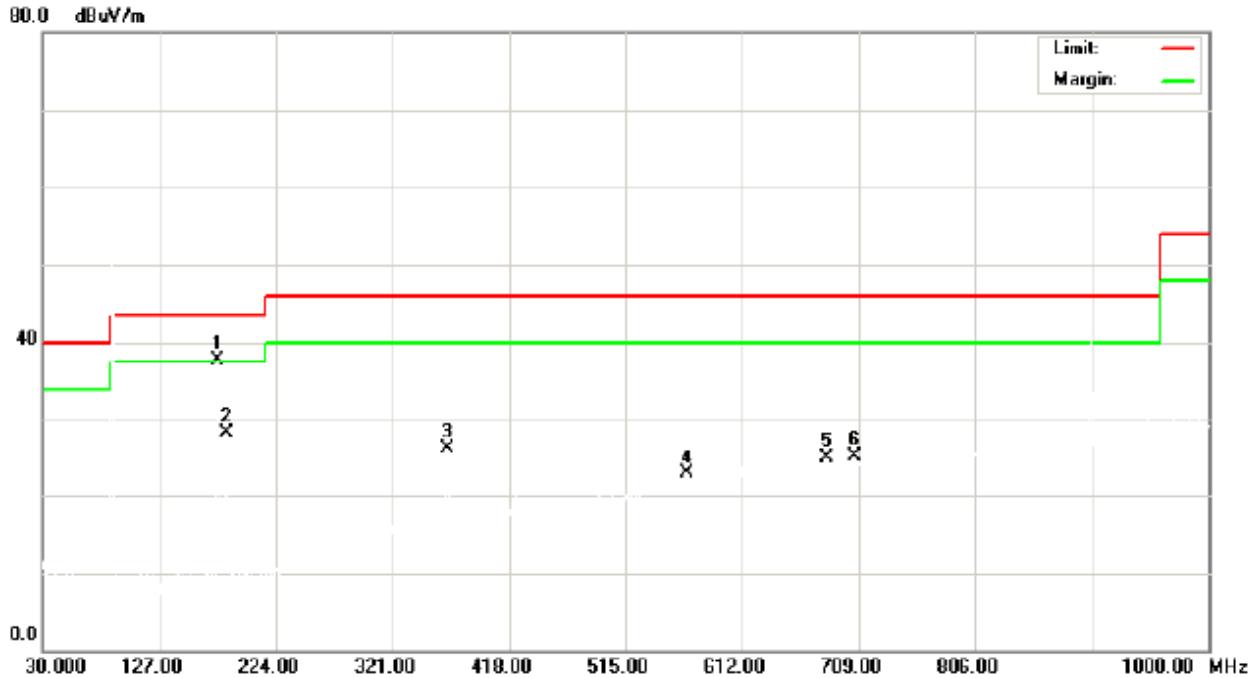




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 24V
Test Mode :	TX CH51 (98.1MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
182.29	V	45.54	-16.86	28.68	43.50	- 14.82	
234.67	V	36.14	-15.41	20.73	46.00	- 25.27	
365.62	V	32.72	-10.27	22.45	46.00	- 23.55	
400.54	V	32.68	-9.01	23.67	46.00	- 22.33	
768.17	V	29.73	-2.32	27.41	46.00	- 18.59	
949.56	V	31.02	0.79	31.81	46.00	- 14.19	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

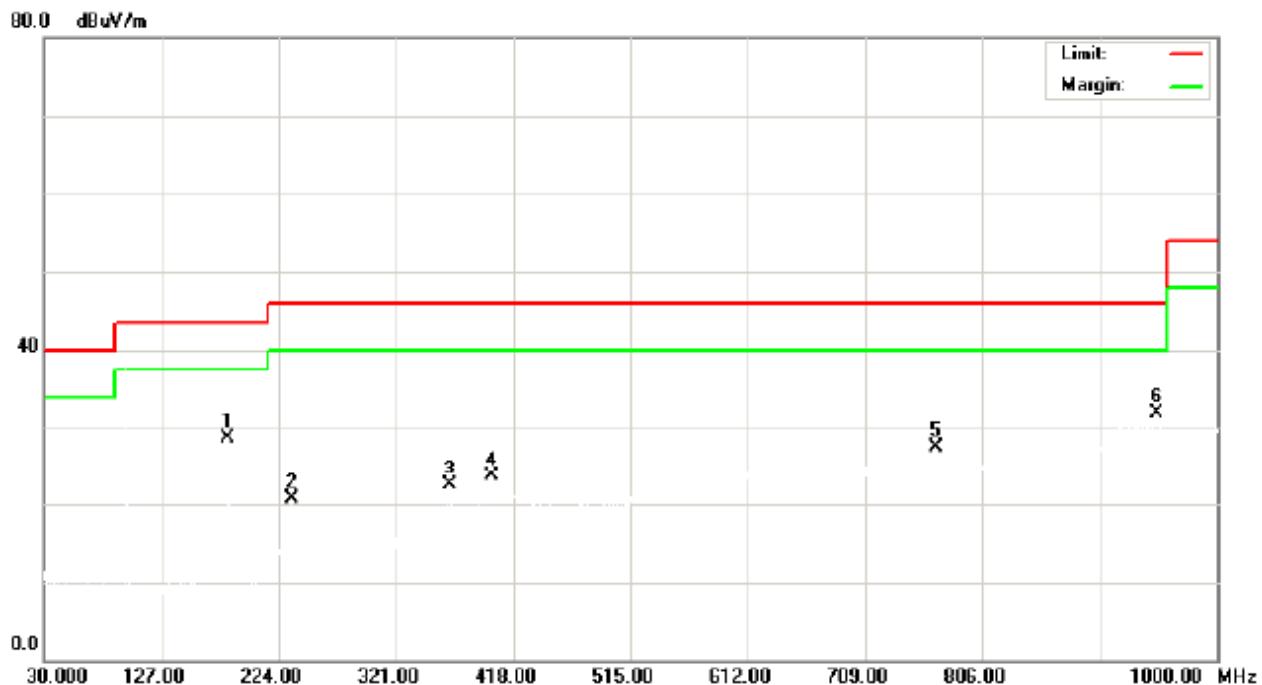




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 24V
Test Mode :	TX CH51 (98.1MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
64.92	H	32.24	-17.60	14.64	40.00	- 25.36	
182.29	H	46.71	-16.86	29.85	43.50	- 13.65	
195.87	H	40.83	-16.63	24.20	43.50	- 19.30	
365.62	H	33.77	-10.27	23.50	46.00	- 22.50	
727.43	H	30.72	-2.85	27.87	46.00	- 18.13	
910.76	H	30.28	0.12	30.40	46.00	- 15.60	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

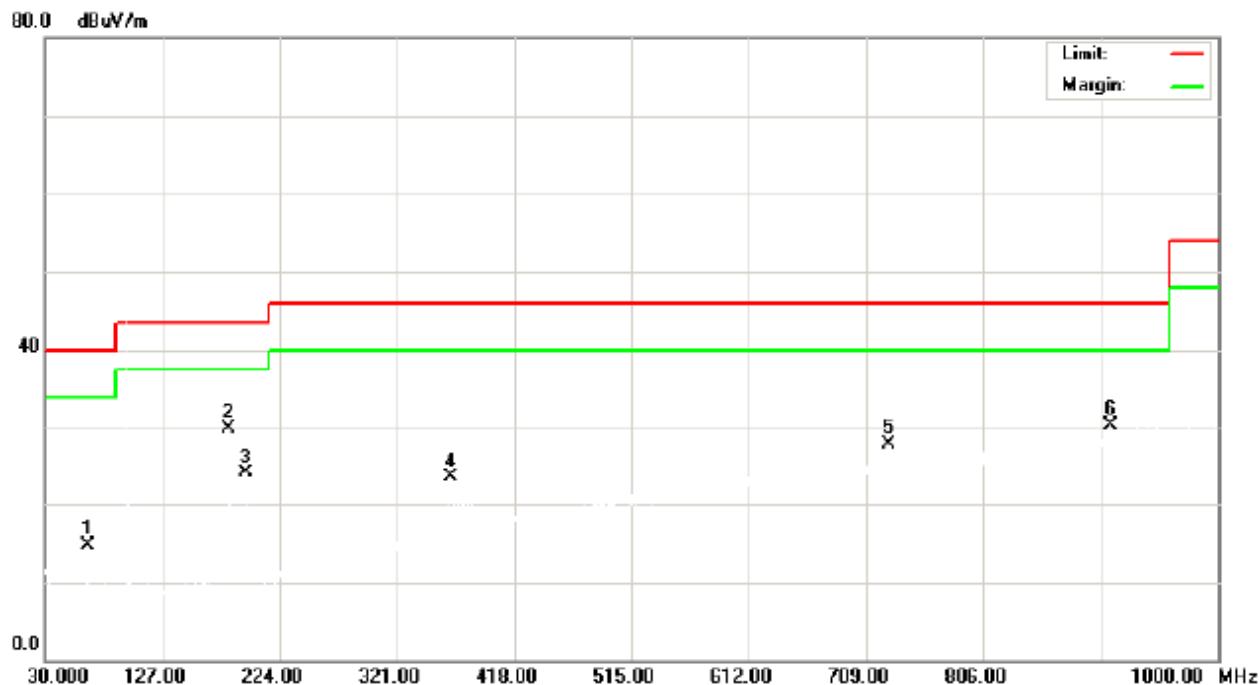



EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 24V
Test Mode :	TX CH100 (107.9MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
182.29	V	46.39	-16.86	29.53	43.50	- 13.97	
365.62	V	36.12	-10.27	25.85	46.00	- 20.15	
400.54	V	29.66	-9.01	20.65	46.00	- 25.35	
552.83	V	29.82	-5.42	24.40	46.00	- 21.60	
693.48	V	29.02	-3.19	25.83	46.00	- 20.17	
936.95	V	30.24	0.57	30.81	46.00	- 15.19	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .






EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Pressure :	1008 hPa	Test Power :	DC 24V
Test Mode :	TX CH100 (107.9MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
183.26	H	50.34	-16.84	33.50	43.50	- 10.00	
215.27	H	37.75	-16.07	21.68	43.50	- 21.82	
366.59	H	35.53	-10.24	25.29	46.00	- 20.71	
551.86	H	30.07	-5.44	24.63	46.00	- 21.37	
734.22	H	29.27	-2.76	26.51	46.00	- 19.49	
949.56	H	30.36	0.79	31.15	46.00	- 14.85	

Remark :

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz .
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform .
- (3) Measuring frequency range from 30MHz to 1000MHz .
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table .

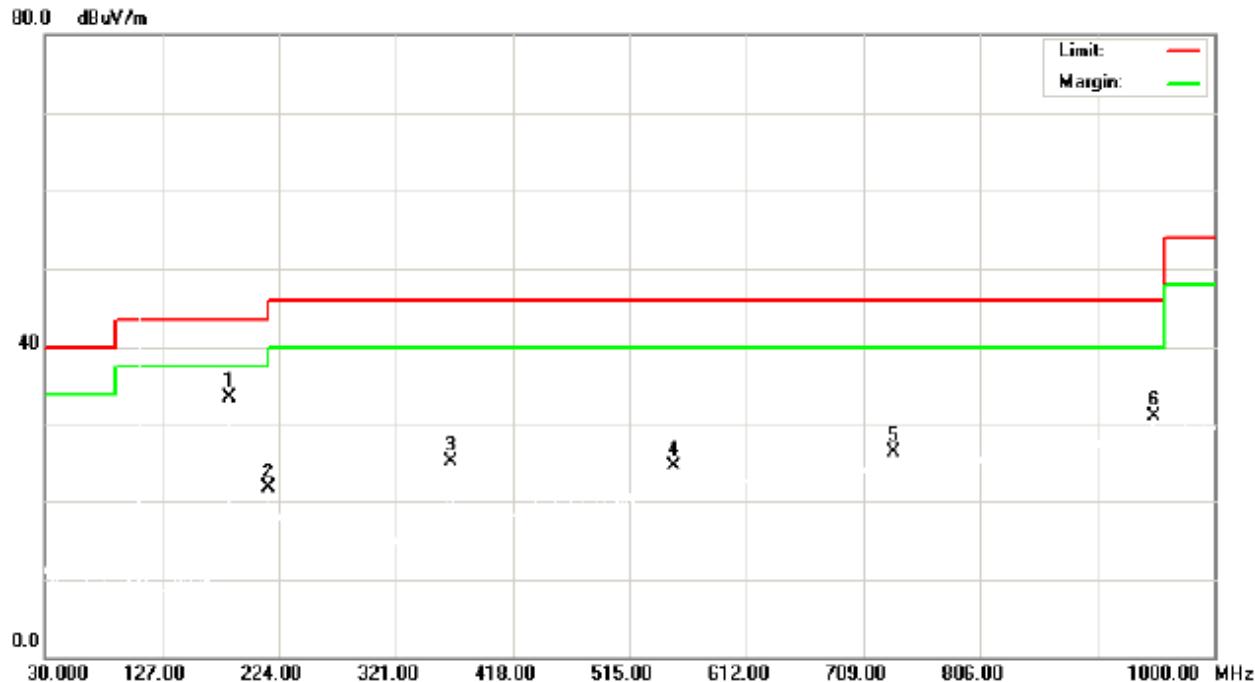



4.3 FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGE EMISSIONS MEASUREMENT

4.3.1 LIMITS OF FIELD STRENGTH OF FUNDAMENTAL AND BAND EDGE EMISSIONS MEASUREMENT

According to 15.239 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
88 to 108	Peak	Average
	67.96	47.96

Band edge emissions outside of the frequency bands shown in below table.

Outside Frequency Band Edge	Limit (dBuV/m) at 3m
Below 88 MHz	40.0 (QP)
Above 108 MHz	43.5 (QP)

4.3.2 MEASURING INSTRUMENTS AND SETTING

Receiver Parameter	Setting
Center Frequency	Fundamental Frequency
RBW	120 KHz
Detector	AV or Peak

4.3.3 TEST PROCEDURE

The test procedure is the same as section 4.1.3.

4.3.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.5

4.3.5 TEST DEVIATION

There is no deviation with the original standard.

4.3.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.

The iPhone is playing typical MPS song and the iPhone Player is adjusted to maximum volume.


**4.3.6 TEST RESULTS (Fundamental & Bandedge emission)**

EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 12V		
Test Mode :	TX CH01 (88.1MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
88.0000	V	48.60	-19.09	29.51	40.00	- 10.49	(X/PK)
88.1260	V	56.17	-19.08	37.09	68.00	- 30.91	(X/PK)
88.1260	V	55.40	-19.08	36.32	48.00	- 11.68	(X/AV)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

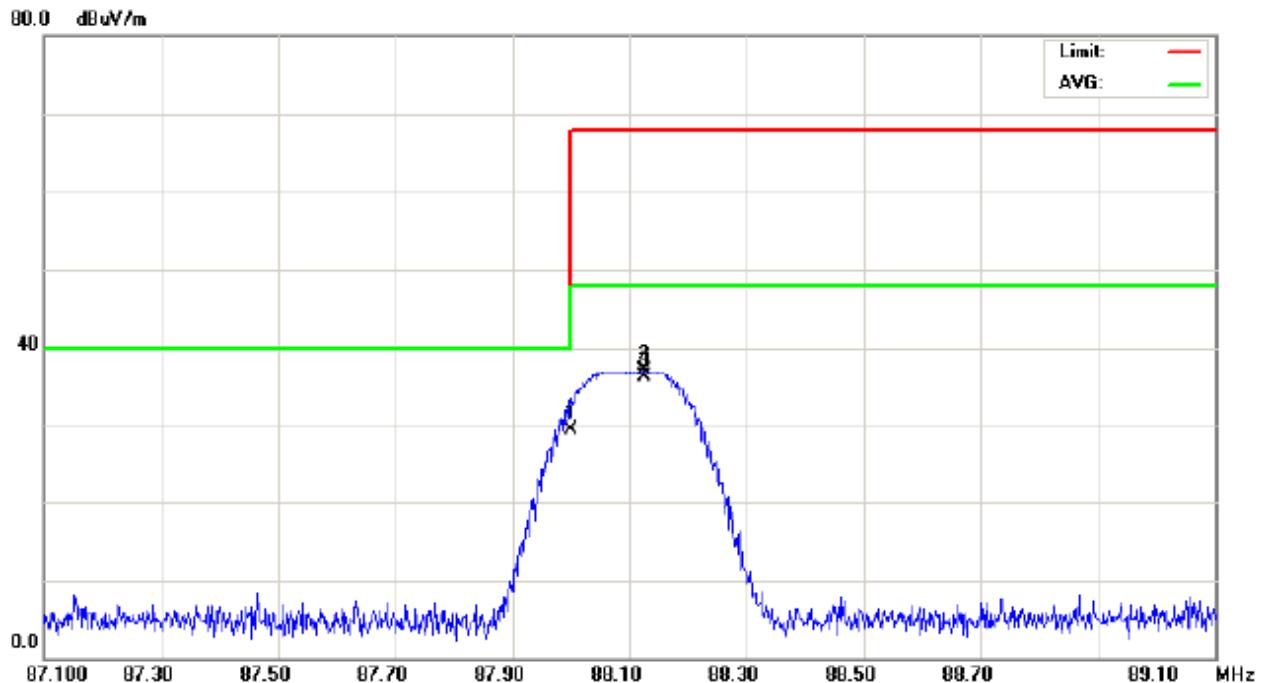




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 12V		
Test Mode :	TX CH01 (88.1MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
88.0000	H	55.23	-19.09	36.14	40.00	- 3.86	(X/PK)
88.1340	H	62.16	-19.08	43.08	68.00	- 24.92	(X/PK)
88.1340	H	61.53	-19.08	42.45	48.00	- 5.55	(X/AV)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

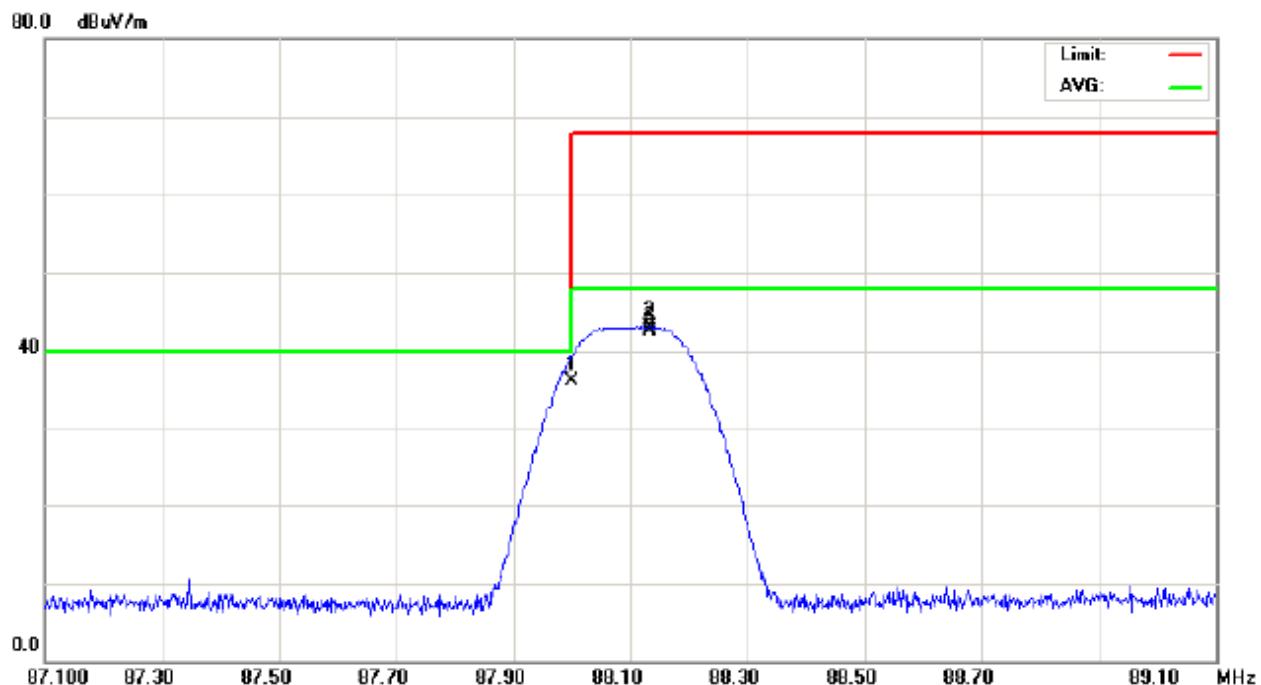




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 12V		
Test Mode :	TX CH51 (98.1MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
98.0680	V	60.05	-18.44	41.61	68.00	- 26.39	(X/PK)
98.0680	V	59.73	-18.44	41.29	48.00	- 6.71	(X/AV)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

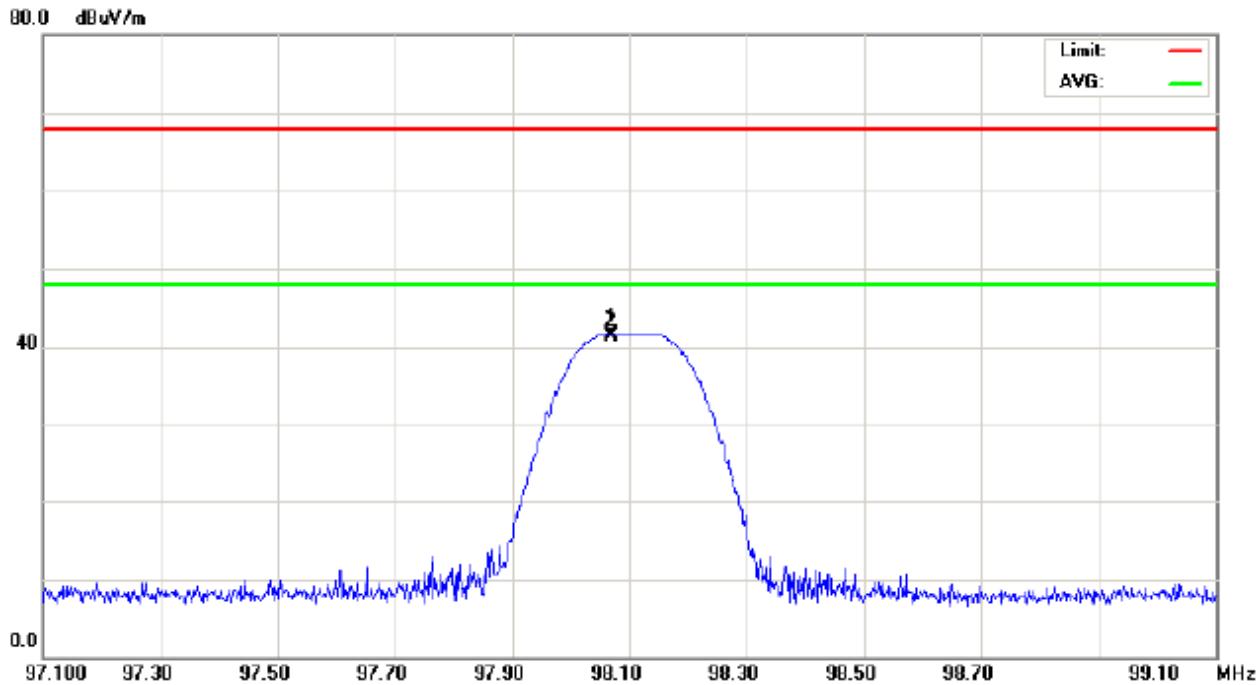




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 12V		
Test Mode :	TX CH51(98.1MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
98.1320	H	66.51	-18.44	48.07	68.00	- 19.93	(X/PK)
98.1320	H	66.28	-18.44	47.84	48.00	- 0.16	(X/AV)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

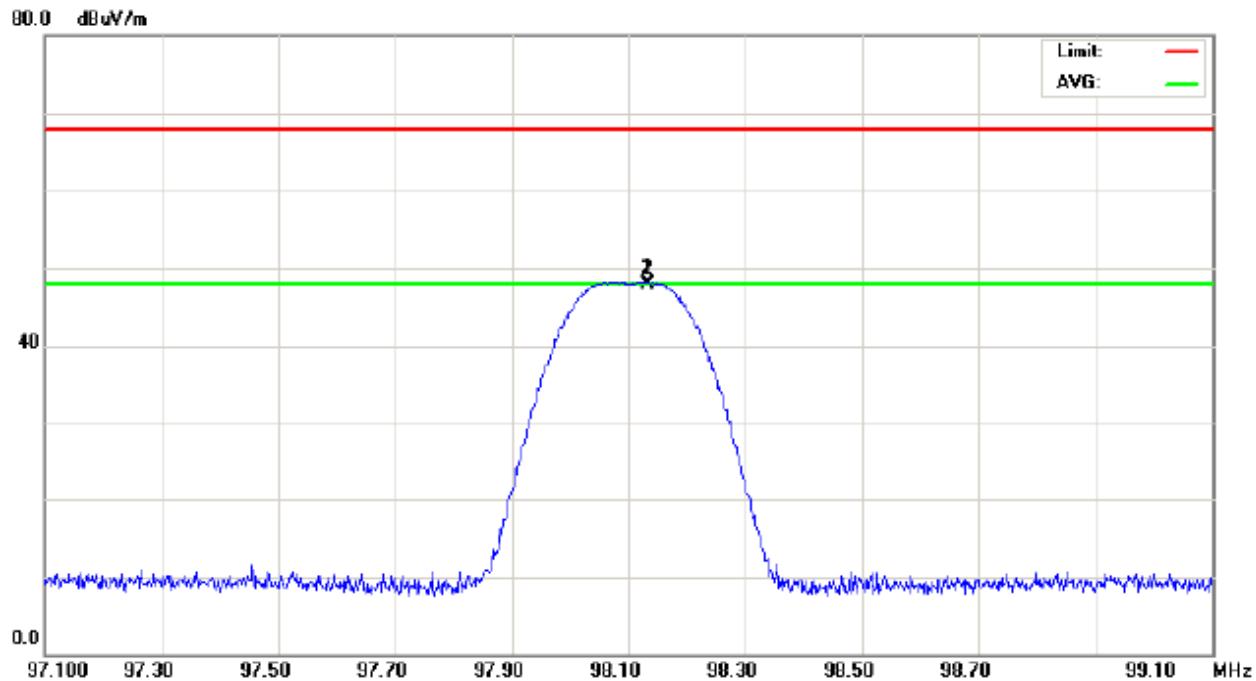




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 12V		
Test Mode :	TX CH100 (107.9MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
107.9340	V	59.10	-18.36	40.74	68.00	- 27.26	(X/PK)
107.9340	V	58.90	-18.36	40.54	48.00	- 7.46	(X/AV)
108.0000	V	52.80	-18.36	34.44	43.50	- 9.06	(X/PK)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

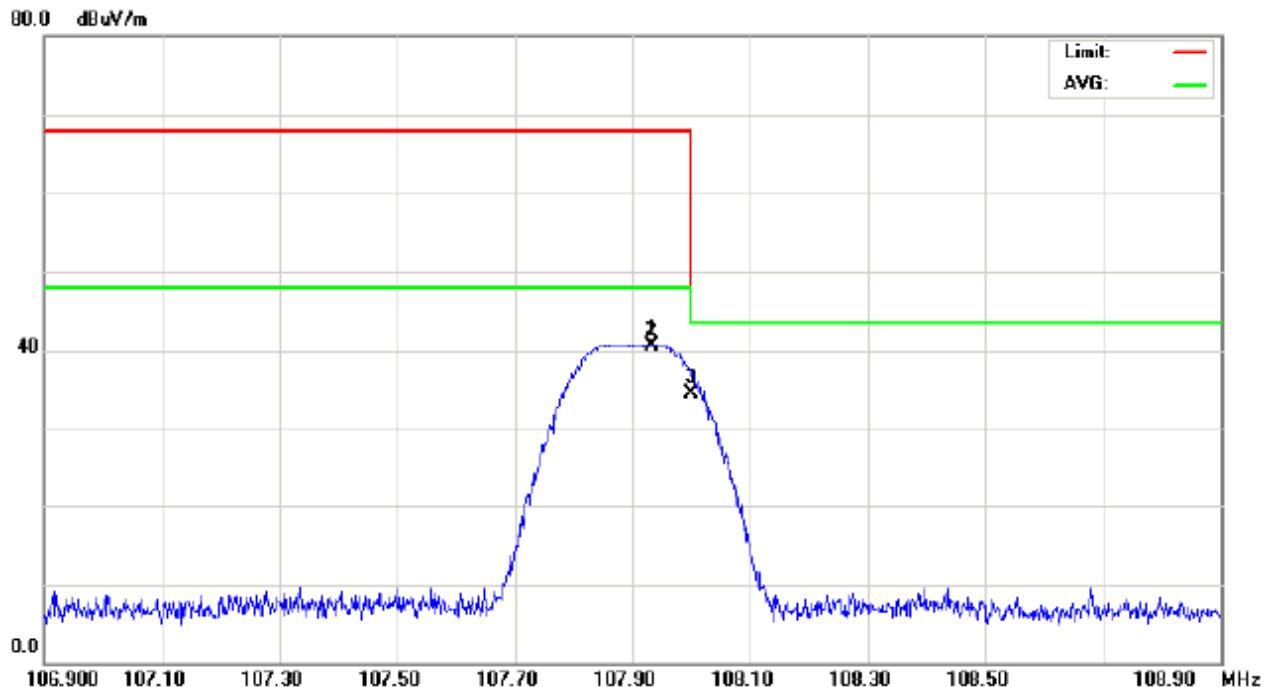




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 12V		
Test Mode :	TX CH100 (107.9MHz) / 12V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
107.9200	H	66.58	-18.36	48.22	68.00	- 19.78	(X/PK)
107.9200	H	65.96	-18.36	47.60	48.00	- 0.40	(X/AV)
108.0000	H	60.10	-18.36	41.74	43.50	- 1.76	(X/PK)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

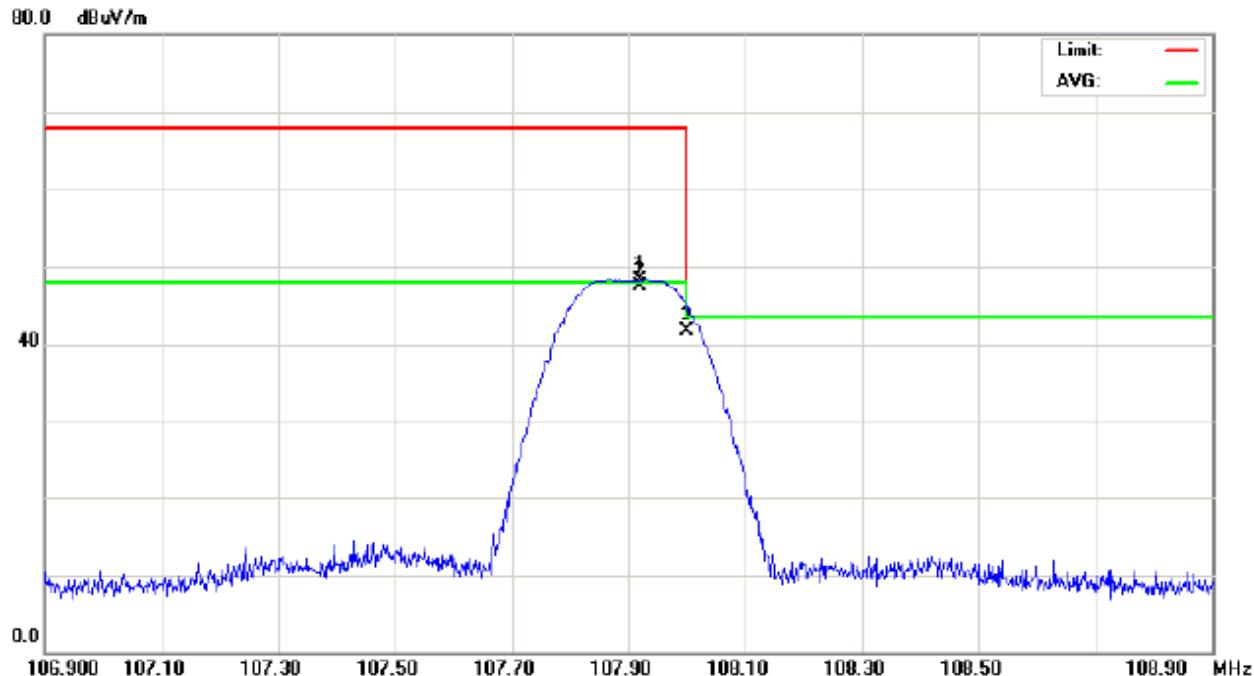




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 24V		
Test Mode :	TX CH01 (88.1MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
88.0000	V	47.99	-19.09	28.90	40.00	- 11.10	(X/PK)
88.1260	V	56.54	-19.08	37.46	68.00	- 30.54	(X/PK)
88.1260	V	55.33	-19.08	36.25	48.00	- 11.75	(X/AV)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

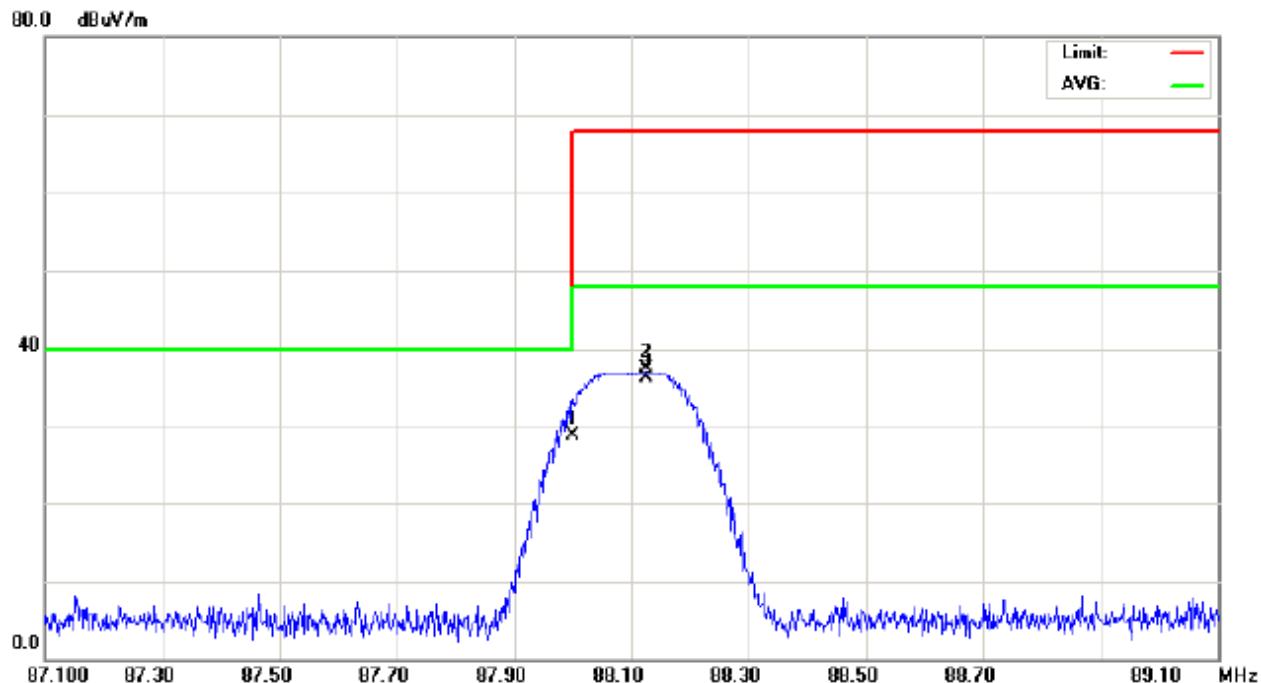




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 24V		
Test Mode :	TX CH01 (88.1MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
88.0000	H	55.23	-19.09	36.14	40.00	- 3.86	(X/PK)
88.1340	H	61.86	-19.08	42.78	68.00	- 25.22	(X/PK)
88.1340	H	61.43	-19.08	42.35	48.00	- 5.65	(X/AV)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

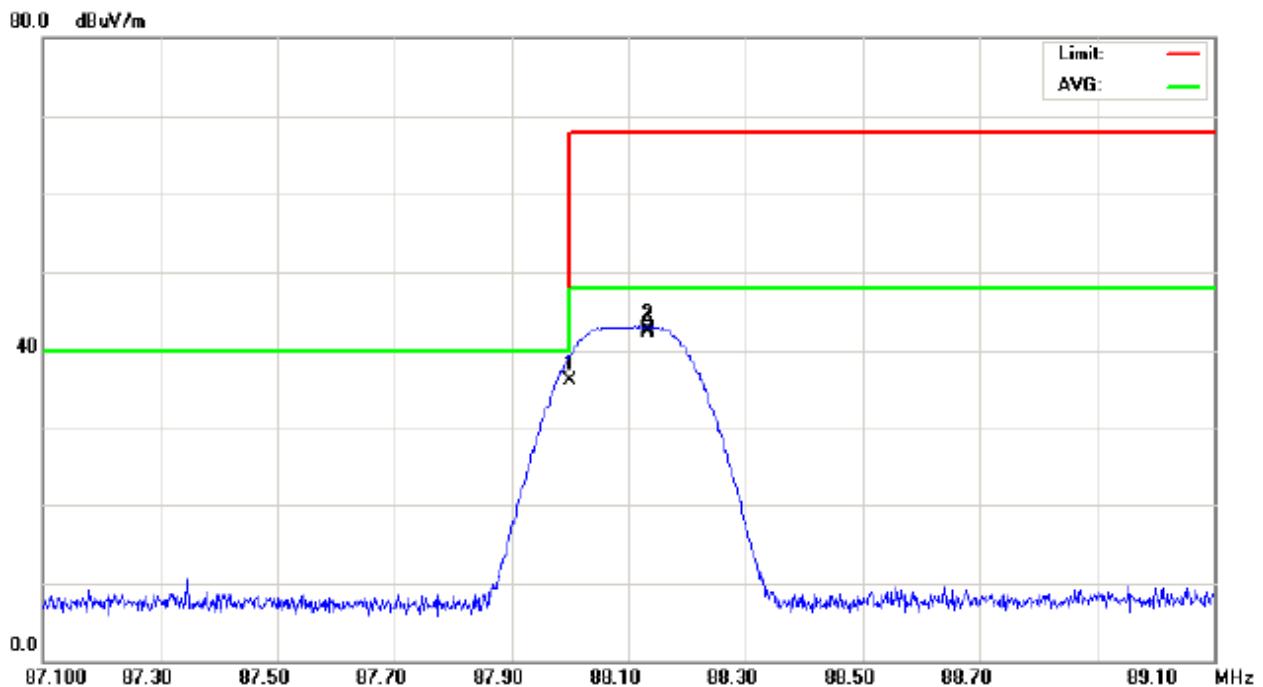




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 24V		
Test Mode :	TX CH51 (98.1MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
98.0680	V	61.35	-18.44	42.91	68.00	- 25.09	(X/PK)
98.0680	V	60.03	-18.44	41.59	48.00	- 6.41	(X/AV)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

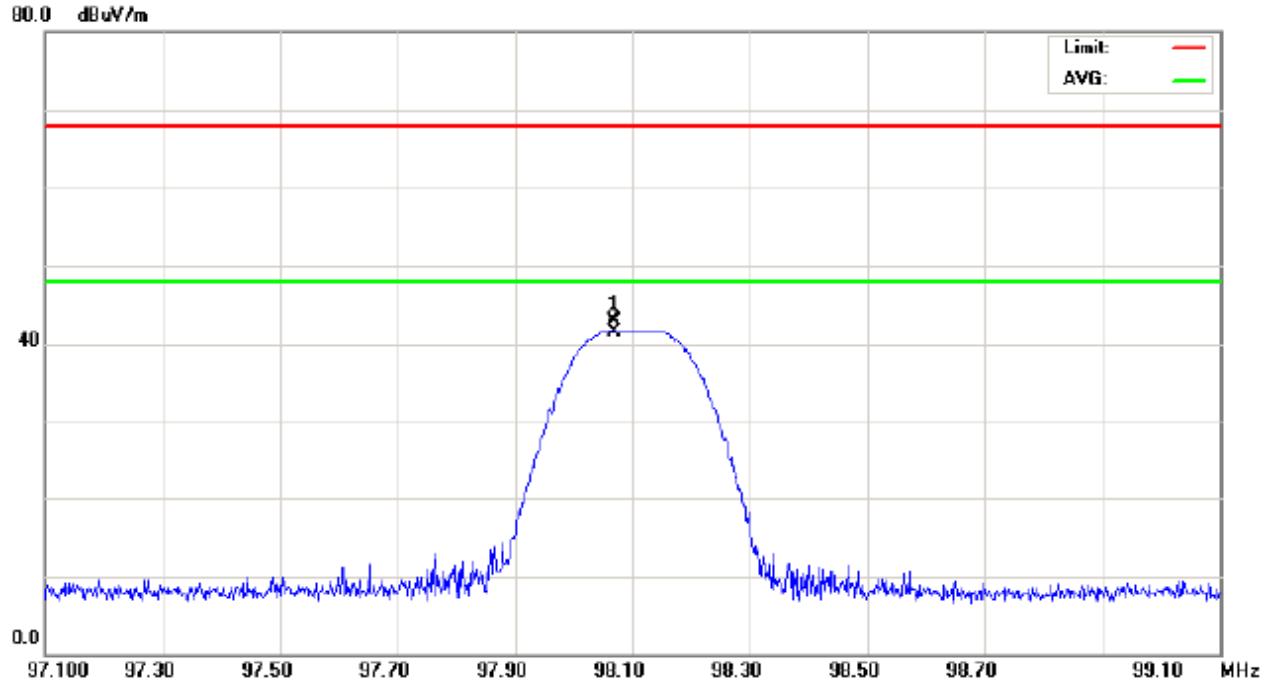




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 24V		
Test Mode :	TX CH51(98.1MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
98.1320	H	66.11	-18.44	47.67	68.00	- 20.33	(X/PK)
98.1320	H	65.28	-18.44	46.84	48.00	- 1.16	(X/AV)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission °
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

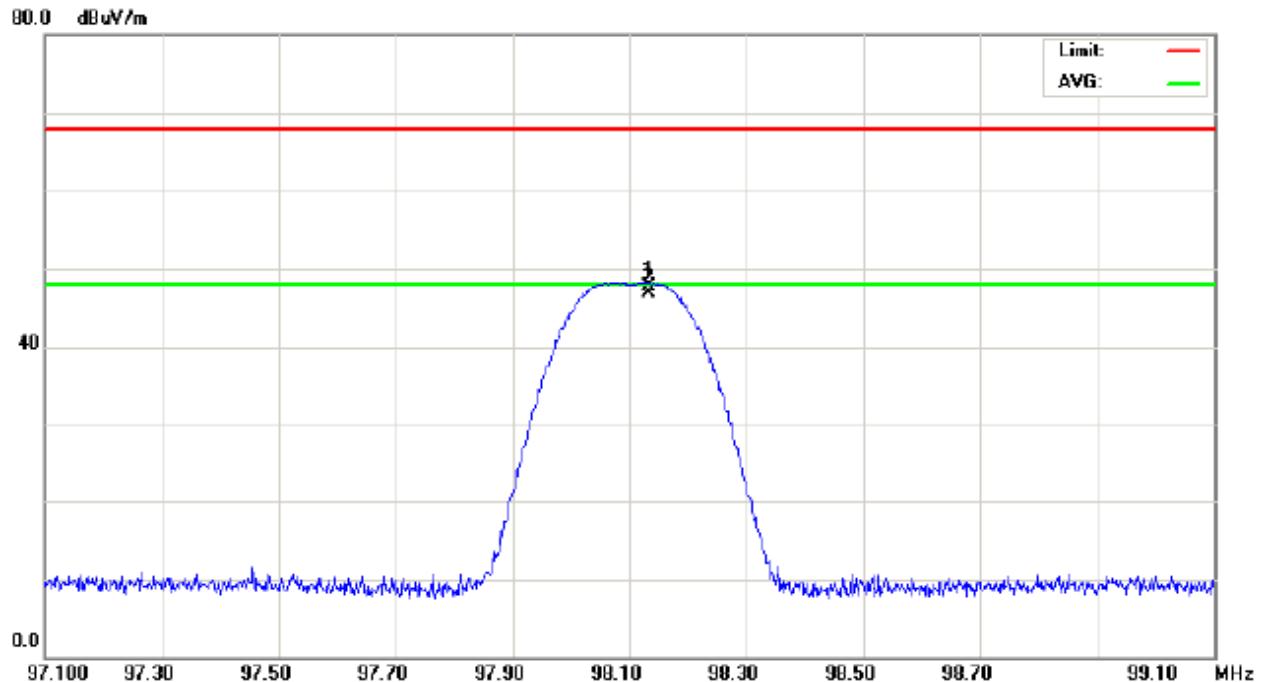




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 24V		
Test Mode :	TX CH100 (107.9MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
107.9340	V	59.70	-18.36	41.34	68.00	- 26.66	(X/PK)
107.9340	V	58.60	-18.36	40.24	48.00	- 7.76	(X/AV)
108.0000	V	53.80	-18.36	35.44	43.50	- 8.06	(X/PK)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

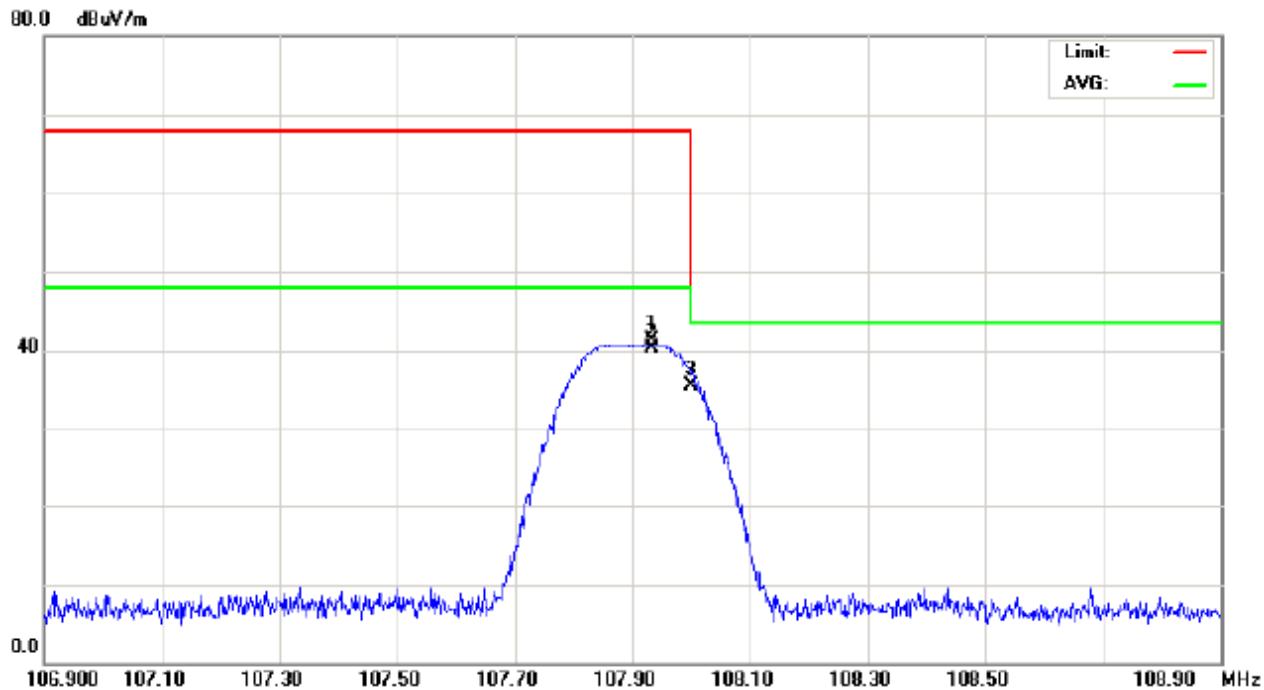




EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	22°C	Relative Humidity :	45%
Test Voltage :	DC 24V		
Test Mode :	TX CH100 (107.9MHz) / 24V		

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Note
107.9200	H	66.35	-18.36	47.99	68.00	- 20.01	(X/PK)
107.9200	H	65.65	-18.36	47.29	48.00	- 0.71	(X/AV)
108.0000	H	60.00	-18.36	41.64	43.50	- 1.86	(X/PK)

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (3) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

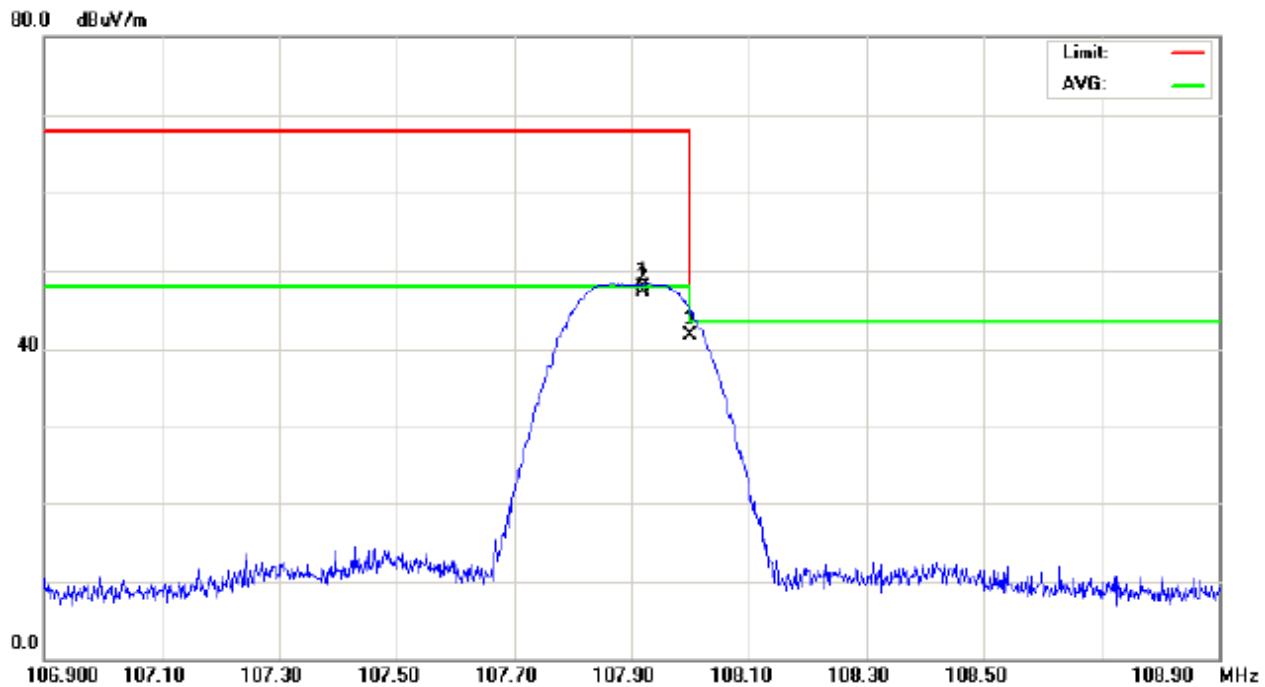



5. BANDWIDTH REQUIREMENT

5.1 LIMITS OF EMISSION BAND MEASUREMENT

Emissions from the intentional radiator shall be confined within a bands 200kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88 to 108MHz.

5.1.1 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov.27.2010

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	10 kHz
VB	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
- The resolution bandwidth of 10 kHz and the video bandwidth of 10 kHz were used.
- Measured the spectrum width with power higher than 20dB below carrier.

5.1.3 TEST SETUP LAYOUT

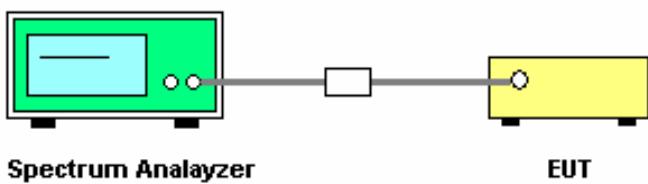

5.1.4 TEST DEVIATION

There is no deviation with the original standard.

5.1.5 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting mode.


The i-pod is playing typical MPS song and the MP3 Player is adjusted to maximum volume.




5.1.6 TEST RESULT OF 20dB SPECTRUM BANDWIDTH

EUT :	Wireless FM Transmitter	Model Name :	GG400002
Temperature :	26°C	Relative Humidity :	60 %
Test Voltage :	DC 12V		
Test Mode :	TRANSMITTER (Mono mode)		
Note :	CH01 (88.1MHz) / CH51 (98.1MHz) / CH100 (107.9MHz)		

Channel	Frequency (MHz)	20dB Bandwidth (kHz)	Limits kHz (20dB Down)	Test Result
01	88.1	86.00	200.0000	PASS
51	98.1	106.00	200.0000	PASS
100	107.9	76.00	200.0000	PASS

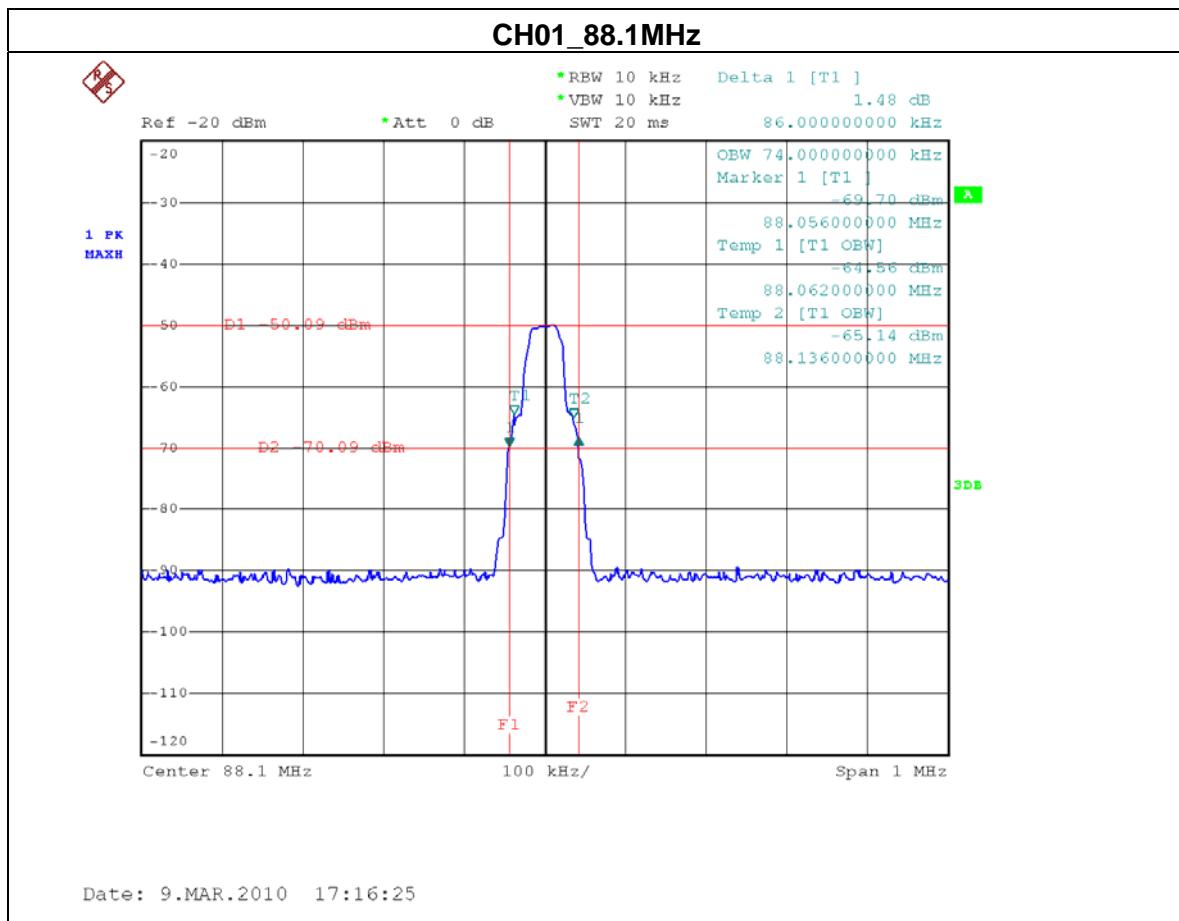

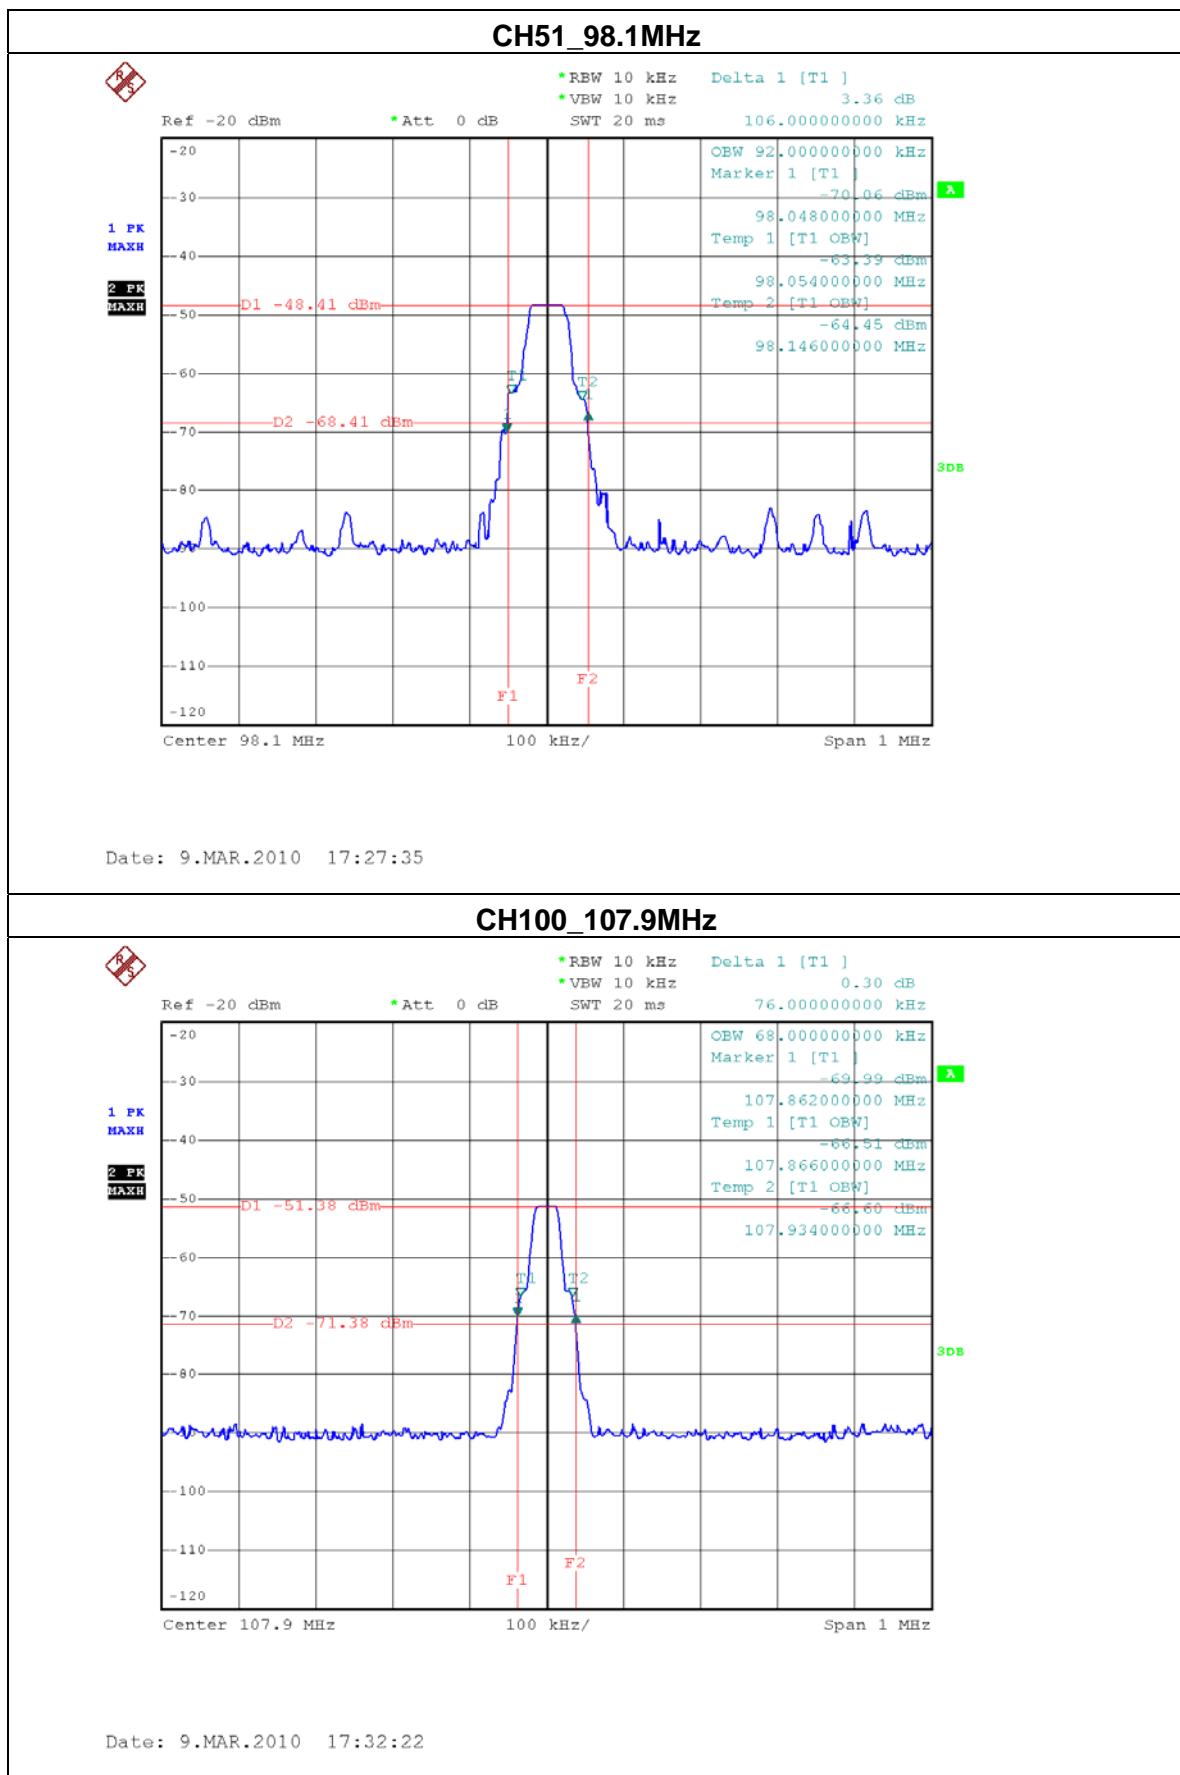



6. EUT TEST PHOTO

Radiated Measurement Photos

