

EMC TEST REPORT FCC 47 CFR Part 15B, ISED ICES-003 Issue 6	
Report Reference No	G0M-1904-8188-EF0115B-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	    DAKKS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAKKS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970
Applicant	Dräger Safety AG & Co. KGaA
Address	Revalstraße 1 23560 Lübeck GERMANY
Test Specification Standard(s)	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4-2014+ANSI C63.4a-2017
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Bump test station for calibration of X-am 8000
Model(s)	X-dock Module X-am 8000+
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	8321894
Software Version(s)	02.02.19
FCC-ID	X6O-IC002
IC	5895F-IC002
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Date of receipt of test item	2019-09-12	
Report:		
Compiled by	Stephan Liebich	
Tested by (+ signature) (Responsible for Test)	Stephan Liebich	
	Matthias Handrik	
Approved by (+ signature) (Test Lab Engineer)	Andreas Pflug	
Date of Issue	2020-02-25	
Total number of pages	53	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
T _{NOM}	Nominal operating temperature
V _{NOM}	Nominal supply voltage

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2020-02-25	Initial Release	

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	16
1.4	Support Equipment.....	25
1.5	Operational Modes.....	25
1.6	EUT Configuration.....	25
1.7	Sample emission level calculation.....	26
2	Result Summary.....	27
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	28
2.2	Test Conditions and Results - Conducted emissions acc. to ANSI C63.4.....	47


1 Equipment (Test Item) Under Test

Description	Bump test station for calibration of X-am 8000	
Model	X-dock Module X-am 8000+	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	unspecified	
Sample ID	25418 (X-dock Module X-am 8000+) 25419 (4*X-dock Module X-am 8000+)	
Hardware Version(s)	8321894	
Software Version(s)	02.02.19	
FCC-ID	X6O-IC002	
IC	5895F-IC002	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	400	
Radio technology	Wireless Communication interface for wireless power transfer	
Supply Voltage	V _{NOM}	24 V DC
AC/DC-Adaptor 1	Model	CENB1030A2400C02
	Vendor	Dräger
	Input	100 - 240 V AC, 50 - 60 Hz
	Output	24 V DC / 1.33 A
AC/DC-Adaptor 2	Model	GT-43004P15024-T3
	Vendor	Globtek
	Input	100 – 240 V AC, 50 - 60 Hz
	Output	24 V DC / 6.25 A
Manufacturer	Dräger Safety AG & Co. KGaA Revalstraße 1 23560 Lübeck GERMANY	


1.1 Equipment Ports

Name	Type	Attributes	Comment
POWER (Port of Master-Unit)	AC;DC	Count: 1 Direction: IN Service only: No Shielded: No	Adaptor 1 (without PE): DC line <2.50 m Adaptor 2 (with PE): AC line <2.40 m DC line <0.90 m
USB (Port of Master-Unit)	IO	Count: 3 Direction: IO Service only: No Shielded: Yes	Connected with USB-Stick
MICRO USB (Port of Master-Unit)	IO	Count: 1 Direction: IO Service only: No Shielded: Yes	Not connected
ETHERNET (Port of Master-Unit)	TP	Count: 1 Direction: IO Service only: No Shielded: Yes	Shielding on both sides
GAS (Port of Master-Unit)	NE	Count: 8 Direction: IO Service only: No Shielded: No	Not connected
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
BAT	DC power input port connected to external battery		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		


1.2 Equipment Photos - Internal

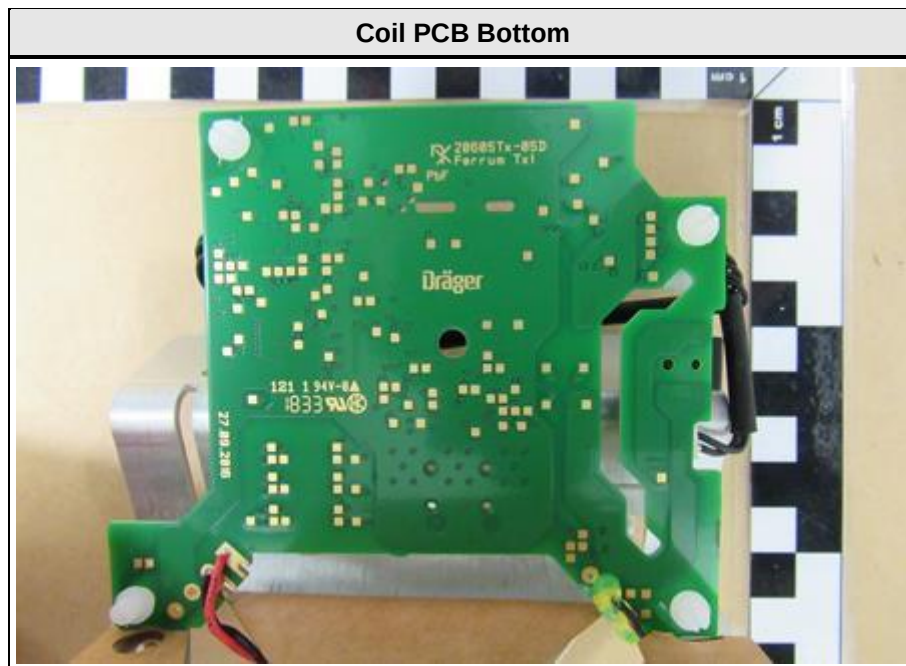


Power Coil and Communication Coil

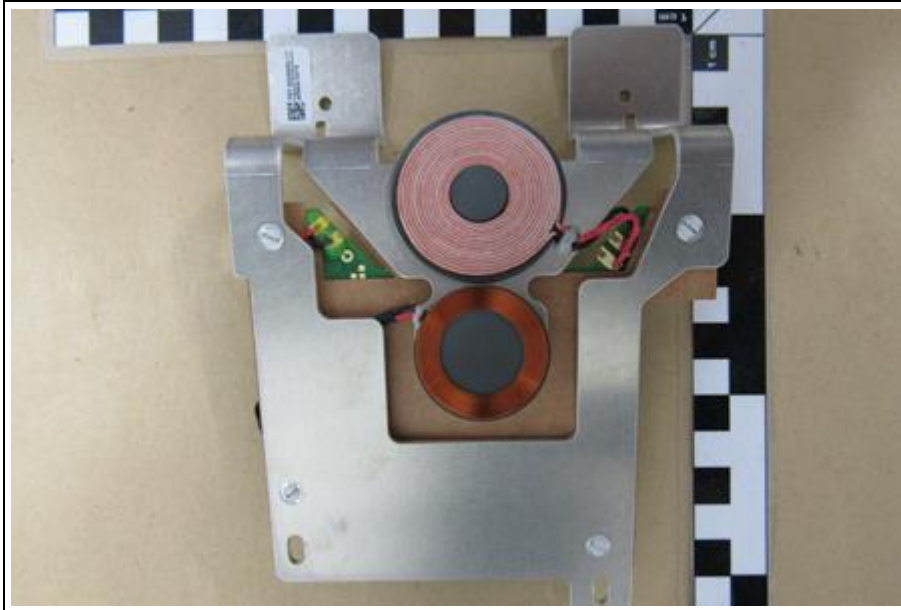

Inside View A

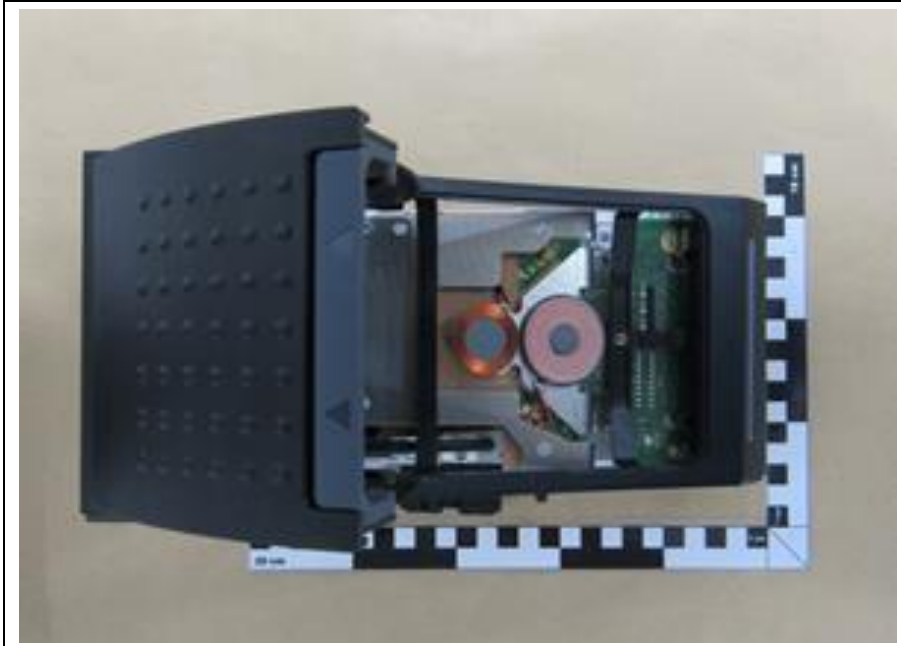


Inside View B

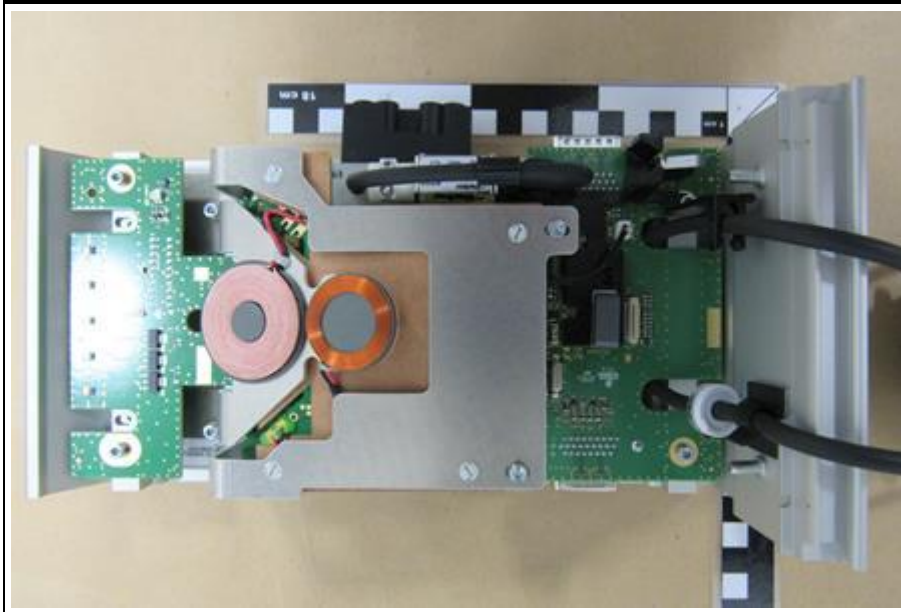


Inside View C




L-Sensor PCB Bottom

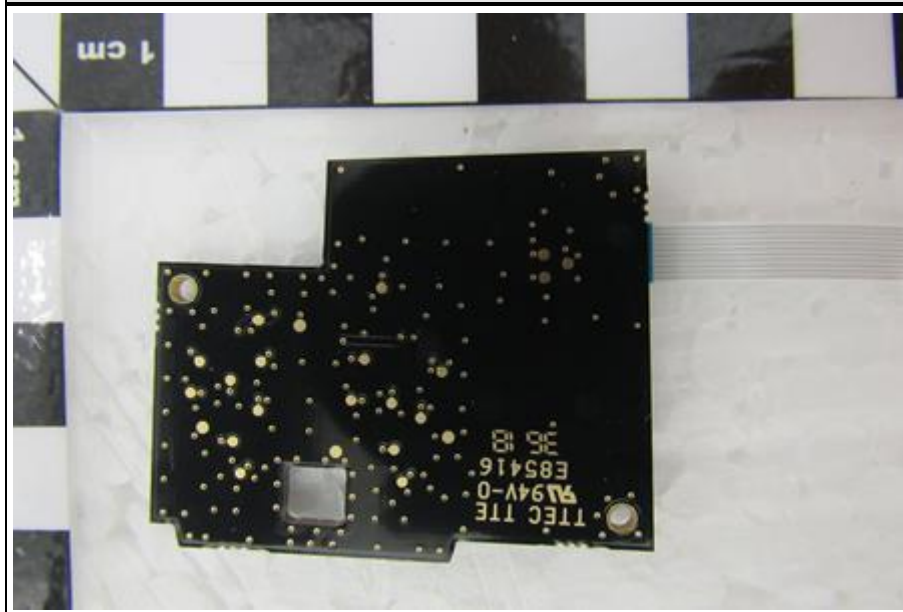


L-Sensor PCB Top

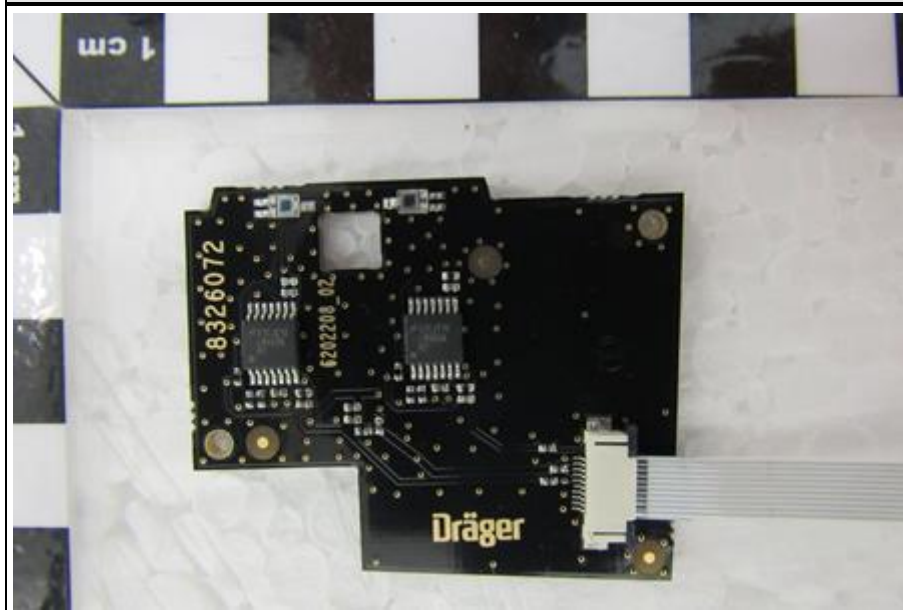


Main PCB Bottom

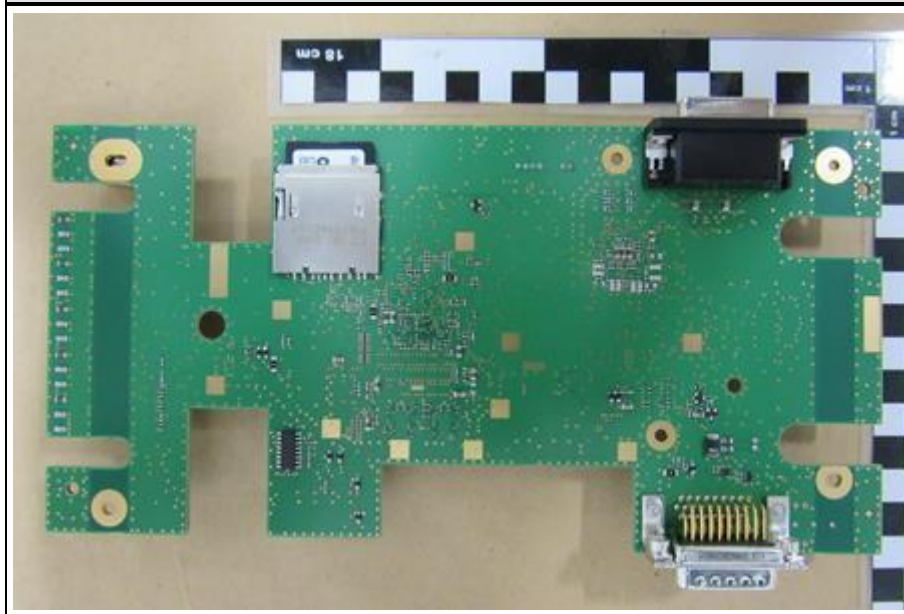


Main PCB Top

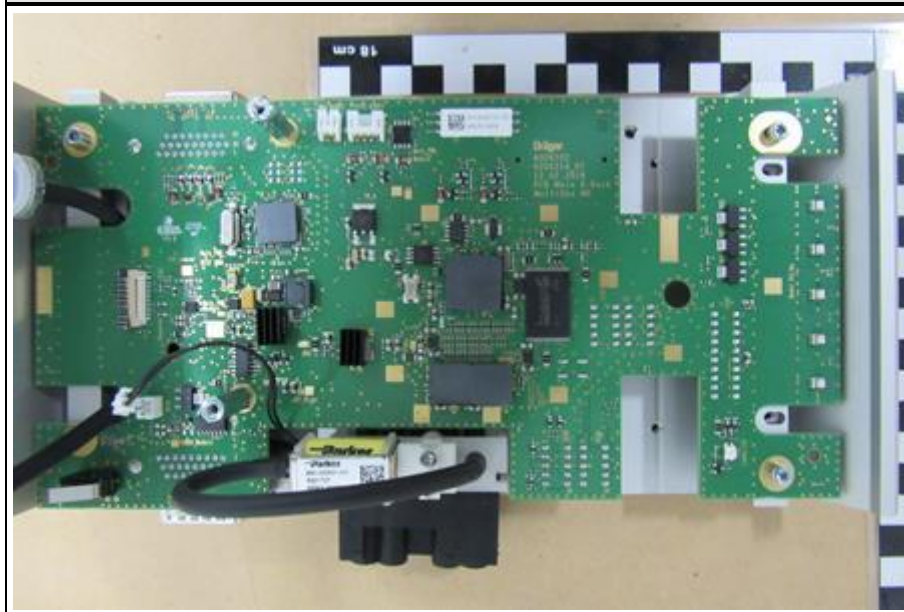


M-Sensor PCB Bottom

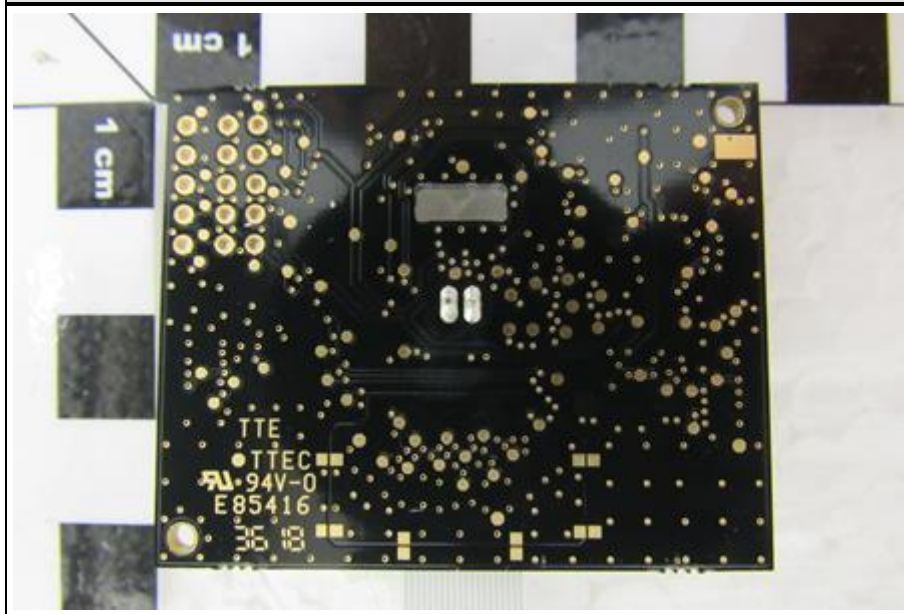


M-Sensor PCB Top

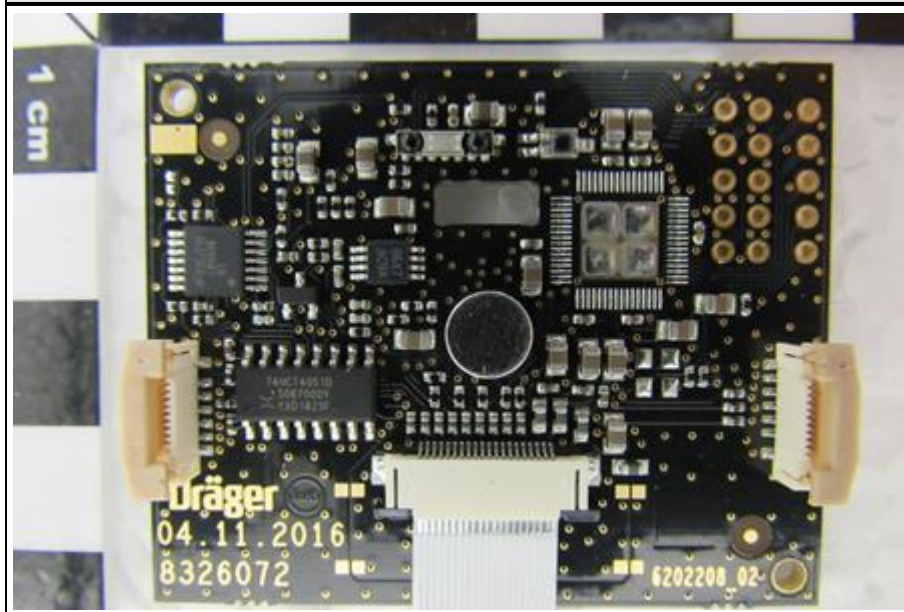


R-Sensor PCB Bottom

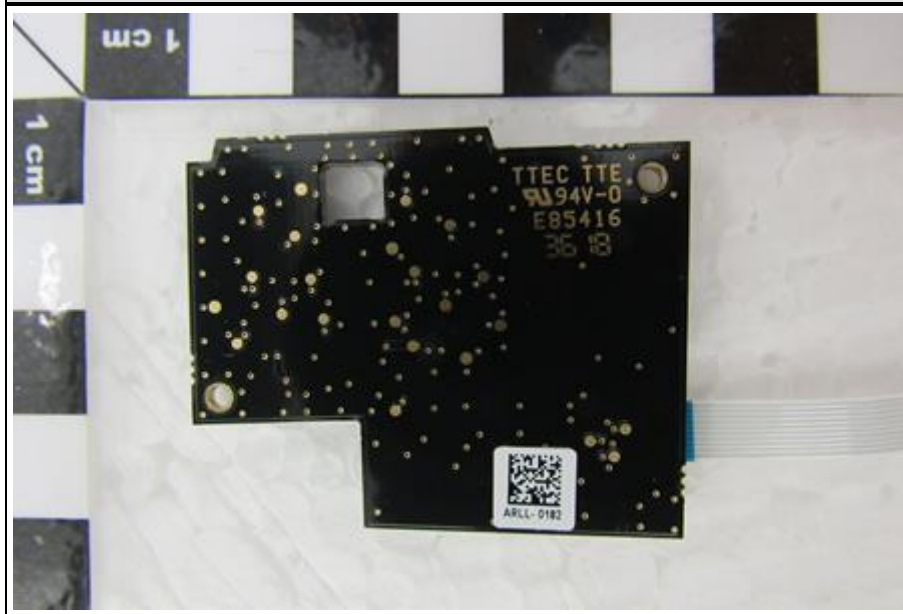


R-Sensor PCB Top

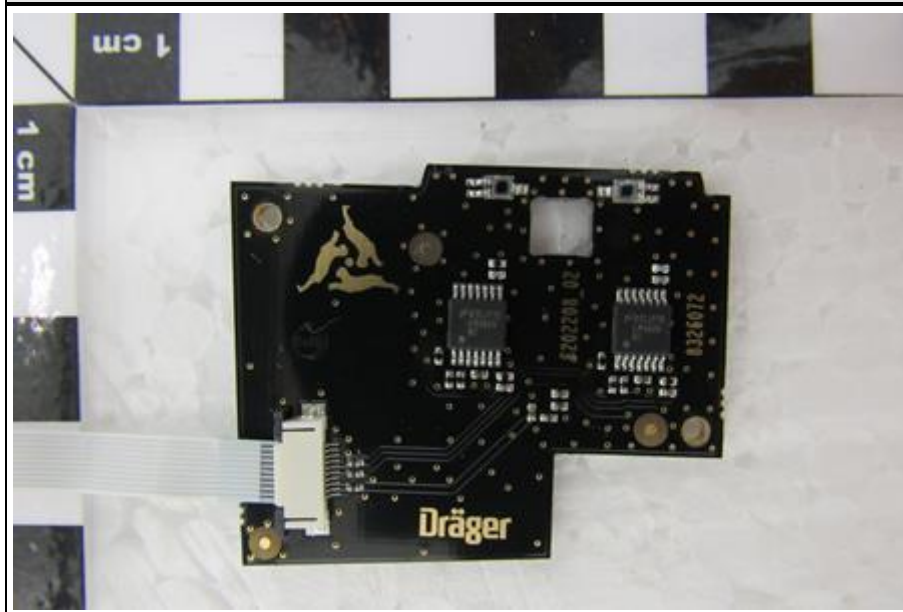

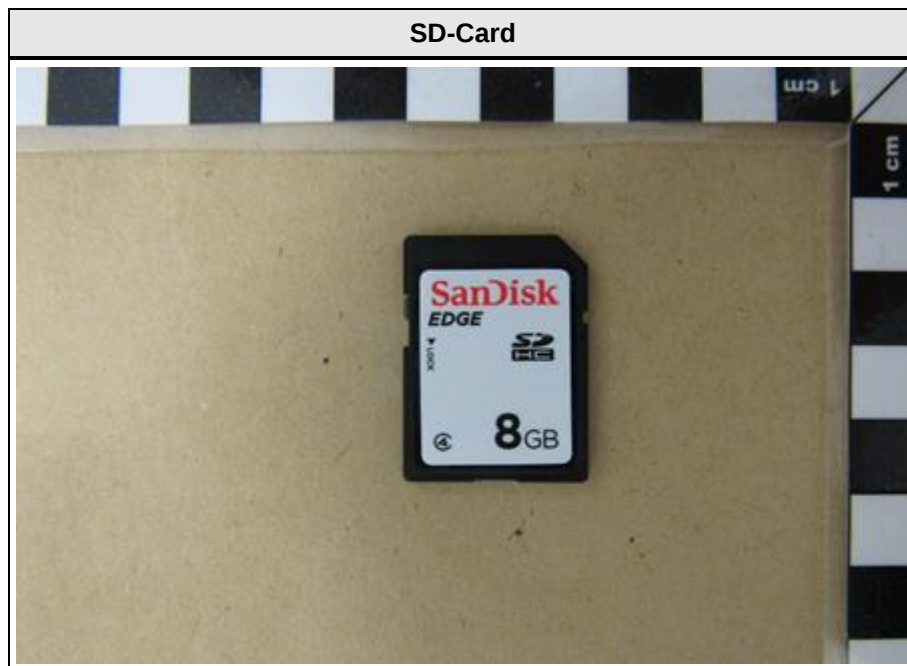


1.3 Equipment Photos - External

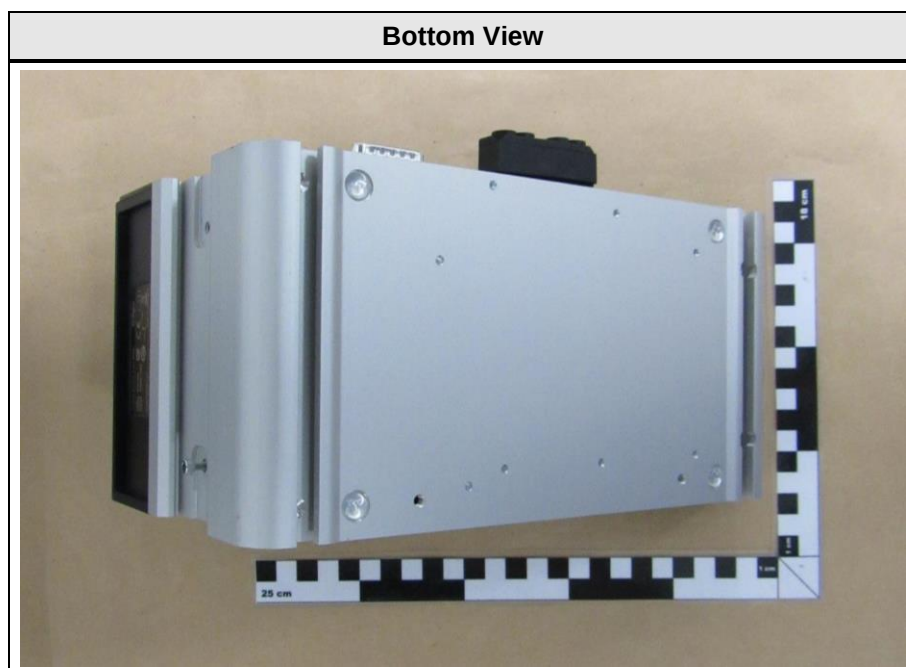


Front view



L-Side View

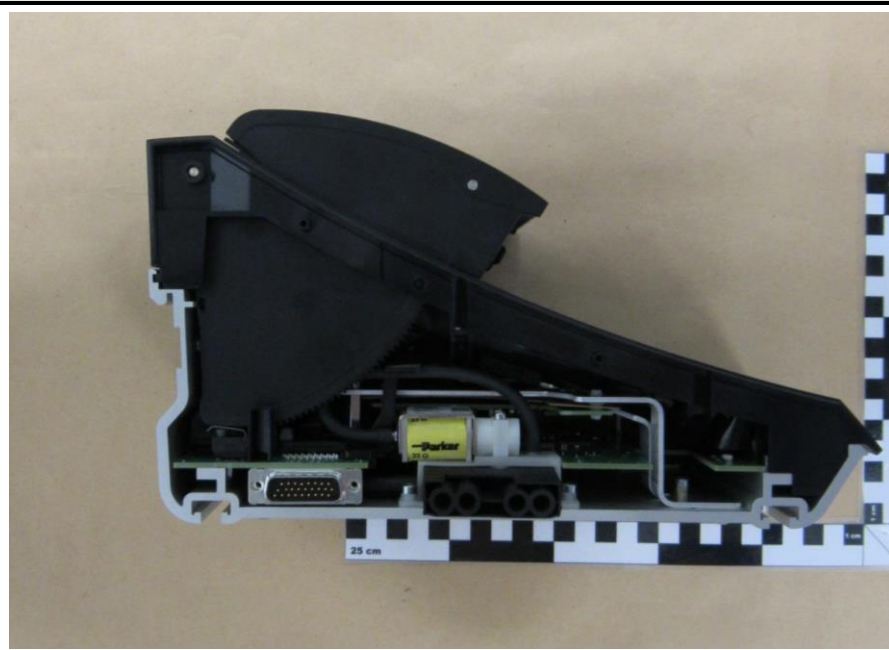


R-Side View

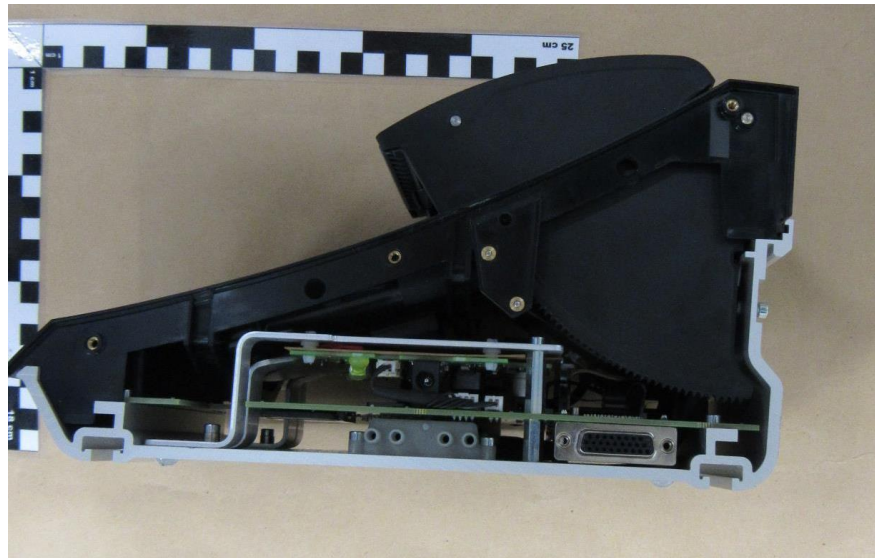

L-Side View



R-Side View

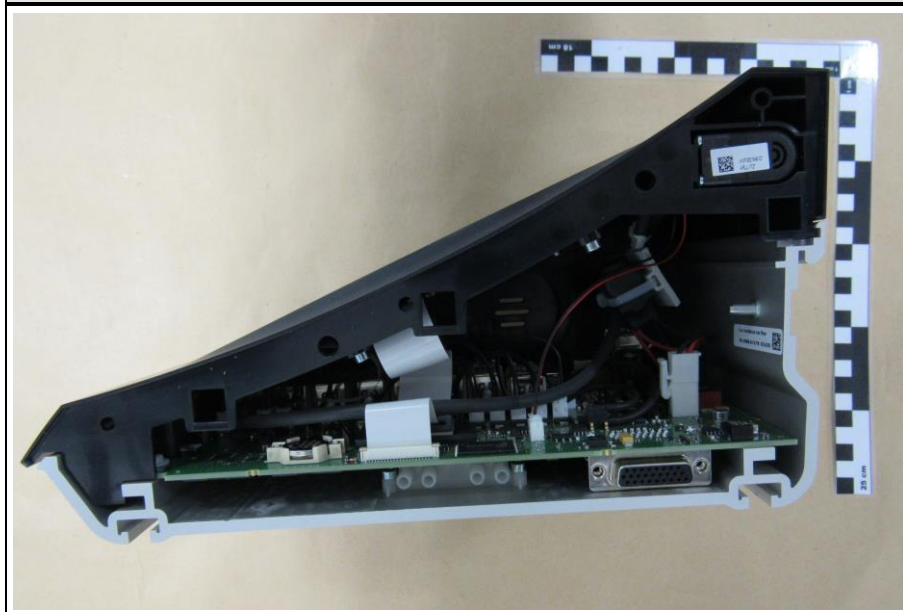

Top View With 1 Stackable Chargingdock



AC-DC-Adaptor 1 Bottom




AC-DC-Adaptor 1 Side



AC-DC-Adaptor 1 Top




AC-DC-Adaptor 2 Bottom

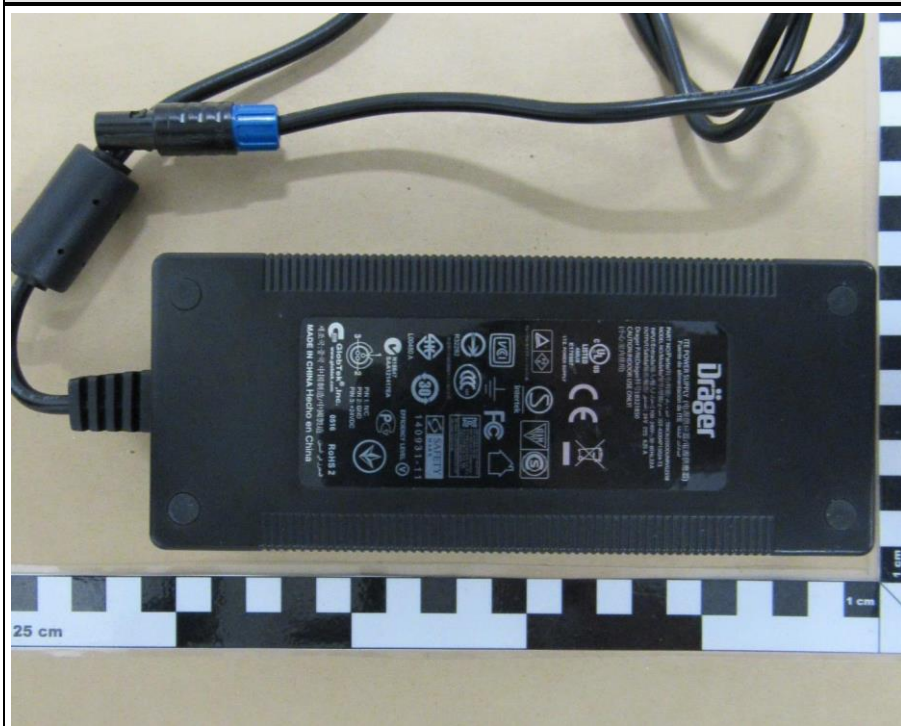

AC-DC-Adaptor 2 Side



AC-DC-Adaptor 2 Top

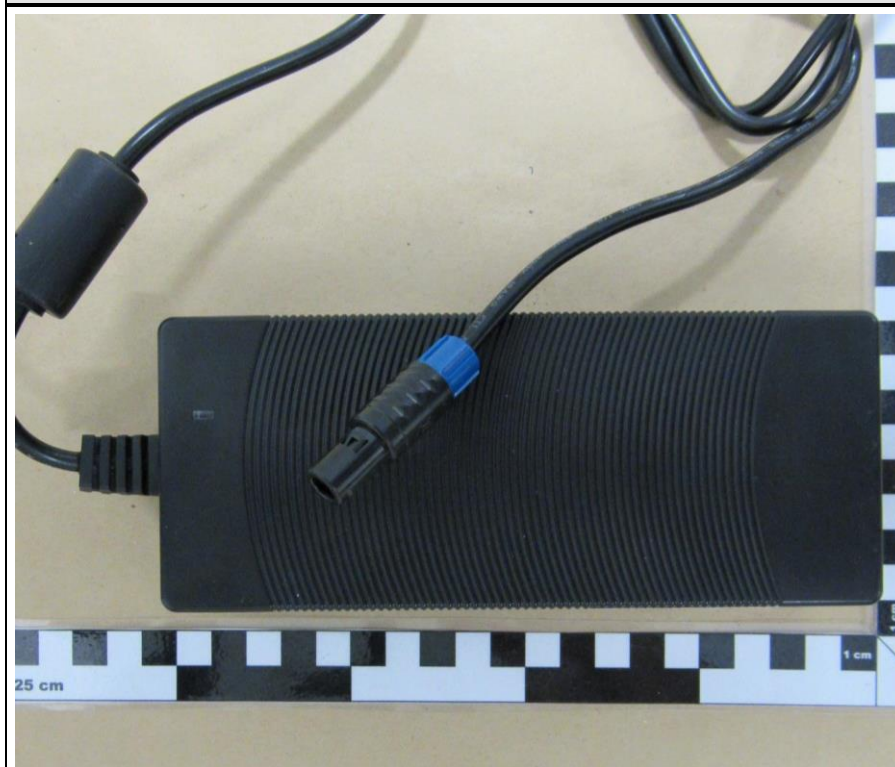

Test Report No.: GOM-1904-8188-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

AC-DC-Adaptor Connector




X-am 8000 Bottom



X-am 8000 Side



X-am 8000 Top

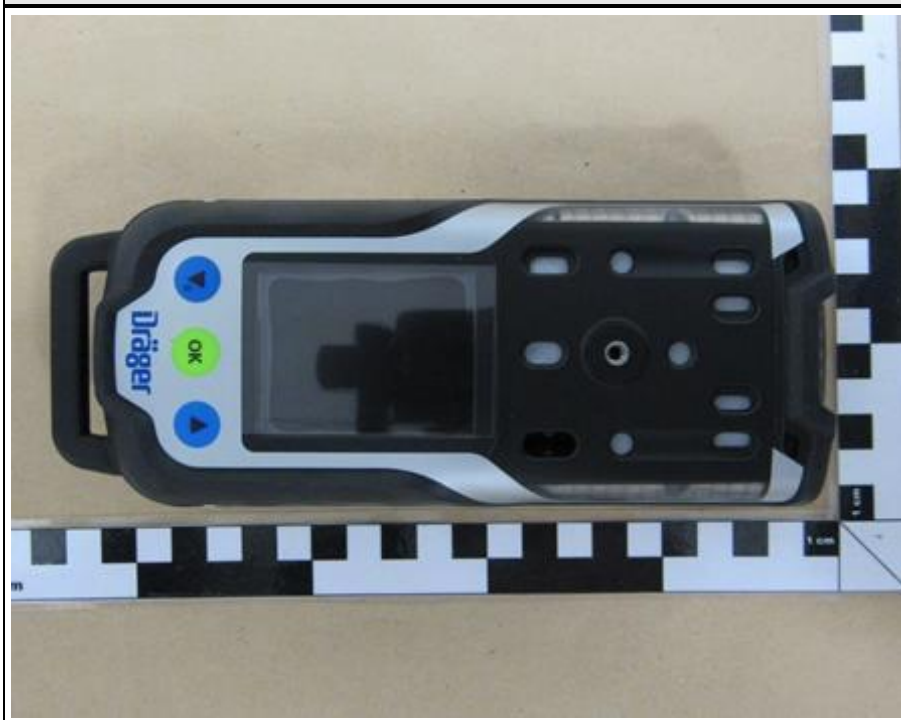

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	Master-Unit	Dräger Safety	X-dock Master	-
AE	Gas detector	Dräger Safety	X-am 8000	Five Units
AE	Notebook	lenovo	X250	-
AE	USB-Stick	-	-	-without cable
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
MON	Monitoring Equipment			
CBL	Connecting Cable			
Comment:				

1.5 Operational Modes

Mode #	Description
1	EUT is in status "Charging" and LAN data connection
Comment: worst case mode	

1.6 EUT Configuration

Configuration #	Description
1	One EUT is connected with Master-Unit. Master-Unit is powered up and powered with 120 V / 60 Hz via AC/DC-Adaptor 1. Master-Unit powered EUT. Gas detector is inserted in EUT for charging. Notebook is connected with Master-Unit via LAN- cable. USB-Stick is connected with Master-Unit.
2	Five EUTs are connected with Master-Unit. Master-Unit is powered up and powered with 120 V / 60 Hz via AC/DC-Adaptor 2. Master-Unit powered EUTs. Each Gas detector is inserted in EUT for charging. Notebook is connected with Master-Unit via LAN cable. USB-Stick is connected with Master-Unit.
Comment:	

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dBµV. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBµV + 26 dB/m	= 47.5 dBµV/m	:	47.5 dBµV/m - 57.0 dBµV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 8, 6.1	Radiated emissions	ANSI C63.4:2014	PASS	-
FCC 15.107 ICES-003, 8, 6.2	AC power line conducted emissions	ANSI C63.4:2014	PASS	-
Comment:				



Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object



2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 8, 6.1
Reference method	ANSI C63.4:2014 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	400
Measurement range	30 MHz to 3.7 GHz
Temperature [°C]	22
Humidity [%]	30
Operator	Stephan Liebich
Date	2020-01-29

2.1.2 Setup

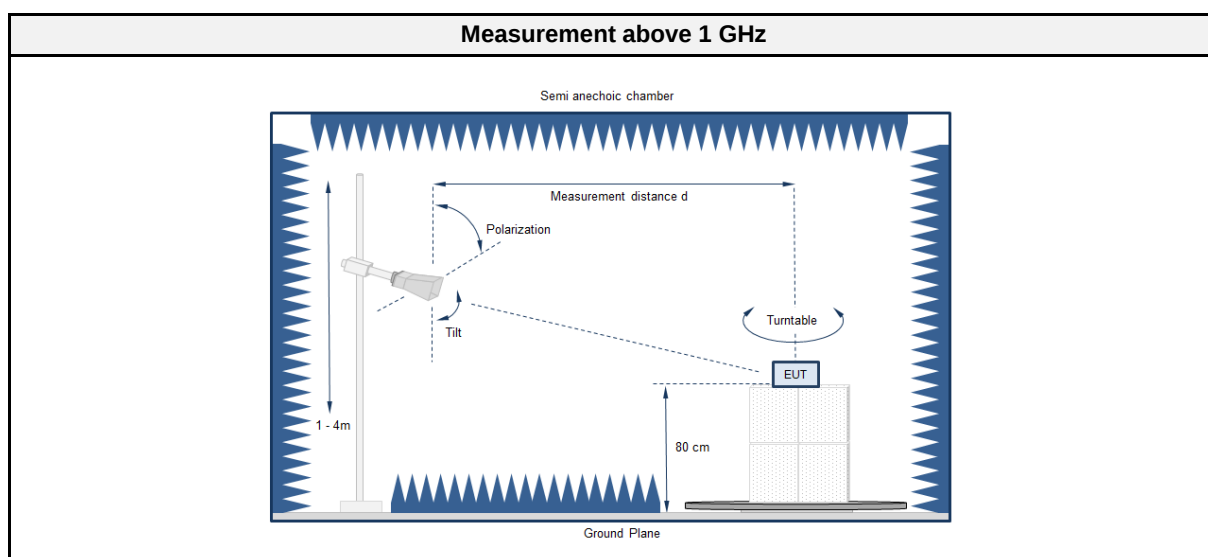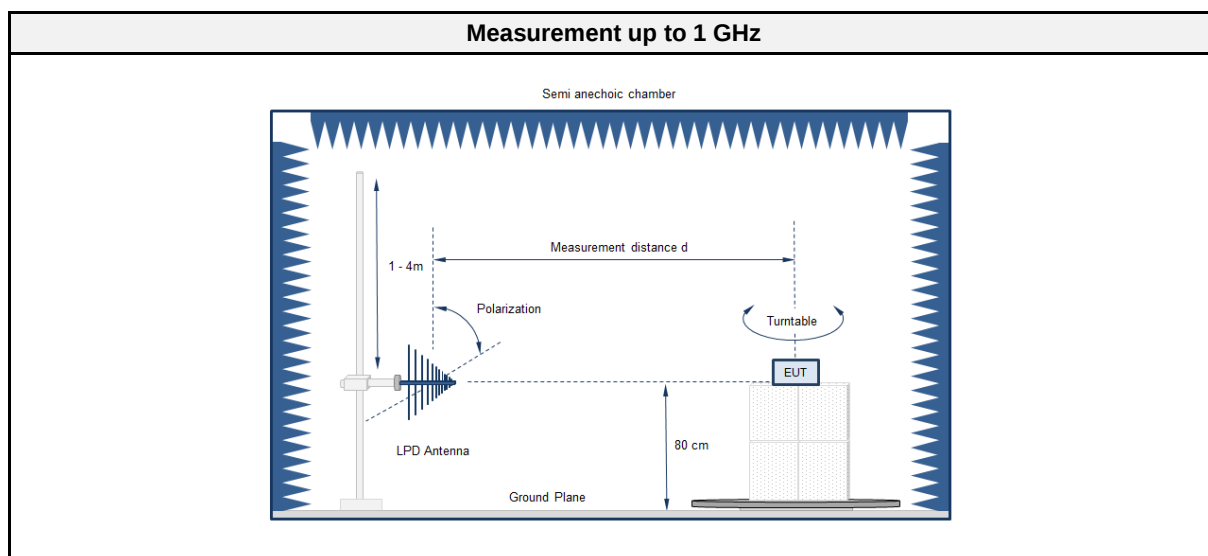

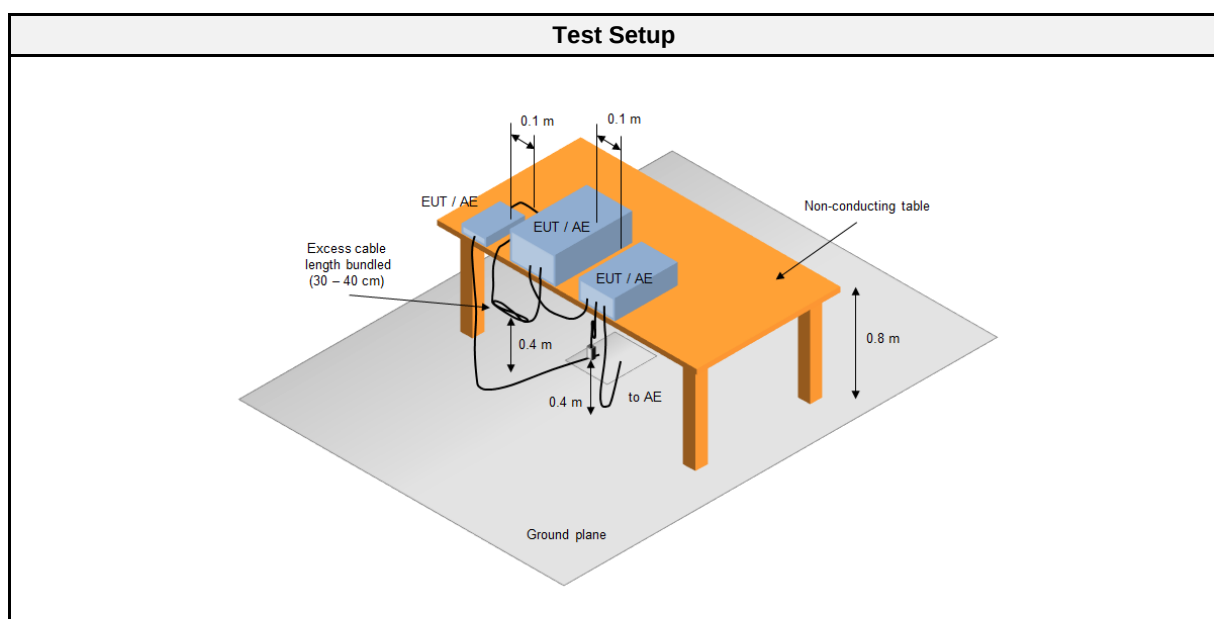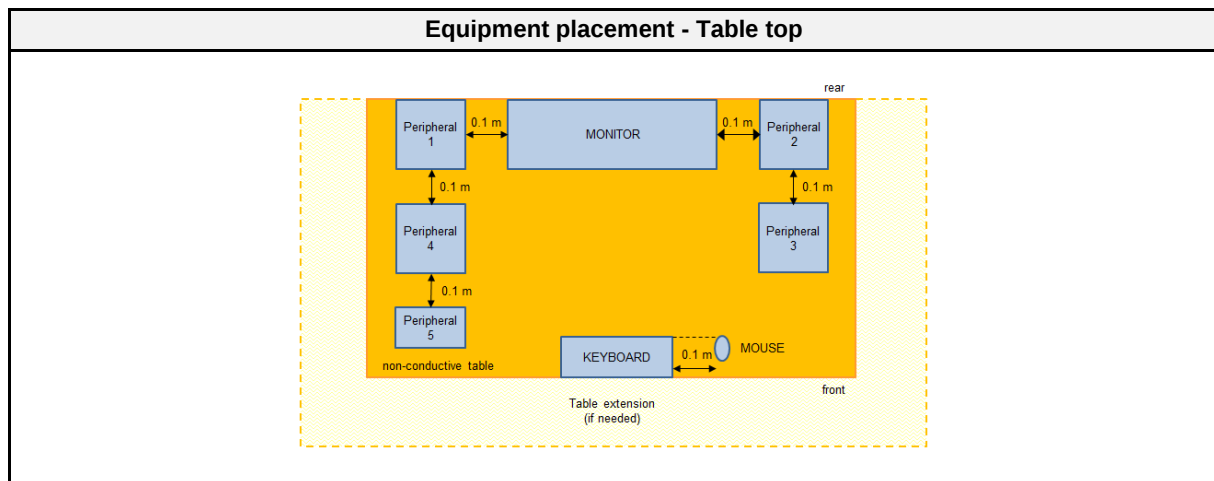

2.1.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2018-07	2021-07
EMI Test Receiver	Keysight	N9038A-526/WXP	EF01070	2019-09	2020-09
Biconical Antenna	R&S	HK 116	EF00030	2019-04	2022-04
LPD Antenna	R&S	HL 223	EF00187	2019-05	2022-05
Horn antenna	Schwarzbeck	BBHA 9120D (1-18GHz)	EF00018	2019-10	2022-10
Climatic Sensor	Embedded Data Systems, LLC.	2800100000254 17E	EF01054	2019-05	2020-05

2.1.4 Procedure

Exploratory measurement	
1.	The EUT was placed on a non-conductive table at a height of 0.8m.
2.	The EUT and support equipment, if needed, were set up to simulate typical usage.
3.	Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
4.	The antenna was placed at a distance of 3 or 10 m.
5.	The received signal was monitored at the measurement receiver.
6.	This procedure has to be performed in both antenna polarizations, horizontal and vertical.
7.	The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3

Final measurement	
1.	The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver.
2.	A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast.
3.	The EUT and cable arrangement were based on the exploratory measurement results.
4.	Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
5.	The test data of the worst-case conditions were recorded and shown on the next pages.

2.1.5 Limits



Class B @ 3 m		
Frequency [MHz]	Detector	Limit [dB μ V/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak	74
	Average	54

Class A @ 10 m		
Frequency [MHz]	Detector	Limit [dB μ V/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak	69.5
	Average	49.5


2.1.6 Results

Test Results			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	-
1	2	PASS	-


2.1.7 Setup Photos

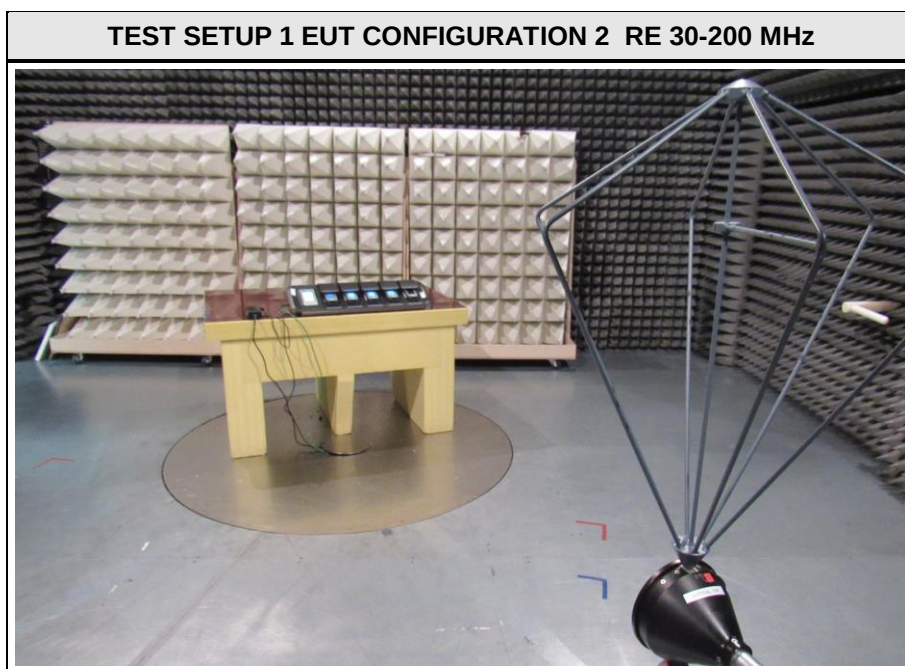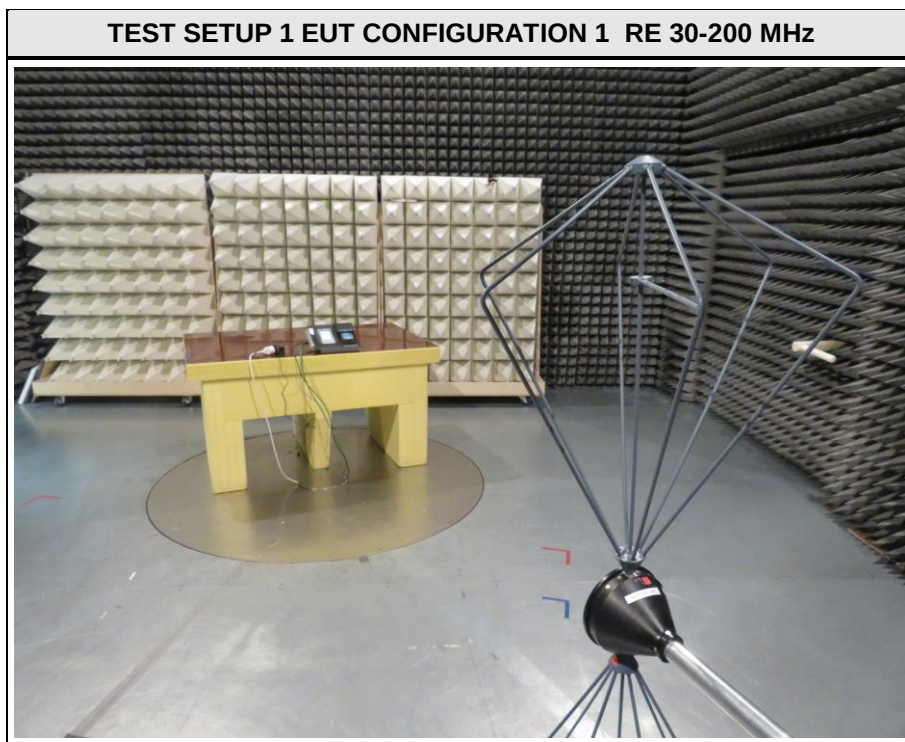

TEST SETUP 2 EUT CONFIGURATION 1 RE 200-1000 MHz

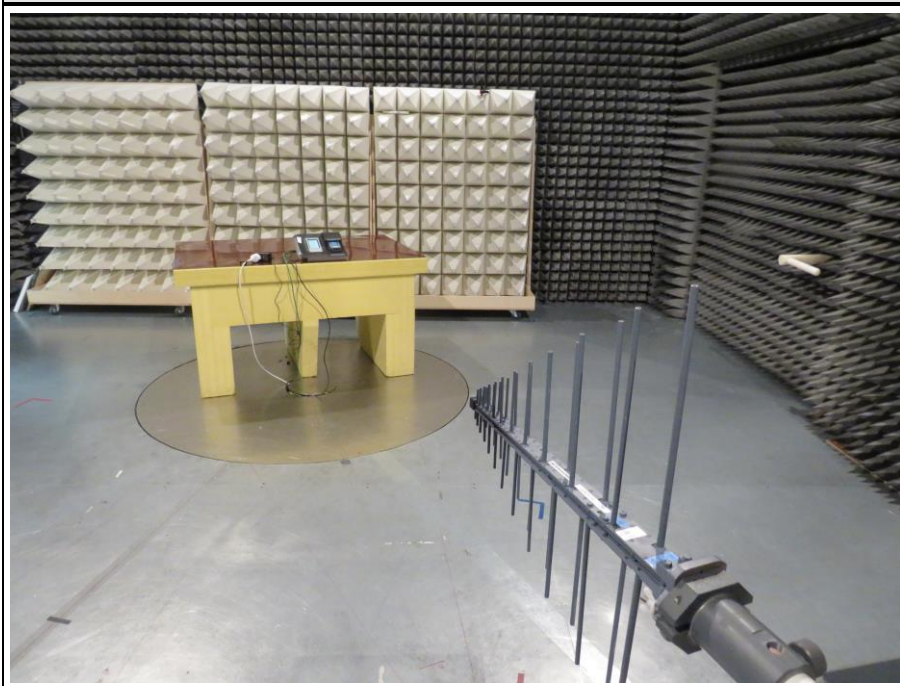

TEST SETUP 2 EUT CONFIGURATION 2 RE 200-1000 MHz

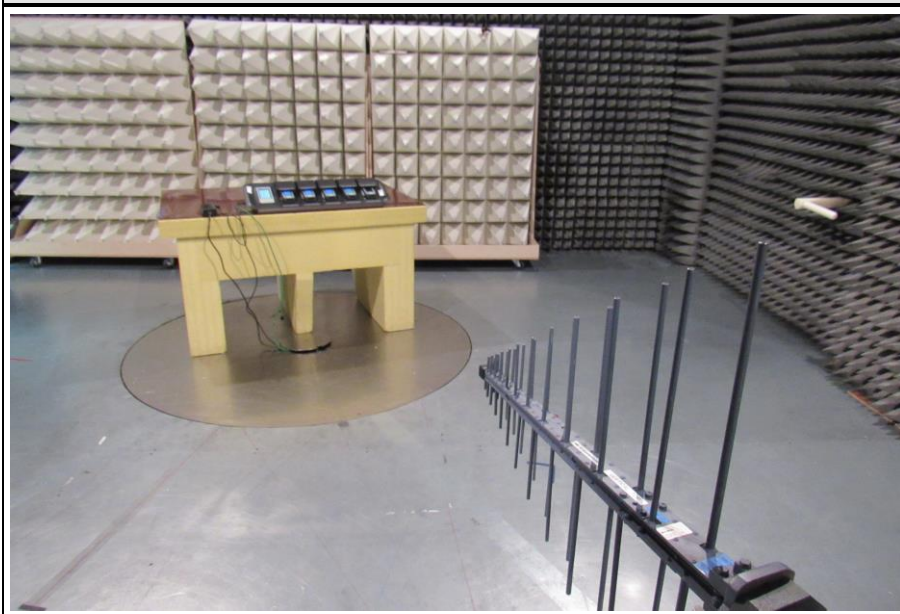

TEST SETUP 3 EUT CONFIGURATION 1 1 RE 1-3.7 GHz



TEST SETUP 3 EUT CONFIGURATION 2 1 RE 1-3.7 GHz



TEST SETUP FOCUS EUT CONFIGURATION 1 RADIATED EMISSION



TEST SETUP FOCUS EUT CONFIGURATION 2 RADIATED EMISSION




2.1.8 Records

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 1)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 1

Index 1

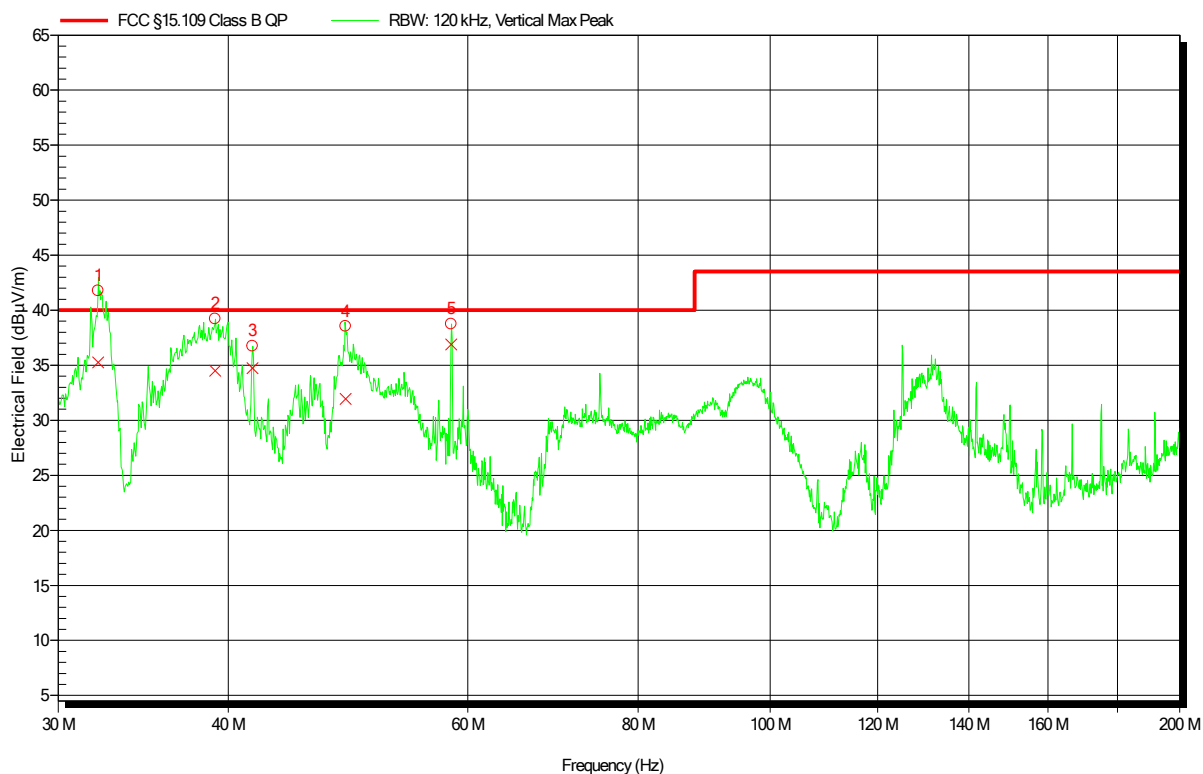

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	32.102 MHz	35.25 dBµV/m	40 dBµV/m	-4.75 dB	Pass	90 Degree	1 m
2	39.128 MHz	34.51 dBµV/m	40 dBµV/m	-5.49 dB	Pass	90 Degree	1 m
3	41.668 MHz	34.73 dBµV/m	40 dBµV/m	-5.27 dB	Pass	90 Degree	1 m
4	48.795 MHz	31.94 dBµV/m	40 dBµV/m	-8.06 dB	Pass	90 Degree	1 m
5	58.325 MHz	36.89 dBµV/m	40 dBµV/m	-3.11 dB	Pass	90 Degree	1 m


Test Report No.: G0M-1904-8188-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 1)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 1


Index 4

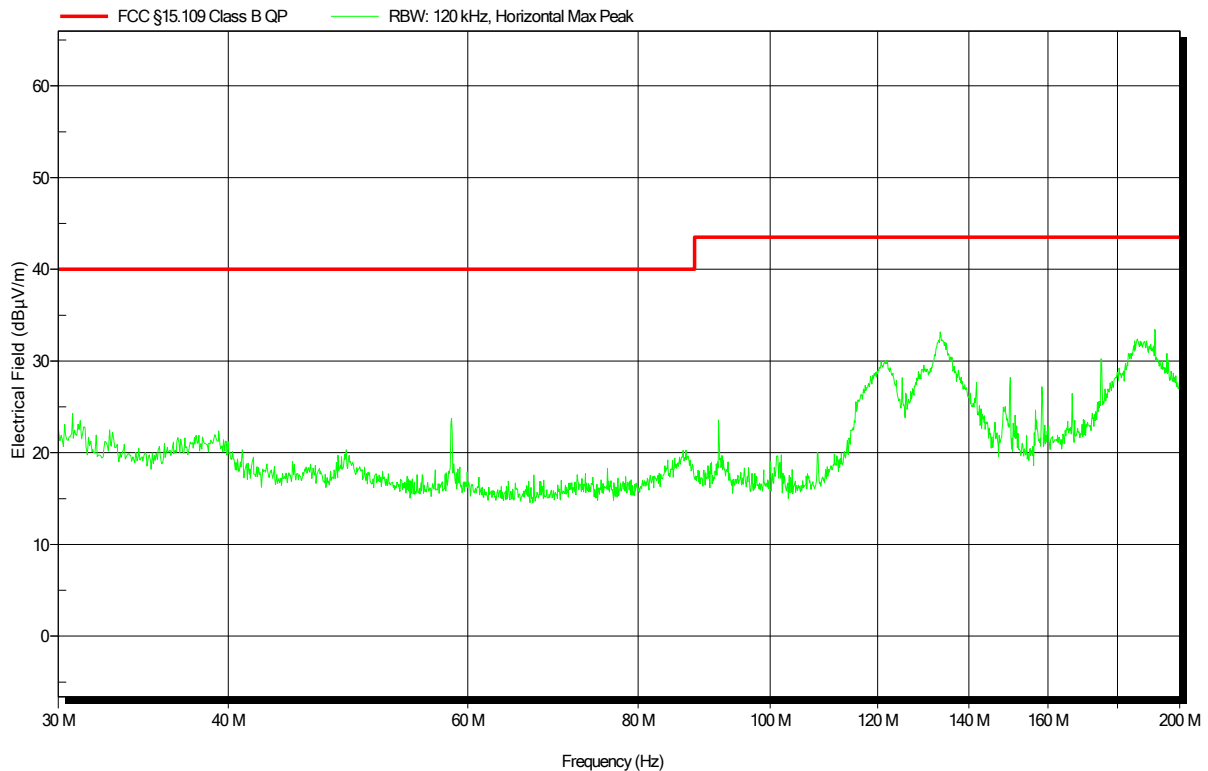

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 1)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 1

Index 5

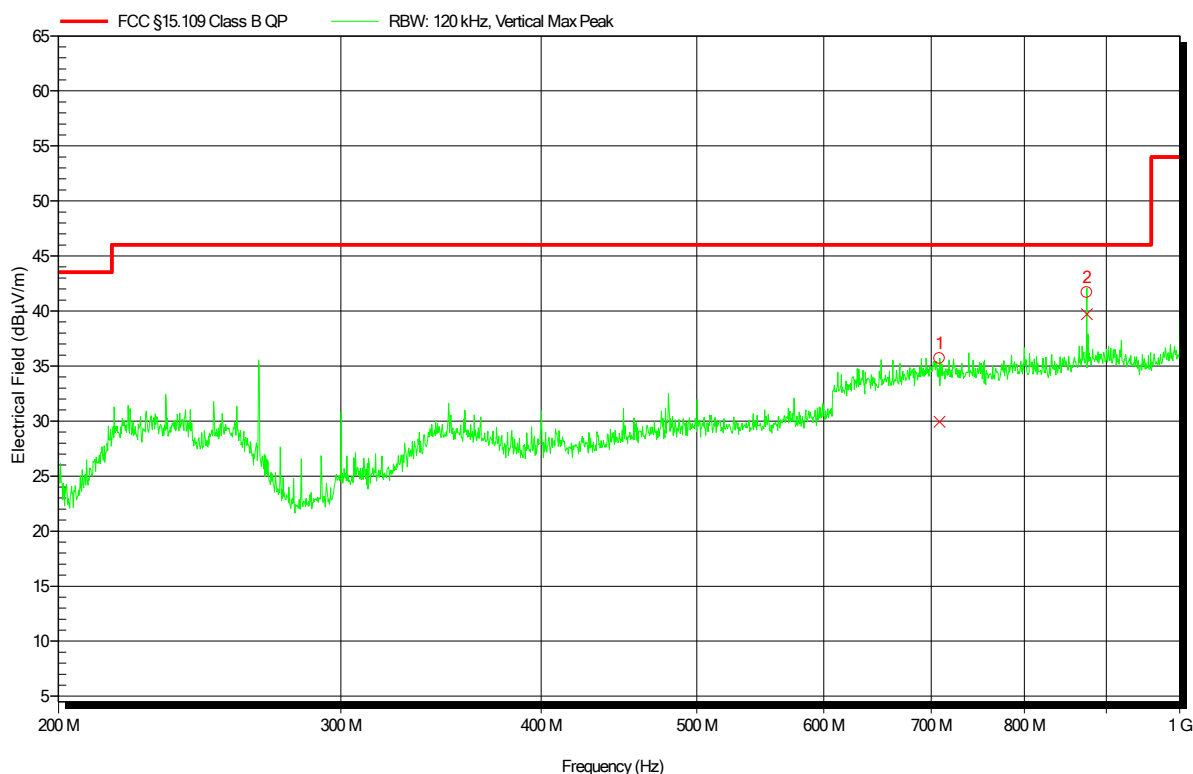


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	708.478 MHz	29.94 dBµV/m	46.02 dBµV/m	-16.08 dB	Pass	0 Degree	1 m
2	874.974 MHz	39.72 dBµV/m	46.02 dBµV/m	-6.3 dB	Pass	0 Degree	1 m

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 1)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 1

Index 8

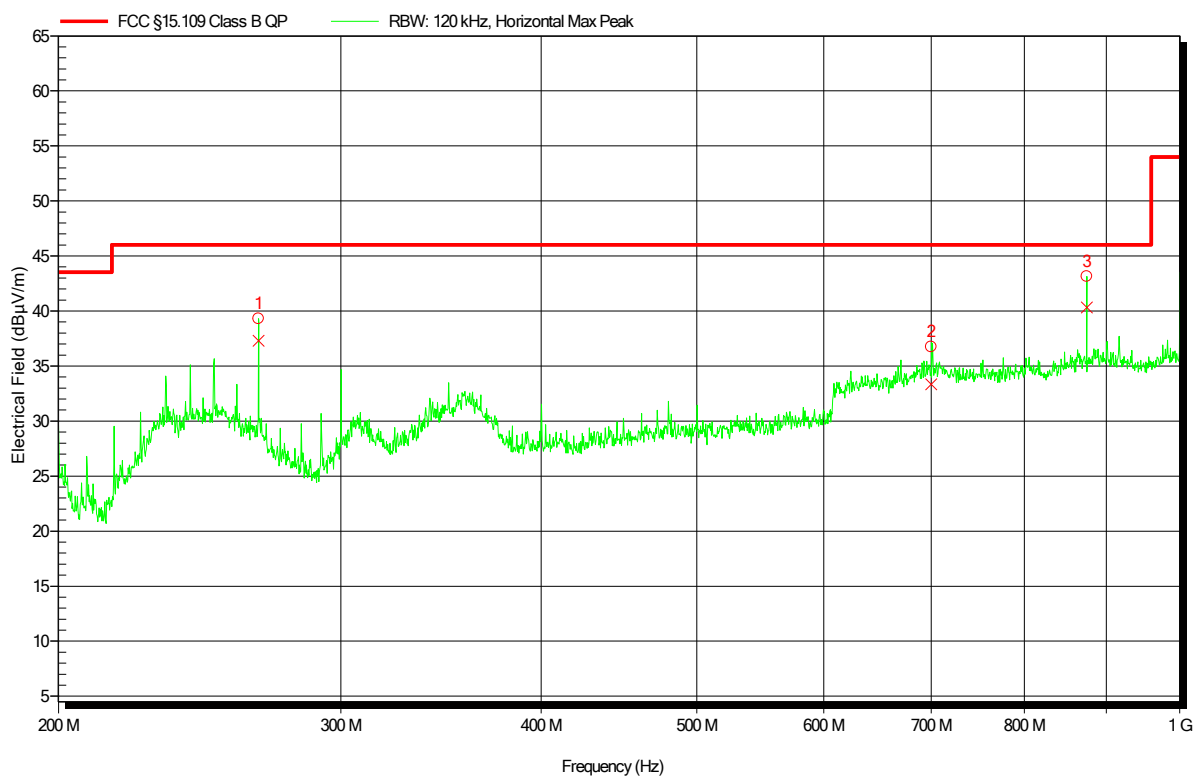


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	266.659 MHz	37.31 dBµV/m	46.02 dBµV/m	-8.71 dB	Pass	52 Degree	1 m
2	699.988 MHz	33.34 dBµV/m	46.02 dBµV/m	-12.68 dB	Pass	52 Degree	1 m
3	874.974 MHz	40.33 dBµV/m	46.02 dBµV/m	-5.69 dB	Pass	52 Degree	1 m

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 1)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 1


Index 9

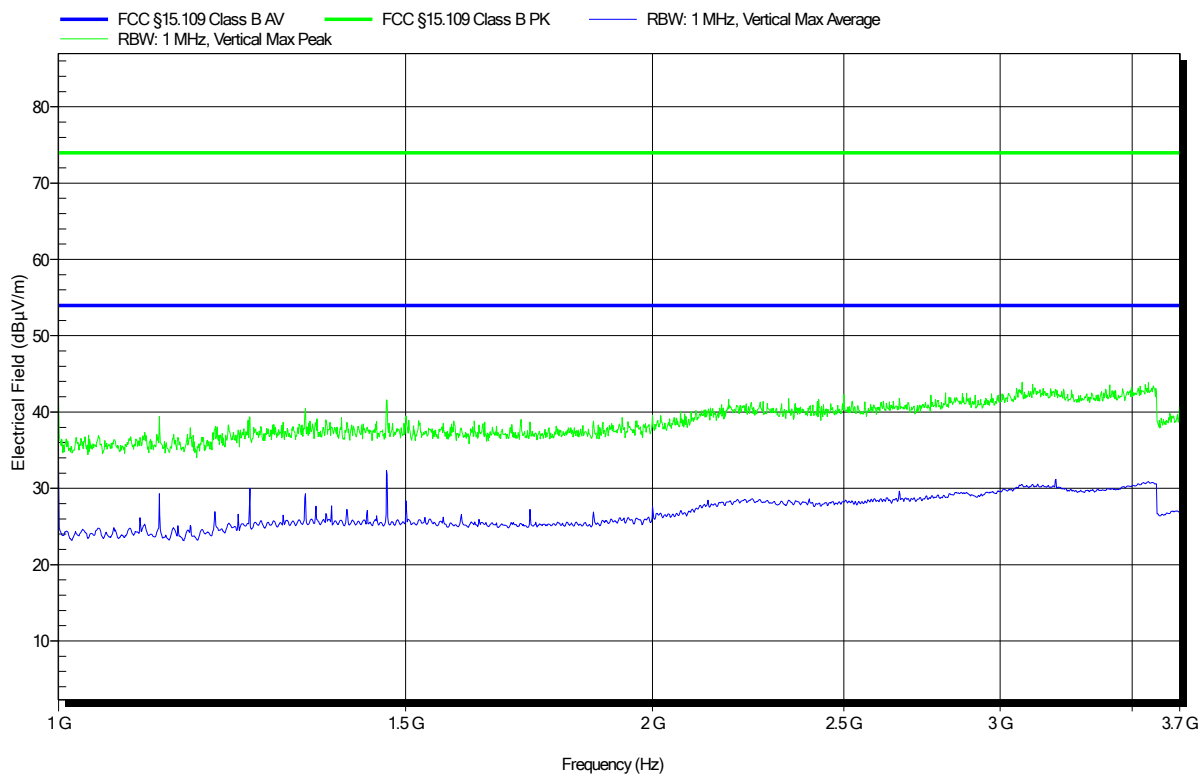

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 1)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 1

Index 12

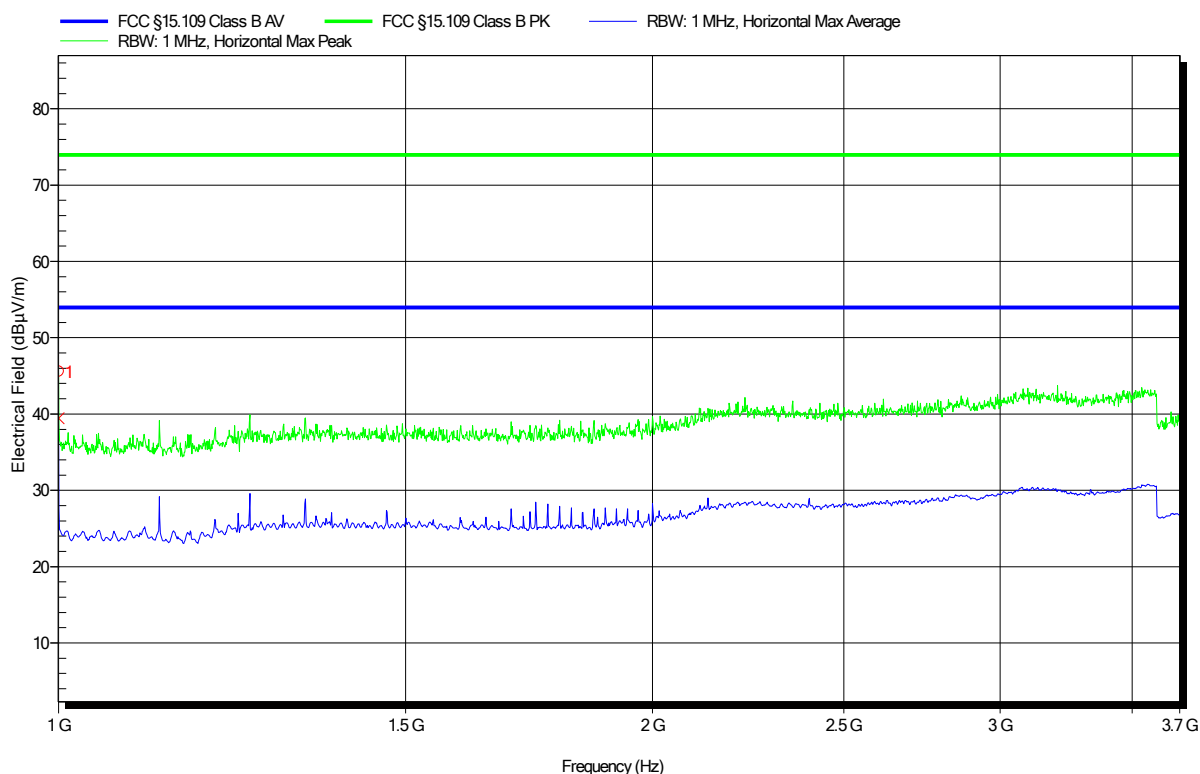


Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1 GHz	45.58 dBµV/m	73.98 dBµV/m	-28.39 dB	Pass	0 Degree	1 m
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1 GHz	39.46 dBµV/m	53.98 dBµV/m	-14.51 dB	Pass	0 Degree	1 m

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418 + 25419
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 2)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 2

Index 27

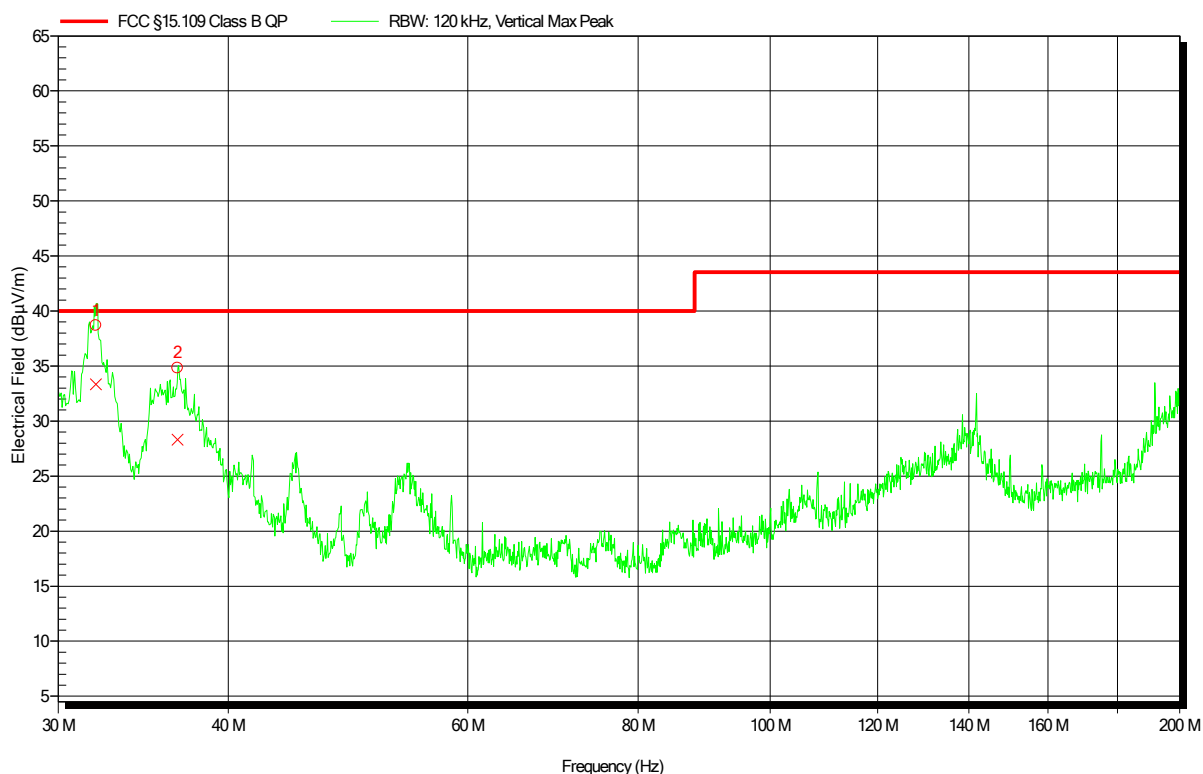


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	31.982 MHz	33.34 dBµV/m	40 dBµV/m	-6.66 dB	Pass	90 Degree	1 m
2	36.726 MHz	28.32 dBµV/m	40 dBµV/m	-11.68 dB	Pass	90 Degree	1 m

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418 + 25419
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 2)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 2

Index 29

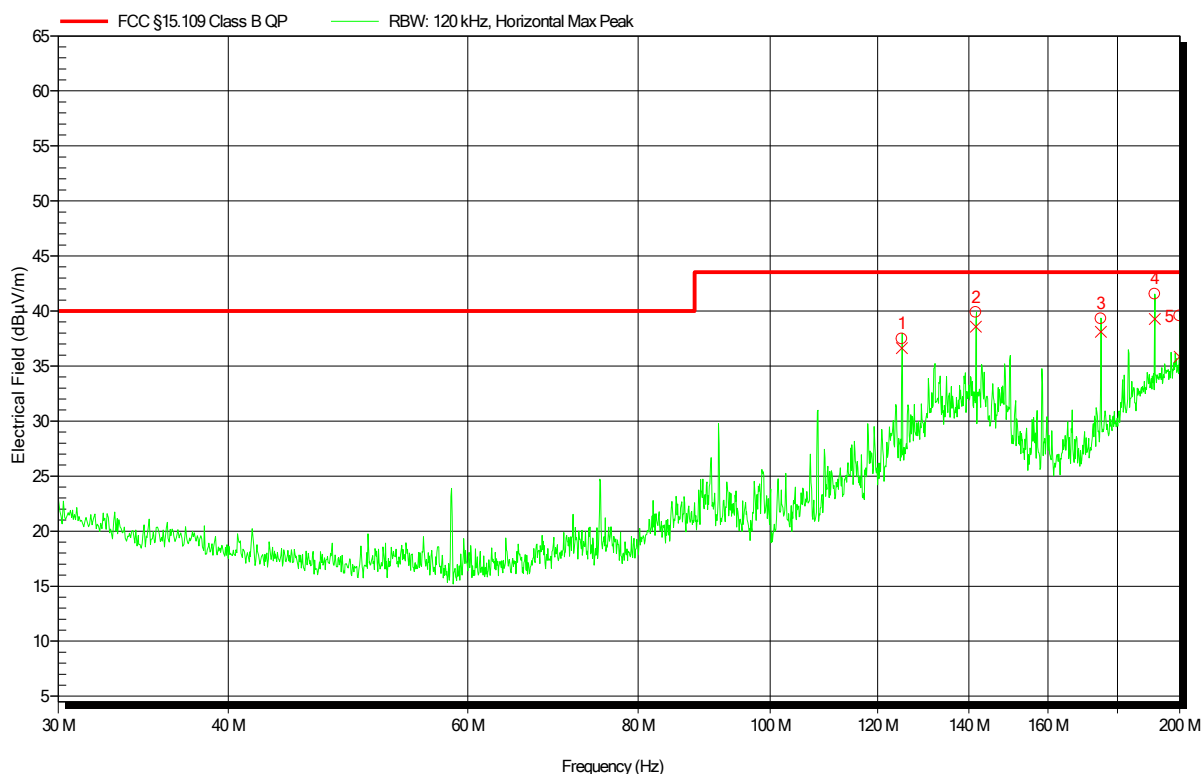


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	125.004 MHz	36.61 dBµV/m	43.52 dBµV/m	-6.91 dB	Pass	30 Degree	1.3 m
2	141.668 MHz	38.58 dBµV/m	43.52 dBµV/m	-4.94 dB	Pass	30 Degree	1.3 m
3	174.995 MHz	38.11 dBµV/m	43.52 dBµV/m	-5.41 dB	Pass	30 Degree	1.3 m
4	191.665 MHz	39.26 dBµV/m	43.52 dBµV/m	-4.26 dB	Pass	30 Degree	1.3 m
5	199.982 MHz	35.84 dBµV/m	43.52 dBµV/m	-7.69 dB	Pass	30 Degree	1.3 m

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418 + 25419
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 2)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 2

Index 22

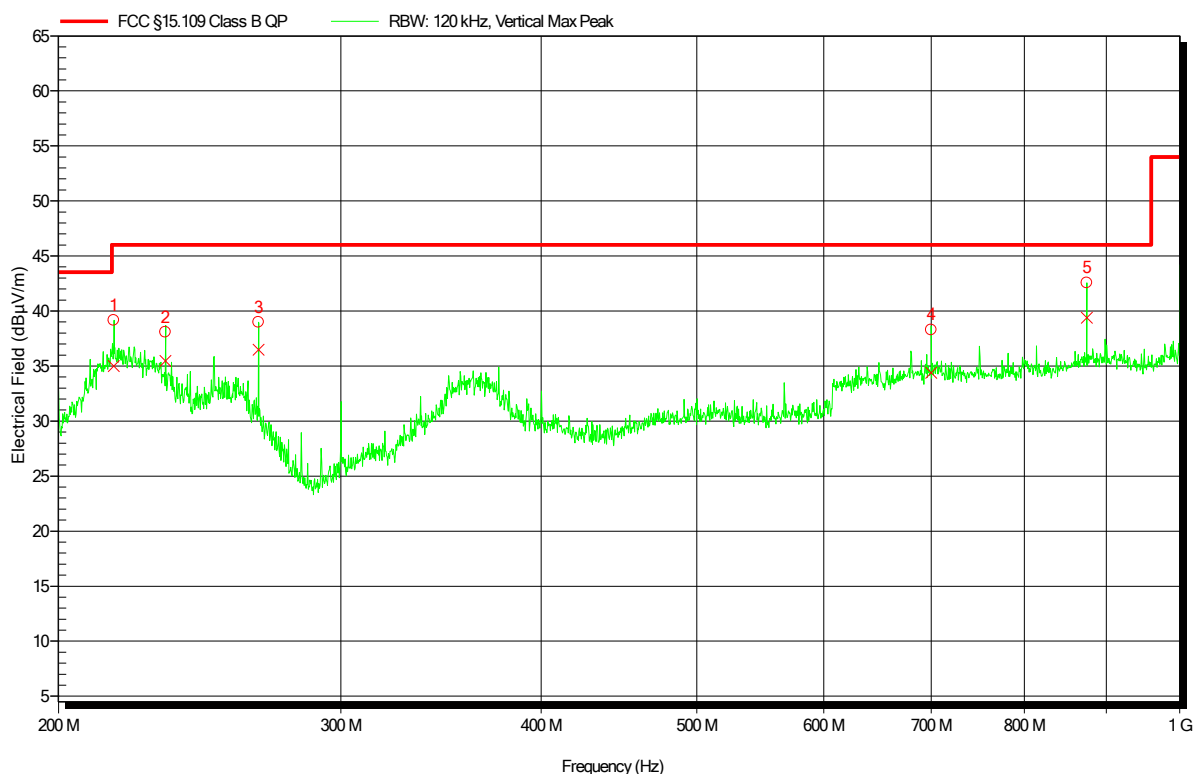


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	216.662 MHz	34.99 dBµV/m	46.02 dBµV/m	-11.03 dB	Pass	30 Degree	1.3 m
2	233.341 MHz	35.46 dBµV/m	46.02 dBµV/m	-10.56 dB	Pass	30 Degree	1.3 m
3	266.659 MHz	36.48 dBµV/m	46.02 dBµV/m	-9.54 dB	Pass	30 Degree	1.3 m
4	700.006 MHz	34.38 dBµV/m	46.02 dBµV/m	-11.64 dB	Pass	30 Degree	1.3 m
5	874.974 MHz	39.4 dBµV/m	46.02 dBµV/m	-6.62 dB	Pass	30 Degree	1.3 m

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418 + 25419
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 2)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 2

Index 25

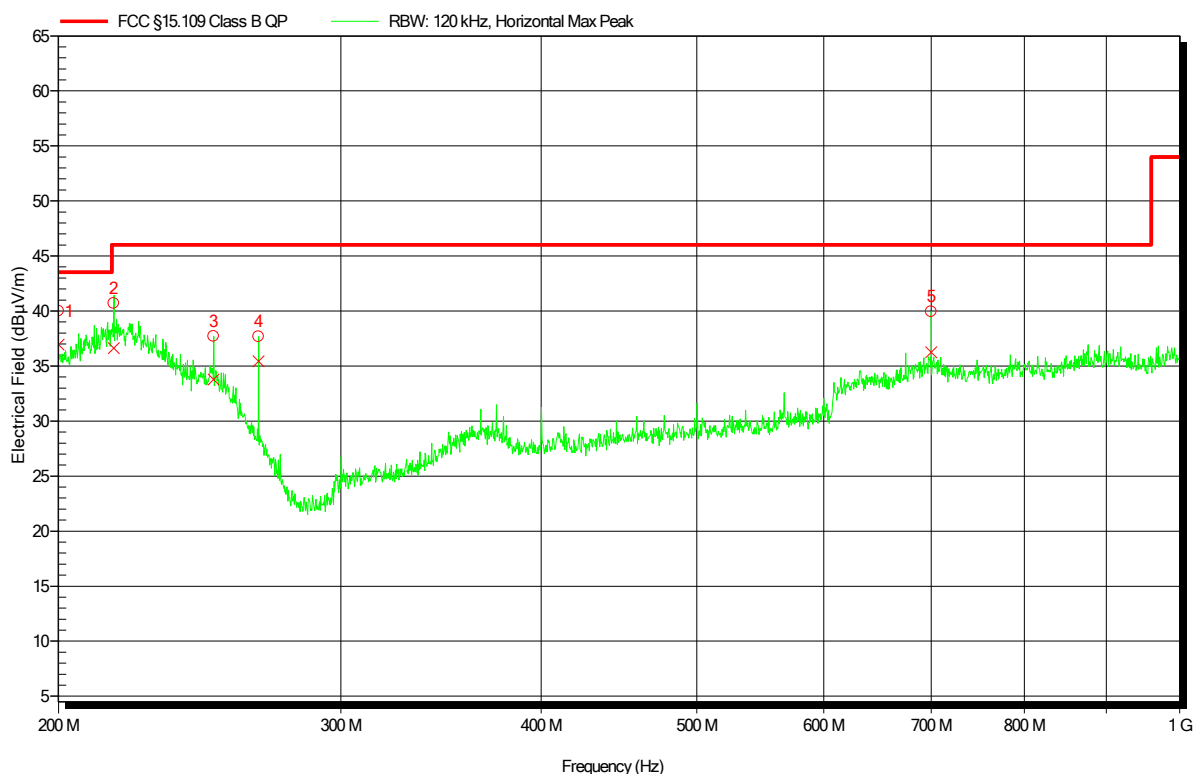


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	200 MHz	36.96 dBµV/m	43.52 dBµV/m	-6.56 dB	Pass	0 Degree	1.3 m
2	216.656 MHz	36.63 dBµV/m	46.02 dBµV/m	-9.39 dB	Pass	0 Degree	1.3 m
3	249.973 MHz	33.77 dBµV/m	46.02 dBµV/m	-12.25 dB	Pass	0 Degree	1.3 m
4	266.659 MHz	35.42 dBµV/m	46.02 dBµV/m	-10.6 dB	Pass	0 Degree	1.3 m
5	699.982 MHz	36.25 dBµV/m	46.02 dBµV/m	-9.77 dB	Pass	0 Degree	1.3 m

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418 + 25419
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 2)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 2

Index 13

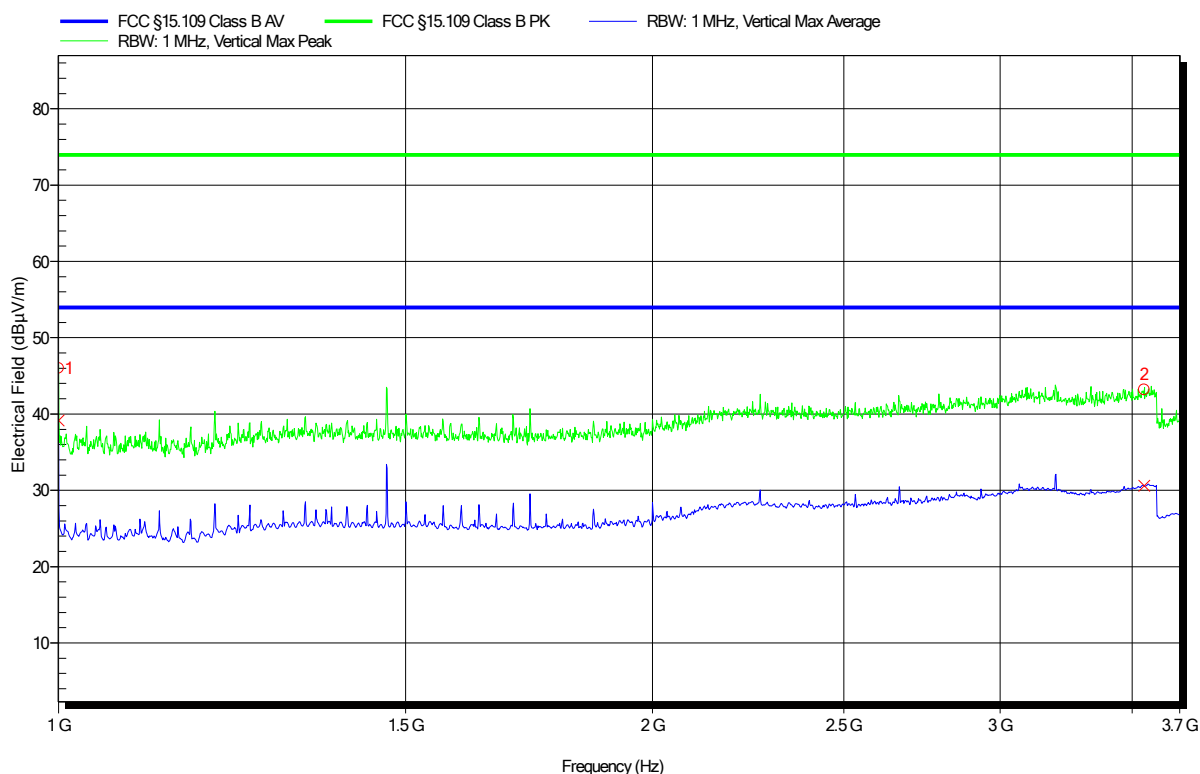

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1 GHz	45.97 dBμV/m	73.98 dBμV/m	-28 dB	Pass	0 Degree	1 m
2	3.549 GHz	43.2 dBμV/m	73.98 dBμV/m	-30.78 dB	Pass	0 Degree	1 m

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1 GHz	39.17 dBμV/m	53.98 dBμV/m	-14.8 dB	Pass	0 Degree	1 m
2	3.549 GHz	30.59 dBμV/m	53.98 dBμV/m	-23.39 dB	Pass	0 Degree	1 m


Test Report No.: G0M-1904-8188-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418 + 25419
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-29
 Operating Conditions: ambient temperature: 22°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 2)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement Distance: 3 m
 Mode: 1
 Note 1: EUT CONFIGURATION 2

Index 16

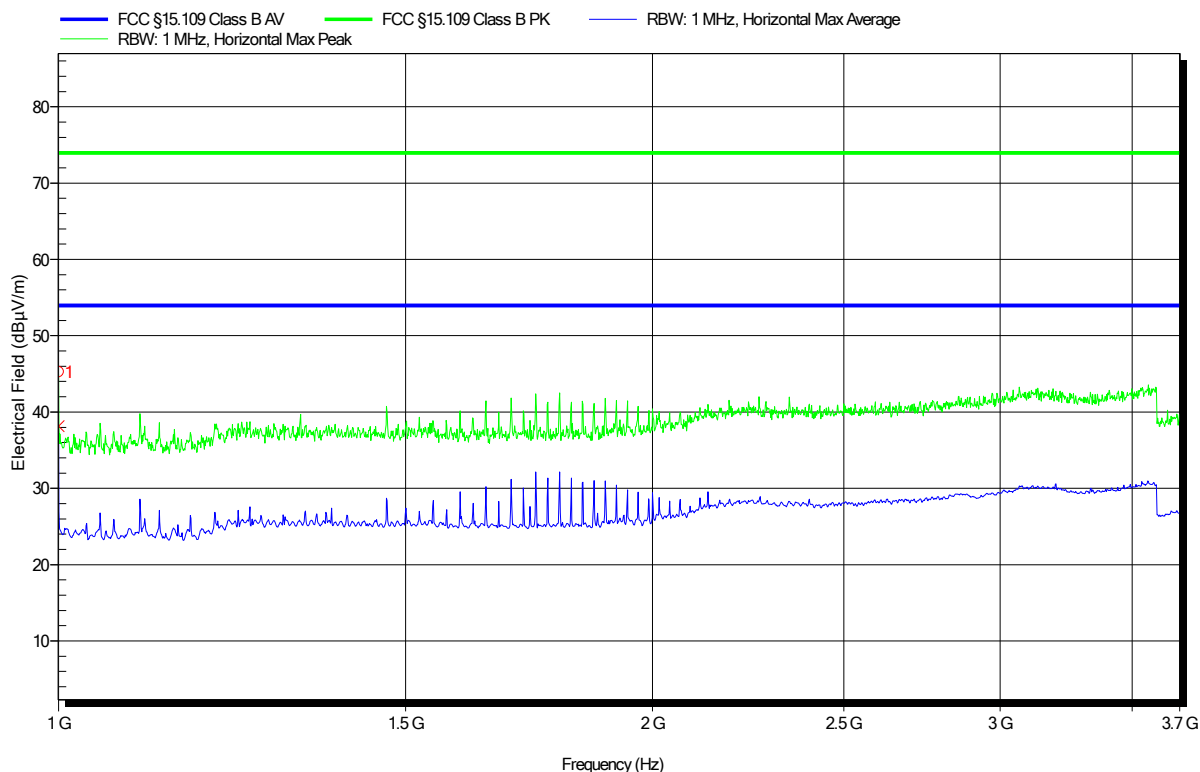

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1 GHz	45.25 dBµV/m	73.98 dBµV/m	-28.72 dB	Pass	0 Degree	1 m



Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1 GHz	38.13 dBµV/m	53.98 dBµV/m	-15.84 dB	Pass	0 Degree	1 m

2.2 Test Conditions and Results - Conducted emissions acc. to ANSI C63.4

2.2.1 Information

Test Information	
Reference	FCC 15.107, ICES-003, 8, 6.2
Reference method	ANSI C63.4:2014 Section 12
Measurement range	150 kHz to 30 MHz
Equipment class	Class B
Equipment type	Table top
Temperature [°C]	21
Humidity [%]	30
Operator	Stephan Liebich
Date	2020-01-30

2.2.2 Setup

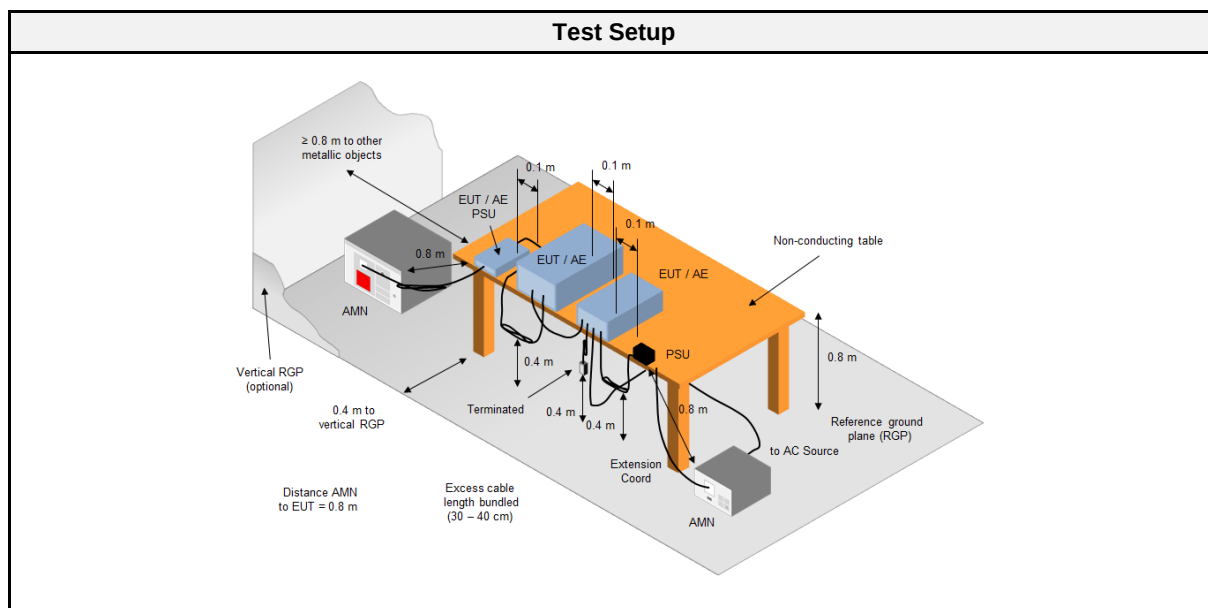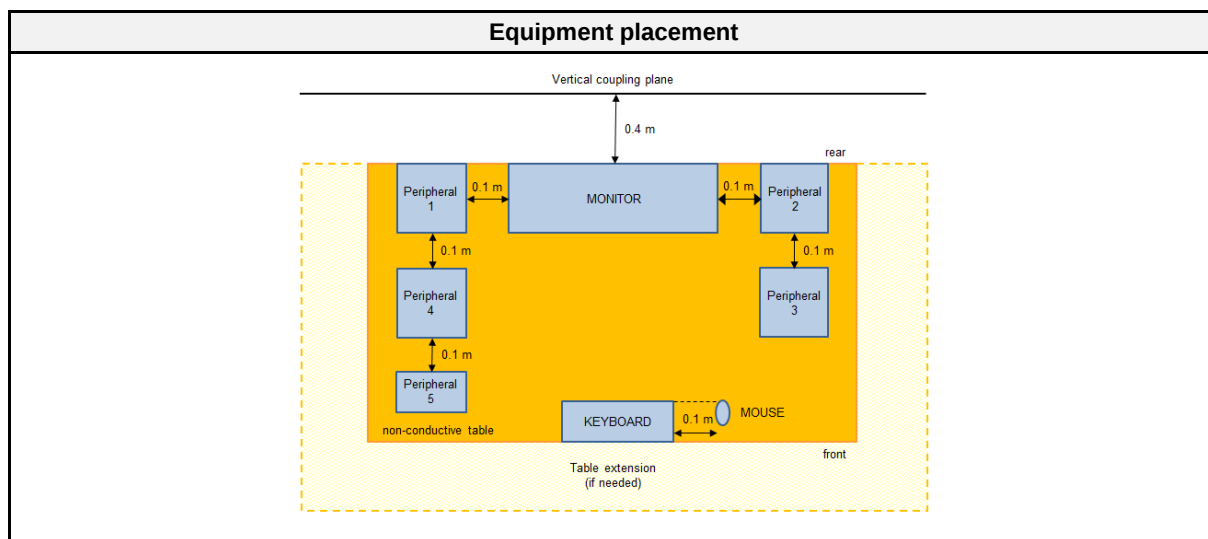

2.2.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH3-Z5	EF00036	2019-07	2021-07
Pulse Limiter	R&S	ESH3-Z2	EF01063	2019-07	2020-07
EMI Test Receiver	R&S	ESR 7	EF00943	2019-10	2020-10
Climatic Sensor	Embedded Data Systems, LLC.	2800100000254 17E	EF01054	2019-05	2020-05

2.2.4 Procedure

Exploratory measurement	
1.	The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
2.	The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
3.	The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
4.	The LISN measurement port was connected to a measurement receiver
5.	I/O cables were bundled not longer than 0.4 m
6.	Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
7.	To maximize the emissions the cable positions were manipulated
8.	The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Final measurement	
1.	The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
2.	The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
3.	The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
4.	The LISN measurement port was connected to a measurement receiver
5.	The EUT and cable arrangement were based on the exploratory measurement results
6.	The test data of the worst-case conditions were recorded and shown on the next pages

2.2.5 Limits

Class B		
Frequency [MHz]	Quasi-peak Limit [dBμV]	Average Limit [dBμV]
0.15 - 0.5	66 - 56 *	56 - 46 *
0.5 - 5	56	46
5 - 30	60	50
* Decreases with the logarithm of the frequency		

2.2.6 Results

AC power line conducted emissions					
Port	Coupling	Operational mode	EUT Configuration	Verdict	Remark
POWER	AMN	1	1	PASS	-
POWER	AMN	1	2	PASS	-

2.2.7 Setup Photos

TEST SETUP EUT CONFIGURATION 1 CONDUCTED EMISSION



TEST SETUP EUT CONFIGURATION 2 CONDUCTED EMISSION




2.2.8 Records

Conducted emissions at the mains power port according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-30
 Operating Conditions: ambient temperature: 21°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 1)
 LISN: Rohde & Schwarz ESH3-Z5
 Mode: 1
 Applied to Port: POWER
 Note 1: EUT CONFIGURATION 1

Index 35

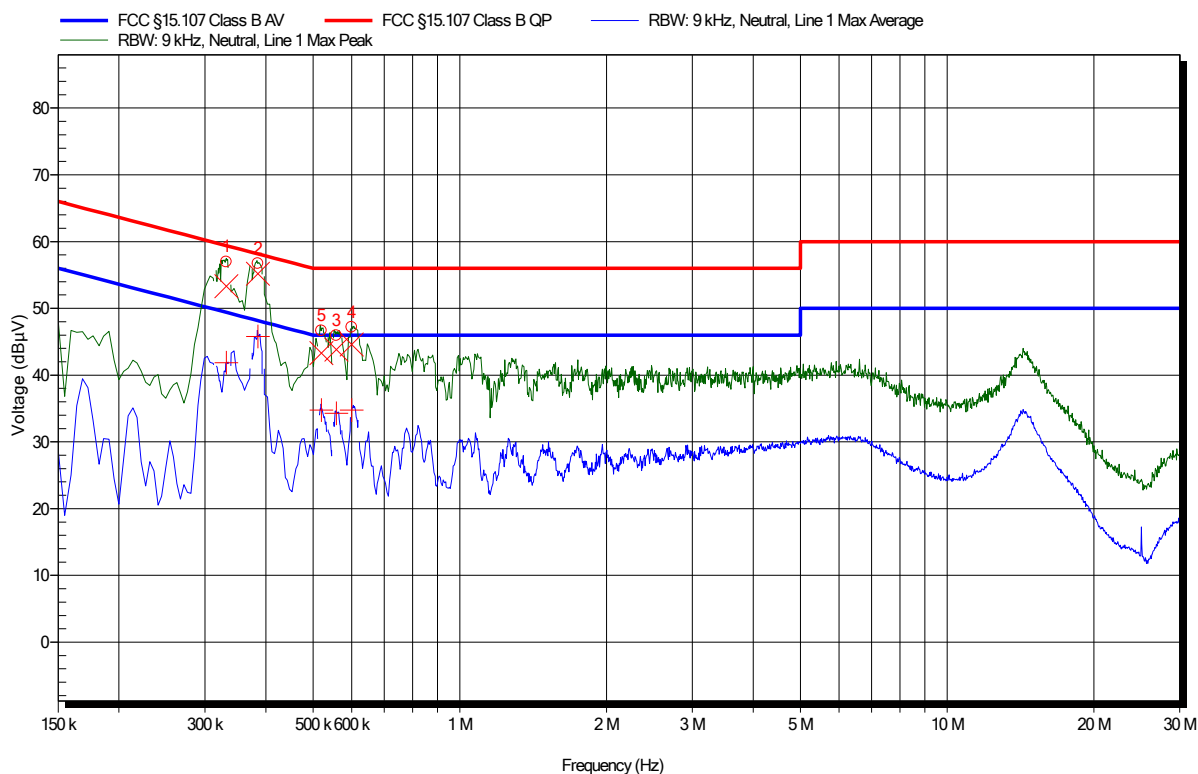

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	332.25 kHz	53.31 dBμV	59.39 dBμV	-6.08 dB	Pass	Neutral
2	385.35 kHz	55.18 dBμV	58.16 dBμV	-2.98 dB	Pass	Neutral
3	558.15 kHz	43.81 dBμV	56 dBμV	-12.19 dB	Pass	Neutral
4	600 kHz	44.58 dBμV	56 dBμV	-11.42 dB	Pass	Neutral
5	519.9 kHz	43.28 dBμV	56 dBμV	-12.72 dB	Pass	Line 1

Test Report No.: G0M-1904-8188-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	332.25 kHz	41.84 dBµV	49.39 dBµV	-7.55 dB	Pass	Neutral
2	385.35 kHz	45.78 dBµV	48.16 dBµV	-2.38 dB	Pass	Neutral
3	558.15 kHz	34.27 dBµV	46 dBµV	-11.73 dB	Pass	Neutral
4	600 kHz	34.77 dBµV	46 dBµV	-11.23 dB	Pass	Neutral
5	519.9 kHz	34.74 dBµV	46 dBµV	-11.26 dB	Pass	Line 1

Conducted emissions at the mains power port according to FCC part 15B

Project Number: G0M-1904-8188
 Applicant: Dräger Safety AG & Co. KGaA
 Model Description: Bump test station for calibration of X-am 8000
 Model: X-dock Module X-am 8000+
 Test Sample ID: 25418 + 25419
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Liebich
 Test Date: 2020-01-30
 Operating Conditions: ambient temperature: 21°C
 power input: 120 V / 60 Hz (AC/DC-Adaptor 2)
 LISN: Rohde & Schwarz ESH3-Z5
 Mode: 1
 Applied to Port: POWER
 Note 1: EUT CONFIGURATION 2

Index 30

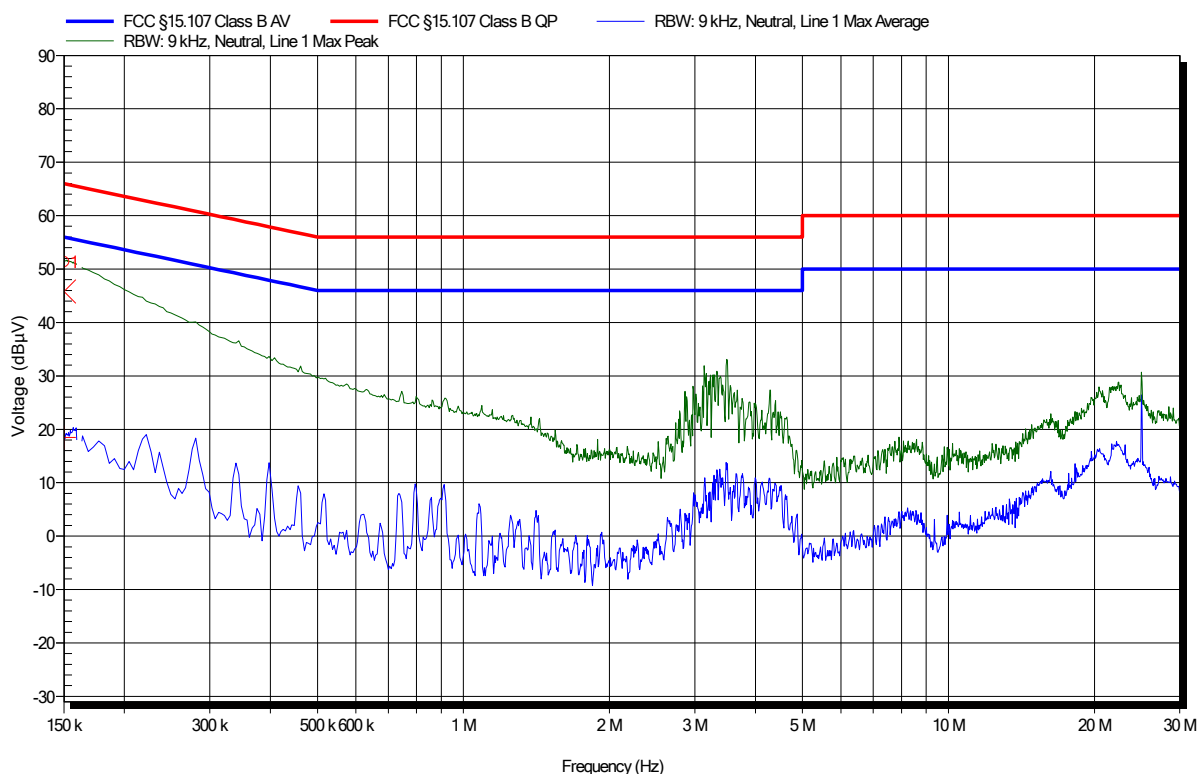

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	150 kHz	45.78 dBμV	66 dBμV	-20.22 dB	Pass	Neutral
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	150 kHz	18.49 dBμV	56 dBμV	-37.51 dB	Pass	Neutral