

FCC TEST REPORT

FCC 47 CFR Part 15C
Industry Canada RSS-210

Operation within the 13.110 – 14.010 MHz band

Report Reference No. : G0M-1504-4714-TFC225RI-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : Dräger Safety AG & Co. KGaA

Address : Revalstraße 1
23560 Lübeck
GERMANY

Test specification:

Standard : 47 CFR Part 15C
RSS-210, Issue 8, 2010-12
RSS-Gen, Issue 4, 2014-11
ANSI C63.4:2014

Test scope : complete Radio compliance test

Equipment under test (EUT):

Product description	Powered Air Purifying Respirator
Model No.	R59500
Additional Model(s)	None
Brand Name(s)	Dräger X-plore 8500 (IP)
Hardware version	V05.00
Firmware / Software version	V00.26
	FCC-ID: X6O-XPLORE8500 IC: 5895F-XPLORE8500
Test result	Passed

Possible test case verdicts:

- neither assessed nor tested : N/N
- required by standard but not appl. to test object : N/A
- required by standard but not tested : N/T
- not required by standard for the test object : N/R
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:

Test Lab Temperature : 20 – 23 °C

Test Lab Humidity : 32 – 38 %

Date of receipt of test item : 2015-05-07

Date (s) of performance of tests : 2015-08-20 – 2015-08-21

Compiled by : Matthias Handrik

Tested by (+ signature) : Matthias Handrik
(Responsible for Test)



Approved by (+ signature) : Toralf Jahn
(Deputy Head of Lab)



Date of issue : 2015-10-02

Total number of pages : 27

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
01	2015-10-02	Initial Release	

REPORT INDEX

1 EQUIPMENT (TEST ITEM) DESCRIPTION:	5
1.1 Photos – Equipment External	6
1.2 Photos – Equipment internal	8
1.3 Photos – Test setup	10
1.4 Supporting Equipment Used During Testing	11
1.5 Test Modes	12
1.6 Test Equipment Used During Testing	13
1.7 Sample emission level calculation	14
2 RESULT SUMMARY	15
3 TEST CONDITIONS AND RESULTS	16
3.1 Test Conditions and Results – Occupied Bandwidth	16
3.2 Test Conditions and Results – Fundamental in-band field strength emissions	17
3.3 Test Conditions and Results – Emissions radiated outside the specified frequency band	19
3.4 Test Conditions and Results – Frequency stability	21
ANNEX A Transmitter in-band emissions	23
ANNEX B Transmitter radiated spurious emissions	24

1 Equipment (Test item) Description:

Description	Powered Air Purifying Respirator	
Model	R59500	
Additional Model(s)	None	
Brand Name(s)	Dräger X-plore 8500 (IP)	
Serial number	None	
Hardware version	V05.00	
Software / Firmware version	V00.26	
FCC-ID	X6O-XPLORE8500	
IC	5895F-XPLORE8500	
Equipment type	End product	
Radio type	Transceiver	
Radio technology	13.56 MHz RFID	
Operating frequency range	13.56 MHz	
Assigned frequency band	13.110 - 14.010 MHz	
Frequency range	F_{MID}	13.56 MHz
Spreading	None	
Modulations	ASK	
Number of channels	1	
Channel spacing	None	
Number of antennas	1	
Antenna	Type	external dedicated
	Model	loop antenna
	Manufacturer	custom
Manufacturer	MSC Technologies Systems GmbH Munzingerstr. 3 79111 Freiburg Germany	
Power supply	V_{NOM}	12 VDC
	V_{MIN}	9 VDC
	V_{MAX}	12.6 VDC
Temperatures	T_{NOM}	20°C
	T_{MIN}	-10°C
	T_{MAX}	60°C
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
		None		

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Test Modes

Mode #	Description	
Single	General conditions:	EUT powered by battery
	Radio conditions:	Mode = standalone transmit Modulation = ASK Power level = Maximum

1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

Occupied Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2015-04	2016-04

Field strength emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2015-04	2016-04
Loop Antenna	R&S	HFH2-Z2	EF00184	2014-11	2016-11
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF =	Net Reading :	Net reading - FCC limit = Margin
21.5 dB μ V + 26 dB =	47.5 dB μ V/m :	47.5 dB μ V/m - 57.0 dB μ V/m = -9.5 dB

2 Result Summary


FCC 47 CFR Part 15C, IC RSS-210				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	RSS-Gen 6.6	N/R	Informational only
FCC 15.225(a-c) IC RSS-210 A2.6(a-c)	Fundamental in-band field strength emissions	ANSI C63.4	PASS	
FCC 15.225(d) FCC 15.209 IC RSS-210 A2.6(d)	Emission radiated outside the specified frequency band	ANSI C63.4	PASS	
FCC 15.225(e) IC RSS-210 A2.6	Frequency stability	ANSI C63.4	PASS	
IC RSS-Gen 4.10 IC RSS-Gen 7.1	Receiver radiated spurious emissions	ANSI C 63.4	N/A	
47 CFR 15.207 RSS-Gen 8.8	AC power line conducted emissions	ANSI C63.4	N/A	EUT not powered directly or indirectly via AC-Mains
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Occupied Bandwidth

Occupied Bandwidth acc. to IC RSS-Gen		Verdict: PASS
Test according to measurement reference	Reference Method	
	RSS-Gen 6.6	
Test frequency range	Tested frequencies	
	F_{MID}	
EUT test mode	Single	
Limits		
None (Informational only)		
Test setup		
		
Test procedure		
<ol style="list-style-type: none"> 1. EUT set to test mode (Communication tester is used if needed) 2. Span set to at least twice the emission spectrum 3. Resolution bandwidth set to 1 % of span 4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function 		
Test results		
Channel	Frequency [MHz]	Occupied Bandwidth [kHz]
F_{MID}	13.56	222.756
Comments: Measurement is applicable to all variants		

3.2 Test Conditions and Results – Fundamental in-band field strength emissions

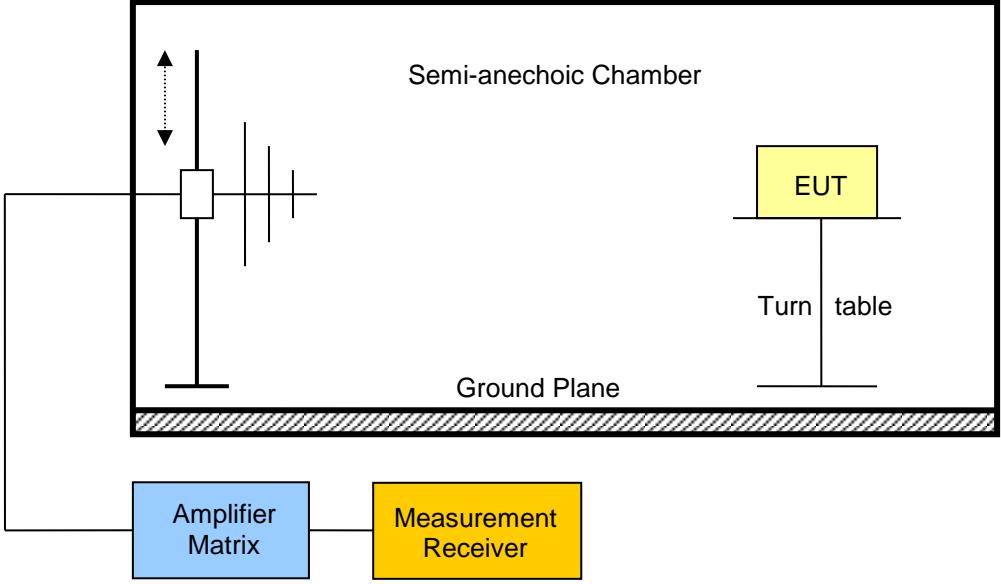Field strength emissions acc. to FCC 47 CFR 15.225 / IC RSS-210		Verdict: PASS	
Test according referenced standards	Reference Method		
	FCC 15.225(a-c) / IC RSS-210 A2.6(a-c)		
Test according to measurement reference	Reference Method		
	ANSI C63.4		
Test frequency range	Tested frequencies		
	F_{MID}		
EUT test mode	Single		
Limits			
Frequency range [MHz]	Limit [μ V/m]	Limit [dB μ V/m]	Limit Distance [m]
13.553 – 13.567	15848	84	30
13.410 – 13.553	334	50.5	30
13.567 – 13.710			
13.110 – 13.410	106	40.5	30
13.710 – 14.010			
Test setup			
			
Test procedure			
<ol style="list-style-type: none"> 1. EUT set to test mode 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector 4. Below 30MHz and extrapolation factor of 40dB/decade is used and at 30MHz and above an extrapolation factor of 20dB/decade is used (47 CRF 15.31(f)). 			


Test results								
Channel	Frequency [MHz]	Emission [MHz]	Level @ 30m [db μ V/m]	Det.	Pol.	Limit @ 30m [db μ V/m]	Measurement distance [m]*	Margin [dB]
F _{MID}	13.56	13.56	35.3	pk	-	84	3m	-48.70

Comments: * Physical distance between EUT and measurement antenna. See Annex


3.3 Test Conditions and Results – Emissions radiated outside the specified frequency band

Radiated out-of-band band emissions acc. to FCC 47 CFR 15.225 / IC RSS-210		Verdict: PASS		
Test according referenced standards	Reference Method			
	FCC 15.225(d) / IC RSS-210 A2.6(d)			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Test frequency range	Tested frequencies			
	9 kHz – 216 MHz			
EUT test mode	Single			
Limits				
Frequency range [MHz]	Detector	Limit [μ V/m]	Limit [dB μ V/m]	Limit Distance [m]
0.009 – 0.490	Quasi-Peak	2400/F[kHz]	48.5 – 13.8	300
0.490 – 1.705	Quasi-Peak	2400/F[kHz]	13.8 – 2.97	30
1.705 – 30	Quasi-Peak	30	29.5	30
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

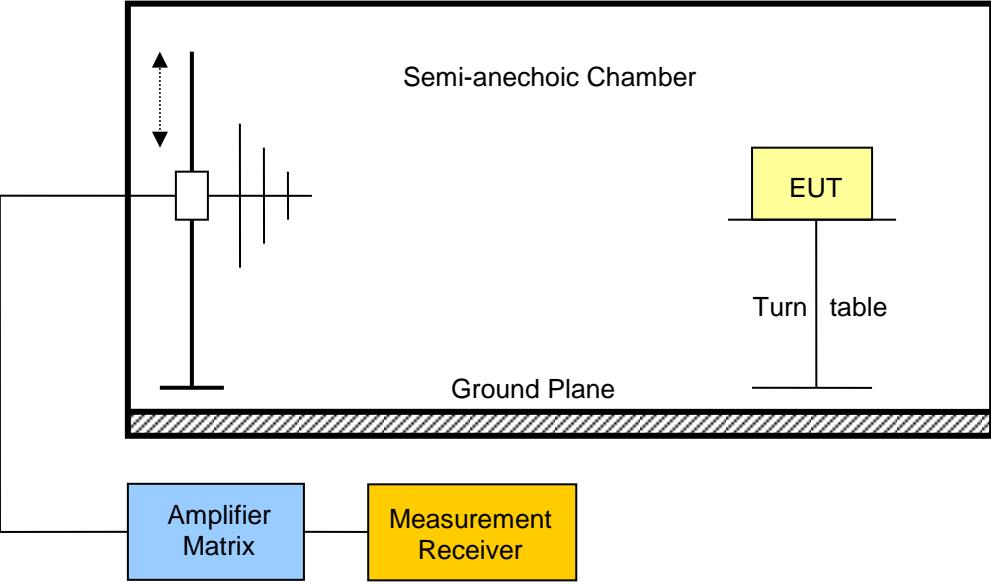Test setup								
								
Test procedure								
<ol style="list-style-type: none"> 1. EUT set to test mode 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to maximum emission levels 								
Test results								
Channel	Frequency [MHz]	Emission [MHz]	Level [db μ V/m]	Detector	Pol.	Limit [db μ V/m]	Limit distance [m]*	Margin [dB]
F_{MID}	13.56	0.035438	-49.30	avg	ver	36.60	3	-85.86
F_{MID}	13.56	0.065635	-49.30	avg	ver	31.20	3	-80.55
F_{MID}	13.56	0.077117	-57.50	avg	ver	29.80	3	-87.35
F_{MID}	13.56	0.088315	-56.40	avg	ver	28.70	3	-85.05
F_{MID}	13.56	0.13144	-56.70	avg	ver	25.30	3	-81.97
F_{MID}	13.56	1.136	-13.30	pk	ver	26.50	3	-39.81
Comments: * Physical distance between EUT and measurement antenna.								

3.4 Test Conditions and Results – Frequency stability

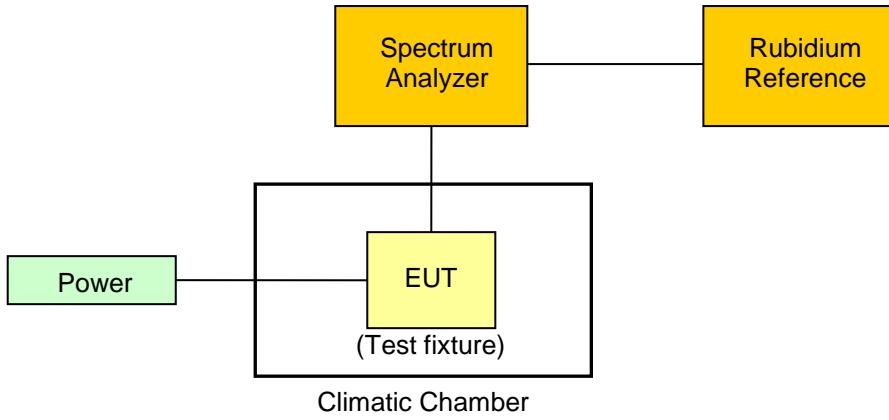Occupied Bandwidth acc. to FCC 15.225 / IC RSS-210		Verdict: PASS
Test according referenced standards	Reference Method	
	FCC 15.225(e) / IC RSS-210 A2.6	
Test according to measurement reference	Reference Method	
	ANSI C63.4	
Test frequency range	Tested frequencies	
	F_{MID}	
EUT test mode	Single	
Limits		
Frequency error limit		
$\pm 0.01\% (\pm 100\text{ppm})$		
Test setup		
		
Test procedure		
<ol style="list-style-type: none"> 1. EUT set to test mode 2. The ambient temperature and supply voltage is set according to measurement conditions 3. Span is set to capture fundamental emission 4. Frequency error is measured with frequency counter measurement function 		

Test results					
Channel	Frequency [MHz]	Temp.	Voltage	Measured Frequency [MHz]	Error [ppm]
F _{MID}	13.56	T _{nom} = 20°C	V _{nom} = 12 VDC	13.5601033	07.62
F _{MID}	13.56	T _{nom} = 20°C	V _{min} = 9 VDC	13.5601031	07.60
F _{MID}	13.56	T _{nom} = 20°C	V _{max} = 12.6 VDC	13.5601031	07.60
F _{MID}	13.56	T _{min} = -10°C	V _{nom} = 12 VDC	13.5601506	11.11
F _{MID}	13.56	T _{max} = 60°C	V _{nom} = 12 VDC	13.5600217	01.60

Comments:

ANNEX A Transmitter in-band emissions

Spurious emissions according to FCC 15.225

Project number: G0M-1504-4714

Applicant:

EUT Name: Powered Air Purifying Respirator

Model: R59500

Test Site: Eurofins Product Service GmbH

Operator: Handrik

Test Conditions: $T_{nom}: 24^{\circ}\text{C}$, $V_{nom}: 12\text{VDC}$

Antenna: Rohde & Schwarz HFH 2-Z2


Measurement distance: 3 m converted to 30 m

Mode: TX; 13.56 MHz with tube

Test Date: 2015-08-20

Note: EUT verical

Index 49

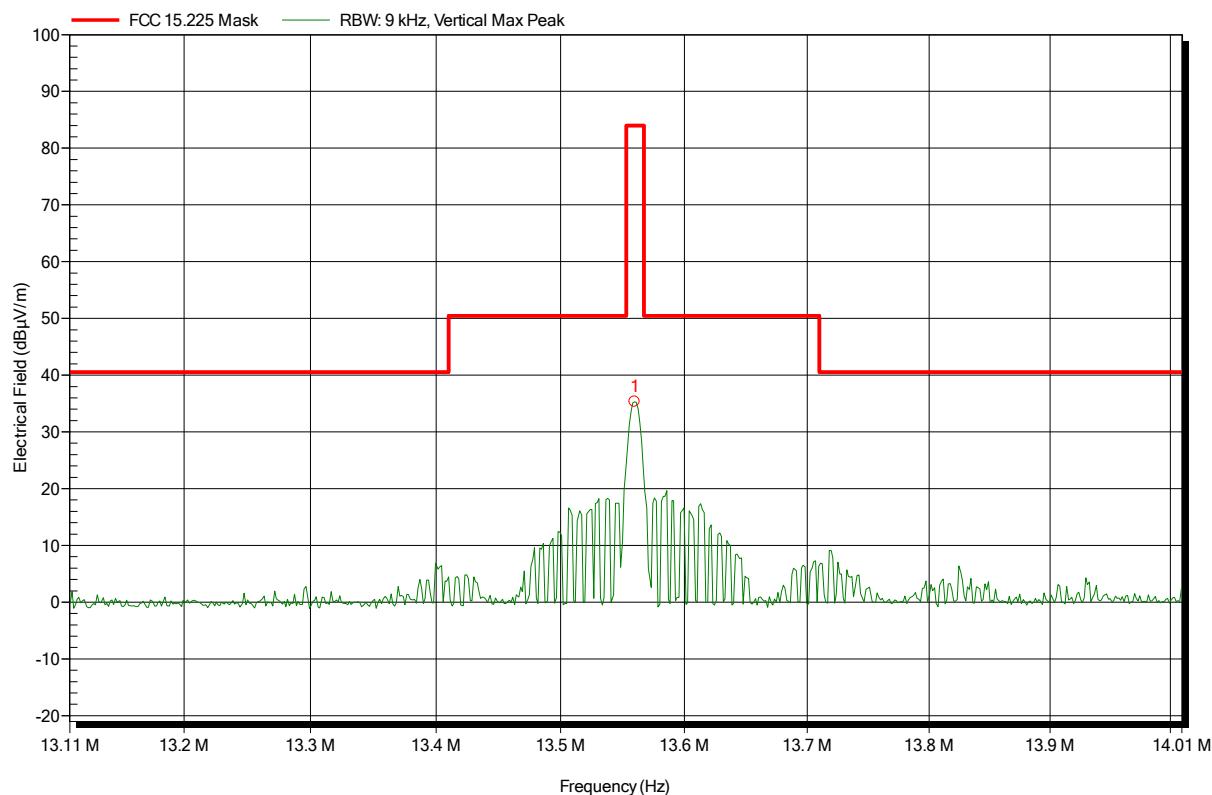

Frequency
13.56 MHz

Peak
35.3 dBμV/m

ANNEX B Transmitter radiated spurious emissions

Spurious emissions according to FCC 15.225

Project number: G0M-1504-4714

Applicant:

EUT Name: Powered Air Purifying Respirator

Model: R59500

Test Site: Eurofins Product Service GmbH

Operator: Handrik

Test Conditions: T_{nom} : 24°C, V_{nom} : 12VDC

Antenna: Rohde & Schwarz HFH 2-Z2


Measurement distance: 3 m converted to 300 m

Mode: TX; 13.56 MHz with tube

Test Date: 2015-08-20

Note: EUT vertical

Index 46

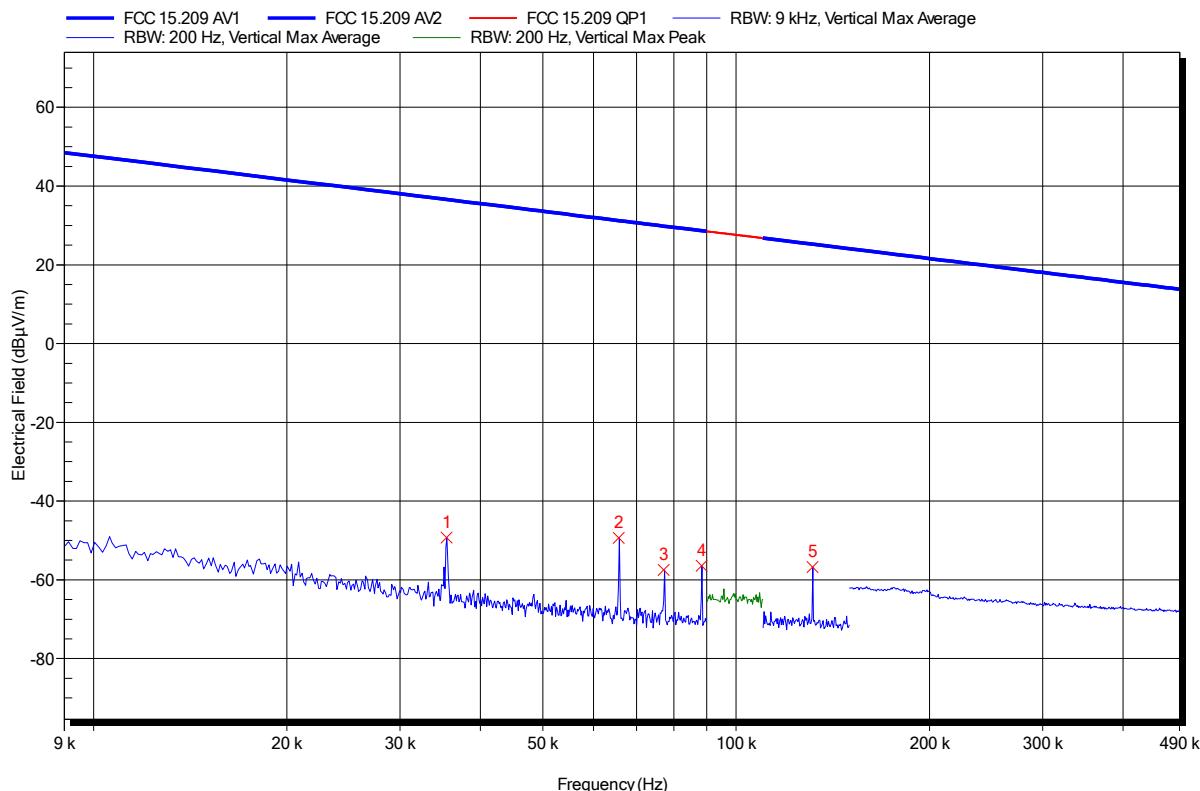

Frequency	Average	Average Limit	Average Difference	Average Status
35.438 kHz	-49.3 dB μ V/m	36.6 dB μ V/m	-85.86 dB	Pass
65.635 kHz	-49.3 dB μ V/m	31.2 dB μ V/m	-80.55 dB	Pass
77.17 kHz	-57.5 dB μ V/m	29.8 dB μ V/m	-87.35 dB	Pass
88.315 kHz	-56.4 dB μ V/m	28.7 dB μ V/m	-85.05 dB	Pass
131.44 kHz	-56.7 dB μ V/m	25.3 dB μ V/m	-81.97 dB	Pass


Spurious emissions according to FCC 15.225

Project number: G0M-1504-4714

Applicant:

EUT Name: Powered Air Purifying Respirator
 Model: R59500
 Test Site: Eurofins Product Service GmbH
 Operator: Handrik
 Test Conditions: $T_{nom}: 24^{\circ}\text{C}$, $V_{nom}: 12\text{VDC}$
 Antenna: Rohde & Schwarz HFH 2-Z2
 Measurement distance: 3 m converted to 30 m
 Mode: TX; 13.56 MHz with tube
 Test Date: 2015-08-20
 Note: EUT vertical

Index 47

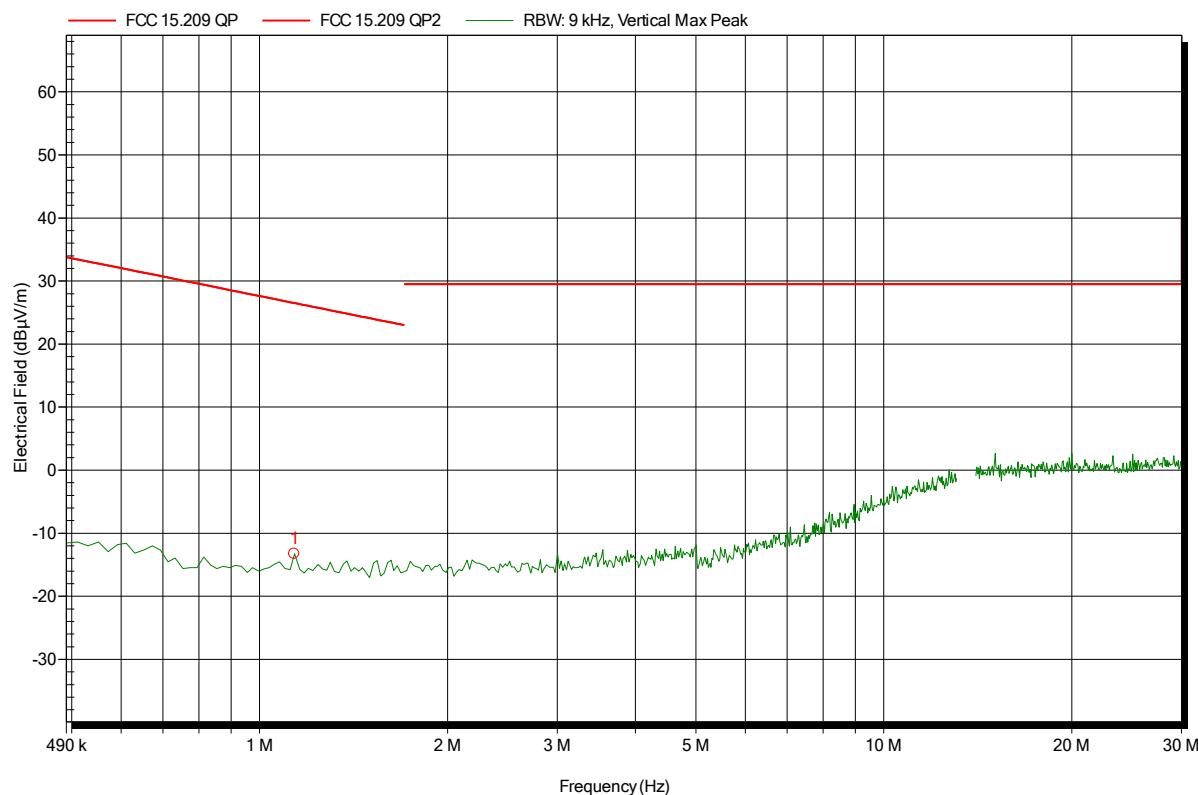


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.136 MHz	-13.3 dB μ V/m	26.5 dB μ V/m	-39.81 dB	Pass

Spurious emissions according to FCC 15.225

Project number: G0M-1504-4714

Applicant:
EUT Name: Powered Air Purifying Respirator
Model: R59500
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 24°C, Vnom: 12VDC
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: TX; 13.56 MHz with tube
Test Date: 2015-08-20
Note: EUT vertical

Index 51

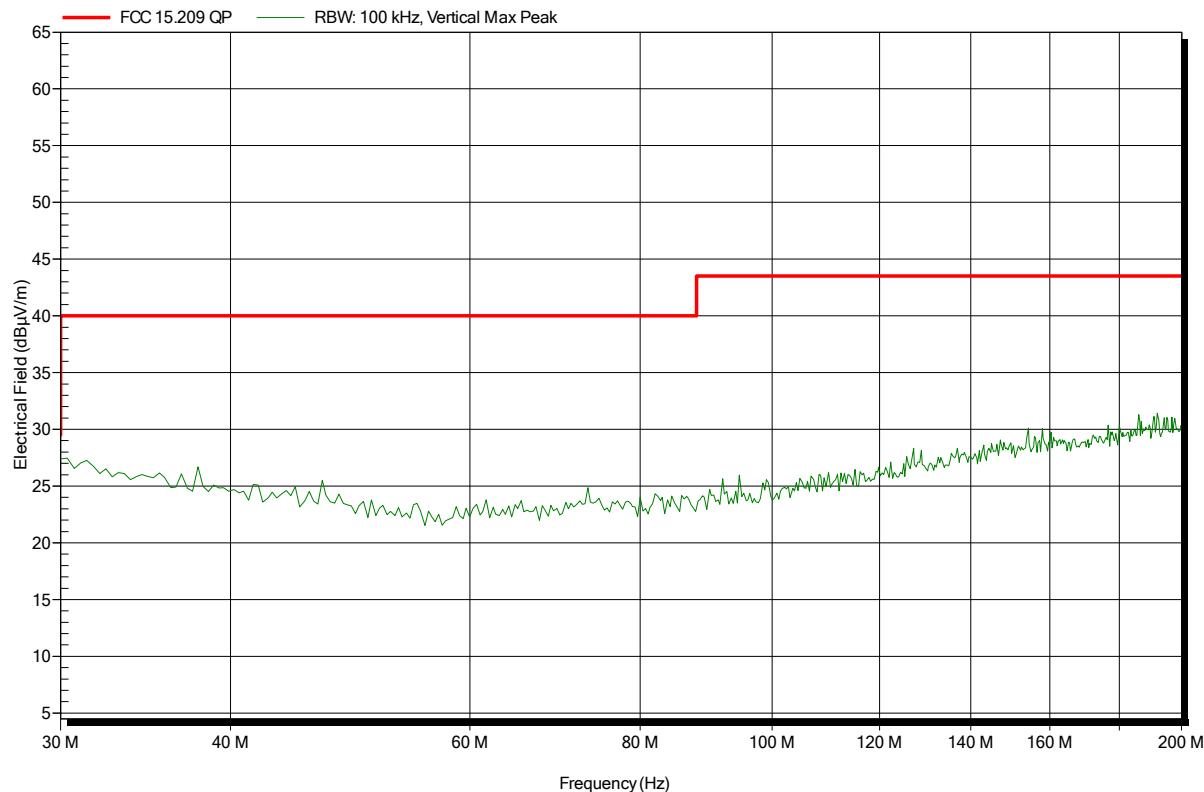

Test Report No.: G0M-1504-4714-TFC225RI-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 26 of 27

Spurious emissions according to FCC 15.225

Project number: G0M-1504-4714

Applicant:
EUT Name: Powered Air Purifying Respirator
Model: R59500
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: Tnom: 24°C, Vnom: 12VDC
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; 13.56 MHz with tube
Test Date: 2015-08-20
Note: EUT vertical

Index 52

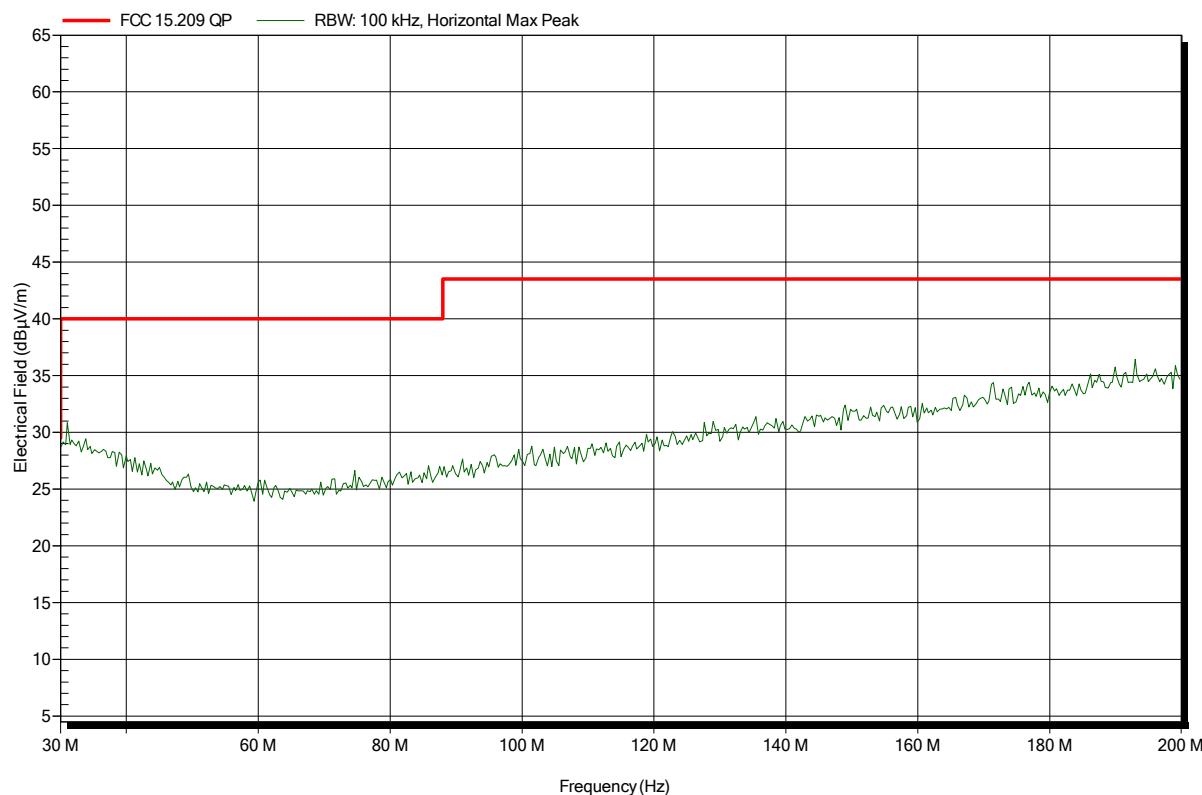

Test Report No.: G0M-1504-4714-TFC225RI-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 27 of 27