

Certification Test Report

**FCC ID: X6P-0003186B
IC: 8832A-0003186B**

**FCC Rule Part: 15.231
IC Radio Standards Specification: RSS-210**

ACS Report Number: 09-0259.W06.11.A

**Manufacturer: HomeRun Holdings Corp.
Model: HRH-PT05**

**Test Begin Date: August 27, 2009
Test End Date: August 27, 2009**

Report Issue Date: October 20, 2010



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.


Prepared by: _____
Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 17 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	3
2	TEST FACILITIES.....	4
2.1	LOCATION	4
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	4
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	5
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	5
2.3.2	<i>Open Area Tests Site (OATS)</i>	6
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	7
3	APPLICABLE STANDARD REFERENCES.....	7
4	LIST OF TEST EQUIPMENT.....	8
5	SUPPORT EQUIPMENT	9
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	9
7	SUMMARY OF TESTS.....	10
7.1	ANTENNA REQUIREMENT – FCC: CFR 47 PART 15.203.....	10
7.2	POWER LINE CONDUCTED EMISSIONS – FCC: CFR 47 PART 15.207/ IC: RSS-GEN 7.2.2.....	10
7.3	PERIODIC OPERATION – FCC: CFR 47 15.231(A)(1)/ IC: RSS-210 A1.1.1(A)	10
7.3.1	<i>Test Methodology</i>	10
7.3.2	<i>Test Results.....</i>	10
7.4	OCCUPIED BANDWIDTH – FCC: CFR 47 15.231(C)(1)/ IC: RSS-210 A1.1.3.....	11
7.4.1	<i>Test Methodology</i>	11
7.4.2	<i>Test Results.....</i>	11
7.5	RADIATED EMISSIONS (FIELD STRENGTH/SPURIOUS) – FCC: CFR 47 15.231(B)/ IC: RSS-210 A1.1.2.....	13
7.5.1	<i>Test Methodology</i>	13
7.5.2	<i>Duty Cycle Correction.....</i>	13
7.5.3	<i>Test Results.....</i>	15
7.5.4	<i>Sample Calculation:</i>	17
8	CONCLUSION	17

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210.

1.2 Product description

The HRH-PT05 is a portable handheld transmitter which operates on a single channel at 433.92 MHz.

Manufacturer Information:

HomeRun Holdings Corp.
6370 Mt. Pleasant St. NW
North Canton OH 44720
USA

Test Sample Serial Number(s):

ACS #1

Test Sample Condition:

The test sample was provided in working order with no visible defects.

Operating Voltage:

The HRH-PT05 operates off a single 3.0V lithium battery.

Detailed photographs of the EUT are filed separately with this filing.

1.3 Test Methodology and Considerations

The HRH-PT05 is a stand-alone handheld device and was tested (3) orientations which represent normal intended operation.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 894540

Industry Canada Lab Code: IC 4175A-1

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

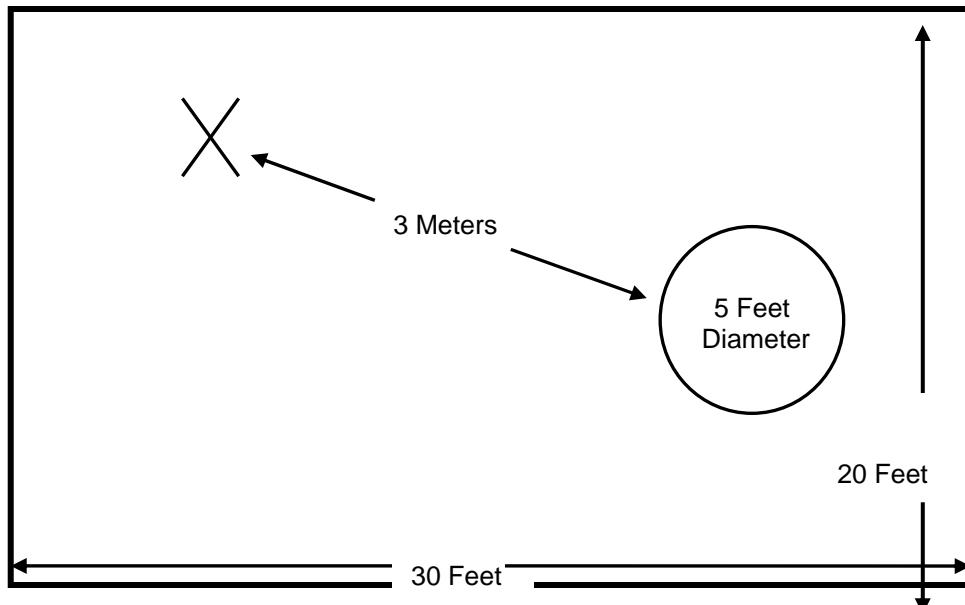


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style reinforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

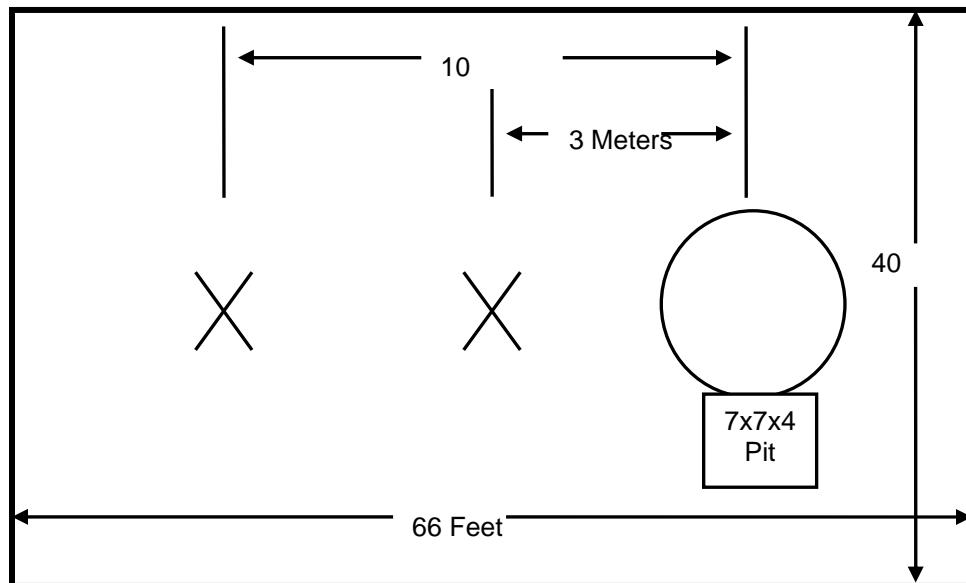


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal group reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

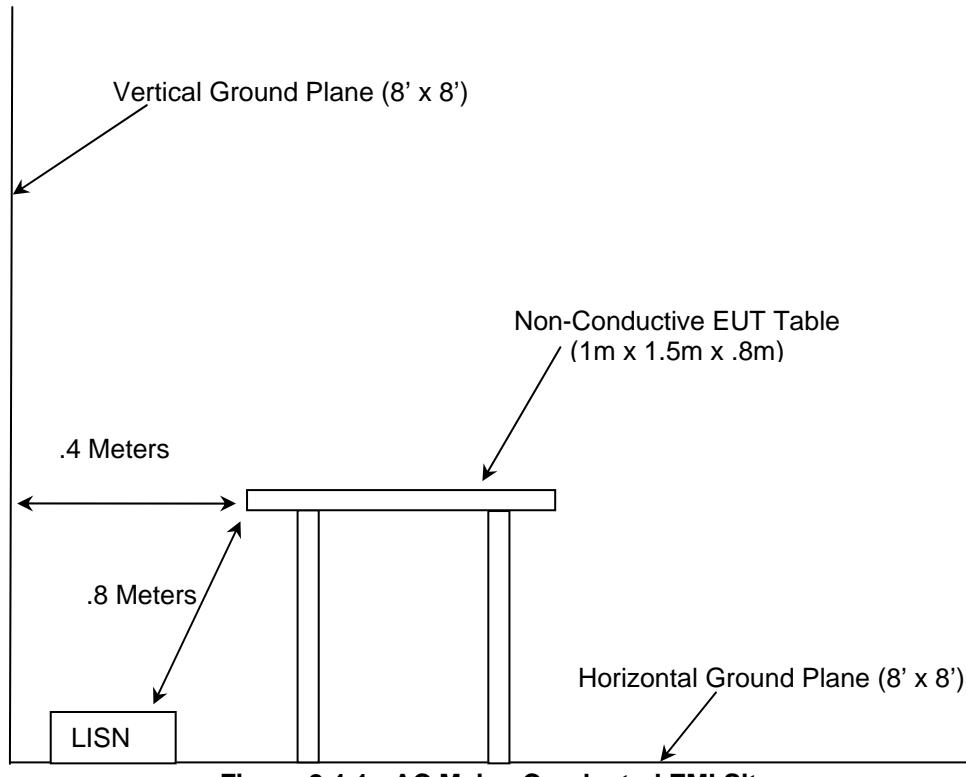


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2010
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2010
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 7 June 2007
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 2, June 2007.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

Equipment Calibration Information					
ACS#	Mfg.	Eq. type	Model	S/N	Cal. Due
22	Agilent	Amplifiers	8449B	3008A00526	10-22-2009
40	EMCO	Antenna	3104	3211	01-22-2010 (See Note3)
193	ACS	Cable Set	OATS cable Set	0193	01-05-2010 (See Note1)
211	Eagle	Filter	C7RFM3NFM	HLC-700	01-05-2010 (See Note2)
213	TEC	Amplifiers	PA 102	44927	12-22-2009 (See Note1)
277	EMCO	Antennas	93146	9904-5199	09-09-2009 (See Note3)
283	Rohde & Schwarz	Spectrum Analyzers	FSP40	1000033	09-19-2009
329	A.H. Systems	Antennas	SAS-571	721	08-04-2010 (See Note3)
343	Florida RF Labs	Cables	SMRE-200W-12.0-SMRE	NA	05-04-2010 (See Note1)
430	Florida RF Labs	Cables	SMS-290AW-480-SMS	NA	05-04-2010 (See Note1)

Note1: Items characterized on an annual cycle. The date shown indicates the next characterization due date.

Note2: Items verified on an annual cycle. The date shown indicates the next verification due date.

Notes3: Items calibrated on a 2 year cycle.

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number	FCC ID
The EUT was tested stand-alone with no support equipment utilized.					

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

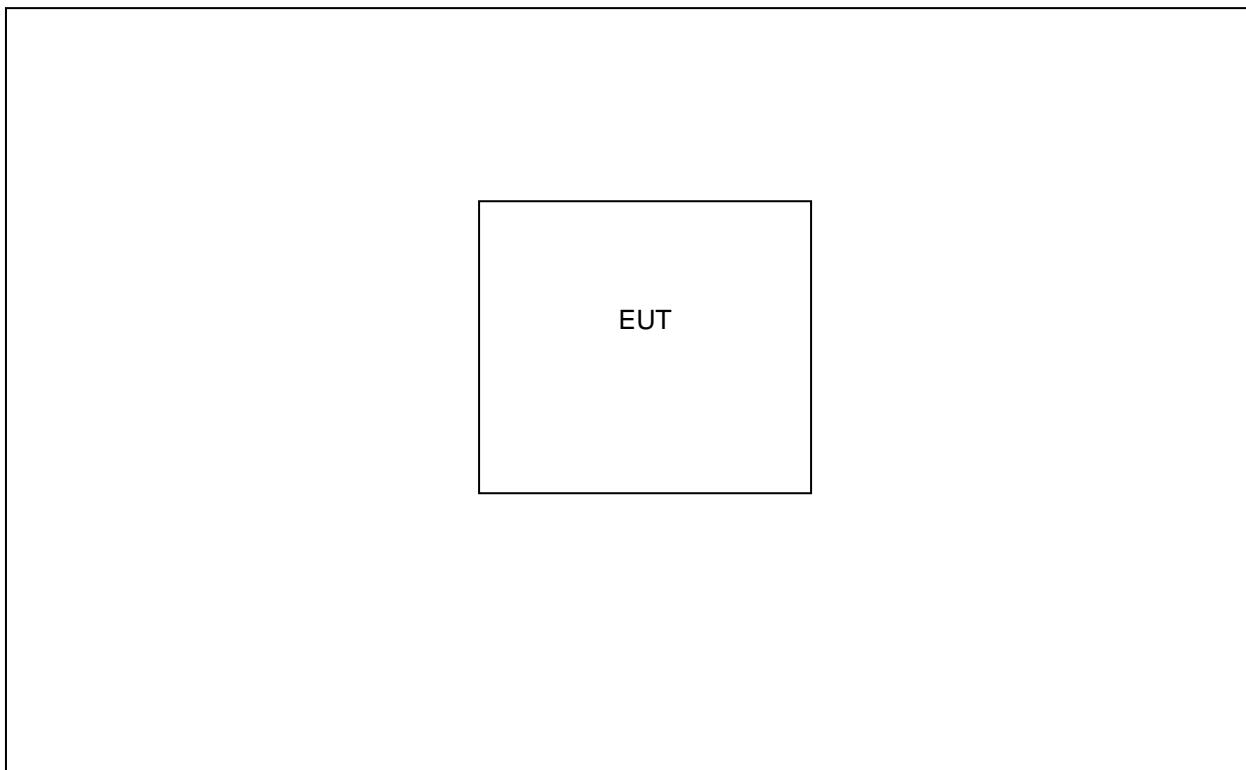


Figure 6-1: EUT Test Setup

*See Test Setup photographs for additional detail.

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: CFR 47 Part 15.203

The HRH-PT05 utilizes an integral PCB antenna which cannot be removed without permanently damaging the device thus satisfying Part 15.203.

7.2 Power Line Conducted Emissions – FCC: CFR 47 Part 15.207/ IC: RSS-GEN 7.2.2

The EUT is battery operated therefore the requirements for AC power line conducted emissions are not applicable.

7.3 Periodic Operation – FCC: CFR 47 15.231(a)(1)/ IC: RSS-210 A1.1.1(a)

7.3.1 Test Methodology

A transmitter activated automatically shall cease transmission within 5 seconds after activation, (i.e. maximum 5 seconds of operation).

A manually operated transmitter shall employ a push-to-operate switch and be under manual control at all transmission times. When released, the transmitter shall cease transmission (holdover time of up to 5 seconds is permitted).

The transmitter is manually activated and was evaluated using a spectrum analyzer at zero span.

7.3.2 Test Results

The transmitter deactivated after the manual switch was released. The results are shown in Figure 7.3.2-1.

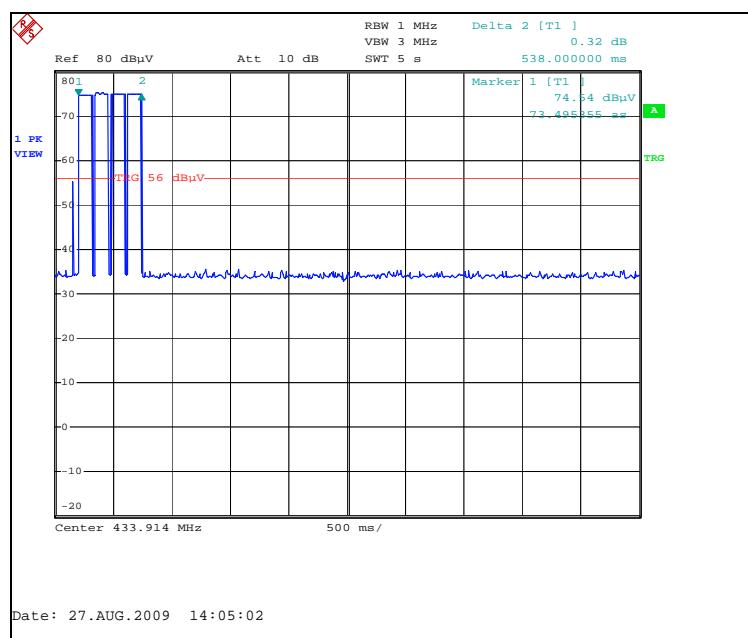


Figure 7.3.2-1: Transmitter Hold Time

7.4 Occupied Bandwidth – FCC: CFR 47 15.231(c)(1)/ IC: RSS-210 A1.1.3

7.4.1 Test Methodology

For devices operating above 70MHz and below 900 MHz, the bandwidth of the emission shall be no wider than 0.25% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier for FCC compliance. The 99% occupied bandwidth is also provided.

7.4.2 Test Results

The 20dB and 99% bandwidths were measured as 52.4kHz and 124.0kHz respectively. 0.25% of the 433.92MHz center frequency is equivalent to 1084.8kHz. Therefore the 20dB and 99% bandwidths of the emission is less than 0.25% of the center frequency. The results are shown in Figure 7.4.2-1 and 7.4.2-2.

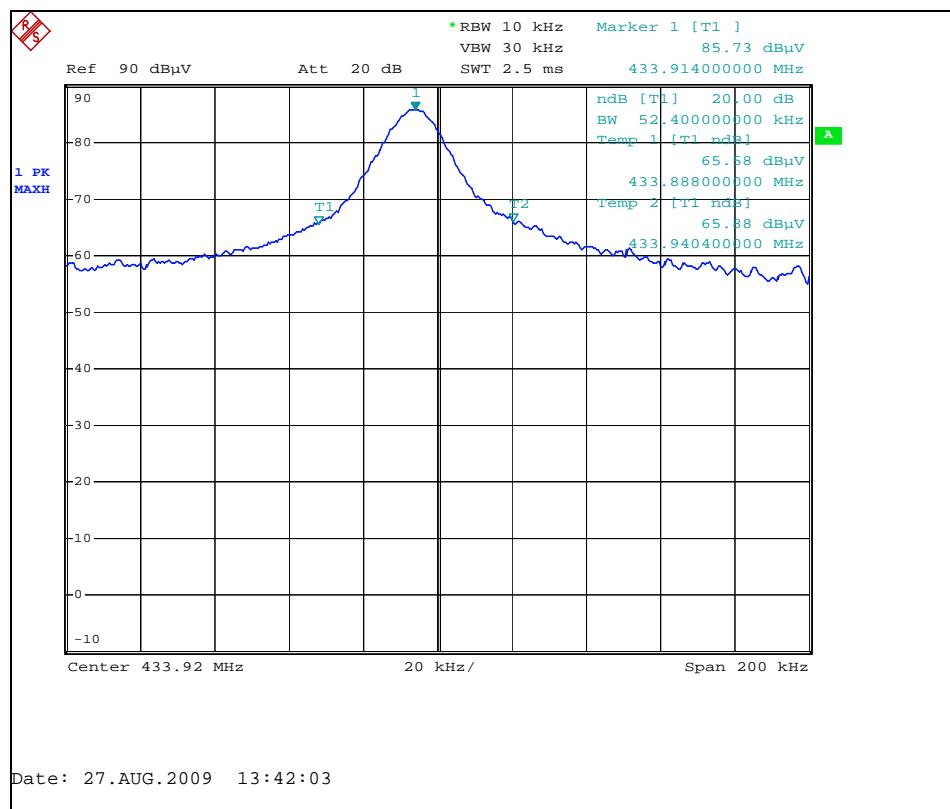


Figure 7.4.2-1: Occupied Bandwidth – 20dB

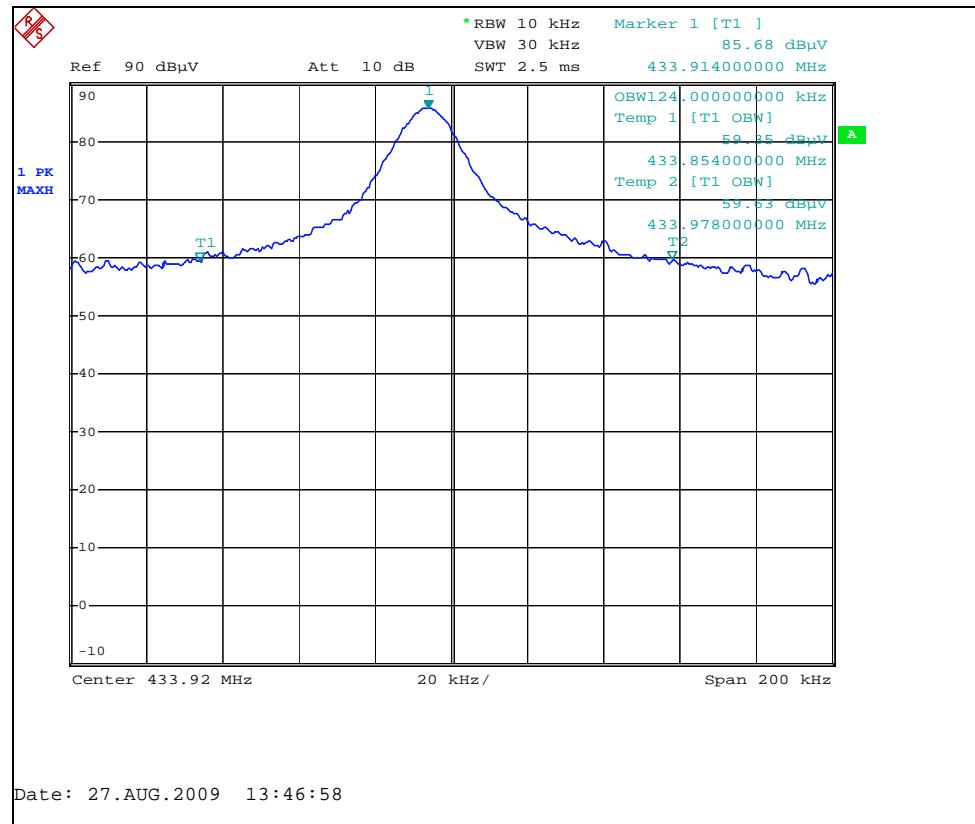


Figure 7.4.2-2: Occupied Bandwidth – 99%

7.5 Radiated Emissions (Field Strength/Spurious) – FCC: CFR 47 15.231(b) / IC: RSS-210 A1.1.2

7.5.1 Test Methodology

Radiated emissions tests were made over the frequency range of 30MHz to 5GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, average measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz. For frequencies above 1000MHz, average and peak measurements were made with RBW of 1 MHz and a VBW of 3 MHz.

Further, compliance with the provisions of 15.205 was demonstrated using the measurement instrumentation specified in that section where applicable.

The EUT was evaluated in multiple orientations (X, Y, & Z) based on the intended use. Data for all orientations evaluated is presented below in section 7.5.3.

7.5.2 Duty Cycle Correction

For average radiated measurements, the measured level was reduced by a factor 6.02dB to account for the duty cycle of the EUT. The worst case duty cycle was determined to be 50%. The duty cycle correction factor is determined using the formula: $20\log(0.5) = 6.02\text{dB}$. Determination of the duty cycle correction is included in the plots and justification below.

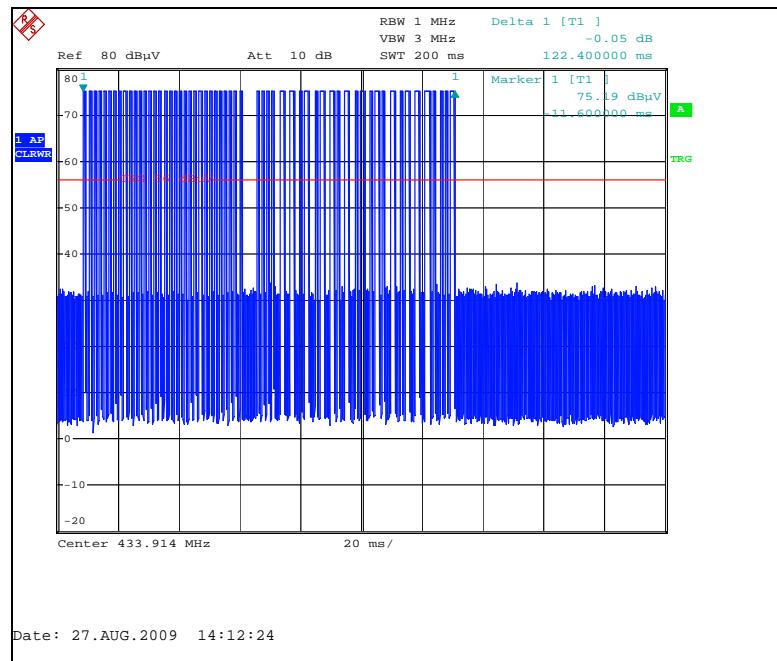


Figure 7.5.2-1: Pulse Train Period

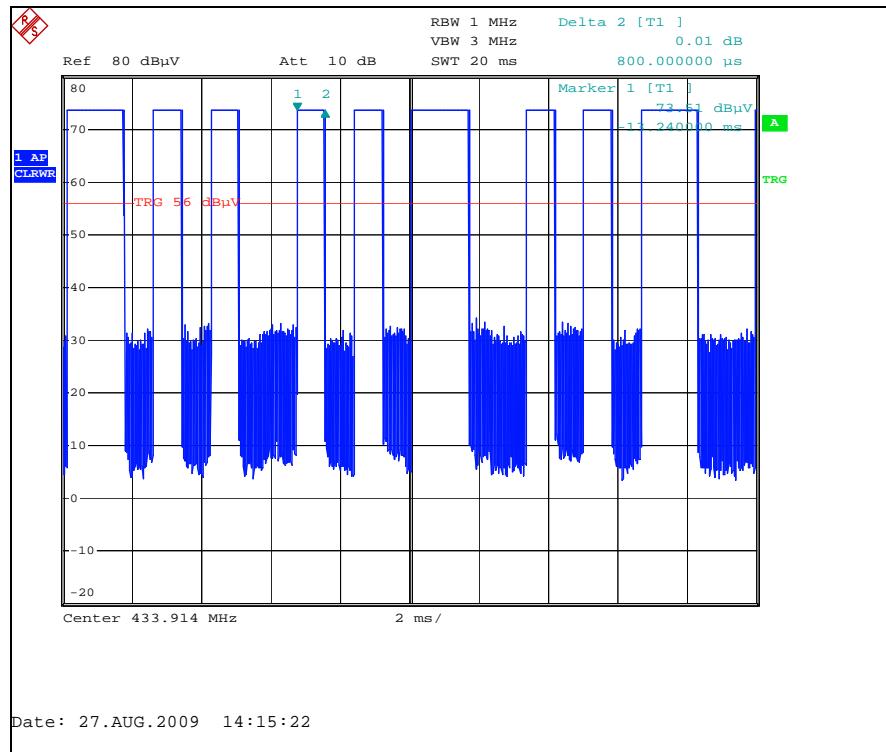


Figure 7.5.2-2: Duty Cycle

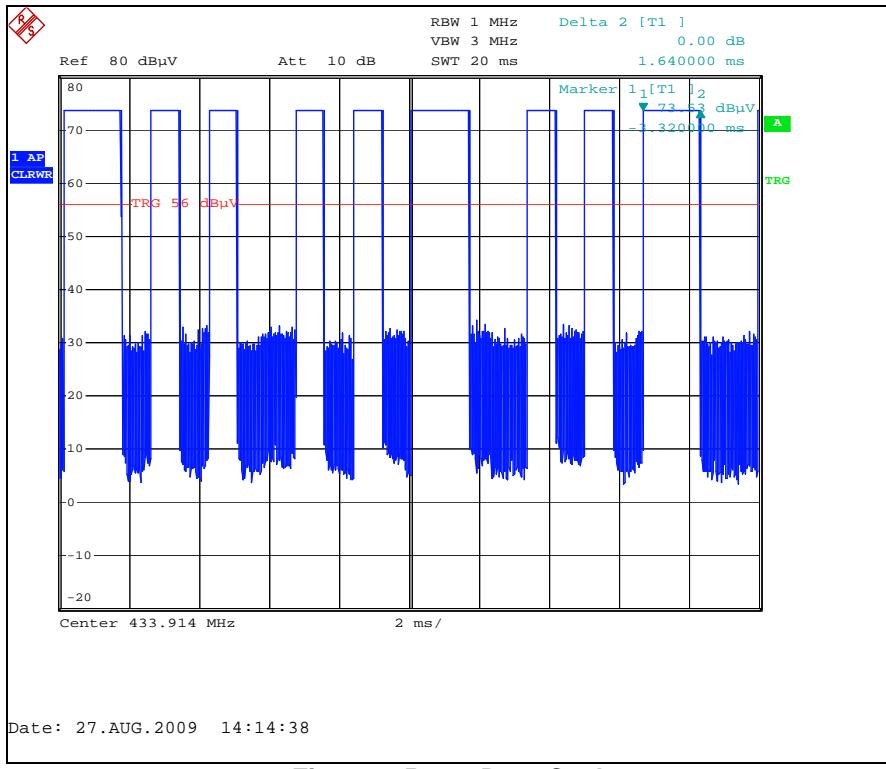


Figure 7.5.2-3: Duty Cycle

7.5.3 Test Results

Radiated spurious emissions are reported in Tables 7.5.3-1 to 7.5.3-3. Emissions not reported were below the noise floor of the measurement system.

Table 7.5.3-1: Radiated Emissions – X Orientation (Upright)

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
Fundamental Frequency										
433.92	86.75	86.75	H	-4.50	82.25	76.23	100.8	80.8	18.58	4.6
433.92	70.55	70.55	V	-5.00	65.55	59.53	100.8	80.8	35.28	21.3
Spurious Emissions										
867.84	62.05	62.05	H	2.74	64.79	58.76	80.8	60.8	16.04	2.06
867.84	56.54	56.54	V	2.18	58.72	52.70	80.8	60.8	22.11	8.13
1735.68	49.01	49.01	H	-4.00	45.01	38.99	80.8	60.8	35.82	21.84
1735.68	48.26	48.26	V	-4.05	44.21	38.19	80.8	60.8	36.62	22.64
2169.6	53.93	53.93	H	-1.00	52.93	46.91	80.8	60.8	27.89	13.91
2169.6	54.55	54.55	V	-1.00	53.55	47.53	80.8	60.8	27.27	13.29
2603.52	54.35	54.35	H	0.37	54.72	48.70	80.8	60.8	26.11	12.13
2603.52	55.28	55.28	V	0.53	55.81	49.79	80.8	60.8	25.02	11.04
3037.44	59.94	59.94	H	1.69	61.63	55.61	80.8	60.8	19.19	5.21
3037.44	61.39	61.39	V	1.57	62.96	56.94	80.8	60.8	17.87	3.89
3471.36	59.05	59.05	H	2.05	61.10	55.08	80.8	60.8	19.73	5.75
3471.36	57.52	57.52	V	2.05	59.57	53.55	80.8	60.8	21.26	7.28
3905.28	55.65	55.65	H	-0.82	54.83	48.81	74.0	54.0	19.17	5.19
3905.28	54.99	54.99	V	-0.82	54.17	48.15	74.0	54.0	19.83	5.85
4339.2	52.39	52.39	H	4.55	56.94	50.92	74.0	54.0	17.06	3.08
4339.2	50.52	50.52	V	4.65	55.17	49.15	74.0	54.0	18.83	4.85

Table 7.5.3-2: Radiated Emissions – Y Orientation (Back)

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
Fundamental Frequency										
433.92	81.90	81.90	H	-4.50	77.40	71.38	100.8	80.8	23.43	9.45
433.92	87.67	87.67	V	-5.00	82.67	76.65	100.8	80.8	18.16	4.18
Spurious Emissions										
867.84	61.44	61.44	H	2.74	64.18	58.15	80.8	60.8	16.65	2.67
867.84	59.74	59.74	V	2.18	61.92	55.90	80.8	60.8	18.91	4.93
1735.68	48.95	48.95	H	-4.00	44.95	38.93	80.8	60.8	35.88	21.90
1735.68	50.13	50.13	V	-4.05	46.08	40.06	80.8	60.8	34.75	20.77
2169.6	59.10	59.10	H	-1.00	58.10	52.08	80.8	60.8	22.72	8.74
2169.6	55.03	55.03	V	-1.00	54.03	48.01	80.8	60.8	26.79	12.81
2603.52	56.76	56.76	H	0.37	57.13	51.11	80.8	60.8	23.70	9.72
2603.52	54.63	54.63	V	0.53	55.16	49.14	80.8	60.8	25.67	11.69
3037.44	62.30	62.30	H	1.57	63.87	57.85	80.8	60.8	16.96	2.98
3037.44	61.29	61.29	V	1.57	62.86	56.84	80.8	60.8	17.97	3.99
3471.36	60.59	60.59	H	2.05	62.64	56.62	80.8	60.8	18.19	4.21
3471.36	60.16	60.16	V	2.05	62.21	56.19	80.8	60.8	18.62	4.64
3905.28	56.59	56.59	H	-0.82	55.77	49.75	74.0	54.0	18.23	4.25
3905.28	58.16	58.16	V	-0.82	57.34	51.32	74.0	54.0	16.66	2.68
4339.2	54.04	54.04	H	5.07	59.11	53.08	74.0	54.0	14.89	0.92
4339.2	50.67	50.67	V	4.65	55.32	49.30	74.0	54.0	18.68	4.70

Table 7.5.3-3: Radiated Emissions – Z Orientation (Side)

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
Fundamental Frequency										
433.92	82.70	82.70	H	-4.50	78.20	72.18	100.8	80.8	22.63	8.65
433.92	88.65	88.65	V	-5.00	83.65	77.63	100.8	80.8	17.18	3.20
Spurious Emissions										
867.84	51.90	51.90	H	2.74	54.64	48.61	80.8	60.8	26.19	12.21
867.84	62.60	62.60	V	2.18	64.78	58.76	80.8	60.8	16.05	2.07
1735.68	50.07	50.07	H	-4.00	46.07	40.05	80.8	60.8	34.76	20.78
1735.68	49.28	49.28	V	-4.05	45.23	39.21	80.8	60.8	35.60	21.62
2169.6	56.92	56.92	H	-1.00	55.92	49.90	80.8	60.8	24.90	10.92
2169.6	54.13	54.13	V	-1.00	53.13	47.11	80.8	60.8	27.69	13.71
2603.52	60.17	60.17	H	0.37	60.54	54.52	80.8	60.8	20.29	6.31
2603.52	59.19	59.19	V	-5.11	54.08	48.06	80.8	60.8	26.74	12.76
3037.44	61.99	61.99	H	1.69	63.68	57.66	80.8	60.8	17.14	3.16
3037.44	65.07	65.07	V	-4.02	61.05	55.03	80.8	60.8	19.78	5.80
3471.36	60.93	60.93	H	3.12	64.05	58.03	80.8	60.8	16.77	2.79
3471.36	66.18	66.18	V	-2.52	63.66	57.64	80.8	60.8	17.17	3.19
3905.28	54.69	54.69	H	-0.82	53.87	47.85	74.0	54.0	20.13	6.15
3905.28	55.53	55.53	V	-0.82	54.71	48.69	74.0	54.0	19.29	5.31
4339.2	52.06	52.06	H	5.07	57.13	51.10	74.0	54.0	16.87	2.90
4339.2	51.63	51.63	V	5.07	56.70	50.67	74.0	54.0	17.30	3.33

7.5.4 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF _T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R _U	=	Uncorrected Reading
R _C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Fundamental Frequency (X Orientation)

PEAK:

Corrected Level: 62.05 + 2.74 = 64.8dBuV

Margin: 80.8dBuV - 64.8dBuV = 16.0dB

AVERAGE:

Corrected Level: 62.05 + 2.74 - 6.02 = 58.8dBuV

Margin: 60.8dBuV - 58.8dBuV = 2.0dB

8 CONCLUSION

In the opinion of ACS, Inc. the HRH-PT05 manufactured by HomeRun Holdings Corp. met the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT