

TEST REPORT For FCC

Test Report No. : TK-FR10048

Date of Issue : 12/06/2010

Description of Product : 2.4GHz Radio Control

Model No. : TS401

Applicant : **Nextlink Co., Ltd.**
701, Jungang Induspia II #144-5 Sangdaewon-dong,
Jungwon-gu Seongnam-si,Gyeonggi-do

Manufacturer : **Nextlink Co., Ltd.**
701, Jungang Induspia II #144-5 Sangdaewon-dong,
Jungwon-gu Seongnam-si,Gyeonggi-do

Standards : FCC Part 15 Subpart C §15.247

Test Date : 11/23/2010 ~ 12/06/2010

Test Results : PASS FAIL


The test results relate only to the items tested.

Tested by:



Kyu-Chul Shin
Test Engineer
Date:12/06/2010

Reviewed by:



KT Kang
Technical Manager
Date: 12/06/2010

THRU-KES CO.,LTD.

477-6, Hager-Ri, Yoju-Up, Yoju-Gun Kyunggi-Do,469-803, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

TABLE OF CONTENTS

1.0	General Product Description	3
1.1	Tested Frequency	3
1.2	Model Differences	4
1.3	Device Modifications	4
1.4	Peripheral Devices	4
1.5	Calibration Details of Equipment Used for Measurement	5
1.6	Test Facility(4769B-1)	5
2.0	Summary of tests	6
2.1	Technical Characteristic Test	7
2.1.1	6dB Bandwidth - 15.247(a)	7
2.1.2	Maximum peak Conducted Output Power-15.247(b)	10
2.1.3	Power Spectral Density-15.247(e)	13
2.1.4	Band - edge -15.247(d)	16
2.1.5	Field Strength of Emissions 15.209	21
2.1.6	AC Conducted Emissions 15.207	26
	APPENDIX A – Test Equipment Used For Tests	27

1.0 General Product Description

Equipment model name : TS401
Serial number : Prototype
EUT condition : Pre-production, not damaged
Antenna type : Patch antenna Gain 2.97dBi
Frequency Range : 2405MHz ~ 2480MHz
RF output power : 22.65 dBm Peak Conducted
Number of channels : 76
Channel Spacing : 1 MHz
Power Source : DC 6V

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2405	2440	2480

1.2 Model Differences

Not applicable

1.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.4 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
EUT	Nextlink Co., Ltd.	TS401	-	-
Notebook	F U J I T S U L I M I T E D	S6120	-	DoC
DC Power Supply	HAN YOUNG ELECT. CO.	HYP-3010D	-	-

1.5 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.6 Test Facility

THRU-KES Co.,Ltd. (Test Site # : 343818)
477-6, Hager-Ri, Yoju-Up, Yoju-Gun Kyunggi-Do, 469-803, Korea

2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500kHz	Conducted	C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(e)	Transmitter Power Spectral Density	< 8dBm @ 3kHz		C
15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	c
15.207	AC Conducted Emissions	EN 55022	Line Conducted	NA

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.4-2003

2.1 Technical Characteristic Test

2.1.1 6dB Bandwidth - 15.247(a)

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz Span = 40 MHz

VBW = 100 kHz (VBW \geq RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data:


Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2405	1.65	Complies
2440	1.65	Complies
2480	1.66	Complies


- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth > 500kHz

See next pages for actual measured spectrum plots.

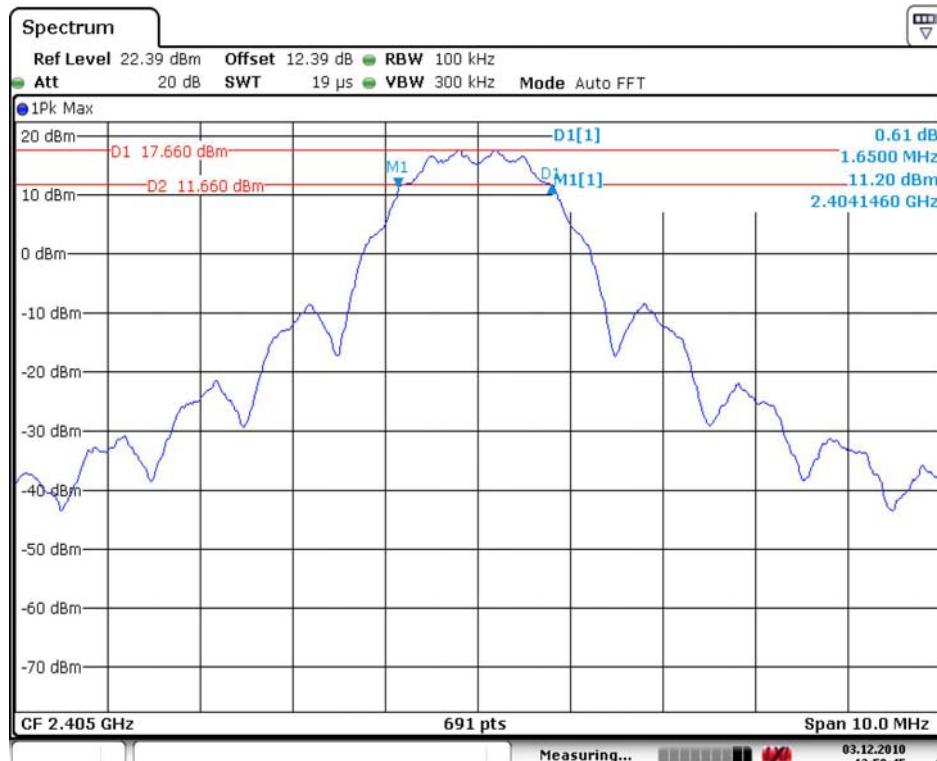

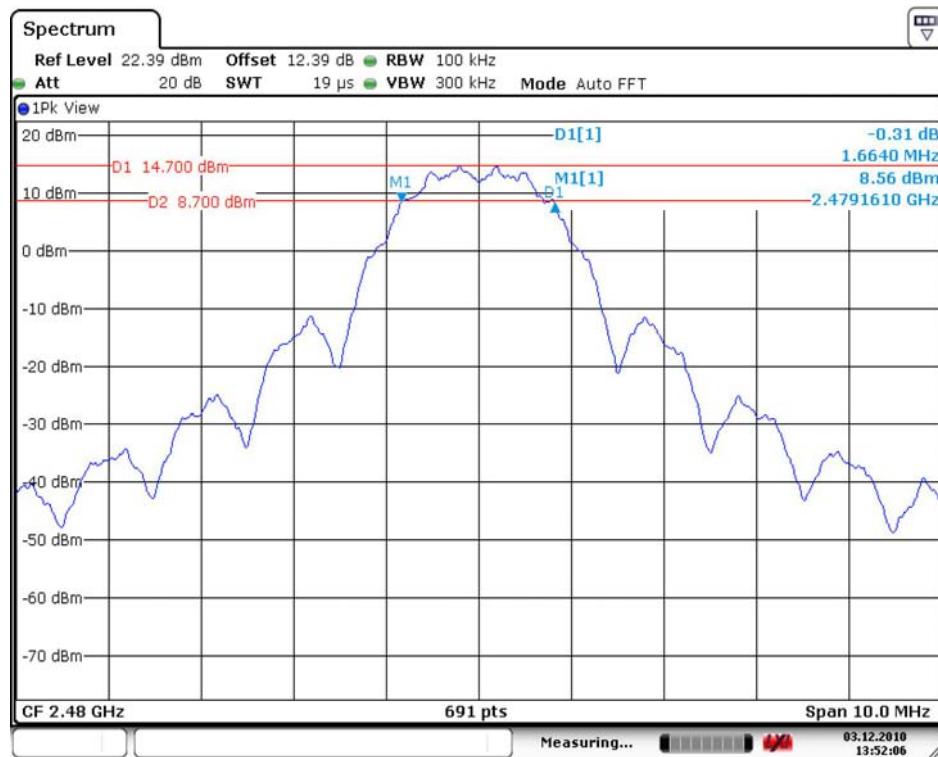


2.1.2 Maximum peak Conducted Output Power-15.247(b)

Test Location

RF Test Room

Test Procedures

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

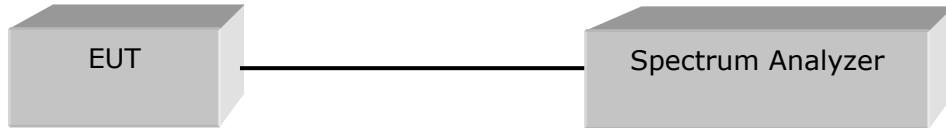

Limit


< 1 W


Test Results

Frequency (MHz)	Channel No.	Peak output power(dBm)	Limit	Result
2405	Low	22.65	30dBm	Complies
2440	Middle	22.10	30dBm	Complies
2480	High	20.01	30dBm	Complies

See next pages for actual measured spectrum plots.

Peak Conducted Output Power

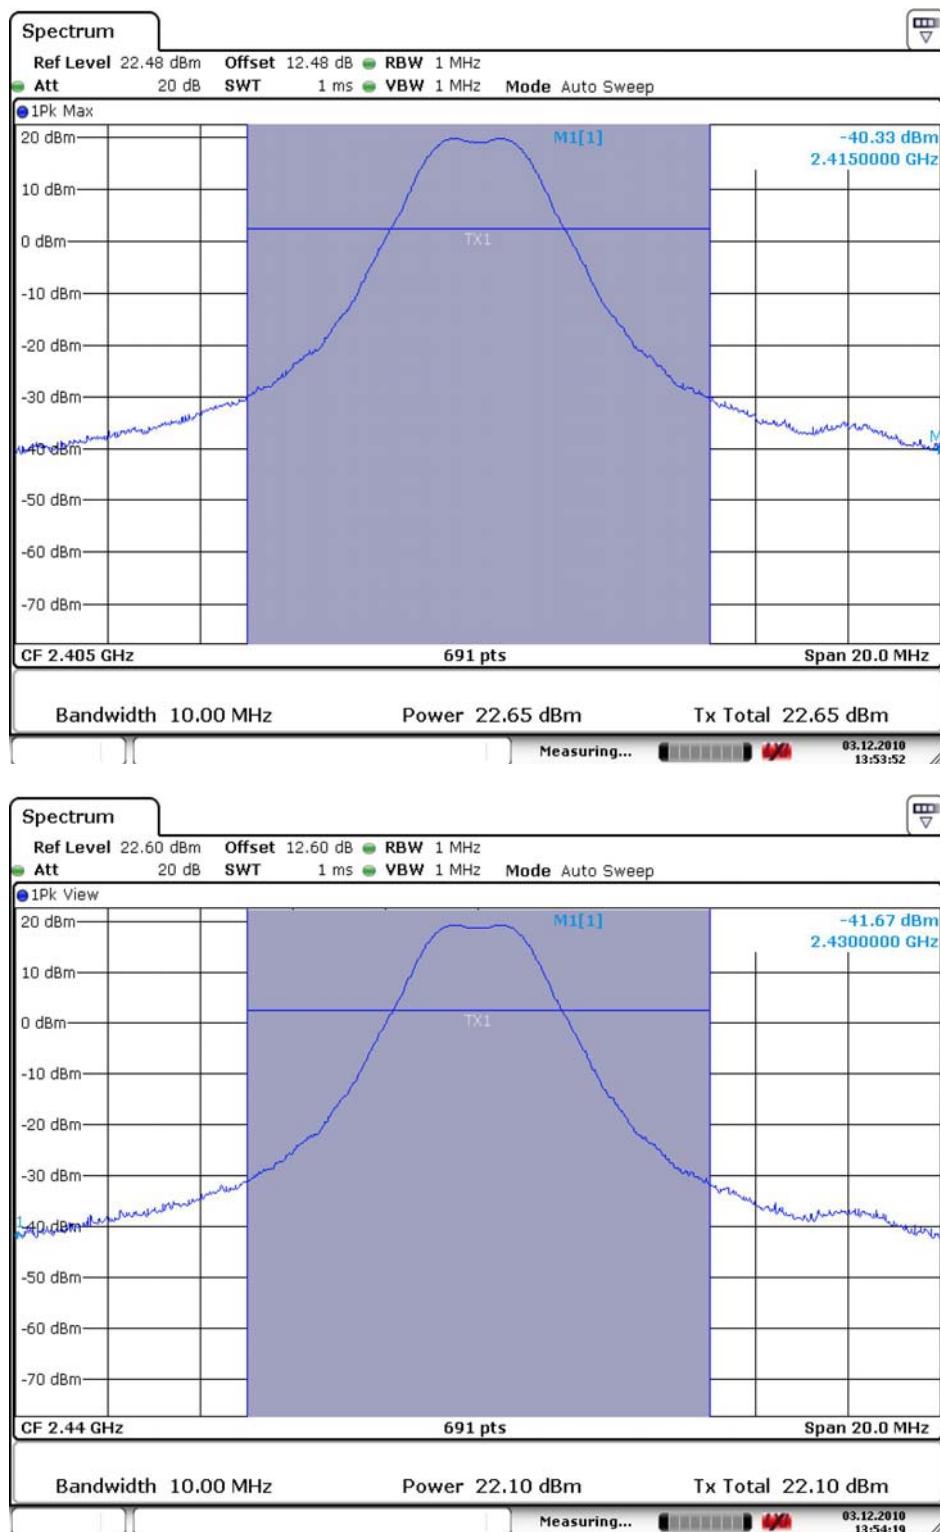

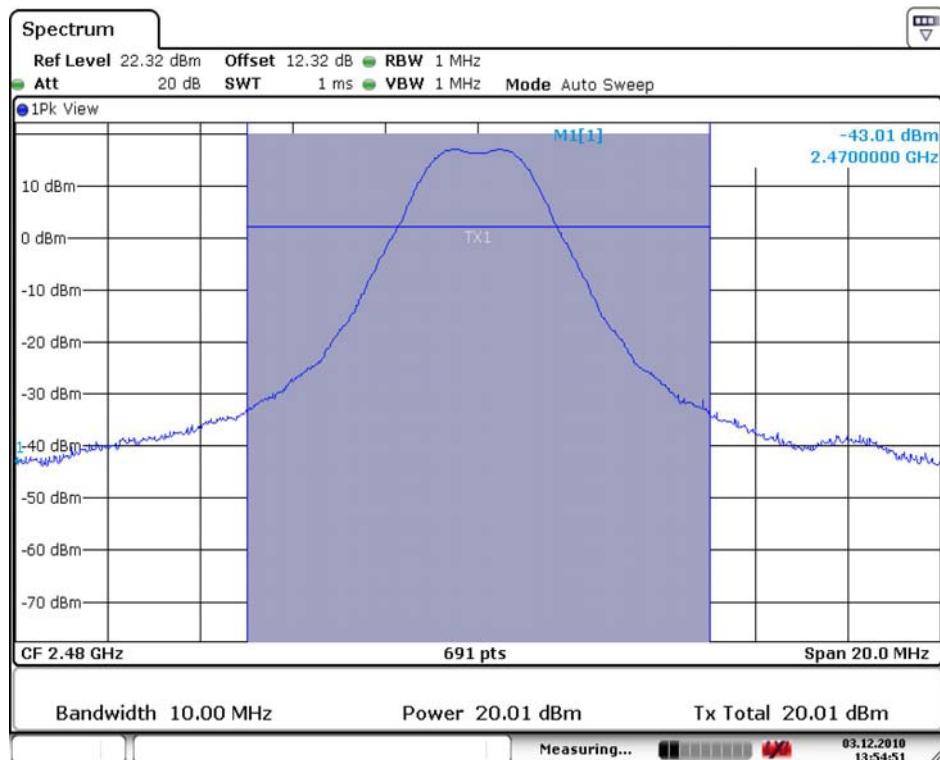Peak Conducted Output Power

2.1.3 Power Spectral Density-15.247(e)

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

$$VBW = (VBW \geq RBW)$$

Sweep = 100KHz(Span/3KHz)

Span = 300 KHz

Detector function = peak

Trace = max hold

Measurement Data:

Frequency (MHz)	Ch.	Test Results	
		dBm	Result
2405	Low	7.33	Complies
2440	Middle	6.34	Complies
2480	High	5.65	Complies



- See next pages for actual measured spectrum plots.


Minimum Standard:

Power Spectral Density < 8dBm @ 3kHz BW

See next pages for actual measured spectrum plots.

Power Density Measurement

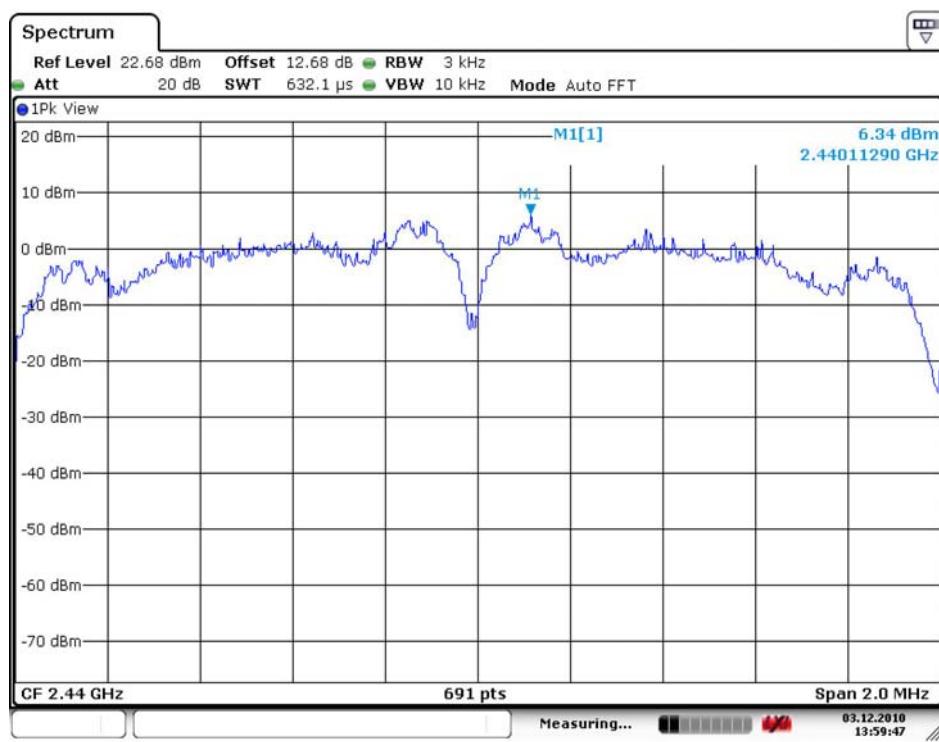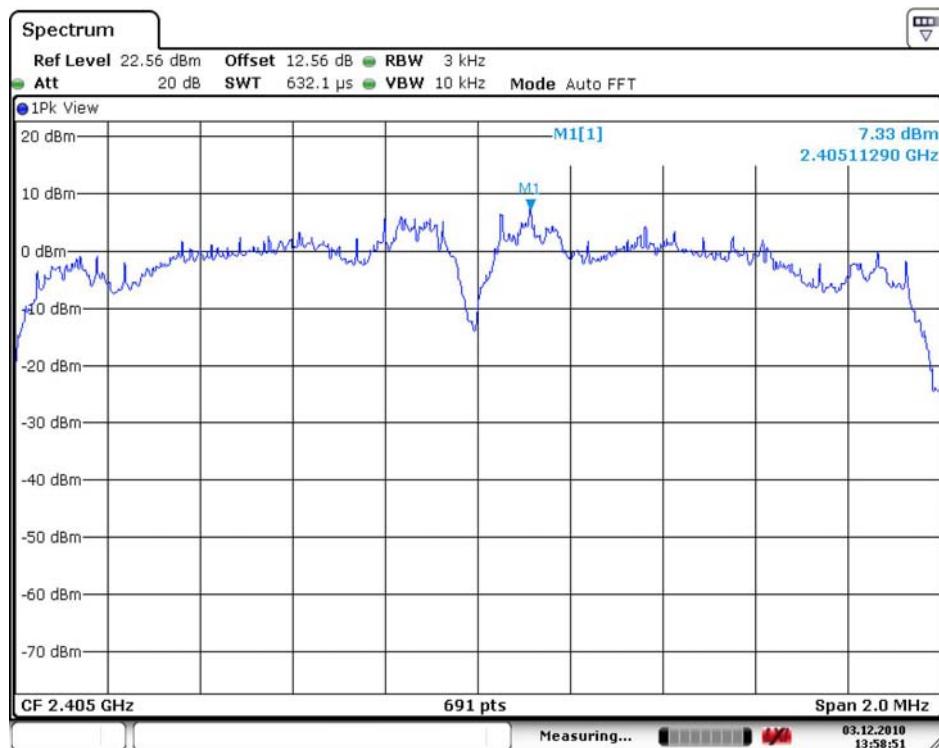

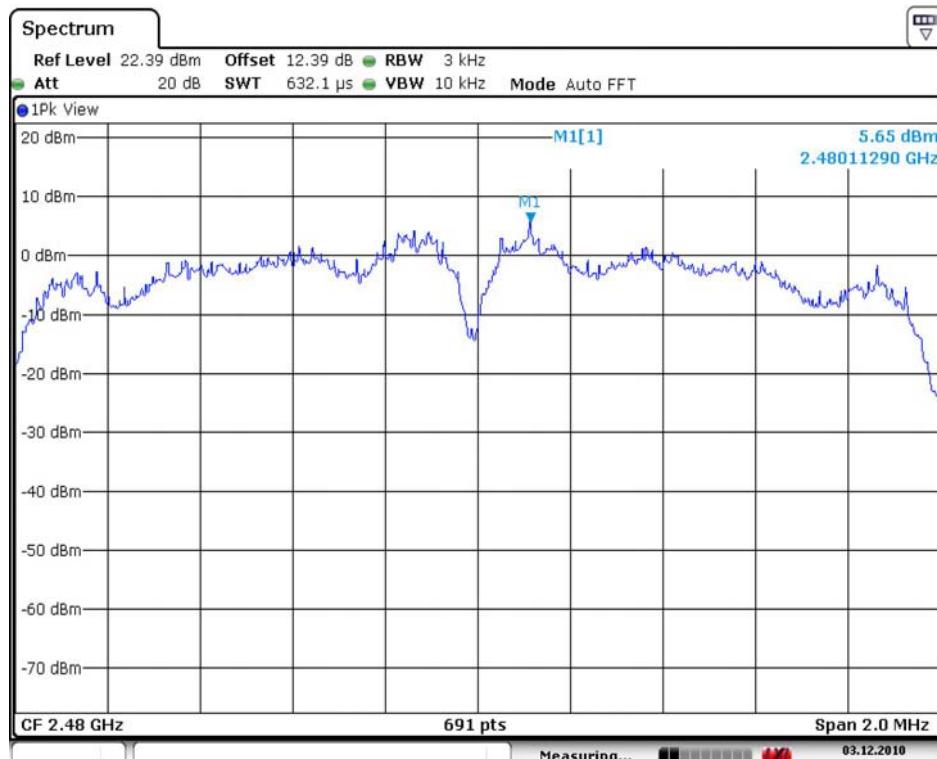

2.1.4 Band - edge -15.247(d)

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz VBW = 100 kHz

Span = 40 MHz Detector function = peak



Measurement Data: Complies


- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------


See next pages for actual measured spectrum plots.


Band-edge Measurements

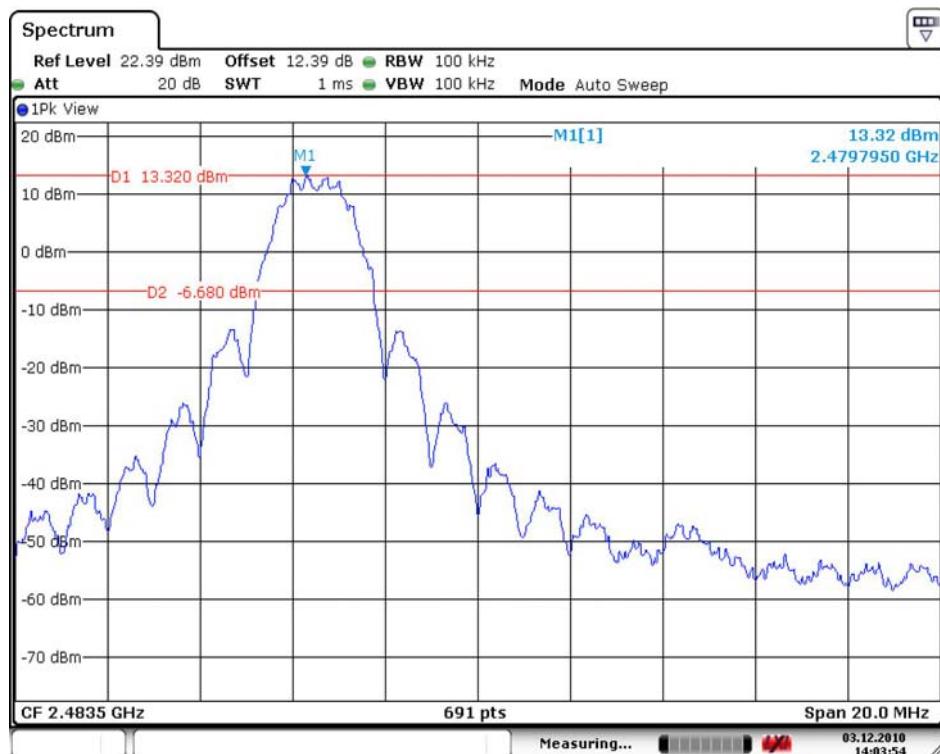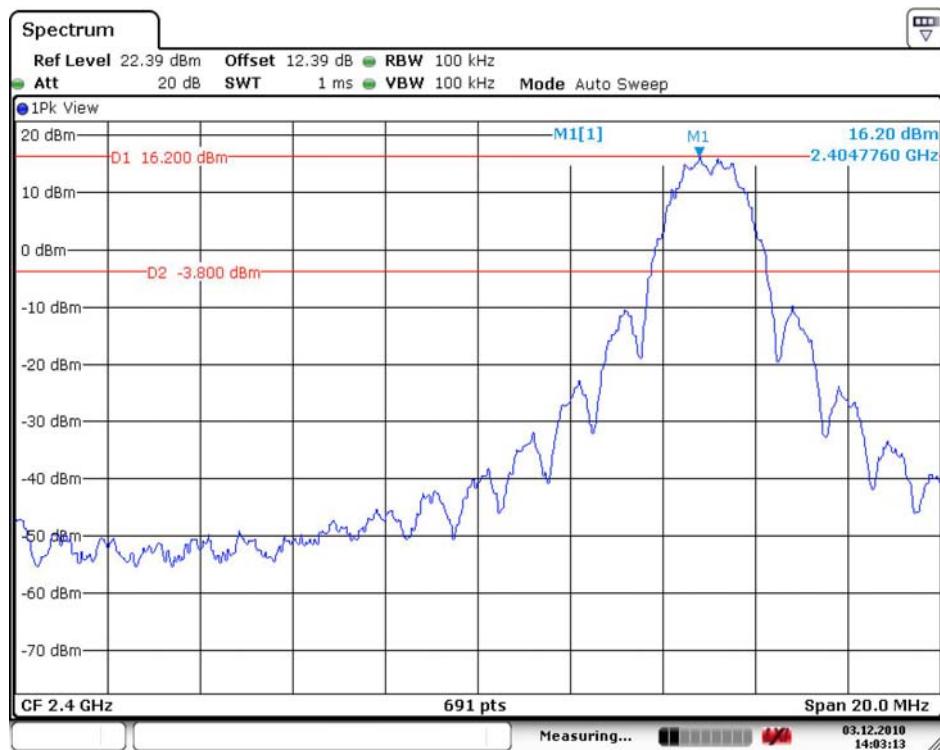

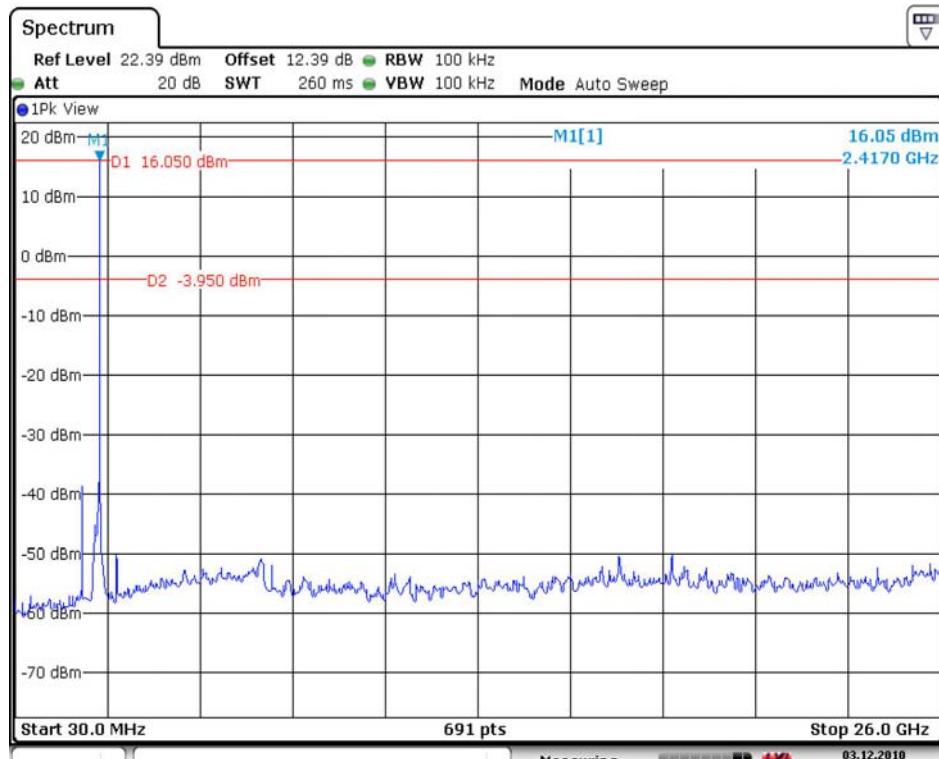**Band – edge (at 20 dB blow) – Low channel
Frequency Range = 30 MHz ~ 10th harmonic**

Band – edge (at 20 dB blow) – Mid channel
Frequency Range = 30 MHz ~ 10th harmonic

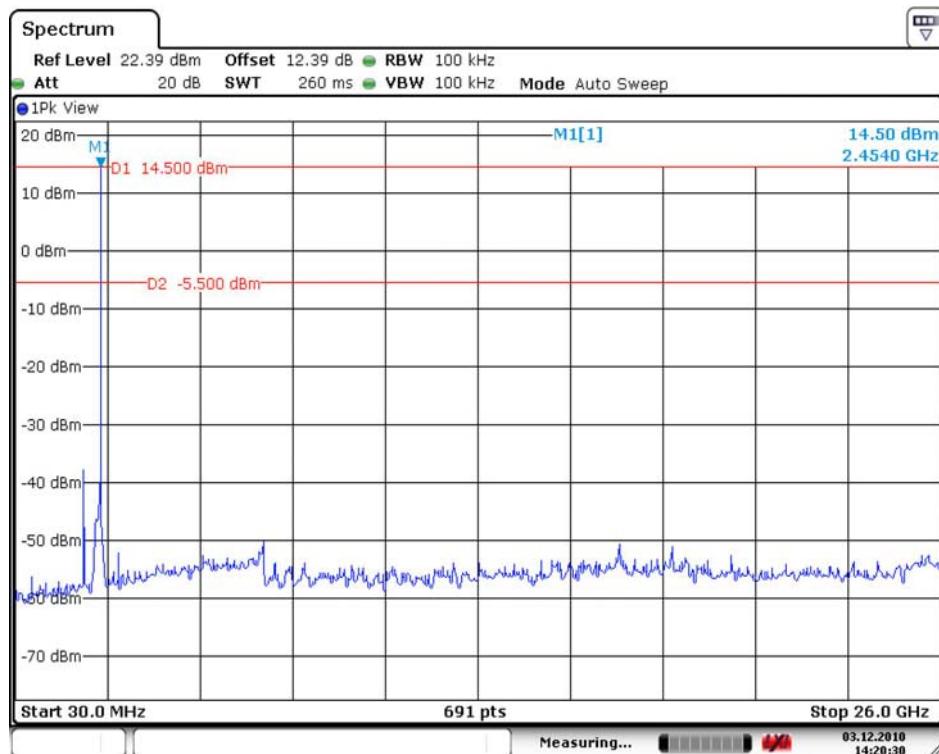

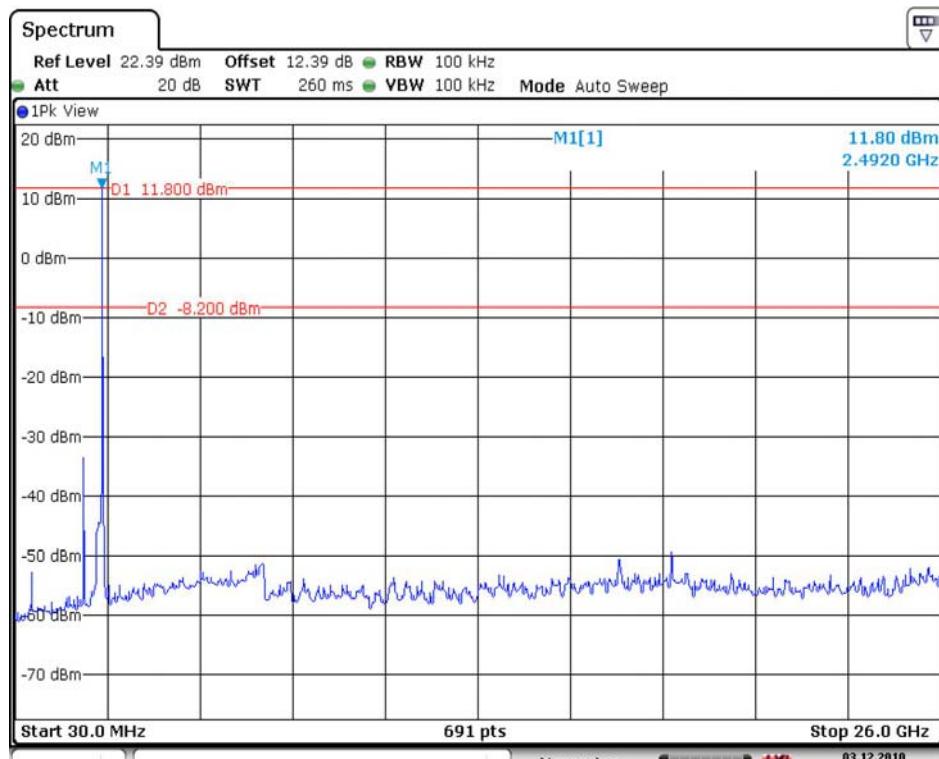**Band – edge (at 20 dB blow) – High channel
Frequency Range = 30 MHz ~ 10th harmonic**

2.1.5 Field Strength of Emissions 15.209

Test Location

Testing was performed at a test distance of 3 meter Open Area Test Site

Test Procedures

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.


The spectrum analyzer is set to:

Below 1GHz :

RBW=100KHz/VBW=300KHz/Sweep=AUTO

Above 1GHz:

- (a) PEAK:RBW=VBW=1MHz/Sweep=AUTO
- (b) AVERAGE:RBW=1MHz/VBW=10Hz/Sweep=AUTO

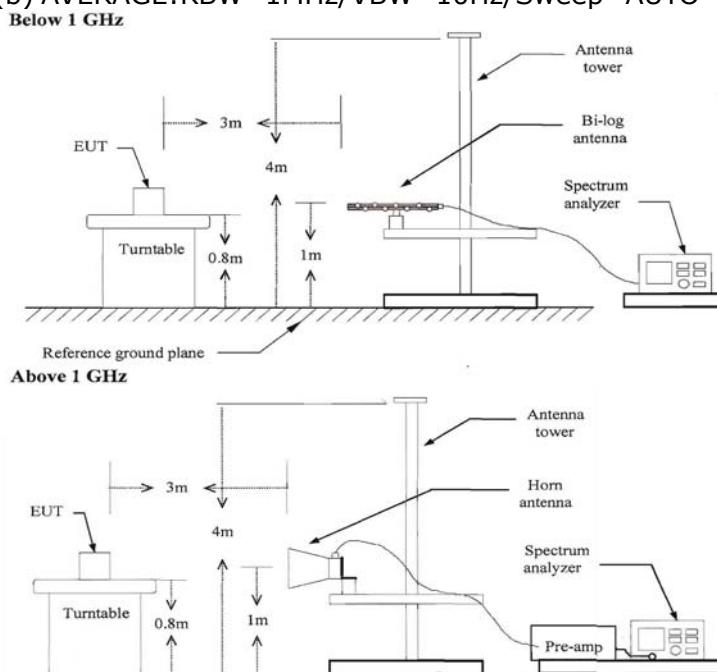

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m
30-88	100**	40
88-216	150**	43.5
216-960	200**	46
Above 960	500	54

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Test Results

EUT	2.4GHz Radio Control	Measurement Detail		
Model	TS401	Frequency Range		Below 1000MHz
Channel	-	Detector function		Quasi-Peak

-Operation mode

By preliminary testing and verifying three axis(X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the test was executed the worst condition and test data were recorded in his report

Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dBuV)
32.02	14.16	V	12.54	4.36	31.06	40	8.94
48.00	15.09	V	12.83	3.20	31.12	40	8.88
171.98	17.28	H	11.91	2.78	31.97	43.6	11.63
210.24	23.65	V	9.69	3.16	36.50	43.5	7.00
218.54	17.98	V	10.01	3.21	31.20	46	14.80
311.05	17.30	H	12.92	3.38	33.60	46	12.40
336.03	24.59	V	13.51	3.78	41.88	46	4.12

Test Results

EUT	2.4GHz Radio Control	Measurement Detail		
Model	TS401	Frequency Range		1 ~ 25GHz
Channel	Low	Detector function		Peak(PK) , Average(AV)

-Operation mode

By preliminary testing and verifying three axis(X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the test was executed the worst condition and test data were recorded in his report

Frequency	Reading A/P	Pol.	Height	Correction			Limits/ Detector A/P	Result A/P	Margin A/P
				Factor					
[MHz]	[dBuV/m]		[m]	Antenna	Amp.Gain	Cable	[dBuV/m]	[dBuV/m]	[dB]
1923.9	43.57/46.25	V	1	27.42	34.0	4.57	54/74	41.57/44.24	12.44/29.76

Remark :

1. Corrected Level = Reading – Preamp + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. Margin value = Limits – Corrected Level

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency	Reading Peak	Pol.	Height	Correction			Limits/ Detector Peak	Result Peak
				Factor				
[MHz]	[dBuV/m]		[m]	Antenna	Amp.Gain	Cable	[dBuV/m]	[dBuV/m]
2387.39	39.16	V	1.0	27.42	34.0	4.62	74	37.20
2486.52	41.95	V	1.0	27.42	34.0	4.84	74	40.21

Test Results

EUT	2.4GHz Radio Control	Measurement Detail		
Model	TS401	Frequency Range		1 ~ 25GHz
Channel	Mid	Detector function		Peak(PK) , Average(AV)

-Operation mode

By preliminary testing and verifying three axis(X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the test was executed the worst condition and test data were recorded in his report

Frequency	Reading A/P	Pol.	Height	Correction			Limits/ Detector A/P	Result A/P	Margin A/P
				Factor					
[MHz]	[dBuV/m]		[m]	Antenna	Amp.Gain	Cable	[dBuV/m]	[dBuV/m]	[dB]
1929.7	39.57/45.18	V	1	27.42	34.0	4.57	54/74	37.56/43.17	16.44/30.83

Remark : 1. Corrected Level = Reading – Preamp + Correction Factor

2. Correction Factor = Antenna Factor + Cable Loss

3. Margin value = Limits – Corrected Level

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency	Reading Peak	Pol.	Height	Correction			Limits/ Detector Peak	Result Peak
				Factor				
[MHz]	[dBuV/m]		[m]	Antenna	Amp.Gain	Cable	[dBuV/m]	[dBuV/m]
2383.681	39.13	V	1.0	27.42	34.0	4.62	74	37.17
2490.220	42.07	V	1.0	27.42	34.0	4.84	74	40.33

Test Results

EUT	2.4GHz Radio Control	Measurement Detail		
Model	TS401	Frequency Range		1 ~ 25GHz
Channel	High	Detector function		Peak(PK) , Average(AV)

-Operation mode

By preliminary testing and verifying three axis(X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the test was executed the worst condition and test data were recorded in his report

Frequency	Reading A/P	Pol.	Height	Correction			Limits/ Detector A/P	Result A/P	Margin A/P
				Factor					
[MHz]	[dBuV/m]	[m]	Antenna	Amp.Gain	Cable	[dBuV/m]	[dBuV/m]	[dB]	
1931.4	33.48/41.58	V	1	27.42	34.0	4.57	54/74	31.47/39.57	22.53/34.43

Remark :

1. Corrected Level = Reading – Preamp + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. Margin value = Limits – Corrected Level

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency	Reading Peak	Pol.	Height	Correction			Limits/ Detector Peak	Result Peak
				Factor				
[MHz]	[dBuV/m]	[m]	Antenna	Amp.Gain	Cable	[dBuV/m]	[dBuV/m]	
2388.183	38.85	V	1.0	27.42	34.0	4.62	74	36.89
2483.818	42.79	V	1.0	27.42	34.0	4.84	74	41.05

2.1.6 AC Conducted Emissions 15.207

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	-

Not Applicable

APPENDIX A – Test Equipment Used For Tests

No	Description	Manufacturer	Model No.	Serial No.	Due Cal.
1	Test Receiver	Rohde & Schwarz	ESHS 10	862970/018	2011.05.06
2	Test Receiver	Rohde & Schwarz	ESVS 10	826008/014	2011.05.06
3	Spectrum Analyzer	Hewlett Packard	8566B	2311A02394	2011.05.06
4	Spectrum Analyzer	Rohde & Schwarz	FSV30	100130	2011.11.29
5	Modulation Analyzer	Hewlett Packard	8901B	3438A05094	2011.05.06
6	Audio analyzer	Hewlett Packard	8903B	3011A12915	2011.05.06
7	Preamplifier	Hewlett Packard	8447F	2805A02570	2011.05.06
8	Preamplifier	A.H. Systems	PAM-0118	164	2011.05.06
9	Signal Generator	Hewlett Packard	8673D	2708A00448	2011.05.06
10	Power Meter	Hewlett Packard	437B	312U24787	2011.05.06
11	Power Sensor	Hewlett Packard	8482B	3318A06943	2011.05.06
12	Loop Antenna	Rohde & Schwarz	HFH2-Z2.335.4711.52	826532/006	2011.02.06
13	Dipole Antenna	Rohde & Schwarz	VHAP	574	2011.07.07
14	Dipole Antenna	Rohde & Schwarz	VHAP	575	2011.07.17
15	Dipole Antenna	Rohde & Schwarz	UHAP	545	2011.07.17
16	Dipole Antenna	Rohde & Schwarz	UHAP	546	2011.07.07
17	Biconical Antenna	Eaton Corp.	94455-1	0977	2011.07.03
18	Biconical Antenna	EMCO	3104C	9111-2468	2011.07.03
19	Log Periodic Antenna	EMCO	3146	2051	2011.06.05
20	Log Periodic Antenna	EMCO	3146	8901-2320	2011.07.03
21	Horn Antenna	A.H. Systems	SAS-571	414	2011.03.16
22	Waveform Generator	Hewlett Packard	33120A	US34001190	2011.05.06
23	Digital Oscilloscope	Tektronix	TDS 340A	B012287	2011.05.06
24	Dummy Load	Bird Electronics	8251	11511	2011.05.06

Test Setup Photos and Configuration

Radiated Electric Field Emissions

