



## TEST REPORT

Report No. : AZ0045690(2) Date : Oct 14, 2020

Application No. : LZ026051(3)

Applicant : 9141-0720 Quebec Inc. DBA MANARAS/OPERA  
136 Oneida Drive, Pointe-Claire  
Canada, H9R 1A8

Sample Description : One(1) item of submitted sample stated to be:

Sample Description	Model No.
Garage Door Controller	MIC-001

Radio Frequency : 390 MHz and 2412 – 2462MHz

Rating : AC24V

Sample registration No. : RZ008595-001(6)

PMN : MIC-001

HVIN : MIC-001

Date Received : Sep 24, 2020

Test Period : Sep 24, 2020 – Sep 29, 2020

Test Requested : FCC 47CFR Part 15 Certification  
ISED Certification for License-exempt Device

Test Method : 47 CFR Part 15 (10-1-19 Edition)  
ANSI C63.10 – 2013  
ANSI C63.4 – 2014  
RSS-210 Issue 10  
RSS-Gen Issue 5

Test Result : See attached sheet(s) from page 2 to 16.

Conclusion : The submitted sample was found to comply with requirement of FCC 47CFR Part 15  
Subpart C, section 15.231 and ISED Canada Radio Standard Specification RSS-210.

Remark : This report is only for the measurement of 390MHz transmitter. The authorization of the  
WiFi module has been certified by FCC and ISED.

For and on behalf of  
CMA Industrial Development Foundation Limited

Authorized Signature : \_\_\_\_\_

Mr. WONG Lap-pong, Andrew  
Manager

Page 1 of 16

FCC ID: X7OMIC001  
IC: 8860A-MIC001

The conformity statement stated in Conclusion above is based on the decision rule agreed with applicant and listed in [www.cmateesting.org/qac/statement-of-conformity.pdf](http://www.cmateesting.org/qac/statement-of-conformity.pdf).  
This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website [www.cmateesting.org](http://www.cmateesting.org).  
This document shall not be reproduced except in full without written approval by CMA Testing. The results apply to the sample as received unless otherwise specified. The observations and test results in this report are relevant only to the sample tested.

**CMA Industrial Development Foundation Limited**

**Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.**

**Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: [info@cmateesting.org](mailto:info@cmateesting.org) Web Site: <http://www.cmateesting.org>**

## **TEST REPORT**

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### **Table of Contents**

1	General Information .....	3
1.1	General Description .....	3
1.2	Location of the test site .....	4
1.3	List of measuring equipment.....	5
1.4	Measurement Uncertainty .....	6
1.5	Test Summary .....	6
1.6	External Photo, Internal Photo and Test Configuration Photo.....	6
2	Description of the radiated emission test .....	7
2.1	Test Procedure .....	7
2.2	Test Setup .....	8
2.3	Test Result .....	10
3	Description of the Line-conducted Test .....	12
3.1	Test Procedure .....	12
3.2	Test Result .....	12
3.3	Test Setup .....	12
3.4	Graph and Table of Conducted Emission Measurement Data .....	12
4	Additional requirement .....	13
5	Appendices.....	14

## TEST REPORT

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### 1 General Information

#### 1.1 General Description

The EUT is a Garage Door Controller, model: MIC-001. It is used to control the garage door with smartphone. It is equipped with a 390MHz transmitter and WiFi transceiver to make the communication with the smartphone. The WiFi function is mainly to connect with smartphone and local router for smartphone controlling the garage door with “Orbit Home” mobile App. The 390MHz transmitter is connected with other 390MHz Siren for security purpose. The voltage input of the MIC-001 is AC24V.

The 390MHz transmitter is operating in frequency 390MHz and operated by the RF IC, SYN115 with 12.1875MHz oscillator. ASK modulation is used. The RF signal is transmitted with a PCB antenna, 0.0dBi antenna gain.

The WiFi transceiver is operating with IEEE 802.11b/g/n(HT20) and in frequency band 2412 – 2462MHz. The WiFi transceiver is operated by WiFi Module, model: HM-WF8266A. The WiFi module has been certified by FCC and ISED under WiFi module with FCC ID:2ASEO-HM-WF8266A and IC: 24999-WF8266A respectively.

Brief Circuit Description is listed below

U2	:	RF IC of 390MHz Transmitter, SYN115
Y1, C8, C9	:	12.1875MHz clock for 390MHz RF IC
L2, C3, C4, C5	:	Matching circuit
U1	:	WiFi Module, HM-WF8266A
U3	:	MCU



## **TEST REPORT**

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### 1.2 Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2014. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,  
9 – 13 Wong Chuk Yeung Street,  
Fo Tan, Shatin,  
New Territories,  
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2014. A shielded room is located at :

Ground Floor, Yan Hing Centre,  
9 – 13 Wong Chuk Yeung Street,  
Fo Tan, Shatin,  
New Territories,  
Hong Kong.

FCC Accredited Lab (Designation Number: HK0004)  
ISED Wireless Test Site (ISED Assigned Code: 4093A)

## TEST REPORT

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### 1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	Rohde & Schwarz	ESCI	100152	15 Jan 2021	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSP 30	100628	29 Oct 2021	1 Year
Log Periodic Antenna	Teseq	UPA6109	43666	08 Oct 2020	2Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	02 Feb 2023	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	02 Feb 2023	2Years
Loop Antenna	EMCO	6502	00056620	29 Oct 2020	2Years
Coaxial Cable	Schaffner	RG213/U	N/A	06 May 2021	1 Years
Coaxial Cable	Suhner	RG214/U	N/A	06 May 2021	1 Years



## TEST REPORT

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### 1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor  $k=2$ , providing a level of confidence of approximately 95%.

#### Radiated emissions

Frequency	Uncertainty ( $U_{lab}$ )
30MHz ~ 200MHz (Horizontal)	4.59dB
30MHz ~ 200MHz (Vertical)	4.49dB
200MHz ~1000MHz (Horizontal)	4.94dB
200MHz ~1000MHz (Vertical)	4.97dB
1GHz ~ 6GHz	4.52dB
6GHz – 18GHz	4.58dB

### 1.5 Test Summary

TEST ITEM	FCC REFERENCE	RSS REFERENCE	RESULT
Radiated emission	15.231(a)	RSS-210 Annex A, A.1.2	Comply
Assigned bandwidth (20dB bandwidth)	15.231(c)	-	Comply
Occupied bandwidth >0.25% of centre frequency	-	RSS-210 Annex A, A.1.3	Comply
Transmission time after automatic activation	15.231(b)	RSS-210 Annex A, A.1.1	Comply

### 1.6 External Photo, Internal Photo and Test Configuration Photo

The External Photo, Internal Photo and Test Configuration Photo associated with this report for the tested product are saved in separated pdf file listed in the following

File content	File name
External Photo	X7OMIC001_8860A-MIC001 External Photo.pdf
Internal Photo	X7OMIC001_8860A-MIC001 Internal Photo.pdf
Test Configuration Photo	X7OMIC001_8860A-MIC001 Test SetupPhoto.pdf



## **TEST REPORT**

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### **2 Description of the radiated emission test**

#### **2.1 Test Procedure**

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 – 2013.

A non-conductive turntable with dimensions of 1.5m x 0.4m x 0.8m (L x W x H) placed above the reference ground plane. The equipment under test (EUT) was placed at 0.8m height for below 1GHz measurement and 1.5m height for above 1GHz measurement. The test distance is 3m between EUT and receiving antenna. A broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated. Additional absorbing material will be placed between the EUT and receiving antenna for above 1GHz measurement.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.


The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.

## TEST REPORT


Report No. : AZ0045690(2)

Date : Oct 14, 2020

### 2.2 Test Setup

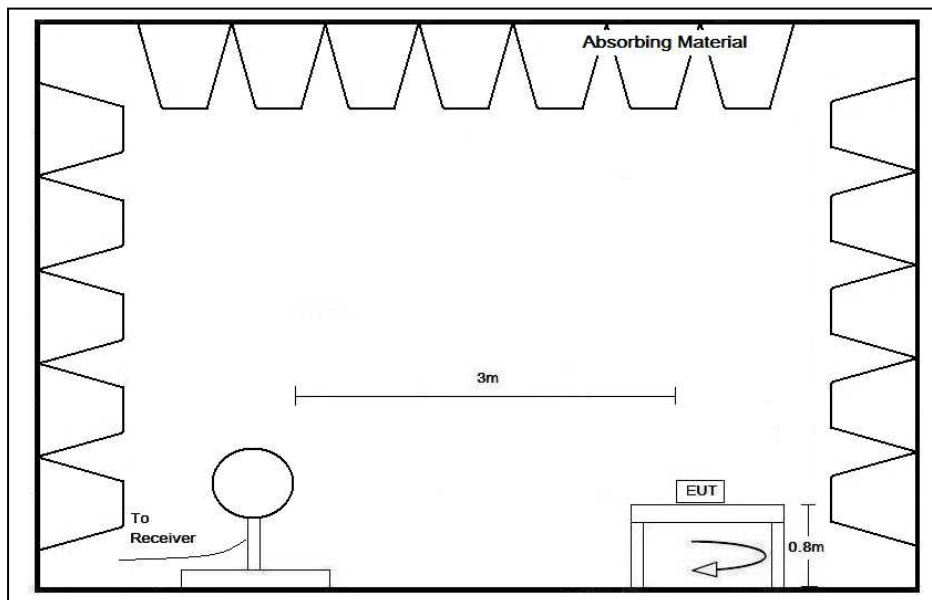

Below 30MHz

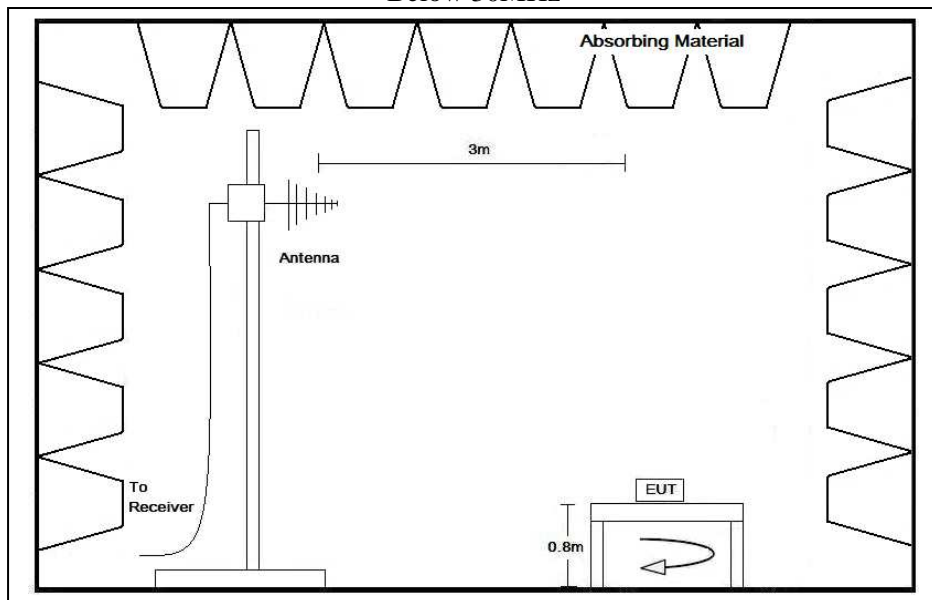

30MHz – 1GHz




## TEST REPORT

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### 2.2 Test Setup

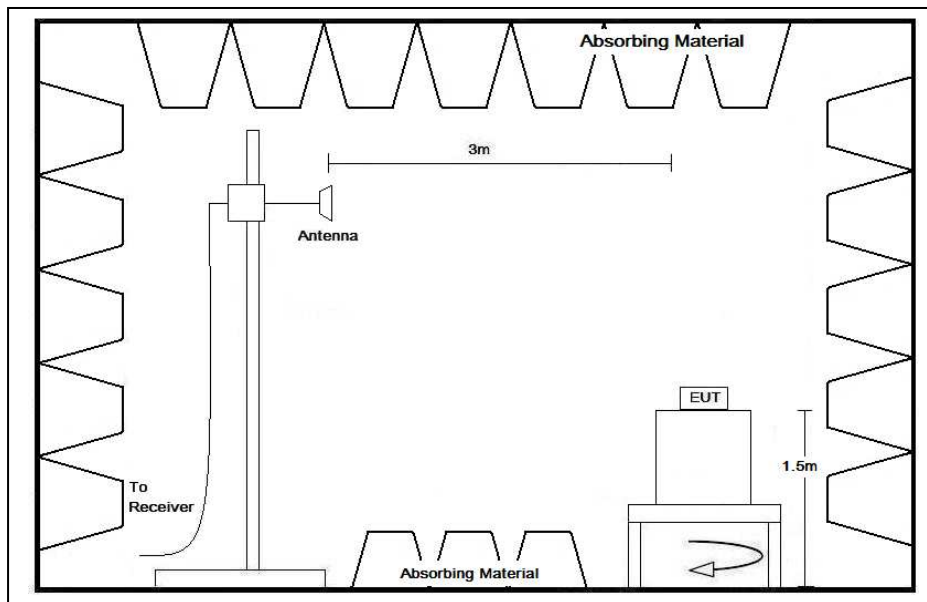

Above 1GHz



## **TEST REPORT**

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### 2.3 Test Result

Peak Detector data was measured unless otherwise stated.

The radiated emissions are measured from 9kHz to 4GHz (the tenth harmonics)

The worst case configuration is shown on the worst case configuration of test setup photo.

The frequencies from fundamental up to tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next pages.

The EUT has been tested in Transmission mode.

It was found that the EUT meet the FCC and RSS requirement.

Page 10 of 16

FCC ID: X7OMIC001  
IC: 8860A-MIC001

Document name: FCC/ISED for LPD - Document Ref No: RT-EL-EMC-047 - Issue Date: 13 Mar 2019 - Edition: 2

**CMA Industrial Development Foundation Limited**

**Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.**

**Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: [info@cmatesting.org](mailto:info@cmatesting.org) Web Site: <http://www.cmatesting.org>**

## TEST REPORT

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### 2.4 Radiated Emission Measurement Data

#### Radiated emission

##### Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	25.2	° C
Relative humidity:	56.6	%

Channel: 390MHz

Polarization	Frequency (MHz)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)	Detector Type
H	390.024	44.9	28.3	73.2	79.2	-6.0	PK
V	390.018	49.9	28.3	78.2	79.2	-1.0	PK
V	780.019	10.3	28.3	38.6	59.2	-20.6	PK
H	1170.030*	51.2	-7.6	43.6	54.0	-10.4	PK
H	2340.048*	52.5	-4.7	47.8	54.0	-6.2	PK
H	2730.090*	44.7	-2.3	42.4	54.0	-11.6	PK
H	3120.160	38.6	3.2	41.8	59.2	-17.4	PK

Remark: 1) All emissions are measured with Peak detector and compared with the average limit, so no average measurement and duty cycle measurement are performed.

\* The emissions fall in the restricted band under 15.205, so the average limit shown on 15.209 applied.

## TEST REPORT

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### 3 Description of the Line-conducted Test


#### 3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. The EUT was setup as described in the procedures, and both lines were measured.

#### 3.2 Test Result

No measurement is required as the EUT is operating with 24VAC

#### 3.3 Test Setup

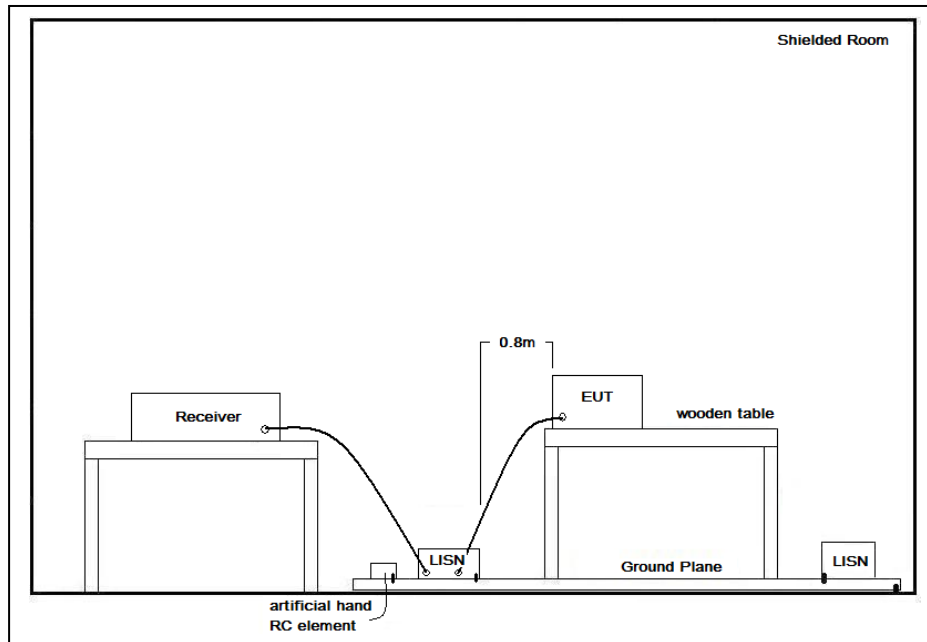

#### 3.4 Graph and Table of Conducted Emission Measurement Data

Not Applicable



## **TEST REPORT**

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### **4 Additional requirement**

#### **4.1 Bandwidth**

Appendices A1 show the fundamental emission is confined in the specified band. The 20dB bandwidth is 4.175kHz and 99% bandwidth is 7.415kHz. The bandwidth requirement is 0.25% of 390MHz = 975kHz. It also shows that the EUT meets the FCC Part 15.231(c) and RSS-210 Annex A A.1.3 bandwidth requirement.

#### **4.2 Transmission time**

Duration of each transmission after automatic activation = 0.970s

The duration of the transmission is less than 5s after transmission is activated automatically. An Appendices A2 is shown the EUT to comply with FCC Part 15, section 15.231(a)(2) and RSS-210, Annex A, section A.1.1(b)





## **TEST REPORT**

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### **5 Appendices**

A1.	Bandwidth Plot	1	page(s)
A2.	Transmission Time	1	Page(s)

Page 14 of 16

FCC ID: X7OMIC001  
IC: 8860A-MIC001

Document name: FCC/ISED for LPD - Document Ref No: RT-EL-EMC-047 - Issue Date: 13 Mar 2019 - Edition: 2

**CMA Industrial Development Foundation Limited**

**Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.**


**Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: [info@cmatesting.org](mailto:info@cmatesting.org) Web Site: <http://www.cmatesting.org>**

## TEST REPORT


Report No. : AZ0045690(2)

Date : Oct 14, 2020

### A1. Bandwidth Plot

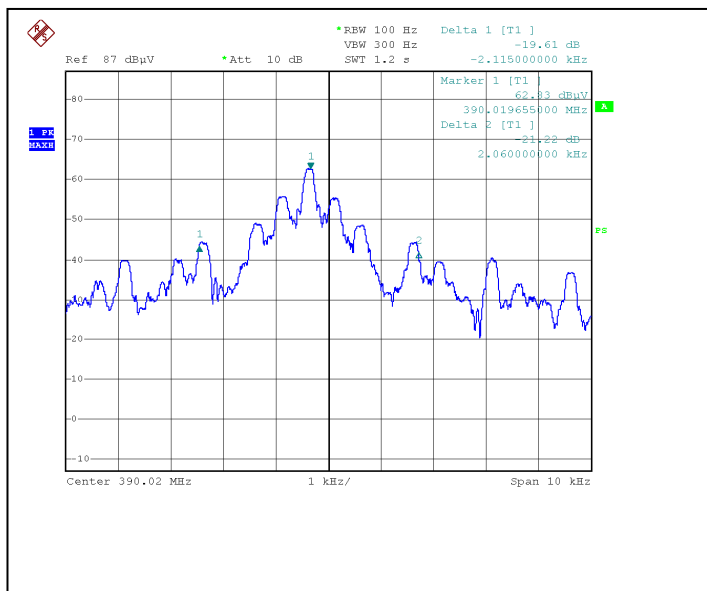

20dB bandwidth

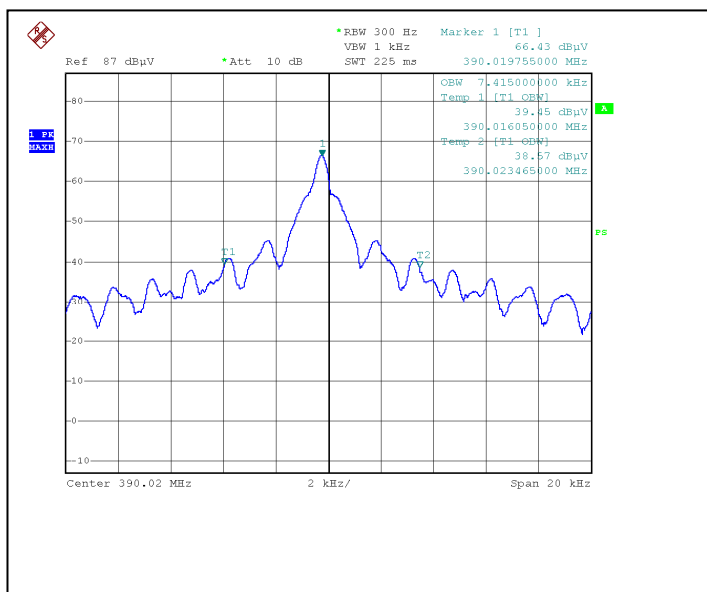

99% occupied bandwidth




## TEST REPORT

Report No. : AZ0045690(2)

Date : Oct 14, 2020

### A2. Transmission time

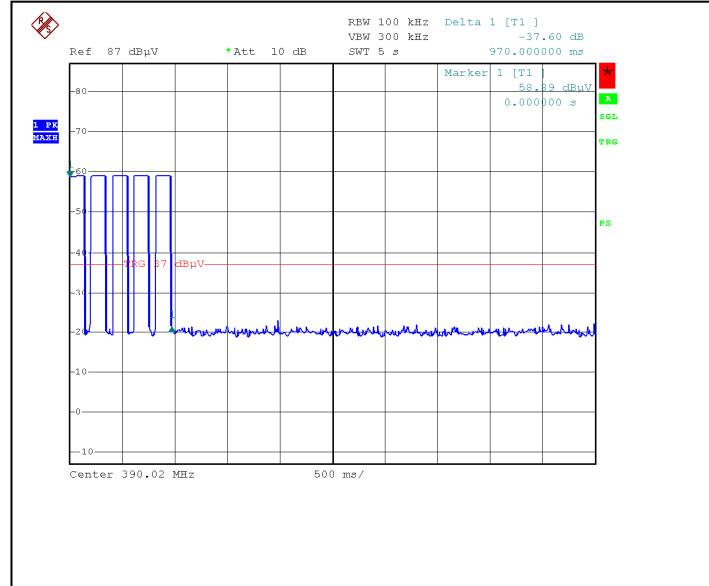

\*\*\*\*\* End of Report \*\*\*\*\*