Page 1 of 46

Rev: 00

FCC Test Report

Part 15 subpart C

Client Information:

Applicant: AAMP OF FLORDIA, DBA AAMP OF AMERICA AAMP Global

Applicant add.: 13190 56th court suite #401 Clearwater,florida

Product Information:

EUT Name: Isimple BT Cassette Adapter with Action

Model No.: ISBT38

Brand Name: N/A

FCC ID: XBD-ISBT38A

Standards: FCC PART 15 Subpart C: 2016 section 15.247

Prepared By:

Dongguan Yaxu (AiT) Technology Limited

Add.: No.22, Jinqianling Third Street, Jitigang, Huangjiang,

Dongguan, Guangdong, China

Date of Receipt: Aug. 28, 2016 Date of Test: Aug. 28~ Aug. 31, 2016

Date of Issue: Aug. 31, 2016 Test Result: Pass

This device described above has been tested by Dongguan Yaxu(AiT) Technology Limited, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by: Seal-Cherr

Approved by:

Contents

	COVER P	AGE	Page
1		ENTS	
2	TEST	SUMMARY	4
	2.1 Co	MPLIANCE WITH FCC PART 15 SUBPART C	4
	2.2 TE	ST LOCATION	5
	2.3 ME	ASUREMENT UNCERTAINTY	5
3	TEST	FACILITY	6
	3.1 DE	VIATION FROM STANDARD	6
	3.2 AB	NORMALITIES FROM STANDARD CONDITIONS	6
4	GENE	RAL INFORMATION	7
	4.1 GE	NERAL DESCRIPTION OF EUT	7
	4.2 DE	SCRIPTION OF TEST CONDITIONS	9
	4.3 TE	ST PERIPHERAL LIST	10
	4.4 EU	IT PERIPHERAL LIST	10
5	EQUIF	MENTS LIST FOR ALL TEST ITEMS	11
6		RESULT	
		TENNA REQUIREMENT	
	6.1.1	Standard requirement	
	6.1.2	EUT Antenna	
	-	NDUCTION EMISSIONS MEASUREMENT	
	6.2.1	Applied procedures / Limit	
	6.2.2	Test procedure	
	6.2.3	Test setup	
	6.2.4	Test results	
	6.3 RA	DIATED EMISSIONS MEASUREMENT	
	6.3.1	Applied procedures / Limit	
	6.3.2	Test setup	15
	6.3.3	Test procedure	17
	6.3.4	Test Result	18
	6.3.5	TEST RESULTS (Restricted Bands Requirements)	23
	6.4 BA	NDWIDTH TEST	24
	6.4.1	Applied procedures / Limit	24
	6.4.2	Test procedure	24
	6.4.3	Deviation from standard	24
	6.4.4	Test setup	24
	6.4.5	Test results	25
	6.5 PE	AK POWER DENSITY	28
	6.5.1	Applied procedures / Limit	28





	6.5.2	Test procedure	28
	6.5.3	Deviation from standard	28
	6.5.4	Test results	29
	6.6 MAX	XIMUM PEAK OUTPUT POWER	32
	6.6.1	Applied procedures / Limit	32
	6.6.2	Test procedure	32
	6.6.3	Deviation from standard	32
	6.6.4	Test setup	32
	6.6.5	Test results	33
	6.7 BAN	ND EDGE	36
	6.7.1	Applied procedures / Limit	36
	6.7.2	Test procedure	36
	6.7.3	Deviation from standard	36
	6.7.4	Test setup	36
	6.7.5	Test results	37
	6.8 Cor	NDUCTED SPURIOUS EMISSIONS	38
	6.8.1	Applied procedures / Limit	38
	6.8.2	Test procedure	38
	6.8.3	Deviation from standard	38
	6.8.4	Test setup	38
	6.8.5	Test results	39
7	РНОТС	OGRAPHS	45
	7.1 RAI	DIATED EMISSION TEST SETUP	45
	7.2 EU	T Constructional Details	46

Page 4 of 46

Rev: 00

2 Test Summary

2.1 Compliance with FCC Part 15 subpart C

Test		Test Requirement	Standard Paragraph	Result
Antenna Requirement		FCC Part 15 C:2016	Section 15.247(c)	PASS
Conduction	Emissions	FCC Part 15 C:2016	Section 15.207(a)	PASS
Radiated I	Emissions	FCC Part 15 C:2016	Section 15.247(d)	PASS
Occupied	Bandwidth	FCC Part 15 C:2016	Section 15.247(a)(2)	PASS
Peak power density		FCC Part 15 C:2016	Section 15.247(e)	PASS
Maximum Peak Output Power		FCC Part 15 C:2016	Section 15.247(b)(1)	PASS
Band	edge	FCC Part 15 C:2016	Section 15.247(d)	PASS
Conducted Emis	•	FCC Part 15 C:2016	Section 15.247(d)	PASS
Note:				
(1)	(1) Reference to the KDB 558074 D01 DTS Meas Guidance v03r05			
(2)) Reference to ANSI C63.10:2013.			
(3)	The pouduct support for Bluetooth 4.0 dual mode (including basic rate / EDR and low energy mode), this report is test for low energy mode, for Bluetooth basic rate / EDR mode please refers to the report number E-F1608018-2.			



Page 5 of 46

Rev: 00

2.2 Test Location

All tests were performed at:

Dongguan Yaxu (AiT) Technology Limited No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan, Guangdong, China Tel.: +86.769.82020499 Fax.: +86.769.82020495

2.3 Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements uncertainty Levels, the maximum value of the uncertainty as below

No.	Item	Uncertainty
1	Conducted Emission Test	1.20dB
2	Radiated Emission Test	3.30dB



Page 6 of 46

Rev: 00

3 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

.CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

.FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

.Industry Canada(IC)-Registration No: IC6819A-1

The 3m Semi-Anechoic Chamber and 3m/10m Open Area Test Site of Dongguan Yaxu (AiT) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 12, 2014.

.VCCI- Registration No: 2705

The 3m/10m Open Area Test Site, Shielding Room and 3m Chamber of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on Nov. 21, 2012. The Telecommunication Ports Conducted Disturbance Measurement of Dongguan Yaxu (AiT) Technology Limited have been registered by Voluntary Control Council for Interference on May. 13, 2013.

.TUV NORD

Dongguan Yaxu (AiT) Technology Limited has been assessed on Jun. 13, 2013 that it can carry out EMC tests by order and under supervision of TUV NORD.

.ITS- Registration No: TMPSHA031

Dongguan Yaxu (AiT) Technology Limited has been assessed and included in Intertek Shanghai TMP Program regarding Laboratory facilities and test equipment on Jul.22, 2012.

3.1 Deviation from standard

None

3.2 Abnormalities from standard conditions

None



Page 7 of 46

Rev: 00

4 General Information

4.1 General Description of EUT

Manufacturer:	Skytech Creations Ltd.
Manufacturer Address:	Qiaotou Industrial distrct,Qiaoli Zone,Changping Town,Dongguan Guangdong Province,China.
EUT Name:	Isimple BT Cassette Adapter with Action
Model No:	ISBT38
Brand Name:	N/A
Serial No:	N/A
Derivative model No.:	N/A
Operation frequency:	2402 MHz to 2480 MHz
NUMBER OF CHANNEL:	40
Modulation Technology:	GFSK(1Mbps)
Bluetooth version:	BT4.0 Dual-mode
Antenna Type:	Integral antenna
Antenna Gain:	maximum 0dBi
H/W No.:	V1.0
S/W No.:	V1.06
Power Supply Range:	DC 3.7V from battery or DC 5V from micro-USB port
Power Supply:	The same as above
Power Cord:	N/A
Output power (max):	0.77dBm
Note:	
1.	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



Report No.: E-F1608018-1 Page 8 of 46 Rev: 00


	Description of	Channel:	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

Report No.: E-F1608018-1 Page 9 of 46

Rev: 00

4.2 Description of Test conditions

(1) EUT was tested in normal configuration (Please See following Block diagram)



Note:

- 1. The EUT was programmed to be in continuously transmitting mode with fully-charged battery and the transmit duty cycle is not less than 98%.
- 2. Using the notebook and the transform board to control the fixed transmitting frequency and other test mode. After finishing the test setting, the notebook and the transform board will be removed during measurements.
- (2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the adiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over	Number of	Location in
which device operates	frequencies	the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

(4) Frequency range of radiated measurements:

According to the 15.33, the test range will be up to the tenth harmonic of the highest fundamental frequency.



Page 10 of 46

Rev: 00

4.3 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	Notebook	ASUS	N/A	X401A	X16- 9607 2	N/A	N/A
2	USB line	N/A	N/A	N/A	N/A	N/A	0.3m/ unshielded /detachable
3	Transform board	N/A	N/A	N/A	N/A	N/A	N/A

4.4 EUT Peripheral List

No.	Equipme nt	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Remark
1	USB line	N/A	N/A	N/A	N/A	0.6m/shielded /detachable	N/A

Page 11 of 46

Rev: 00

Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	ADVANTEST	R3182	150900201	2016.06.29	2017.06.28
2	EMI Measuring Receiver	R&S	ESR	101660	2016.06.29	2017.06.28
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2016.06.29	2017.06.28
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2016.06.29	2017.06.28
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2016.06.29	2017.06.28
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2016.06.29	2017.06.28
7	SHF-EHF Horn	SCHWARZBECK	BBHA9170	BBHA9170367	2016.06.29	2017.06.28
8	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.29	2017.06.28
9	EMI Test Receiver	R&S	ESCI	100124	2016.06.29	2017.06.28
10	LISN	Kyoritsu	KNW-242	8-837-4	2016.06.29	2017.06.28
11	LISN	Kyoritsu	KNW-407	8-1789-3	2016.06.29	2017.06.28
12	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.29	2017.06.28
13	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.29	2017.06.28
14	Radiated Cable 1#	FUJIKURA	5D-2W	01	2015.12.25	2016.12.24
15	Radiated Cable 2# (1GHz -25GHz)	FUJIKURA	10D2W	02	2015.12.25	2016.12.24
16	Conducted Cable 1#(9KHz-30MHz)	FUJIKURA	1D-2W	01	2015.12.25	2016.12.24
17	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	N/A

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.



Page 12 of 46

Rev: 00

6 Test Result

6.1 Antenna Requirement

6.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

6.1.2 EUT Antenna

The antenna is Integral antenna board and no consideration of replacement. Antenna gain is maximum 0dBi from 2.4GHz to 2.5GHz.

Page 13 of 46

Rev: 00

6.2 Conduction Emissions Measurement

6.2.1 Applied procedures / Limit


Frequency of Emission (MHz)	Conducted Limit (dBμV)		
	Quasi-peak	Average	
0.15-0.5	66 to 56 *	56 to 46 *	
0.5-5	56	46	
5-30	60	50	

Note: Decreases with the logarithm of the frequency.

6.2.2 Test procedure

EUT was placed upon a wooden test table 0.8m above the horizontal metal reference plane and 0.4m from the Vertical ground plane, and it was connected to an AMN. The closest distance between the boundary of the EUT and the surface of the AMN is 0.8m. All peripherals were connected to another AMN, and placed at a distance of 10cm from each other. A spectrum and receiver was connected to the RF output port of the AMN. Both average and quasi-peak value were detected.

6.2.3 Test setup

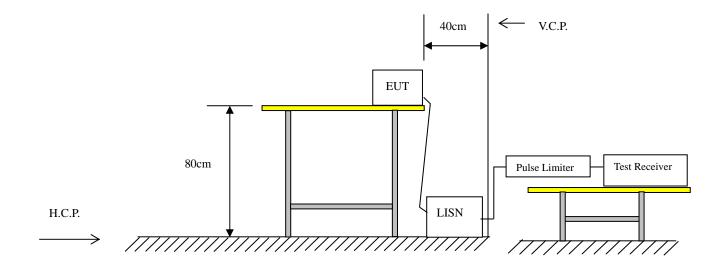



Page 14 of 46

Rev: 00

6.2.4 Test results

Remark: Because the EUT employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Measurements to demonstrate compliance with the conducted limits are not required for devices.

During the charging procedure, the Bluetooth function of this device is inactive.

Page 15 of 46

Rev: 00

6.3 Radiated Emissions Measurement

6.3.1 Applied procedures / Limit


15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Francisco (MILIT)	Field Stre	ngth	Measurement
Frequency of Emission (MHz)	μV/m	dBµV/m	Distance (meters)
0.009-0.49	2400/F(kHz)		300
0.49-1.705	24000/F(kHz)		30
1.705-30	30		30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

6.3.2 Test setup

Test Configuration:


1) 9 kHz to 30 MHz emissions:

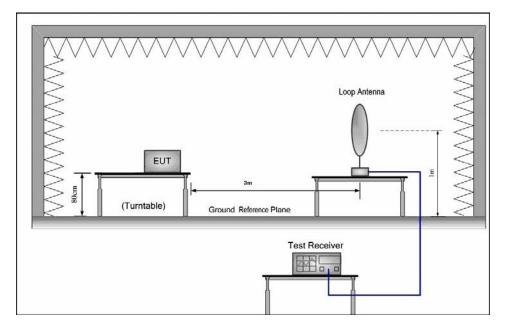


Page 16 of 46

Rev: 00

2) 30 MHz to 1 GHz emissions:

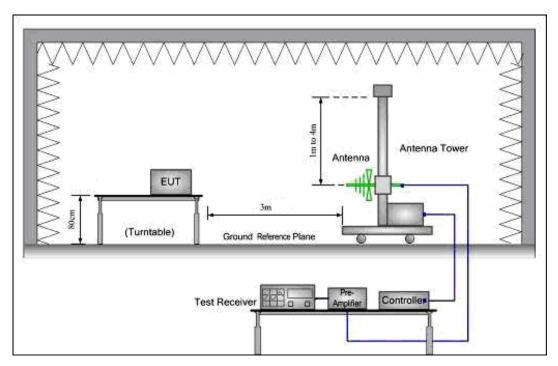

3) 1 GHz to 25 GHz emissions:

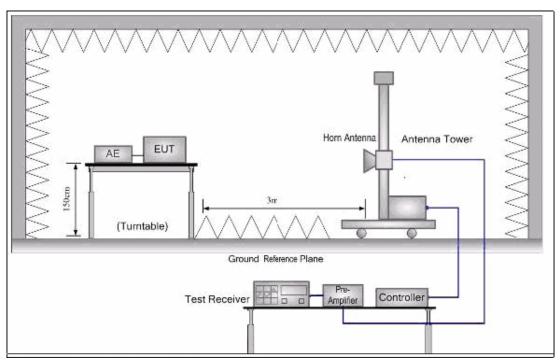



Page 17 of 4

Rev: 00

6.3.3 Test procedure

- a. The EUT was placed on the top of a wooden table 0.8 meters (for measurement at frequency below 1GHz) and a wooden table 1.5 meters (for measurement at frequency above 1GHz) above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter, for the test frequency of above 1GHz, horn antenna opening in the test would have been facing the EUT when rise or fall) and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The resolution bandwidth and video bandwidth of the test receiver was 1MHz and 1MHz for Peak detection at frequency above 1GHz.
- g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)
- h. Repeat above procedures until all frequencies measured was complete.

For measurement at frequency above 1GHz

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

In 18GHz to 25GHz, The EUT was checked by Horn ANT. But the test result at least have 20dB margin. The EUT was tested in Chamber Site.



Page 18 of Rev: 00 46

6.3.4 Test Result

Radiated Emissions Test Data Below 30MHz

EUT:	Isimple BT Cassette Adapter with Action	Model Name:	ISBT38		
Temperature:	25 ℃	Test Data	2016-08-29		
Pressure:	1005 hPa	Relative Humidity:	60%		
Test Mode:	TX(1Mbps worst case)	Test Voltage:	DC 3.7V from battery		
Measurement Distance	3 m	Frenqucy Range	9KHz to 30MHz		
RBW/VBW	9KHz~150KHz/RB 200Hz for QP, 150KHz~30MHz/RB 9KHz for QP				

No emission found between lowest internal used/generated frequencies to 30MHz.



Page 19 of 46

Rev: 00

Radiated Emissions Test Data Below 1GHz

EUT:	Isimple BT Cassette Adapter with Action	Model Name:	ISBT38		
Temperature:	25 ℃	Test Data	2016-08-29		
Pressure:	1010 hPa	Relative Humidity:	60%		
Test Mode:	TX (1Mbps) CH00 (worst case)	Test Voltage:	DC 3.7V from battery		
Measurement Distance	3 m	Frenqucy Range	30MHz to 1GHz		
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.				

(a) Antenna polarization: Horizontal

Frequency	Reading	Correct	Measure	Limit	Margin	Detector Type
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	
	(dBuV)	(dB)	(dBuV/m)			
38.6160	30.37	-14.49	15.88	40.00	-24.12	QUASIPEAK
46.9947	30.19	-14.28	15.91	40.00	-24.09	QUASIPEAK
181.2834	31.33	-11.07	20.26	43.50	-23.24	QUASIPEAK
326.7395	30.14	-8.74	21.40	46.00	-24.60	QUASIPEAK
576.6443	30.62	-2.76	27.86	46.00	-18.14	QUASIPEAK
714.1734	31.62	-0.45	31.17	46.00	-14.83	QUASIPEAK

(b) Antenna polarization: Vertical

(-)	(4)/ 111011114 POBILIZATION FORESTEE							
Frequency	Reading	Correct	Measure	Limit	Margin	Detector Type		
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)			
	(dBuV)	(dB)	(dBuV/m)					
35.8746	29.38	-16.76	12.62	40.00	-27.38	QUASIPEAK		
107.8876	31.63	-13.46	18.17	43.50	-25.33	QUASIPEAK		
287.9904	30.52	-9.85	20.67	46.00	-25.33	QUASIPEAK		
472.1759	29.26	-6.05	23.21	46.00	-22.79	QUASIPEAK		
620.7096	29.88	-1.84	28.04	46.00	-17.96	QUASIPEAK		
801.7862	29.37	3.30	32.67	46.00	-13.33	QUASIPEAK		

Note: "" means the worst case

Measurement Level = Reading Level + Factor Factor= Ant Factor + Cable Loss - Pre-amplifier



Page 20 of 46

Rev: 00

Radiated Emissions Test Data Above 1GHz

EUT:	Isimple BT Cassette Adapter with Action	Model Name:	ISBT38			
Temperature:	25 ℃	Test Data	2016-08-29			
Pressure:	1010 hPa	Relative Humidity:	60%			
Test Mode:	TX(1Mbps)	Test Voltage:	DC 3.7V from battery			
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz			
RBW/VBW	Spurious emission: 1MHz/1MHz for Peak, 1MHz/10Hz for Average.					
KDVV/ V DVV	non-restricted band: 100KHz/300KHz for Peak.					

(a) Antenna polarization: Horizontal

(-)	, ,a poisia no						
Frequency	Reading	Correct	Measure	Limit	Margin	Detector	
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре	
	(dBuV)	(dB)	(dBuV/m)				
4804.000	54.95	5.06	60.01	74.00	-13.99	PEAK	
4804.000	42.34	5.06	47.40	54.00	-6.60	AVERAGE	
7206.000	44.77	7.03	51.80	74.00	-22.20	PEAK	
7206.000	31.68	7.03	38.71	54.00	-15.29	AVERAGE	

(b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
Frequency	Reading	Correct	ivicasure		J	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4804.000	49.14	5.06	54.20	74.00	-19.80	PEAK
4804.000	36.72	5.06	41.78	54.00	-12.22	AVERAGE
7206.000	42.16	7.03	49.19	74.00	-24.81	PEAK
7206.000	31.45	7.03	38.48	54.00	-15.52	AVERAGE

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor Factor= Ant Factor + Cable Loss - Pre-amplifier

Low Channel 00: 2402 MHz

Data rate: 1Mbps



Page 21 of 46

Rev: 00

(a) Antenna polarization: Horizontal

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4880.000	49.35	5.14	54.49	74.00	-19.51	PEAK
4880.000	38.26	5.14	43.40	54.00	-10.60	AVERAGE
7320.000	45.33	7.52	52.85	74.00	-21.15	PEAK
7320.000	34.12	7.52	41.64	54.00	-12.36	AVERAGE

(b) Antenna polarization: Vertical

(10) 1 11 10 11 10 10 10 10	b) futtornia polarization. Voltical								
Frequency	Reading	Correct	Measure	Limit	Margin	Detector			
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре			
	(dBuV)	(dB)	(dBuV/m)						
4880.000	45.87	5.14	51.01	74.00	-22.99	PEAK			
4880.000	35.21	5.14	40.35	54.00	-13.65	AVERAGE			
7320.000	44.17	7.52	51.69	74.00	-22.31	PEAK			
7320.000	33.54	7.52	41.06	54.00	-12.94	AVERAGE			

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor Factor= Ant Factor + Cable Loss - Pre-amplifier

Middle Channel 19: 2440 MHz

Data rate: 1Mbps



Page 22 of 46

Rev: 00

(a) Antenna polarization: Horizontal

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
(=)	(dBuV)	(dB)	(dBuV/m)	(4.2.4)	(4.2)	.) 0
4960.000	47.25	5.14	52.39	74.00	-21.61	PEAK
4960.000	35.34	5.14	40.48	54.00	-13.52	AVERAGE
7440.000	42.88	7.52	50.40	74.00	-23.60	PEAK
7440.000	31.79	7.52	39.31	54.00	-14.69	AVERAGE

(b) Antenna polarization: Vertical

Eroguenov	Pooding	Corroct	Measure	Limit	Margin	Dotootor
Frequency	Reading	Correct	Measure	LIIIII	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			·
4960.000	45.51	5.14	50.65	74.00	-23.35	PEAK
4960.000	33.65	5.14	38.79	54.00	-15.21	AVERAGE
7440.000	41.73	7.52	49.25	74.00	-24.75	PEAK
7440.000	30.25	7.52	37.77	54.00	-16.23	AVERAGE

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor Factor= Ant Factor + Cable Loss - Pre-amplifier

Low Channel 39: 2480 MHz

Data rate: 1Mbps



Page 23 of Rev: 00 46

6.3.5 TEST RESULTS (Restricted Bands Requirements)

EUT:	Isimple BT Cassette Adapter with Action	Model Name:	ISBT38		
Temperature:	25 ℃	Test Data	2016-08-29		
Pressure:	1010 hPa	Relative Humidity:	60%		
Test Mode :	TX(1Mbps)	Test Voltage:	DC 3.7V from battery		
RBW/VBW	1MHz/1MHz for Peak, 1MHz/10Hz	for Average.			
Note:	The transmitter was setup to strength was measured at 2310.		west channel. Then the field		
	2. The transmitter was setup to transmit at the highest channel. Then the field				
	strength was measured at 2483.	5-2500 MHz.			
	3. The data of 2390MHz and 2483	.5MHz was the wors	st.		

Test	Ant.Pol.	Freq.	Rea	ding	Ant/CF	А	ct	Lir	mit
Mode	H/V	(MHz)	Peak	AV	CF(dB)	Peak	AV	Peak	AV
			(dBuv)	(dBuv)		(dBuv/m)	(dBuv/m)	(dBuv/m)	(dBuv/m)
	Н	2390.00	45.87	34.18	-5.79	40.08	28.39	74.00	54.00
TX Data rate	V	2390.00	46.42	35.33	-5.79	40.63	29.54	74.00	54.00
1Mbps	Н	2483.50	45.66	34.27	-4.98	40.68	29.29	74.00	54.00
	V	2483.50	46.21	35.76	-4.98	41.23	30.78	74.00	54.00



Page 24 of 46

Rev: 00

6.4 BANDWIDTH TEST

6.4.1 Applied procedures / Limit

15.247(a) (2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4.2 Test procedure

- a. The testing follows FCC KDB publication No. 558074 D01 DTS Meas. Guidance v03r05
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- c. Spectrum Setting: RBW= 100KHz, VBW ≥ 3×RBW, Sweep time = Auto, Detector Function = Peak, centering on a hopping channel Trace = Max Hold.
- d Mark the peak frequency and -6 dB points bandwidth.

6.4.3 Deviation from standard

No deviation.

6.4.4 Test setup

EUT	SPECTRUM
	ANALYZER



Page 25 of 46 Rev: 00

6.4.5 Test results

IEUI:	Isimple BT Cassette Adapter with Action	Model Name:	ISBT38
Temperature:	26 ℃	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power:	DC 3.7V from battery
Test Mode :	TX(1Mbps)		


Test Mode	Test Channel	Frequency	6 dB Bandwidth	Limit
Test Wode	rest orialine	(MHz)	(KHz)	(kHz)
	CH00	2402	703.3	≧500
Data rate 1Mbps	CH19	2440	694.6	≧500
	CH39	2480	703.3	≥ 500




Page 26 of 46

Rev: 00

(1Mbps)
The Lowest Channel 00: 2402 MHz

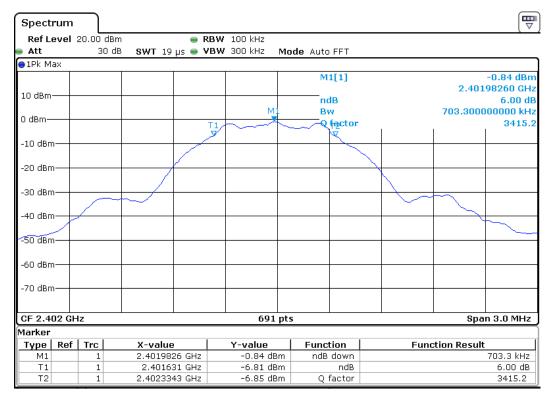

(1Mbps)
The Middle Channel 19: 2440 MHz

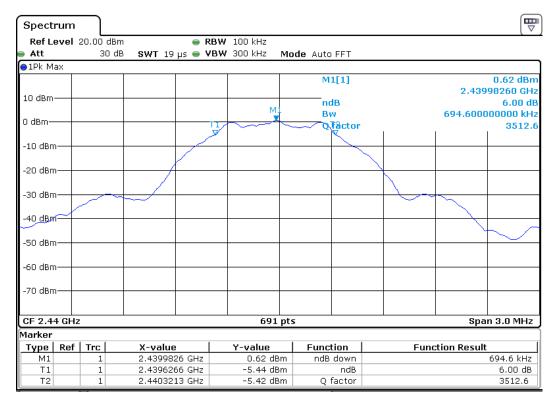




Page 27 of 46

Rev: 00

(1Mbps)
The High Channel 39: 2480MHz

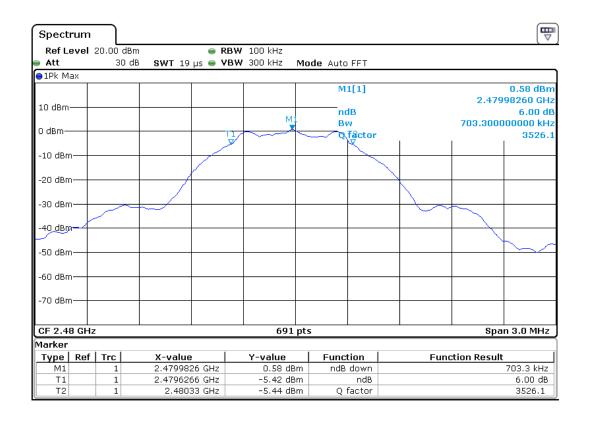



Page 28 of 46

Rev: 00

6.5 Peak Power Density

6.5.1 Applied procedures / Limit

15.247(a) (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

6.5.2 Test procedure

- a. The testing follows Measurement procedure 10.2 Method PKPSD of FCC KDB publication No. 558074 D01 DTS Meas. Guidance v03r05
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- c. Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as center frequency to channel center frequency, span=1.5 times the bandwith, detector = peak 3kHz≤RBW≤100kHz, VBW≥3×RBW kHz, Sweep time=Auto.
- d. Trace mode = max hold. Mark the peak.
- e. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.5.3 Deviation from standard

No deviation.



Page 29 of 46 Rev: 00

6.5.4 Test results

EUT:	Isimple BT Cassette Adapter with	Model Name	ISBT38	
EU1:	Action	iviouei name :		
Temperature:	24 ℃	Relative Humidity:	53%	
Pressure:	1010 hPa	Test Power:	DC 3.7V from battery	
Test Mode:	TX(1Mbps)			

Test Mode	Channel frenqucy (MHz)	Power Density PSD 100kHz (dBm/100kHz)	Limit (dBm/3kHz)	Result
TX	2402	-0.86	8	Pass
(1Mbps)	2440	0.60	8	Pass
(Tivibps)	2480	0.57	8	Pass


Note: The cable loss is 1.0dB




Page 30 of 46

Rev: 00

PSD 100kHz (1Mbps) The Lowest Channel 00: 2402MHz

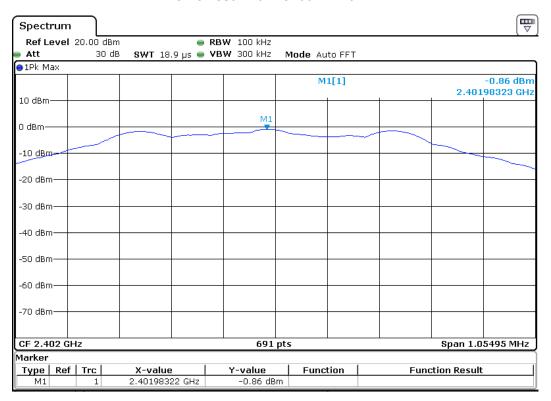

PSD 100kHz (1Mbps) The Middle Channel 19: 2440MHz

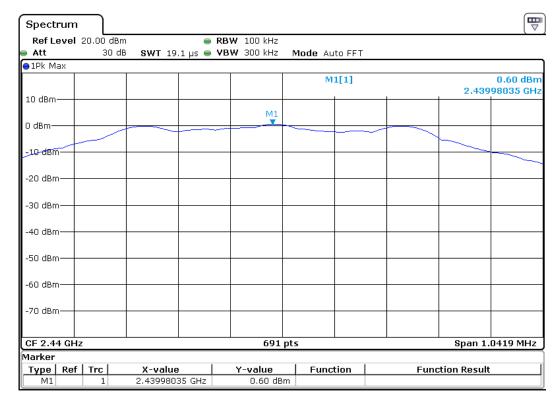




Page 31 of 46

Rev: 00

PSD 100kHz (1Mbps) The High Channel 39: 2480MHz

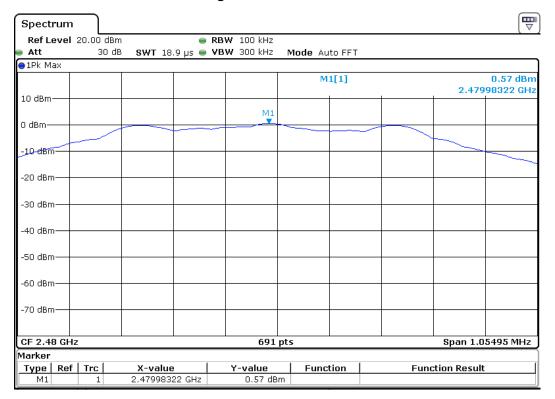



Page 32 of 46

Rev: 00

6.6 Maximum Peak Output Power

6.6.1 Applied procedures / Limit

15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

6.6.2 Test procedure

- a The testing follows FCC KDB publication No. 558074 D01 DTS Meas. Guidance v03r05
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- ^{C.} Spectrum Setting: RBW ≥ Bandwidth, VBW ≥ 3×RBW, Sweep time = Auto, Span ≥ 3×RBW,
- d Detector = peak. Trace mode = max hold.
- e Use peak marker function to determine the peak amplitude level.

6.6.3 Deviation from standard

No deviation.

6.6.4 Test setup





Page 33 of 46

Rev: 00

6.6.5 Test results

EUT:	Isimple BT Cassette Adapter with Action	Model Name:	ISBT38
Temperature:	26 ℃	Relative Humidity:	60%
Pressure:	1010 hPa	Test Voltage:	DC 3.7V from battery
Test Mode :	TX (1Mbps)		
Note: N/A			

Peak Output Power Limit **Test Mode Frequency** Result (dBm) (dBm) -0.71 2402 MHz 30 **Pass** Data rate 1Mbps 2440 MHz 0.75 Pass 30 2480 MHz 0.77 30 Pass


Note: The cable loss is 1.0dB




Page 34 of 46

Rev: 00

(1Mbps)
The Lowest Channel 00: 2402MHz

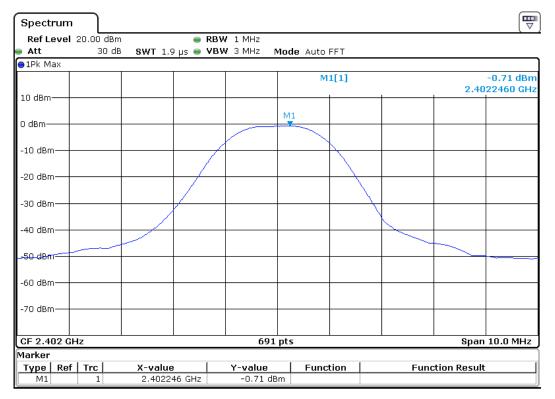

(1Mbps)
The Middle Channel 19: 2440MHz

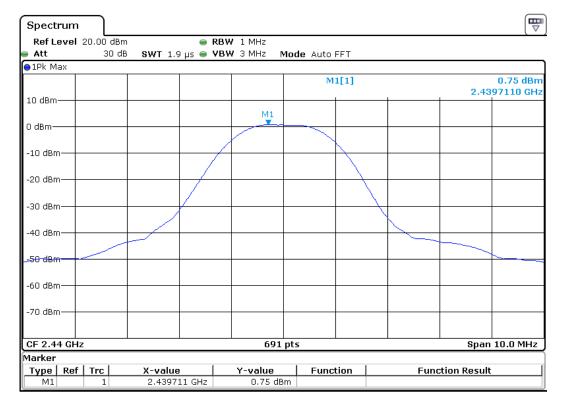




Report No.: E-F1608018-1 Page 35 of 46

Rev: 00

(1Mbps) The High Channel 39: 2480MHz

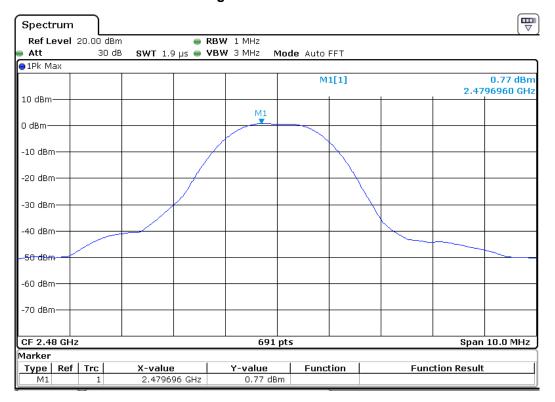



Page 36 of 46

Rev: 00

6.7 Band edge

6.7.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.7.2 Test procedure

- a The testing follows FCC KDB publication No. 558074 D01 DTS Meas. Guidance v03r05
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- c. Spectrum Setting: RBW=100kHz, VBW ≥ 300kHz, Sweep time=Auto, Detector Function=Peak.
- d. The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB. The Upper Edges attenuated more than 20dB.

6.7.3 Deviation from standard

No deviation.

6.7.4 Test setup


EUT	SPECTRUM
	ANALYZER




Page 37 of 46 Rev: 00

6.7.5 Test results

(1Mbps) The Lowest Channel 00: 2402MHz

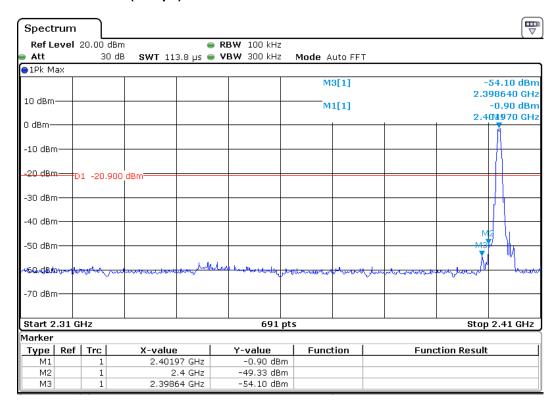

(1Mbps) The High Channel 39: 2480MHz

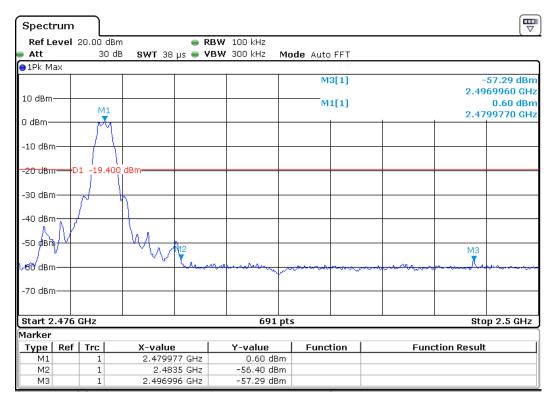



Page 38 of 46

Rev: 00

6.8 Conducted Spurious Emissions

6.8.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.8.2 Test procedure

- a The testing follows FCC KDB publication No. 558074 D01 DTS Meas. Guidance v03r05
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- c. Spectrum Setting: RBW=100kHz, VBW=300kHz, Sweep time=Auto, Detector Function=Peak, sweep points ≥ investigated frequency range/RBW.

6.8.3 Deviation from standard

No deviation.

6.8.4 Test setup




Page 39 of 46


Rev: 00

6.8.5 Test results

The Lowest Channel 00 (1Mbps): 2402MHz

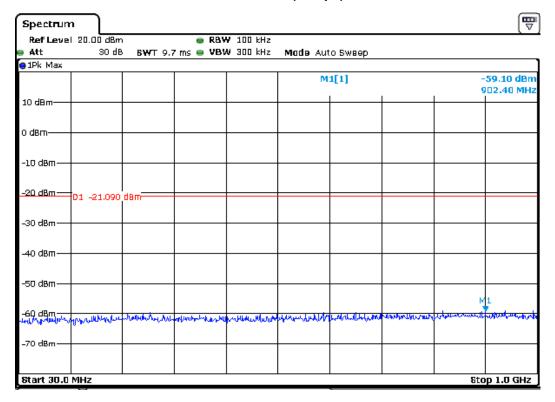


Note: Sweep Points=9700

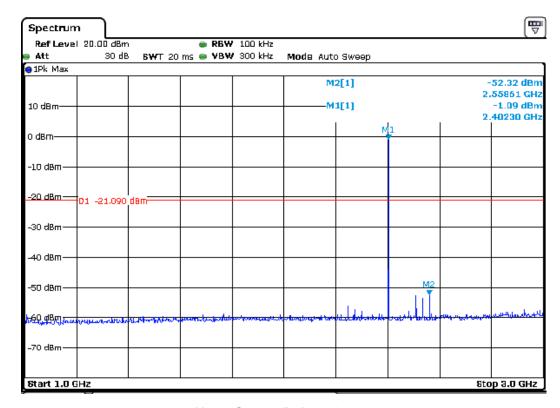




Page 40 of 46

Rev: 00

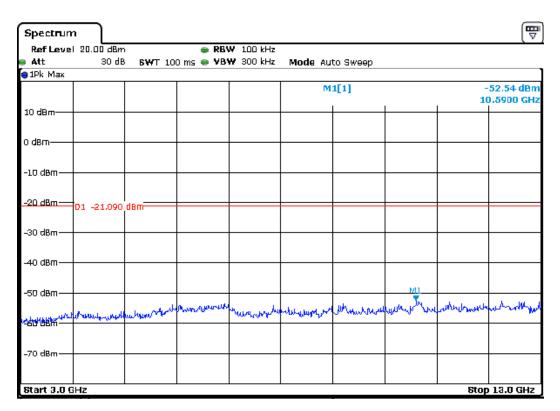


Note: Sweep Points=100000

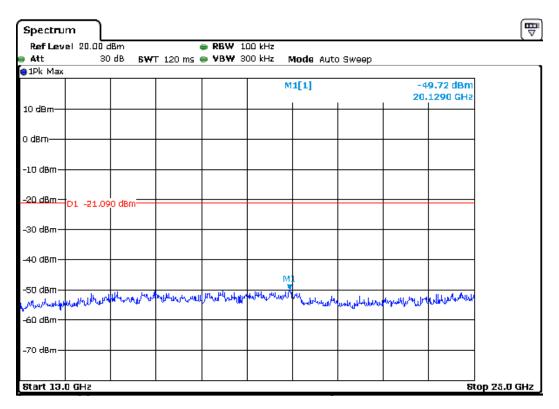




Page 41 of Rev: 00

The Middle Channel 19(1Mbps): 2440MHz

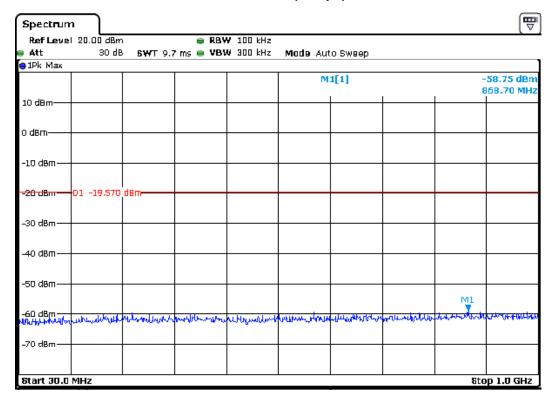


Note: Sweep Points=9700

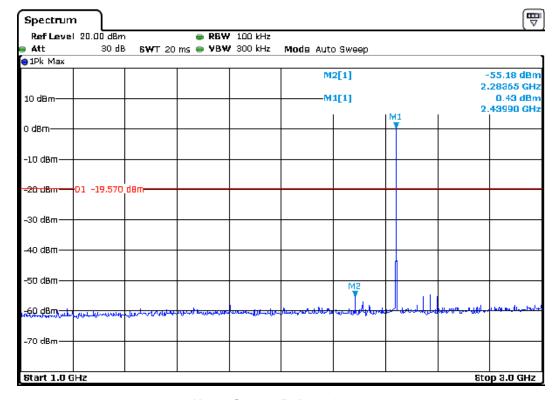


Page 42 of

46

Rev: 00

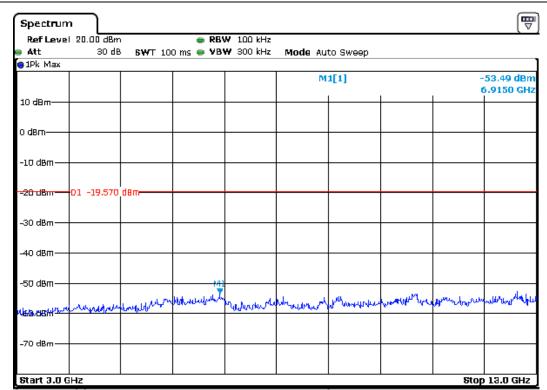

Note: Sweep Points=100000

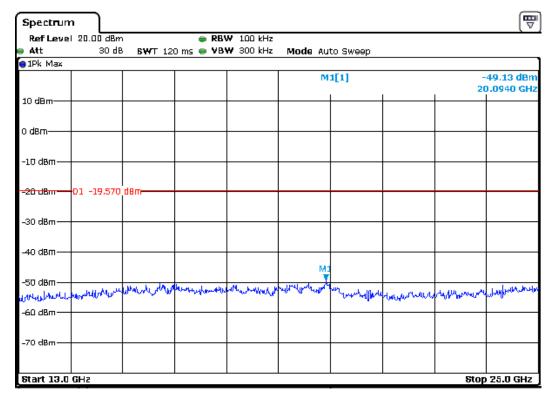





Page 43 of 46

Rev: 00

The High Channel 39(1Mbps): 2480MHz

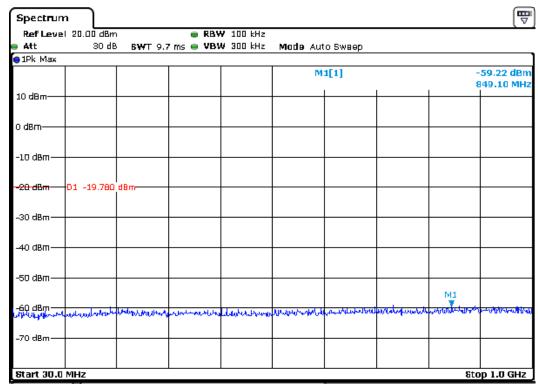


Note: Sweep Points=9700

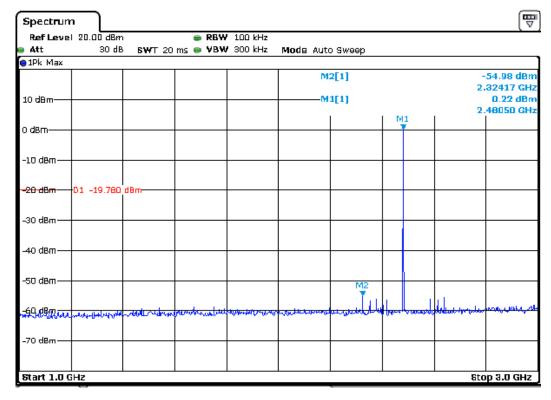




Page 44 of 4

Rev: 00

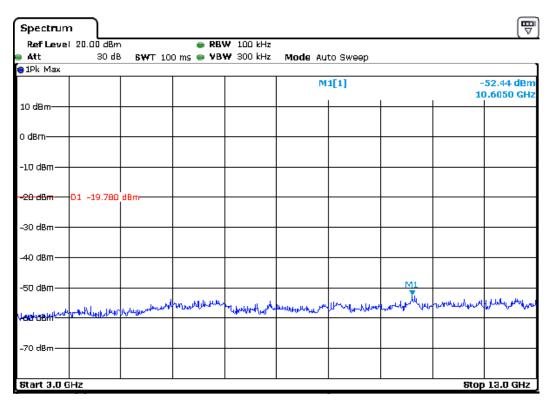

Note: Sweep Points=100000

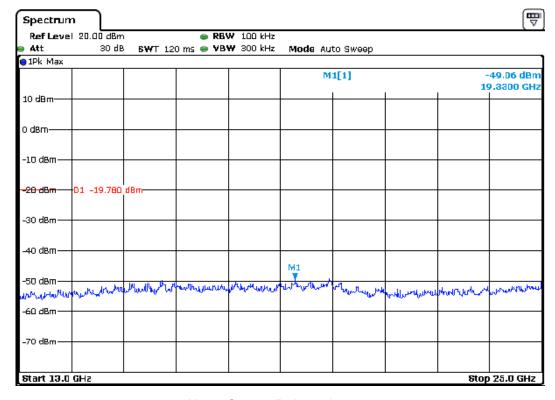



Page 45 of 46

Rev: 00

7 Photographs

7.1 Radiated Emission Test Setup

Radiated Emissions Test Setup Below 1G



Above 1G





Page 46 of 46 Rev: 00

7.2 EUT Constructional Details

Please refer to report E-F1608018-2.

End of report