

Page 1 of 69

Rev: 00

FCC Test Report

Part 15 subpart C

Client Information:

Applicant : AAMP of Florida, dba AAMP of America

Applicant add.: 15500 Lightwave Drive, Suite 202 Clearwater, FL 33760

EUT Information:

EUT Name : PG Amplifier

Model No. : PGBTM51

Brand Name: N/A

FCC ID : XBDPGBTM51

Prepared By:

Dong Guan Yaxu (Ait) Technology Limited

Add.: No. 22, JinQianLing Street 3, JiTiGang Village HuangJiang Town, DongGuan,

GuangDong, China.

Date of Receipt: Jun. 03, 2015 Date of Test: Jun. 04~16, 2015

Date of Issue: Jun 17, 2015 Test Result: Pass

Test procedure used: ANSI C63.4-2009

This device described above has been tested by Dong Guan Yaxu (Ait) Technology Limited, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by:

Seal.Chen

Approved by:

Jackie.Deng

Page 2 of 69

Rev: 00

1 Contents

	COVER I	DAGE	Page
1	CONT	ENTS	2
2	TEST	SUMMARY	4
	2.1 Co	OMPLIANCE WITH FCC PART 15 SUBPART C	4
		EASUREMENT UNCERTAINTY	
3		FACILITY	
J			
		EVIATION FROM STANDARD	
	3.2 A	BNORMALITIES FROM STANDARD CONDITIONS	6
4	GENE	RAL INFORMATION	7
	4.1 G	ENERAL DESCRIPTION OF EUT	7
		ESCRIPTION OF TEST CONDITIONS	
		JT PERIPHERAL LIST	
		EST PERIPHERAL LIST	
_			
5	EQUI	PMENTS LIST FOR ALL TEST ITEMS	11
6	TEST	RESULT	12
	6.1 An	NTENNA REQUIREMENT	12
	6.1.1	Standard requirement	12
	6.1.2	EUT Antenna	12
	6.2 Co	ONDUCTION EMISSIONS MEASUREMENT	
	6.2.1	Applied procedures / Limit	13
	6.2.2	Test procedure	13
	6.2.3	Test results	14
	6.3 R	ADIATED EMISSIONS MEASUREMENT	16
	6.3.1	Applied procedures / Limit	16
	6.3.2	Test procedure	18
	6.3.3	Test Result	19
	6.3.4	TEST RESULTS (Restricted Bands Requirements)	27
	6.4 B	ANDWIDTH TEST	28
	6.4.1	Applied procedures / Limit	28
	6.4.2	Test procedure	28
	6.4.3	Deviation from standard	28
	6.4.4	Test setup	28
	6.4.5	Test results	
		ARRIER FREQUENCIES SEPARATED	
	6.5.1	Applied procedures / Limit	
	6.5.2	Test procedure	
	6.5.3	Deviation from standard	
	654	Test results	34



Report No.: E-F1506002 Page 3 of 69 Rev: 00

6.6 Ho	PPING CHANNEL NUMBER	38
6.6.1	Applied procedures / Limit	38
6.6.2	Test procedure	38
6.6.3	Test result	38
6.7 Dw	ELL TIME	40
6.7.1	Applied procedures / Limit	40
6.7.2	Test procedure	40
6.7.3	Test result	41
6.8 MA	XIMUM PEAK OUTPUT POWER	47
6.8.1	Applied procedures / Limit	47
6.8.2	Test procedure	47
6.8.3	Deviation from standard	47
6.8.4	Test setup	47
6.8.5	Test results	48
6.9 Ban	ND EDGE	52
6.9.1	Applied procedures / Limit	52
6.9.2	Test procedure	52
6.9.3		02
0.9.3	Deviation from standard	
6.9.4	·	52
	Deviation from standard	52 52
6.9.4 6.9.5	Deviation from standard Test setup	52 52 53
6.9.4 6.9.5	Deviation from standard Test setup Test results	52 52 53
6.9.4 6.9.5 6.10 Co	Deviation from standard Test setup Test results NDUCTED SPURIOUS EMISSIONS	52 52 53 57
6.9.4 6.9.5 6.10 Co 6.10.1	Deviation from standard Test setup Test results NDUCTED SPURIOUS EMISSIONS Applied procedures / Limit	52 52 53 57 57
6.9.4 6.9.5 6.10 Co 6.10.1 6.10.2	Deviation from standard Test setup Test results NDUCTED SPURIOUS EMISSIONS Applied procedures / Limit Test procedure	52 52 53 57 57

Rev: 00

2 Test Summary

2.1 Compliance with FCC Part 15 subpart C

Test	Test Requirement	Standard Paragraph	Result
Antenna Requirement	t FCC Part 15 C:2013 Section 15.24		PASS
Conduction Emissions	FCC Part 15 C:2013	Section 15.207(a)	PASS
Radiated Emissions	FCC Part 15 C:2013	Section 15.247(d)	PASS
Bandwidth Test	FCC Part 15 C:2013	Section 15.247(a)(1)	PASS
Carrier Frequencies Separated	FCC Part 15 C:2013	Section 15.247(a)(1)	PASS
Hopping Channel Number	FCC Part 15 C:2013	Section 15.247(a)(1) (iii)	PASS
Dwell Time	FCC Part 15 C:2013	Section 15.247(a)(1) (iii)	PASS
Maximum Peak Output Power	FCC Part 15 C:2013	Section 15.247(b)	PASS
Band edge	FCC Part 15 C:2013	Section 15.247(d)	PASS
Conducted Spurious Emissions	FCC Part 15 C:2013	Section 15.247(d)	PASS

Note: Reference to the FCC Public Notice DA 00-705



Page 5 of 69

Rev: 00

2.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements uncertainty Levels have estimated based on ANSI C63.4:2009, the maximum value of the uncertainty as below

No.	Item	Uncertainty
1	Conducted Emission Test	1.20dB
2	Radiated Emission Test	3.30dB



Page 6 of 69

Rev: 00

3 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

.CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

.FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dong Guan Yaxu (Ait) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

.Industry Canada(IC)-Registration No: IC6819A-1 & IC6819A-2

The 3m Semi-Anechoic Chamber and 3m/10m Open Area Test Site of Dong Guan Yaxu (Ait) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 01, 2014.

.VCCI- Registration No: 2705

The 3m/10m Open Area Test Site, Shielding Room and 3m Chamber of Dong Guan Yaxu (Ait) Technology Limited have been registered by Voluntary Control Council for Interference on Nov. 21, 2012. The Telecommunication Ports Conducted Disturbance Measurement of Dong Guan Yaxu (Ait) Technology Limited have been registered by Voluntary Control Council for Interference on May. 13, 2013.

.TUV NORD

Dong Guan Yaxu (Ait) Technology Limited has been assessed on Jun. 13, 2013 that it can carry out EMC tests by order and under supervision of TUV NORD.

.ITS- Registration No: TMPSHA031

Dong Guan Yaxu (Ait) Technology Limited has been assessed and included in Intertek Shanghai TMP Program regarding Laboratory facilities and test equipment on Jul.22, 2012.

3.1 Deviation from standard

None

3.2 Abnormalities from standard conditions

None



Page 7 of 69

Rev: 00

4 General Information

4.1 General Description of EUT

Manufacturer:	AAMP of Florida, dba AAMP of America
Manufacturer Address:	15500 Lightwave Drive, Suite 202 Clearwater, FL 33760
EUT Name:	PG Amplifier
Model No:	PGBTM51
Operation frequency:	2402 MHz to 2480 MHz
NUMBER OF CHANNEL:	79
Modulation Technology:	GFSK, ∏/4-DQPSK, 8DPSK(1/2/3Mbps)
Bluetooth version:	Bluetooth 2.1+EDR
H/W No.:	A0
S/W No.:	1.3
Antenna Type:	PCB antenna
Antenna Gain:	max 1.5dBi
Brand Name:	N/A
Serial No:	N/A(prototype)
Power Supply Range:	DC 5.0V
Power Supply:	DC 5.0V from the audio power amplifier (power supplied by AC 120V/60Hz)
Power Cord:	N/A
Outrat manage (many)	1Mbps: -1.93dBm
Output power (max):	3Mbps: -1.92dBm
Model description:	None
Note:	
1.	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.




Report No.: E-F1506002 Page 8 of 69 Rev: 00

		Description	n of Channel:		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Rev: 00

4.2 Description of Test conditions

(1) EUT was tested in normal configuration (Please See following Block diagram)

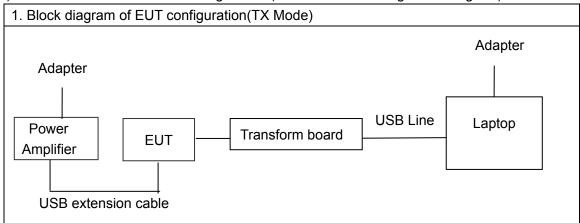

Note: Using the notebook and the transform board to control the fixed transmitting frequency and other test mode. After finishing the test setting, the notebook and the transform board will be removed during measurements.

(2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the adiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

	Frequency range over	Number of	Location in
which device operates		frequencies	the range of operation
Ī	1 MHz or less	1	Middle
1 to 10 MHz		2	1 near top and 1 near bottom
	More than 10 MHz	3	1 near top, 1 near middle and
			1 near bottom

(4) Frequency range of radiated measurements:

According to the 15.33, the test range will be up to the tenth harmonic of the highest fundamental frequency.

(5) Pre-test the EUT in all transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet and conducted to determine the worst-case mode, only the worst-case results(1Mbps/3Mbps) are recorded in this report.



Report No.: E-F1506002 Page 10 of 69

Rev: 00

4.3 EUT Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	None	N/A	N/A	N/A	N/A	N/A

4.4 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	Remark
1	Laptop	ASUA	FCC	X401A	X401A-081BB 820	N/A	Provided by AiT
2	Laptop Adapter	Enertronix	FCC	EXA070 3YH	04G2660047L 2222022854	1.5m/ unshielded/ detachable	Provided by AiT
3	USB extension cable	N/A	N/A	N/A	N/A	0.8m/shielded/ detachable	Provided by AiT
4	Adapter	N/A	N/A	AH48-W 12V1000	N/A	1.5m/ unshielded/ detachable	Provided by AiT
5	Power Amplifier	N/A	N/A	PST350. 2	N/A	N/A	Provided by Applicant



Report No.: E-F1506002 Page 11 of 69

Rev: 00

5 Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	ADVANTEST	R3182	150900201	2014.06.27	2015.06.26
2	EMI Measuring Receiver	R&S	ESR	101660	2014.12.01	2015.11.30
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2014.06.27	2015.06.26
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2014.12.02	2015.12.01
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2014.12.03	2015.12.02
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2014.12.03	2015.12.02
7	SHF-EHF Horn	SCHWARZBECK	BBHA9170	BBHA9170367	2014.12.03	2015.12.02
8	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.09.26	2015.09.25
9	EMI Test Receiver	R&S	ESCI	100124	2014.06.20	2015.06.19
10	LISN	Kyoritsu	KNW-242	8-837-4	2014.06.20	2015.06.19
11	LISN	Kyoritsu	KNW-407	8-1789-3	2014.06.20	2015.06.19
12	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.09.25	2015.09.24
13	Loop Antenna	ARA	PLA-1030/B	1029	2015.03.20	2016.03.19
14	Radiated Cable 1# (30MHz-1GHz)	FUJIKURA	5D-2W	01	2015.01.04	2016.01.03
15	Radiated Cable 2# (1GHz -25GHz)	FUJIKURA	10D2W	02	2014.12.25	2015.12.24
16	Conducted Cable 1#(9KHz-30MHz)	FUJIKURA	1D-2W	01	2015.01.04	2016.01.03
17	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



Report No.: E-F1506002 Page 12 of 69

Rev: 00

6 Test Result

6.1 Antenna Requirement

6.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

6.1.2 EUT Antenna

The antenna is layout on PCB board and no consideration of replacement. Antenna gain is max 1.5 dBi from 2.4GHz to 2.5GHz.

Report No.: E-F1506002 Page 13 of 69

Rev: 00

6.2 Conduction Emissions Measurement

6.2.1 Applied procedures / Limit


Frequency of Emission (MHz)	Conducted Limit (dBµV)		
	Quasi-peak	Average	
0.15-0.5	66 to 56 *	56 to 46 *	
0.5-5	56	46	
5-30	60	50	

Note: Decreases with the logarithm of the frequency.

6.2.2 Test procedure

EUT was placed upon a wooden test table 0.8m above the horizontal metal reference plane and 0.4m from the vertical ground plane, and it was connected to an AMN. The closest distance between the boundary of the EUT and the surface of the AMN is 0.8m. All peripherals were connected to another AMN, and placed at a distance of 10cm from each other. A spectrum and receiver was connected to the RF output port of the AMN. Both average and quasi-peak value were detected.

6.2.3 Test setup

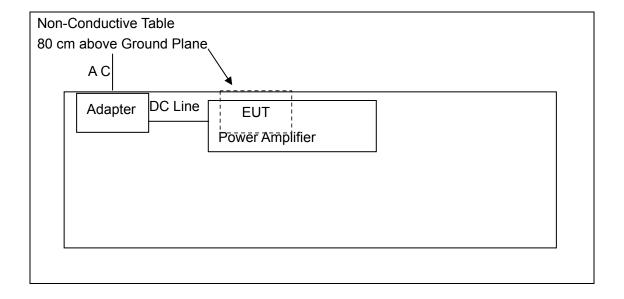



Report No.: E-F1506002 Page 14 of 69

Rev: 00


6.2.4 Test results

EUT:	PG Amplifier	Model Name. :	PGBTM51			
Temperature:	26 ℃	Relative Humidity:	54%			
Pressure:	1010hPa	Test Date :	2015-06-14			
Test Mode:	TX (1Mbps) CH00 (worst case)	Phase :	Line			
Test Voltage :	DC 5.0V from the audio power amplifier (power supplied by AC 120V/60Hz)					

Frequency (MHz)	Meter Reading (dBµV)	Factor(dB)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Detector
0.2020	35.28	11.12	46.40	63.52	-17.12	Quasi-Peak
*0.2020	30.51	11.12	41.63	53.52	-11.89	Average
6.6660	26.04	10.15	36.19	60.00	-23.81	Quasi-Peak
6.5220	16.24	10.15	26.39	50.00	-23.61	Average
24.4020	40.37	2.11	42.48	60.00	-17.52	Quasi-Peak
24.4020	30.65	2.11	32.76	50.00	-17.24	Average

Remark:

- 1. Factor = Insertion Loss + Cable Loss.
- 2. '*' means the worst case.

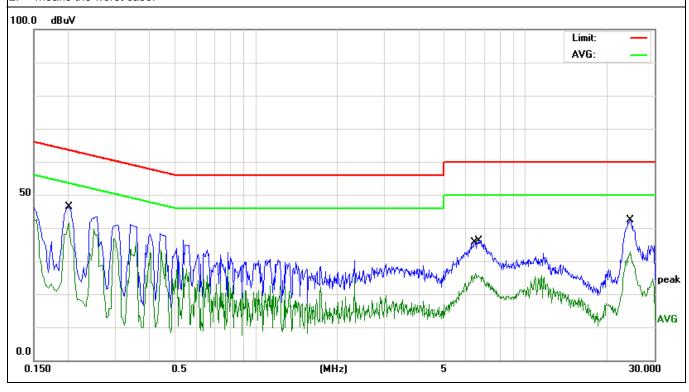



Report No.: E-F1506002 Page 15 of 69


Rev: 00

EUT:	PG Amplifier	Model Name. :	PGBTM51			
Temperature:	26 ℃	Relative Humidity:	54%			
Pressure:	1010hPa	Test Date :	2015-06-14			
Test Mode:	TX (1Mbps) CH00 (worst case)	Phase :	Neutral			
Test Voltage :	DC 5.0V from the audio power amplifier (power supplied by AC 120V/60Hz)					

Frequency (MHz)	Meter Reading (dBµV)	Factor(dB)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Detector
0.2020	35.20	11.12	46.32	63.52	-17.20	Quasi-Peak
*0.2020	30.62	11.12	41.74	53.52	-11.78	Average
6.8100	25.98	10.17	36.15	60.00	-23.85	Quasi-Peak
6.8100	15.97	10.17	26.14	50.00	-23.86	Average
24.1500	39.38	2.11	41.49	60.00	-18.51	Quasi-Peak
24.3340	30.00	2.11	32.11	50.00	-17.89	Average

Remark:

^{2. &#}x27;*' means the worst case.

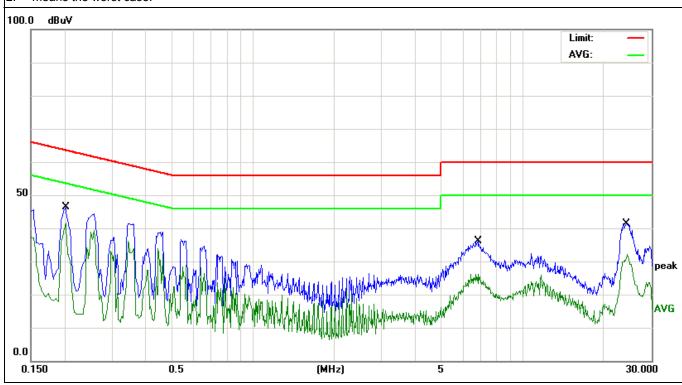

^{1.} Factor = Insertion Loss + Cable Loss.

Report No.: E-F1506002 Page 16 of 69

Rev: 00

6.3 Radiated Emissions Measurement

6.3.1 Applied procedures / Limit


15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

	Field Stre	ength	Measurement
Frequency of Emission (MHz)	μV/m	dBμV/m	Distance (meters)
0.009-0.49	2400/F(kHz)		300
0.49-1.705	24000/F(kHz)		30
1.705-30	30		30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

6.3.2 Test setup

Test Configuration:

1) 9 kHz to 30 MHz emissions:

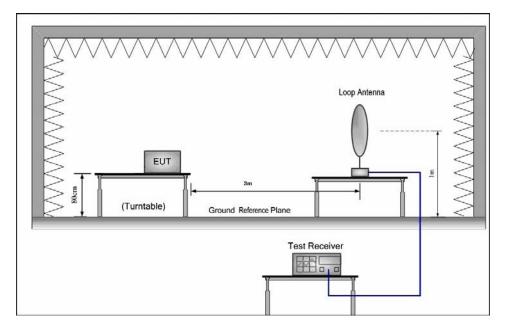


Dong Guan Yaxu (Ait) Technology Limited No. 22, JinQianLing Street 3, JiTiGang Village, HuangJiang Town, DongGuan, GuangDong, China.


Report No.: E-F1506002 Page 17 of 69

Rev: 00

2) 30 MHz to 1 GHz emissions:

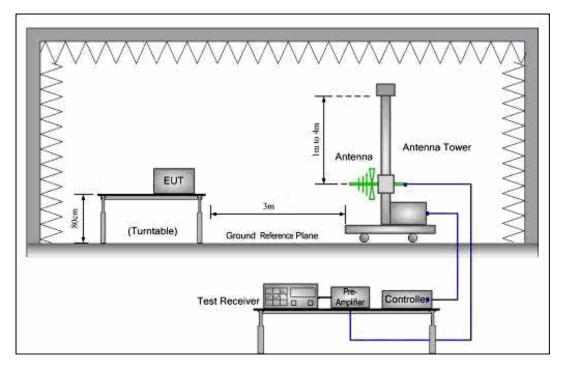

3) 1 GHz to 25 GHz emissions:

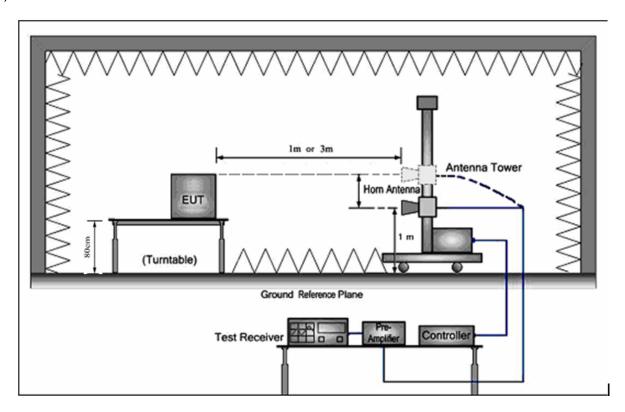



Report No.: E-F1506002 Page 18 of 69

Rev: 00

6.3.3 Test procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter, for the test frequency of above 1GHz, horn antenna opening in the test would have been facing the EUT when rise or fall) and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The resolution bandwidth and video bandwidth of the test receiver was 1MHz and 1MHz for Peak detection at frequency above 1GHz.
- g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)
- h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
- i. Repeat above procedures until all frequencies measured was complete.

For Average measurement at frequency above 1GHz. The resolution bandwidth of the test receiver was 1MHz; due to the shortest pulse width T is 116us, according the video bandwidth should not smaller than 1/T, so the video bandwidth is 10Hz.

The EUT was tested in Chamber Site.



Report No.: E-F1506002 Page 19 of 69

Rev: 00

6.3.4 Test Result

Radiated Emissions Test Data Below 30MHz

EUT:	PG Amplifier	Model Name:	PGBTM51		
Temperature:	25 ℃	Test Data	2015-06-14		
Pressure:	1005 hPa	Relative Humidity:	60%		
			DC 5.0V from the audio power		
Test Mode:	TX	Test Voltage:	amplifier (power supplied by		
			AC 120V/60Hz)		
Measurement Distance	3 m	Frenqucy Range	9KHz to 30MHz		
RBW/VBW	9KHz~150KHz/RB 200Hz for QP, 150KHz~30MHz/RB 9KHz for QP				

No emission found between lowest internal used/generated frequencies to 30MHz.



Report No.: E-F1506002 Page 20 of 69

Rev: 00

Radiated Emissions Test Data Below 1GHz

EUT:	PG Amplifier	Model Name:	PGBTM51			
Temperature:	25 ℃	Test Data	2015-06-14			
Pressure:	1010 hPa	Relative Humidity:	60%			
			DC 5.0V from the audio power			
Test Mode:	TX (1Mbps CH00 worst case)	Test Voltage:	amplifier (power supplied by			
			AC 120V/60Hz)			
Measurement Distance	3 m	Frenqucy Range	30MHz to 1GHz			
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.					

(a) Antenna polarization: Horizontal

(0.)	(a) / the find polarization. Horizontal							
Frequency	Reading	Correct	Measure	Limit	Margin	Detector Type		
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)			
	(dBuV)	(dB)	(dBuV/m)					
139.8507	35.10	-14.90	20.20	43.50	-23.30	QUASIPEAK		
185.1379	34.47	-11.47	23.00	43.50	-20.50	QUASIPEAK		
260.1444	36.13	-10.83	25.30	46.00	-20.70	QUASIPEAK		
323.3204	37.16	-8.76	28.40	46.00	-17.60	QUASIPEAK		
452.7196	34.40	-6.90	27.50	46.00	-18.50	QUASIPEAK		
*706.6997	31.61	-0.16	31.45	46.00	-14.55	QUASIPEAK		

(b) Antenna polarization: vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector Type
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	
	(dBuV)	(dB)	(dBuV/m)			
101.6443	36.66	-13.86	22.80	43.50	-20.70	QUASIPEAK
160.9088	36.33	-14.93	21.40	43.50	-22.10	QUASIPEAK
261.0581	38.39	-10.89	27.50	46.00	-18.50	QUASIPEAK
394.8543	34.83	-6.63	28.20	46.00	-17.80	QUASIPEAK
457.5072	39.03	-6.93	32.10	46.00	-13.90	QUASIPEAK
*584.7894	35.67	-2.41	33.26	46.00	-12.74	QUASIPEAK

Note: '*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss



Report No.: E-F1506002 Page 21 of 69

Rev: 00

Radiated Emissions Test Data Above 1GHz

EUT:	PG Amplifier	Model Name:	PGBTM51			
Temperature:	25 ℃	Test Data	2015-06-14			
Pressure:	1010 hPa	Relative Humidity:	60%			
			DC 5.0V from the audio power			
Test Mode:	1Mbps	Test Voltage:	amplifier (power supplied by			
			AC 120V/60Hz)			
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz			
RBW/VBW	Spurious emission: 1MHz/1MHz for Peak, 1MHz/10Hz for Average.					
KDVV/ V DVV	non-restricted band: 100KHz/300KHz for Peak.					

(a) Antenna polarization: Horizontal

(- /	a, / tite-ma pelanzation rionzental							
Frequency	Reading	Correct	Measure	Limit	Margin	Detector		
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре		
	(dBuV)	(dB)	(dBuV/m)					
4804.000	50.08	5.06	55.14	74.00	-18.86	PEAK		
*4804.000	34.94	5.06	40.00	54.00	-14.00	AVERAGE		
7206.000	45.87	7.03	52.90	74.00	-21.10	PEAK		
7206.000	32.19	7.03	39.22	54.00	-14.78	AVERAGE		
9608.000	39.34	10.63	49.97	74.00	-24.03	PEAK		
9608.000	26.44	10.63	37.07	54.00	-16.93	AVERAGE		

(b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4804.000	50.33	5.06	55.39	74.00	-18.61	PEAK
*4804.000	35.02	5.06	40.08	54.00	-13.92	AVERAGE
7206.000	45.18	7.03	52.21	74.00	-21.79	PEAK
7206.000	30.55	7.03	37.58	54.00	-16.42	AVERAGE
9608.000	37.74	10.63	48.37	74.00	-25.63	PEAK
9608.000	24.67	10.63	35.30	54.00	-18.70	AVERAGE

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss Low Channel 00: 2402 MHz

Data rate: 1Mbps



Report No.: E-F1506002 Page 22 of 69

Rev: 00

(a) Antenna polarization: Horizontal

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4882.000	49.91	5.14	55.05	74.00	-18.95	PEAK
*4882.000	35.24	5.14	40.38	54.00	-13.62	AVERAGE
7323.000	44.61	7.52	52.13	74.00	-21.87	PEAK
7323.000	31.66	7.52	39.18	54.00	-14.82	AVERAGE
9764.000	37.07	11.36	48.43	74.00	-25.57	PEAK
9764.000	24.22	11.36	35.58	54.00	-18.42	AVERAGE

(b) Antenna polarization: Vertical

(8)7 111011114 POI	(b) / therma polarization. Vertical								
Frequency	Reading	Correct	Measure	Limit	Margin	Detector			
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре			
	(dBuV)	(dB)	(dBuV/m)						
4882.000	49.99	5.14	55.13	74.00	-18.87	PEAK			
*4882.000	33.51	5.14	38.65	54.00	-15.35	AVERAGE			
7323.000	44.66	7.52	52.18	74.00	-21.82	PEAK			
7323.000	30.73	7.52	38.25	54.00	-15.75	AVERAGE			
9764.000	37.80	11.36	49.16	74.00	-24.84	PEAK			
9764.000	25.54	11.36	36.90	54.00	-17.10	AVERAGE			

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss Middle Channel 39: 2441 MHz

Data rate: 1Mbps



Report No.: E-F1506002 Page 23 of 69

Rev: 00

(a) Antenna polarization: Horizontal

Frequency	Reading	Correct	Measure	Limit	Margin	Detector	
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре	
	(dBuV)	(dB)	(dBuV/m)				
4960.000	48.68	5.22	53.90	74.00	-20.10	PEAK	
*4960.000	34.27	5.22	39.49	54.00	-14.51	AVERAGE	
7440.000	43.18	8.06	51.24	74.00	-22.76	PEAK	
7440.000	30.22	8.06	38.28	54.00	-15.72	AVERAGE	
9920.000	37.07	12.10	49.17	74.00	-24.83	PEAK	
9920.000	21.64	12.10	33.74	54.00	-20.26	AVERAGE	

(b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4960.000	48.87	5.22	54.09	74.00	-19.91	PEAK
*4960.000	34.15	5.22	39.37	54.00	-14.63	AVERAGE
7440.000	43.38	8.06	51.44	74.00	-22.56	PEAK
7440.000	30.11	8.06	38.17	54.00	-15.83	AVERAGE
9920.000	36.44	12.10	48.54	74.00	-25.46	PEAK
9920.000	23.28	12.10	35.38	54.00	-18.62	AVERAGE

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss High Channel 78: 2480 MHz

Data rate: 1Mbps



Report No.: E-F1506002 Page 24 of 69

Rev: 00

EUT:	PG Amplifier	Model Name:	PGBTM51			
Temperature:	25 ℃	Test Data	2015-06-14			
Pressure:	1010 hPa	Relative Humidity:	60%			
			DC 5.0V from the audio power			
Test Mode :	3Mbps	Test Voltage:	amplifier (power supplied by			
			AC 120V/60Hz)			
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz			
RBW/VBW	Spurious emission: 1MHz/1MHz for Peak, 1MHz/10Hz for Average.					
KDVV/ V DVV	non-restricted band: 100KHz/300KHz for Peak.					

(a) Antenna polarization: Horizontal

(-)	(a) / interina perantation i renzentar								
Frequency	Reading	Correct	Measure	Limit	Margin	Detector			
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре			
	(dBuV)	(dB)	(dBuV/m)						
4804.000	48.89	5.06	53.95	74.00	-20.05	PEAK			
*4804.000	35.59	5.06	40.65	54.00	-13.35	AVERAGE			
7206.000	43.67	7.03	50.70	74.00	-23.30	PEAK			
7206.000	30.37	7.03	37.40	54.00	-16.60	AVERAGE			
9608.000	37.52	10.63	48.15	74.00	-25.85	PEAK			
9608.000	24.33	10.63	34.96	54.00	-19.04	AVERAGE			

(b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector	
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре	
	(dBuV)	(dB)	(dBuV/m)				
4804.000	49.99	5.06	55.05	74.00	-18.95	PEAK	
*4804.000	34.45	5.06	39.51	54.00	-14.49	AVERAGE	
7206.000	44.60	7.03	51.63	74.00	-22.37	PEAK	
7206.000	31.52	7.03	38.55	54.00	-15.45	AVERAGE	
9608.000	38.19	10.63	48.82	74.00	-25.18	PEAK	
9608.000	25.46	10.63	36.09	54.00	-17.91	AVERAGE	

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss Low Channel 00: 2402 MHz

Data rate: 3Mbps



Report No.: E-F1506002 Page 25 of 69

Rev: 00

(a) Antenna polarization: Horizontal

(a) / therma polarization: Horizontal								
Frequency	Reading	Correct	Measure	Limit Margin		Detector		
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре		
	(dBuV)	(dB)	(dBuV/m)					
4882.000	49.38	5.14	54.52	74.00	-19.48	PEAK		
*4882.000	35.18	5.14	40.32	54.00	-13.68	AVERAGE		
7323.000	43.44	7.52	50.96	74.00	-23.04	PEAK		
7323.000	30.53	7.52	38.05	54.00	-15.95	AVERAGE		
9764.000	35.13	11.36	46.49	74.00	-27.51	PEAK		
9764.000	24.54	11.36	35.90	54.00	-18.10	AVERAGE		

(b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector	
(MHz)	Level (dBuV)	Factor (dB)	Level (dBuV/m)	(dBuV/m)	(dB)	Туре	
4882.000	50.01	5.14	55.15	74.00	-18.85	PEAK	
*4882.000	35.44	5.14	40.58	54.00	-13.42	AVERAGE	
7323.000	43.73	7.52	51.25	74.00	-22.75	PEAK	
7323.000	31.56	7.52	39.08	54.00	-14.92	AVERAGE	
9764.000	36.68	11.36	48.04	74.00	-25.96	PEAK	
9764.000	24.34	11.36	35.70	54.00	-18.30	AVERAGE	

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss Middle Channel 39: 2441 MHz

Data rate: 3Mbps



Report No.: E-F1506002 Page 26 of 69

Rev: 00

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level	Correct Factor	Measure Level	Limit (dBuV/m)	Margin (dB)	Detector	
(IVIFIZ)	(dBuV)	(dB)	(dBuV/m)	(ubuv/iii)	(ub)	Туре	
4960.000	49.55	5.22	54.77	74.00	-19.23	PEAK	
*4960.000	34.81	5.22	40.03	54.00	-13.97	AVERAGE	
7440.000	42.92	8.06	50.98	74.00	-23.02	PEAK	
7440.000	30.33	8.06	38.39	54.00	-15.61	AVERAGE	
9920.000	35.77	12.10	47.87	74.00	-26.13	PEAK	
9920.000	24.00	12.10	36.10	54.00	-17.90	AVERAGE	

(b) Antenna polarization: Vertical

Frequency	Reading	Correct	Measure	Limit	Margin	Detector
(MHz)	Level	Factor	Level	(dBuV/m)	(dB)	Туре
	(dBuV)	(dB)	(dBuV/m)			
4960.000	49.31	5.22	54.53	74.00	-19.47	PEAK
*4960.000	35.21	5.22	40.43	54.00	-13.57	AVERAGE
7440.000	42.55	8.06	50.61	74.00	-23.39	PEAK
7440.000	30.05	8.06	38.11	54.00	-15.89	AVERAGE
9920.000	35.06	12.10	47.16	74.00	-26.84	PEAK
9920.000	22.12	12.10	34.22	54.00	-19.78	AVERAGE

Note: '*' means the worst case

10~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss High Channel 78: 2480 MHz

Data rate: 3Mbps



Report No.: E-F1506002 Page 27 of 69

Rev: 00

6.3.5 TEST RESULTS (Restricted Bands Requirements)

EUT:	PG Amplifier	Model Name:	PGBTM51					
Temperature:	25 ℃	Test Data	2015-06-14					
Pressure:	1010 hPa	Relative Humidity:	60%					
			DC 5.0V from the audio power					
Test Mode:	TX 1Mbps\ 3Mbps	Test Voltage:	amplifier (power supplied by AC					
			120V/60Hz)					
Note:	1. The transmitter was se	etup to transmit at the	lowest channel. Then the field					
	strength was measured	at 2310-2390 MHz.						
	2. The transmitter was se	etup to transmit at the	highest channel. Then the field					
	strength was measured	strength was measured at 2483.5-2500 MHz.						
	3. The data of 2390MHz a	nd 2483.5MHz was the	e worst.					

Test	Ant.Pol.	Eroa	Rea	ding	Ant/CF	Α	ct	Lir	mit
Mode	H/V	Freq. (MHz)	Peak (dBuv)	AV (dBuv)	CF(dB)	Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)
	V	2390.00	43.57	33.44	-5.79	37.78	27.65	74.00	54.00
Data rate	Н	2390.00	45.34	32.86	-5.79	39.55	27.07	74.00	54.00
1Mbps	V	2483.50	44.95	33.38	-4.98	39.97	28.40	74.00	54.00
	Н	2483.50	44.96	31.40	-4.98	39.98	26.42	74.00	54.00
	V	2390.00	47.68	36.95	-5.79	41.89	31.16	74.00	54.00
Doto roto	Н	2390.00	46.64	34.88	-5.79	40.85	29.09	74.00	54.00
Data rate 3Mbps	V	2483.50	45.77	35.02	-4.98	40.79	30.04	74.00	54.00
	Н	2483.50	45.44	34.07	-4.98	40.46	29.09	74.00	54.00

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode.
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss Pre-amplifier.



Report No.: E-F1506002 Page 28 of 69

Rev: 00

6.4 BANDWIDTH TEST

6.4.1 Applied procedures / Limit

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dBbandwidth of hopping channel shell be a minimum limit for the hopping channel separation.

6.4.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW, Sweep = auto, Detector function = peak Trace = max hold

6.4.3 Deviation from standard

No deviation.

6.4.4 Test setup

EUT	SPECTRUM
	ANALYZER



Report No.: E-F1506002 Page 29 of 69 Rev: 00

6.4.5 Test results

EUT:	PG Amplifier	Model Name:	PGBTM51
Temperature:	26 ℃	Relative Humidity:	53%
Pressure:	1010 hPa		DC 5.0V from the audio power amplifier (power supplied by AC 120V/60Hz)
Test Mode:	TX 1Mbps/ 3Mbps		


Chai	nnel	Channel frenqucy (MHz)	20dB bandwidth (KHz)	Limit (KHz)	Conclusion
1Mbps	Low	2402	1210	N/A	Pass
	Middle	2441	1270	N/A	Pass
	High	2480	1200	N/A	Pass
3Mbps	Low	2402	1440	N/A	Pass
	Middle	2441	1400	N/A	Pass
	High	2480	1450	N/A	Pass

Report No.: E-F1506002 Page 30 of 69


Rev: 00



CH00-1Mbps

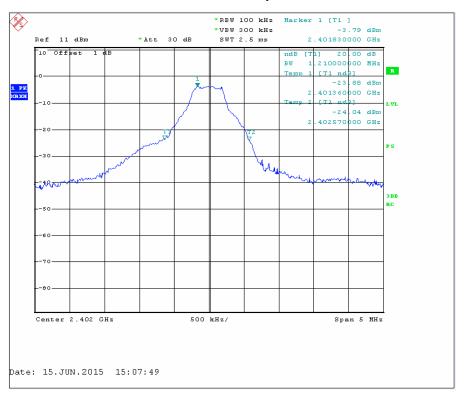

CH 39-1Mbps

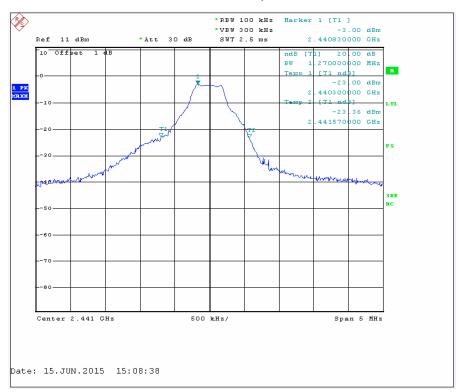


Report No.: E-F1506002 Page 31 of 69


Rev: 00



CH 78-1Mbps

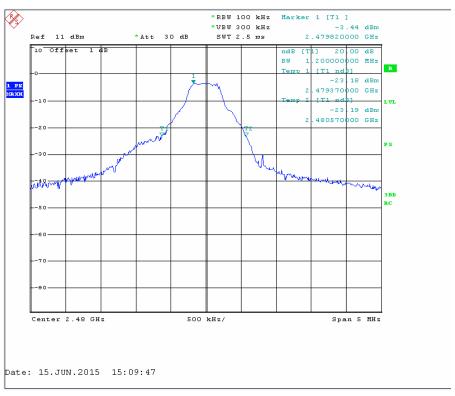


CH 00-3Mbps

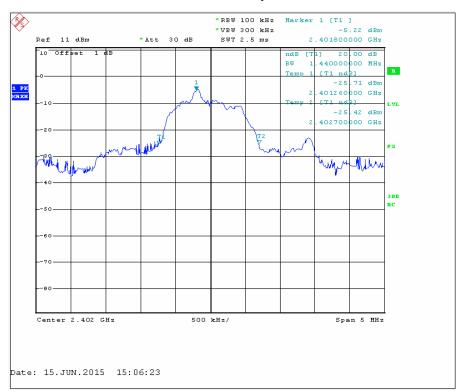

Report No.: E-F1506002 Page 32 of 69

Rev: 00

CH 39-3Mbps

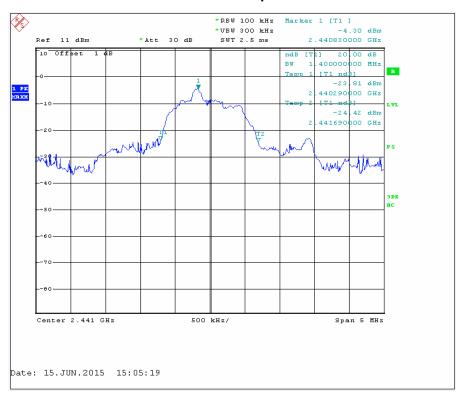

CH 78-3Mbps



Dong Guan Yaxu (Ait) Technology Limited No. 22, JinQianLing Street 3, JiTiGang Village, HuangJiang Town, DongGuan, GuangDong, China.



Report No.: E-F1506002 Page 33 of 69

Rev: 00

6.5 Carrier Frequencies Separated

6.5.1 Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


6.5.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as Span = wide enough to capture the peaks of two adjacent channels, Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span, Video (or Average) Bandwidth (VBW) ≥ RBW Sweep = auto, Detector function = peak, Trace = max hold
- (2) The EUT should be transmitting at its maximum data rate. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

6.5.3 Deviation from standard

No deviation.

6.5.4 Test setup






Report No.: E-F1506002 Page 34 of 69 Rev: 00

6.5.5 Test results


EUT:	PG Amplifier	Model Name:	PGBTM51
Temperature:	26 ℃	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power:	DC 5.0V from the audio power amplifier (power supplied by AC 120V/60Hz)
Test Mode:	TX 1Mbps/ 3Mbps		

Cha	nnel	Channel frenqucy (MHz)	Channel Separation (MHz)	Conclusion
	Low	2402	0.996	Pass
1Mbps	Middle	2441	0.990	Pass
	Highest	2480	0.978	Pass
	Low	2402	1.014	Pass
3Mbps	Middle	2441	1.008	Pass
	Highest	2480	1.008	Pass



Rev: 00



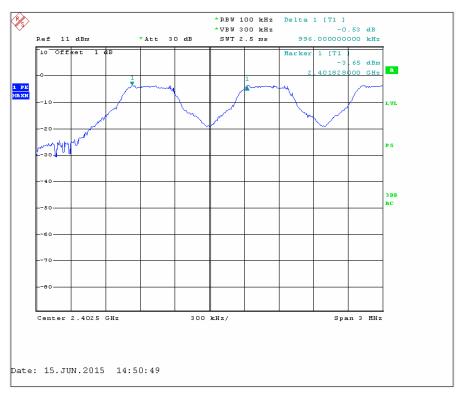

CH 39-1Mbps




Rev: 00



CH 78-1Mbps



CH 00-3Mbps

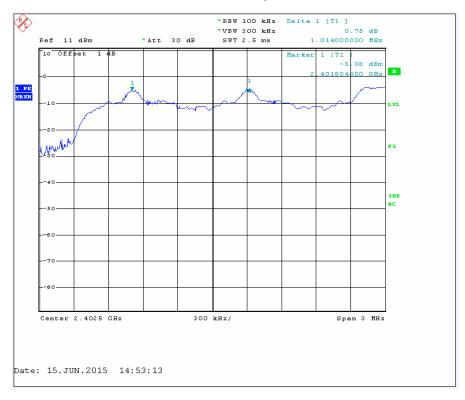


Report No.: E-F1506002 Page 37 of 69


Rev: 00



CH 39-3Mbps

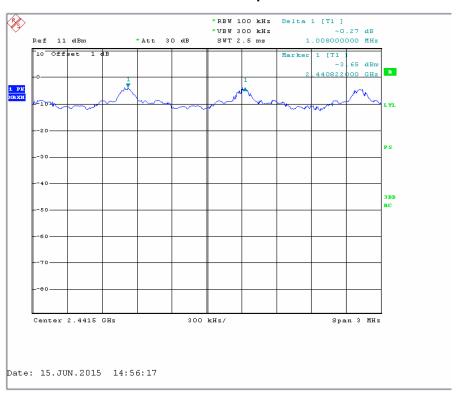

CH 78-3Mbps

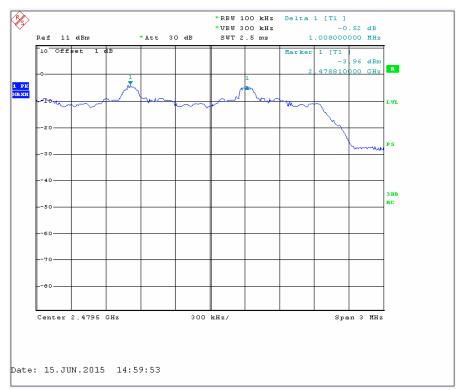

Dong Guan Yaxu (Ait) Technology Limited No. 22, JinQianLing Street 3, JiTiGang Village, HuangJiang Town, DongGuan, GuangDong, China.



Report No.: E-F1506002 Page 38 of 69

Rev: 00

6.6 Hopping Channel Number

6.6.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

6.6.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer , set the Spectrum Analyzer as Span = the frequency band of operation, RBW ≥ 1% of the span, VBW ≥ RBW Sweep = auto Detector function = peak, Trace = max hold
- (2) The EUT should be have its hopping function enabled. Maxhold and record hopping channels It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

6.6.3 Test result

Hopping Channel Number result				
Operating Mode: 1Mbps/ 3Mbps Mode Test date:2015-06-15				
Result	Limit		Conclusion	
79	15		Pass	




Report No.: E-F1506002 Page 39 of 69

Rev: 00

EUT:	PG Amplifier	Model Name:	PGBTM51
Temperature:	26 ℃	Relative Humidity:	53%
Pressure:	1010 hPa		DC 5.0V from the audio power amplifier (power supplied by AC 120V/60Hz)
Test Mode:	TX 1Mbps/ 3Mbps		



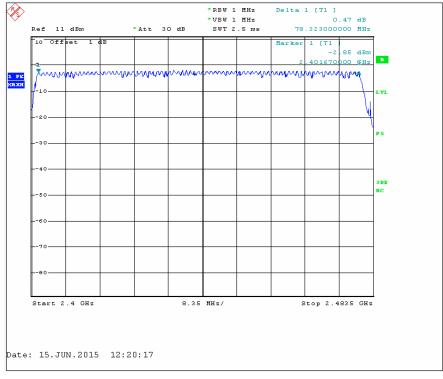

Report No.: E-F1506002 Page 40 of 69

Rev: 00

6.7 Dwell time

6.7.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

6.7.2 Test procedure

- (1) Place the EUT on the table in the chamber or connect the antenna port of the EUT to spectrum analyzer and set it in transmitting mode.
- (2) Set RBW of spectrum analyzer to 1MHz, VBW ≥ RBW
- (3) Use a video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for DH5, DH3 and DH1 packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) A Period Time = 79*0.4=31.6 S

DH1 Time Slot: Reading * (1600/2)*31.6/79 DH3 Time Slot: Reading * (1600/4)*31.6/79 DH5 Time Slot: Reading * (1600/6)*31.6/79

6.7.3 Test setup

EUT	SPECTRUM
	ANALYZER



Report No.: E-F1506002 Page 41 of 69 Rev: 00

6.7.4 Test result

EUT:	PG Amplifier	Model Name:	PGBTM51		
Temperature:	26 ℃	Relative Humidity:	53%		
Pressure:	1010 hPa	Test Power:	DC 5.0V from the audio power amplifier (power supplied by AC 120V/60Hz)		
Test Mode :	CH00-DH1/DH3/DH5 (1Mbp	os Mode)			


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (ms)	Limits (s)
DH1	2402 MHz	0.550	176.0000	0.4000
DH3	2402 MHz	1.710	273.6000	0.4000
DH5	2402 MHz	2.888	308.0531	0.4000

Report No.: E-F1506002 Page 42 of 69


Rev: 00




CH00-DH1

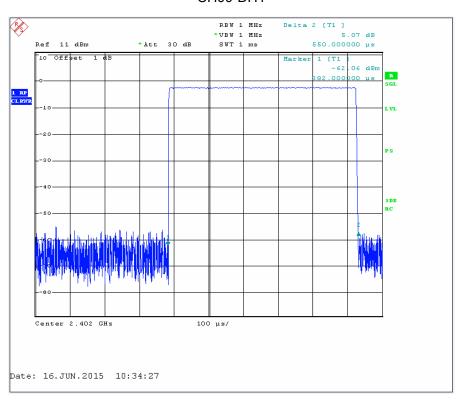

CH00-DH3

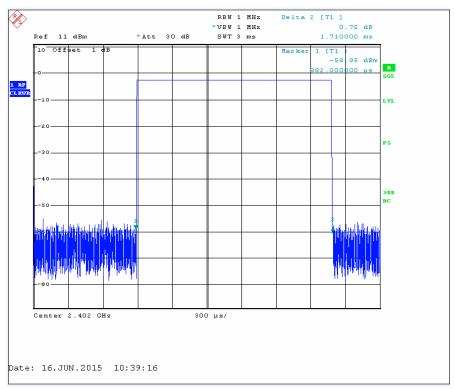


Dong Guan Yaxu (Ait) Technology Limited No. 22, JinQianLing Street 3, JiTiGang Village, HuangJiang Town, DongGuan, GuangDong, China.





CH00-DH5

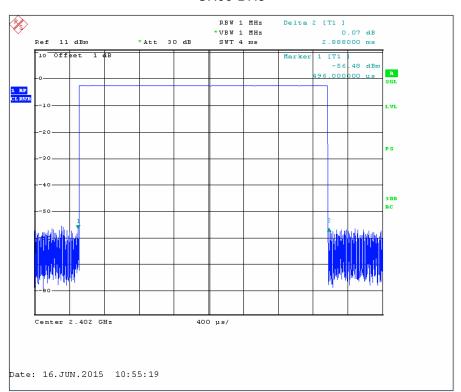



Report No.: E-F1506002 Page 44 of 69 Rev: 00

EUT:	PG Amplifier	Model Name:	PGBTM51
Temperature:	26 ℃	Relative Humidity:	53%
Pressure:	1010 hPa		DC 5.0V from the audio power amplifier (power supplied by AC 120V/60Hz)
Test Mode:	CH00-DH1/DH3/DH5 (3Mbps Mode)		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (ms)	Limits (s)
3DH1	2402 MHz	0.562	179.8400	0.4000
3DH3	2402 MHz	1.680	268.8000	0.4000
3DH5	2402 MHz	2.808	299.5198	0.4000

Report No.: E-F1506002 Page 45 of 69


Rev: 00




CH00-DH1

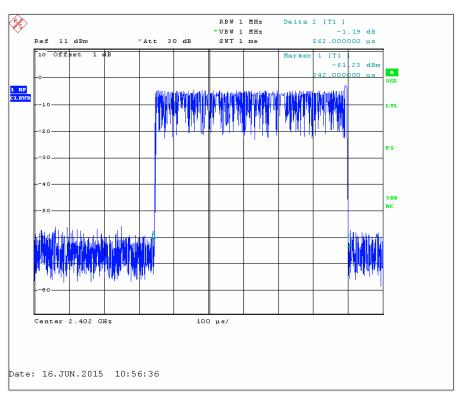


CH00-DH3

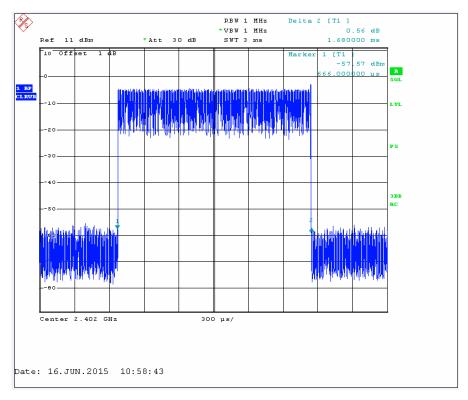





CH00-DH5

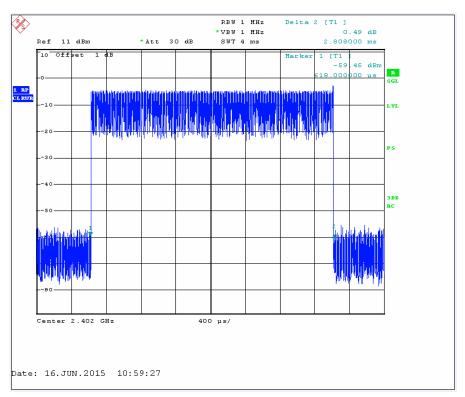



Report No.: E-F1506002 Page 47 of 69

Rev: 00

6.8 Maximum Peak Output Power

6.8.1 Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

15.247(b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

6.8.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW, Sweep = auto Detector function = peak, Trace = max hold
- (2) The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. Also shall be performed at different modes of operation.

6.8.3 Deviation from standard

No deviation.

6.8.4 Test setup





Report No.: E-F1506002 Page 48 of 69 Rev: 00

6.8.5 **Test results**

EUT:	PG Amplifier	Model Name:	PGBTM51
Temperature:	26 ℃	Relative Humidity:	60%
			DC 5.0V from the audio power
Pressure:	1010 hPa	Test Voltage:	amplifier (power supplied by AC
			120V/60Hz)
Test Mode : TX			
Note: All the data rates have be tested and the worst-case as the table below.			


Test Mode	Frequency	Peak Output Power (dBm)	Limit (dBm)	Result
	2402 MHz	-2.67	21	Pass
Data rate 1Mbps	2441 MHz	-1.93	21	Pass
	2480 MHz	-2.19	21	Pass
	2402 MHz	-2.80	21	Pass
Data rate 3Mbps	2441 MHz	-1.92	21	Pass
	2480 MHz	-2.29	21	Pass

Report No.: E-F1506002 Page 49 of 69

Rev: 00



CH 00-1Mbps

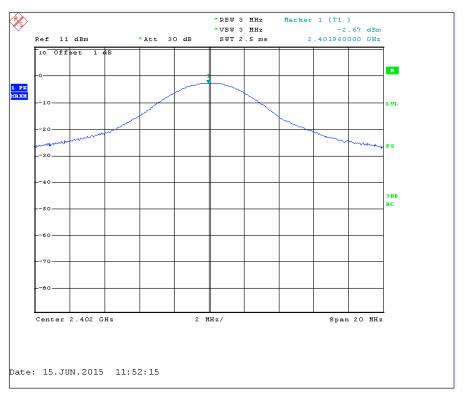

CH 39-1Mbps



Report No.: E-F1506002 Page 50 of 69


Rev: 00



CH 78-1Mbps



CH 00-3Mbps

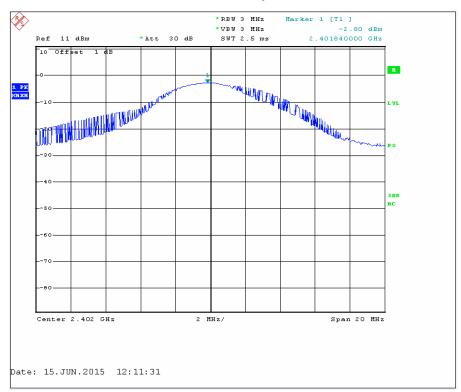


Report No.: E-F1506002 Page 51 of 69


Rev: 00



CH 39-3Mbps

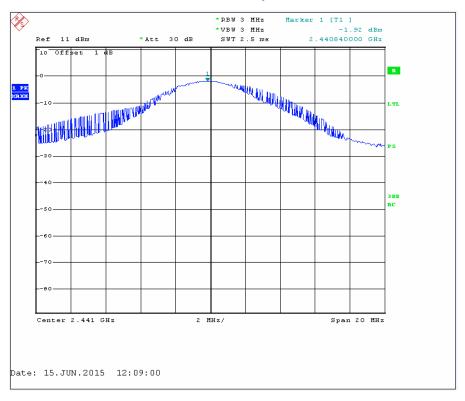

CH 78-3Mbps

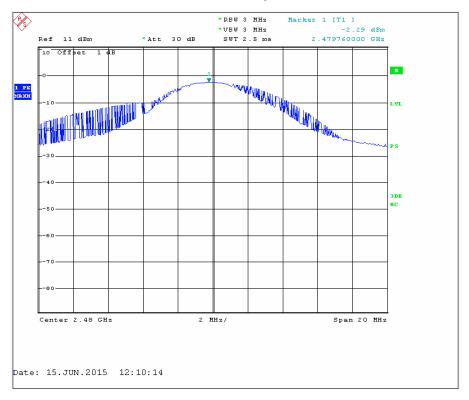



Report No.: E-F1506002 Page 52 of 69

Rev: 00

6.9 Band edge

6.9.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.9.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation, RBW ≥ 1% of the span, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold

6.9.3 Deviation from standard

No deviation.


6.9.4 Test setup






6.9.5 Test results

CH00 (Lower) Data rate 1Mbps

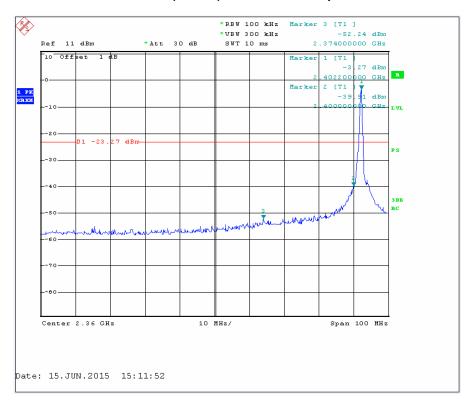


CH 78 (Upper) Data rate 1Mbps

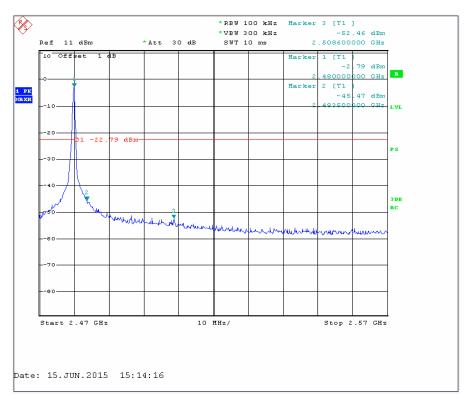


Report No.: E-F1506002 Page 54 of 69

Rev: 00

CH00 (Lower) Data rate 3Mbps

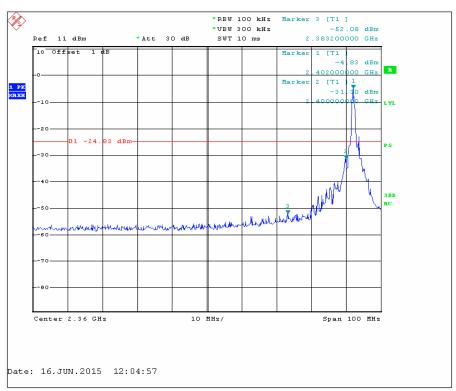


CH 78 (Upper) Data rate 3Mbps

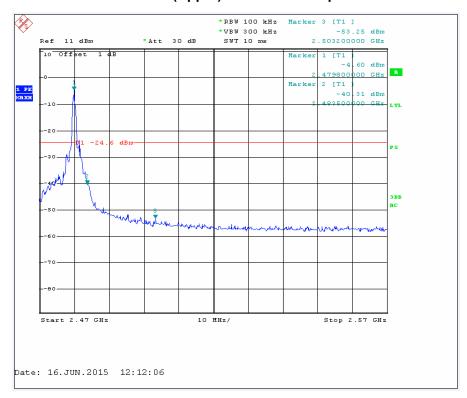




CH00 (Lower) Data rate 1Mbps

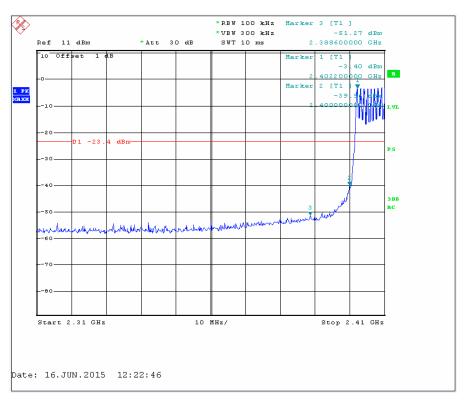


CH 78 (Upper) Data rate 1Mbps

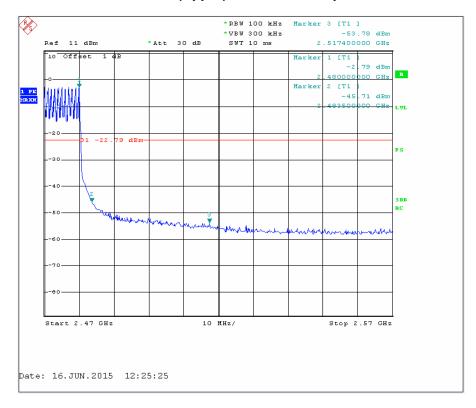


Report No.: E-F1506002 Page 56 of 69

Rev: 00

CH00 (Lower) Data rate 3Mbps

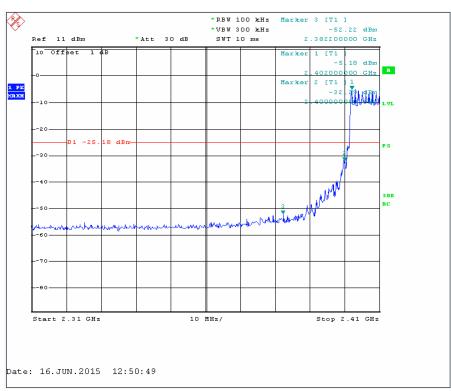

CH 78 (Upper) Data rate 3Mbps

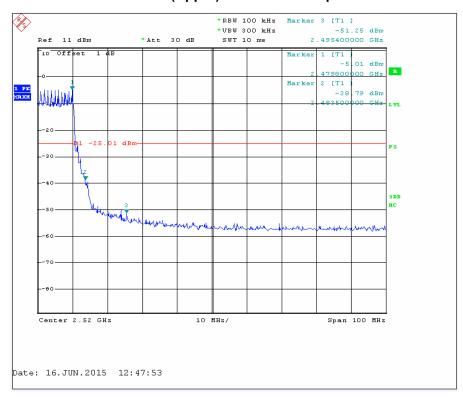



Report No.: E-F1506002 Page 57 of 69

Rev: 00

6.10 Conducted Spurious Emissions

6.10.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


6.10.2 Test procedure


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span. RBW = 100 kHz VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold sweep points ≥ investigated frequency range/RBW.

6.10.3 Deviation from standard

No deviation.

6.10.4 Test setup










6.10.5 Test results

CH00 Data rate 1Mbps

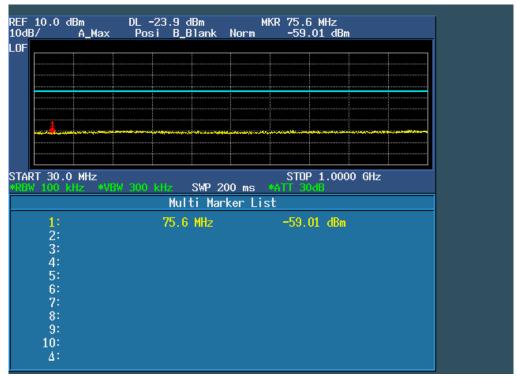


Note: Sweep Points=9700 CH00 Data rate 1Mbps

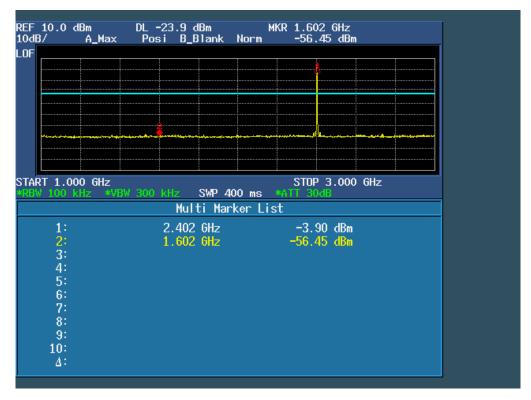






CH00 Data rate 1Mbps

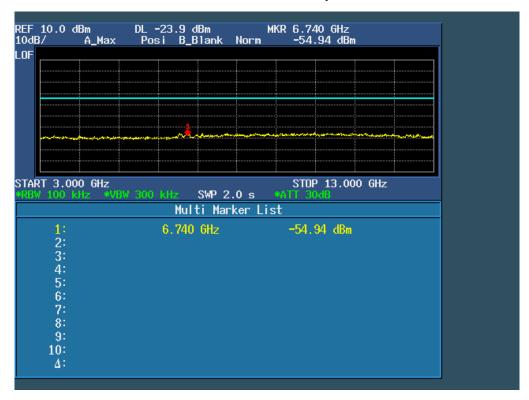

Note: Sweep Points=100000


CH00 Data rate 1Mbps

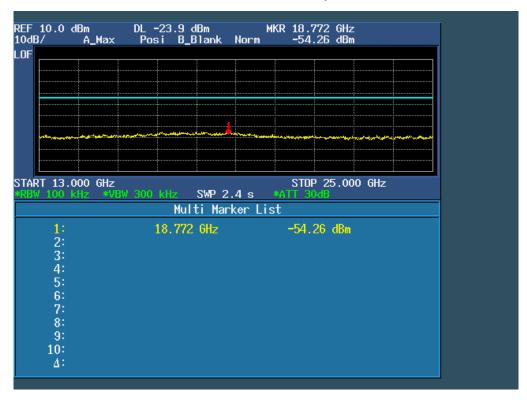








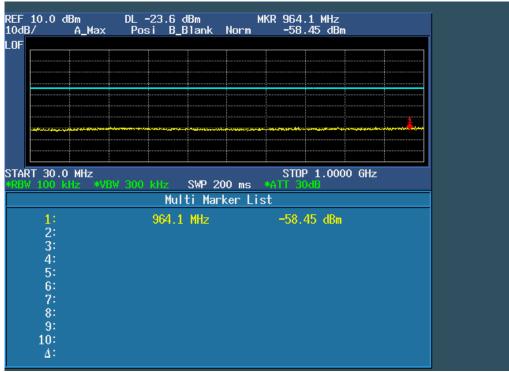

Note: Sweep Points=9700


CH39 Data rate 1Mbps

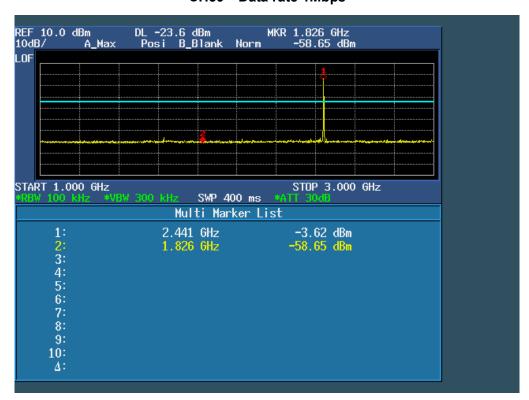




Page 61 of 69


CH39 Data rate 1Mbps

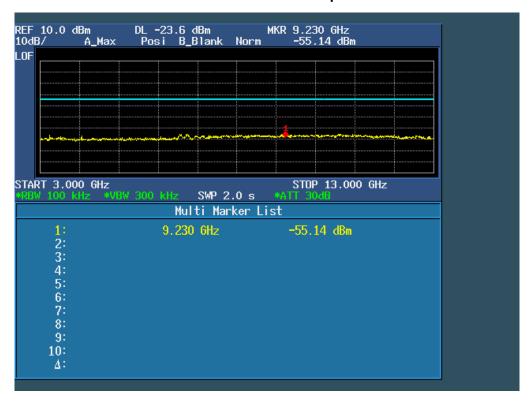

Note: Sweep Points=100000


CH39 Data rate 1Mbps

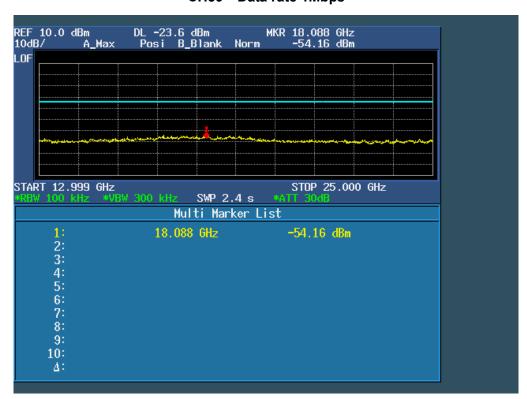







CH78 Data rate 1Mbps

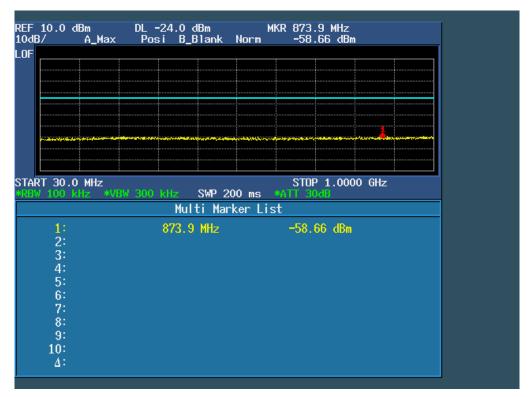

Note: Sweep Points=9700


CH78 Data rate 1Mbps

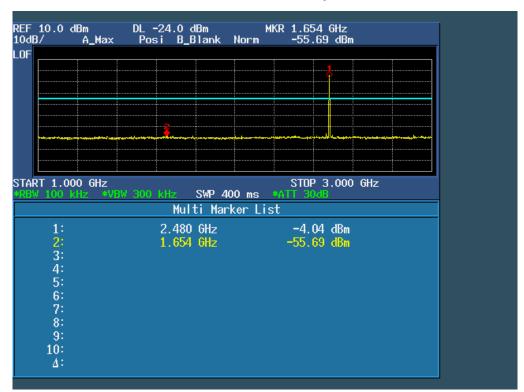






CH78 Data rate 1Mbps

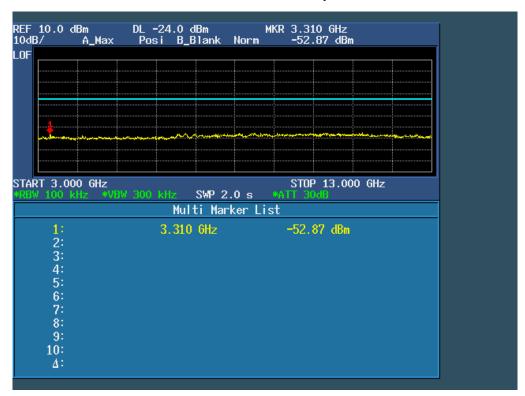

Note: Sweep Points=100000


CH78 Data rate 1Mbps

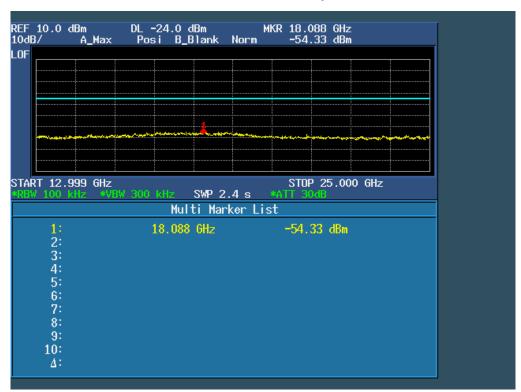






CH00 Data rate 3Mbps

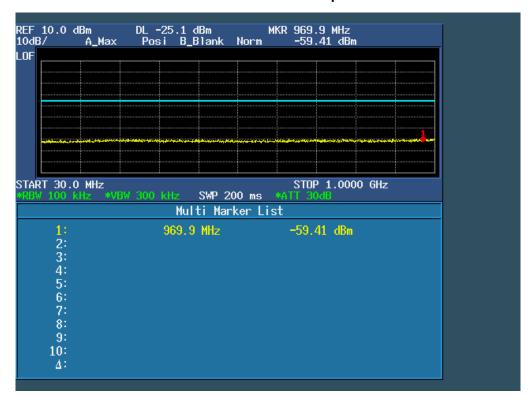

Note: Sweep Points=9700


CH00 Data rate 3Mbps

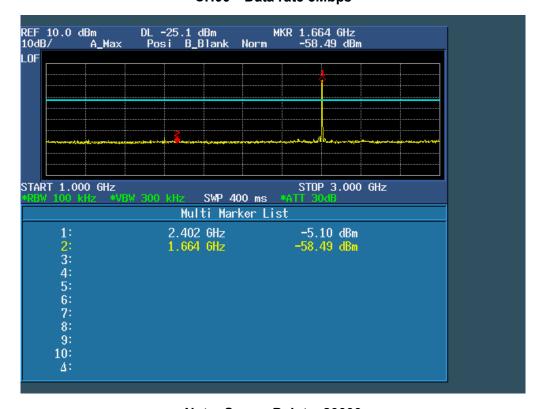








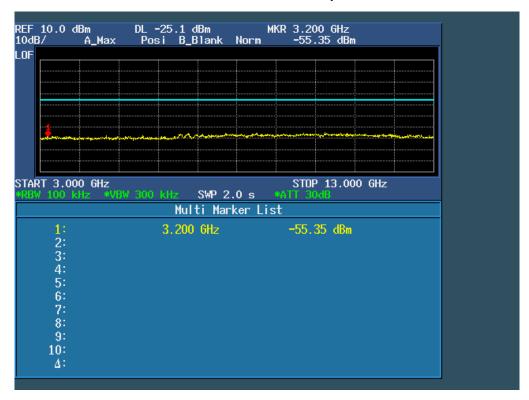


Note: Sweep Points=100000


CH00 Data rate 3Mbps

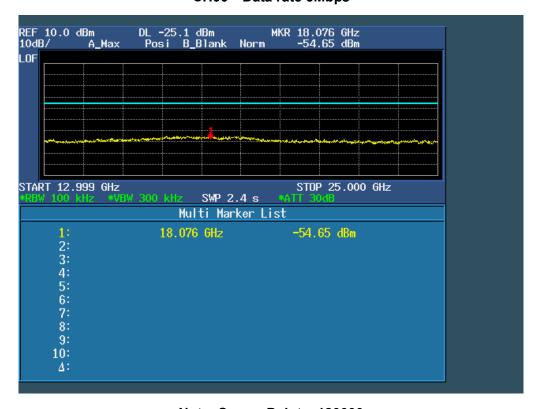








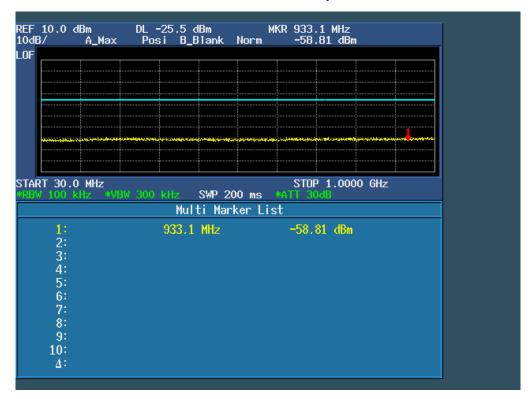

Note: Sweep Points=9700


CH39 Data rate 3Mbps

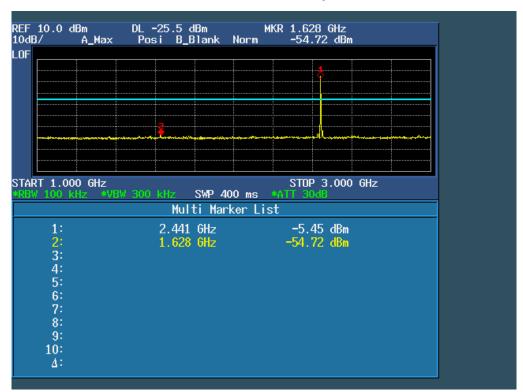







CH39 Data rate 3Mbps

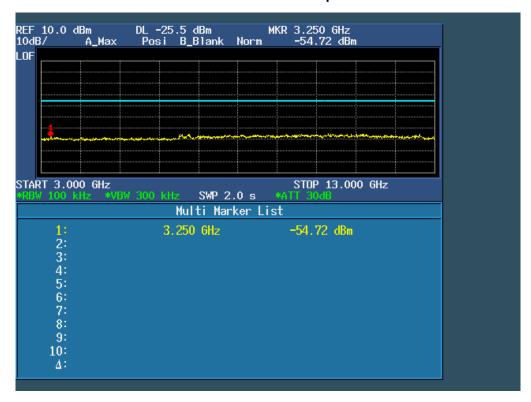

Note: Sweep Points=100000


CH39 Data rate 3Mbps

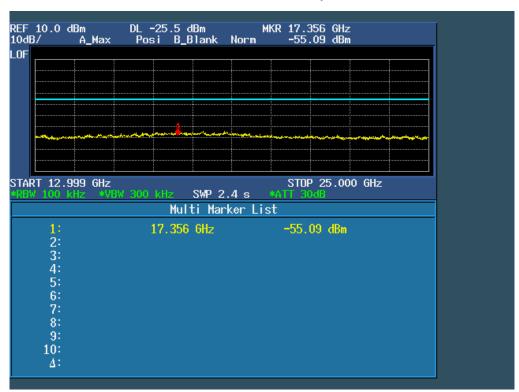







CH78 Data rate 3Mbps

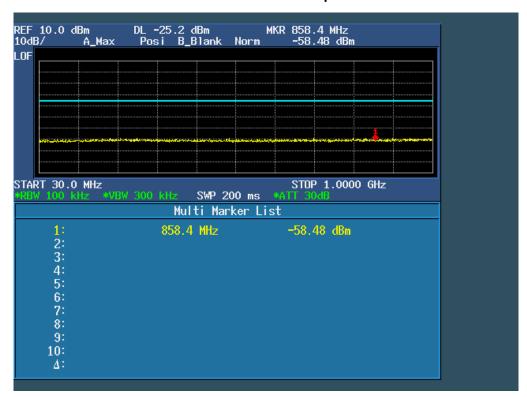



Note: Sweep Points=9700

CH78 Data rate 3Mbps

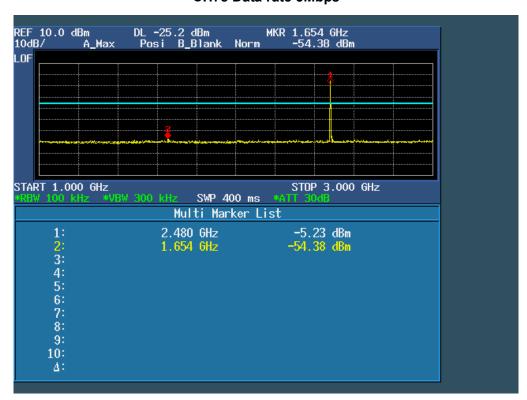





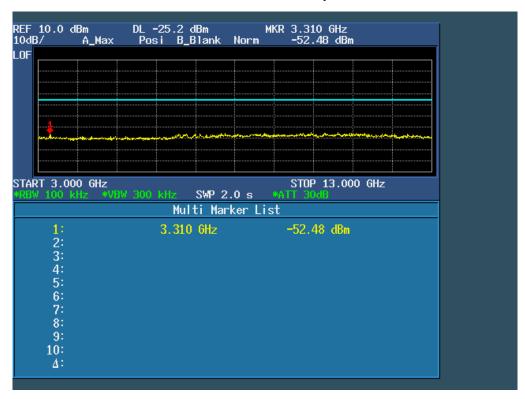

Note: Sweep Points=100000 CH78 Data rate 3Mbps

