# Test Report of FCC Part 15 C for FCC Certificate On Behalf of

# Xi'an Chenxi Aviation Technology Co., Ltd

Product Description: GPS-AV8OR-ACE
Model No.: 066-01209-0099
FCC ID: XBF-BST86410

Prepared for: Xi'an Chenxi Aviation Technology Co., Ltd

No.11, Area C, No.69, Jin Ye Road,. Xi'an, Shanxi, China

Prepared by: Bontek Compliance Testing Laboratory Ltd

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East

Review 2

Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020 Fax: 86-755-86337028

Report No.: BCT09FR-485E-1

**Issue Date:** June 10, 2009

**Test Date:** June 02~10, 2009

Test by:

Kendy Wang

Tony Wu

#### **TABLE OF CONTENTS**

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (E	
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	
1.4 TEST FACILITY	
2. SYSTEM TEST CONFIGURATION	
2.1 EUT CONFIGURATION	
2.2 EUT EXERCISE	
2.3 GENERAL TEST PROCEDURES	
3. SUMMARY OF TEST RESULTS	
4. ANTENNA REQUIREMENT	
4.1 STANDARD APPLICABLE	
4.2 ANTENNA CONNECTED CONSTRUCTION	
5. TEST OF CONDUCTED EMISSION	
5.1 APPLICABLE STANDARD	
5.2 Test Setup Diagram	
5.3 TEST RESULT	
6. TEST OF HOPPING CHANNEL BANDWIDTH	
6.1 APPLICABLE STANDARD	
6.2 EUT SETUP 6.3 TEST EQUIPMENT LIST AND DETAILS	
6.4 TEST PROCEDURE	
6.5 Test Result	
7. TEST OF HOPPING CHANNEL SEPARATION	21
7.1 APPLICABLE STANDARD	
7.2 EUT SETUP	21
7.3 TEST EQUIPMENT LIST AND DETAILS	
7.4 TEST PROCEDURE	
8. TEST OF NUMBER OF HOPPING FREQUENCY	
8.1 APPLICABLE STANDARD8.2 EUT SETUP	
8.3 TEST EQUIPMENT LIST AND DETAILS	
8.4 TEST PROCEDURE	
8.5 Test Result	
9. TEST OF DWELL TIME OF EACH FREQUENCY	27
9.1 APPLICABLE STANDARD	27
9.2 EUT SETUP	
9.3 TEST EQUIPMENT LIST AND DETAILS	
9.4 TEST PROCEDURE	
10. TEST OF MAXIMUM PEAK OUTPUT POWER	
10.1 APPLICABLE STANDARD10.2 EUT SETUP	
10.3 TEST EQUIPMENT LIST AND DETAILS	
10.4 Test Procedure	32
10.5 Test Result	32
11. TEST OF BAND EDGES EMISSION	36

11.1 APPLICABLE STANDARD	36
11.2 EUT SETUP	
11.3 TEST EQUIPMENT LIST AND DETAILS	
11.4 Test Procedure	37
11.5 Test Result	37
12. TEST OF SPURIOUS RADIATED EMISSION	41
12.1 APPLICABLE STANDARD	
12.2 EUT SETUP	
12.3 TEST EQUIPMENT LIST AND DETAILS	
12.4 Test Procedure	
12.5 Test Result	43
HARMONICS	50
13. TEST OF PEAK POWER SPECTRAL DENSITY	57
13.1 APPLICABLE STANDARD	57
13.2 EUT SETUP	
13.3 TEST EQUIPMENT LIST AND DETAILS	
13.4 Test Procedure	57
13.5 Test Result	57
14. RF EXPOSURE	61
14.1 APPLICABLE STANDARD	61
14.2 Test Result	

#### 1. GENERAL INFORMATION

#### 1.1 Product Description for Equipment Under Test (EUT)

#### **Client Information**

Applicant: Xi'an Chenxi Aviation Technology Co., Ltd

Address of applicant: No.11, Area C, No.69, Jin Ye Road,. Xi'an, Shanxi, China

Manufacturer: Xi'an Chenxi Aviation Technology Co., Ltd

Address of manufacturer: No.11, Area C, No.69, Jin Ye Road,. Xi'an, Shanxi, China

#### **General Description of E.U.T**

Items	Description
EUT Description:	GPS-AV8OR-ACE
Trade Name:	BendixKing
Model No.:	066-01209-0099
Supplementary Model No.:	N/A
Type of Modulation:	FHSS
Frequency Band:	2401 MHz ~ 2479 MHz
Number of Channels:	79
Channel Bandwidth:	1 MHz
Antenna Type:	Built-in Antenna
Rated Voltage:	3.7 V from inner rechargeable battery,
	AC/DC Adaptor and car-used Adaptor are attached.
Adaptor Specification:	AC Adapter :
	Brand Name: SENWIN
	Model No.: GFP151DA-050250B-1
	Input:AC 100-240V 50/60Hz,Output:DC 5V 2.5A Length:1.8M
	DC Adapter:
	Brand Name: ATER
	Model No.: R87-08016-101328
	Input: DC 10-28V,
	Output: DC 5V 2.5A
	Length:1.4M

<sup>\*</sup> The test data gathered are from the production sample provided by the manufacturer.

#### 1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, and 15.247 rules.

#### 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 1.4 Test Facility

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China and SGS-CSTC Standards Technical Services Co., Ltd ShenZhen Branch EMC Lab at No.1 Workshop, M-10, Middle Section, Science&Technology Park, Shenzhen 518057, Cina

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC - Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

#### IC Registration No.: 126111

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 126111 on March, 2008.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd ShenZhen Branch EMC Lab, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682.

#### 2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C.

#### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

#### 2.3 General Test Procedures

Conducted Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

## 2.4 List of Measuring Equipments Used

For Radiated Spurious Emission (30~25GHz) test: SGS-CSTC Shenzhen Branch:

Items	Equipment	Manufacturer	Model No.	Last Cal	Calibration Period
1	EMI Test Receiver R&S		ESI 26	2008/6	1 year
2	Horn Antenna	R/S	CH14-H052	2008/6	1 year
3	3m Semi- Anechoic Chamber	ETS	N/A	2008/6	1 year
4	Horn Antenna	R/S	HF906	2008/6	1 year
5	Spectrum Analyzer	HP	8594EM	2008/6	1 year

For other test: Bontek Compliance Testing Laboratory Ltd

Items	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Calibration Period
1	EMI Test Receiver	R&S	ESCI	100687	2008/11/17	1 Year
2	EMI Test Receiver	R&S	ESPI7	100097	2008/11/17	1 Year
3	Amplifier	HP	8447D	1937A024 92	2008/11/17	1 Year
4	3 phase Artificial Mains (L.I.S.N)	SCHWARZBECK	NSLK 8128	8128247	2008/11/17	1 Year
5	TRILOG Broadband Test- Antenna	dband Test- SCHWARZBECK		9163-324	2008/11/17	1 Year
6	Horn Antenna	SCHWARZBECK	BBHA9120A	D69250	2008/11/17	1 Year
7	High Field Biconical Antenna	ELECTRO- METRICS	EM-6913	166	2008/11/17	1 Year
8	Log Periodic Antenna	ELECTRO- METRICS	EM-6950	811	2008/11/17	1 Year
9	Remote Active Vertical Antenna	ELECTRO- METRICS	EM-6892	304	2008/11/17	1 Year
10	Power Clamp	SCHWARZBECK	MDS-21	3812	2008/11/17	1 Year

## 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
15.203/15.247(b)/(c)	Antenna Requirement	Pass
15.207	AC Power Line Conducted Emission	Pass
15.247(a)(1)	Hopping Channel Bandwidth	Pass
15.247(a)(1)	Hopping Channel Separation	Pass
15.247(a)(1)	Number of Hopping Frequency Used	Pass
15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
15.247(b)(1)	Maximum Peak Output Power	Pass
15.247(d)	Band Edges Emission	Pass
15.247(d)	Spurious Radiated Emission	Pass

#### 4. ANTENNA REQUIREMENT

#### 4.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.


#### 5. TEST OF CONDUCTED EMISSION

#### 5.1 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits ( dBuV)				
Trequency Range (Minz)	Quasi-Peak	Average			
0.150~0.500	66~56	56∼46			
0.500~5.000	56	46			
5.000~30.00	60	50			

#### 5.2 Test Setup Diagram

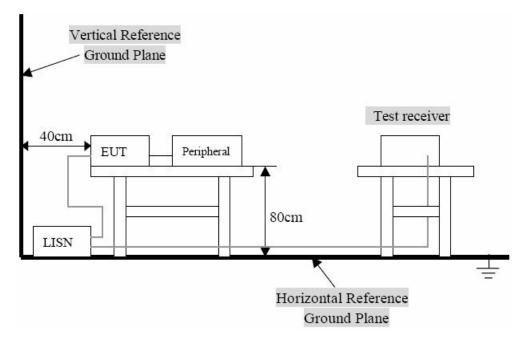

Remark: 1. The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC 15.207 limits.

2. The EUT was connected to a 120 VAC/ 60Hz power source.

#### 5.3 Test Result

Temperature ( °C ) : 22~23	EUT: GPS-AV8OR-ACE
Humidity (%RH ): 50~54	M/N: 066-01209-0099
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Charging Mode

#### Conducted Emission from Connect to PC

EUT: GPS M/N:GPS-AV8OR-ACE

Manufacturer: BCT

Operating Condition: CONNECT TO PC Test Site: SHIELDED ROOM


Operator: HGCHI

Test Specification: AC 120V/60Hz
Comment: L LINE

Temperature: 24 Humiuity: 55%

# SCAN TABLE: "Voltage (150K-30M) FIN" Short Description: 150K-30M V

150K-30M Voltage

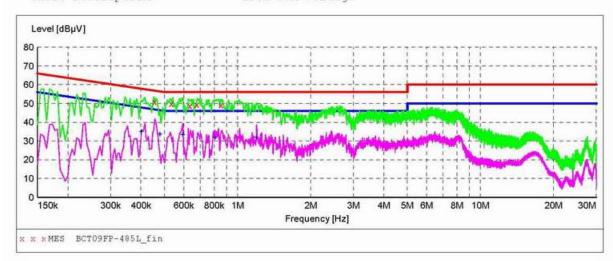

#### MEASUREMENT RESULT: "BCT09FP-485L fin"

6/3/2009 23: Frequency MHz	01 Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.456000	50.90	10.3	57	5.9	QP	L1	GND
0.532500	49.90	10.2	56	6.1	QP	L1	GND
0.636000	48.80	10.2	56	7.2	QP	L1	GND
0.681000	49.40	10.2	56	6.6	QP	L1	GND
0.856500	49.20	10.2	56	6.8	QP	L1	GND

#### MEASUREMENT RESULT: "BCT09FP-485L fin2"

6/3/2009	23:03	1						
Freque	ency	Level	Transd	Limit	Margin	Detector	Line	PE
- 25	MHz	dBµV	dB	dΒμV	dB			
0.402	2000	35.10	10.4	48	12.7	AV	L1	GND
0.478	3500	33.80	10.3	46	12.6	AV	L1	GND
0.595	500	33.50	10.2	46	12.5	AV	L1	GND
0.802	2500	32.20	10.2	46	13.8	AV	L1	GND
1.194	000	32.10	10.3	46	13.9	AV	L1	GND

#### Conducted Emission from Connect to PC

EUT: GPS M/N:GPS-AV8OR-ACE

Manufacturer: BCT

Operating Condition: CONNECT TO PC Test Site: SHIELDED ROOM
Operator: HGCHI


Operator:

Test Specification: AC 120V/60Hz Comment: N LINE

Temperature: 24 Humiuity: 55%

## SCAN TABLE: "Voltage(150K-30M)FIN" Short Description: 150K-30M

150K-30M Voltage

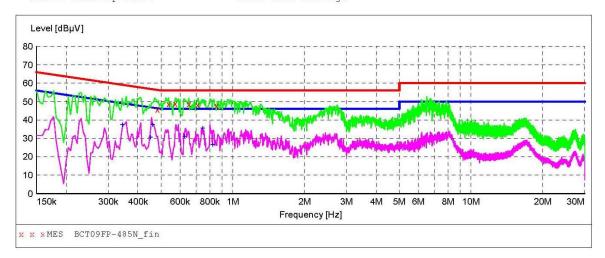

#### MEASUREMENT RESULT: "BCT09FP-485N fin"

6	/3/2009	23:04	4						
	Freque	ency	Level	Transd	Limit	Margin	Detector	Line	PE
		MHz	dΒμV	dB	dBµV	dB			
					,				
	0.483	000	45.60	10.3	56	10.7	QP	N	GND
	0.537	000	48.80	10.2	56	7.2	QP	N	GND
	0.573	000	49.10	10.2	56	6.9	QP	N	GND
	0.654	.000	48.70	10.2	56	7.3	QP	N	GND
	0.712	500	48.20	10.2	56	7.8	OP	N	GND
	0.856	500	47.90	10.2	56	8.1	ÕP	N	GND

#### MEASUREMENT RESULT: "BCT09FP-485N fin2"

6/3/2009 23:04 Frequency MHz	4 Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.343500	37.40	10.5	49	11.7	AV	N	GND
0.451500	30.80	10.3	47	16.0	AV	N	GND
0.460500	37.40	10.3	47	9.3	AV	N	GND
0.627000	31.10	10.2	46	14.9	AV	N	GND
0.748500	35.60	10.2	46	10.4	AV	N	GND
0.825000	26.80	10.2	46	19.2	AV	N	GND

#### **Conducted Emission from AC/DC Adaptor**

EUT: GPS M/N:GPS-AV8OR-ACE

Manufacturer: BCT Operating Condition: CHARGING


Operating
Test Site: SHIED HGCHI SHIELDED ROOM

Test Specification: AC 120V/60Hz Comment: L LINE

Temperature: 24 Humiuity: 55%

# SCAN TABLE: "Voltage (150K-30M) FIN" Short Description: 150K-30M V

150K-30M Voltage

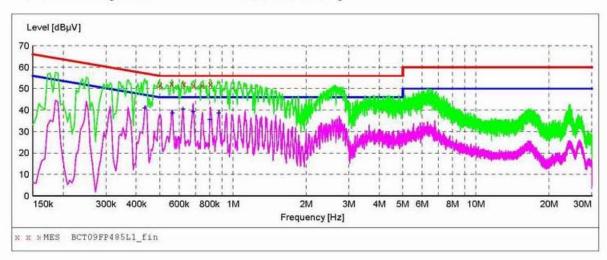

#### MEASUREMENT RESULT: "BCT09FP485L1 fin"

Frequen	08:30 cy Hz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.5010	00	52.00	10.2	56	4.0	QP	L1	GND
0.5595	00	52.30	10.2	56	3.7	QP	L1	GND
0.6270	00	52.10	10.2	56	3.9	QP	L1	GND
0.6900	00	51.50	10.2	56	4.5	QP	L1	GND
0.7440	00	51.40	10.2	56	4.6	QP	L1	GND
0.8070	0.0	52.10	10.2	56	3.9	QP	L1	GND

#### MEASUREMENT RESULT: "BCT09FP485L1 fin2"

8	5/4/2009 08:3 Frequency MHz	O Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.433500	41.10	10.3	47	6.1	AV	L1	GND
	0.564000	38.80	10.2	46	7.2	AV	L1	GND
	0.622500	40.60	10.2	46	5.4	AV	L1	GND
	0.685500	39.40	10.2	46	6.6	AV	L1	GND
	0.802500	35.70	10.2	46	10.3	AV	L1	GND
	0.874500	38.80	10.2	46	7.2	AV	L1	GND

#### **Conducted Emission from AC/DC Adaptor**

EUT: GPS M/N:GPS-AV8OR-ACE


Manufacturer: BCT

Operating Condition: CHARGING Test Site: SHIELDED ROOM

Test Site:
Operator: HGCHI
Test Specification: AC 120V/60Hz
Comment: N LINE

Temperature: 24 Humiuity: 55%

SCAN TABLE: "Voltage(150K-30M)FIN"
Short Description: 150K-30M V 150K-30M Voltage

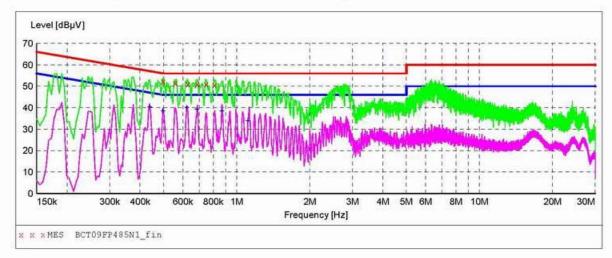

#### MEASUREMENT RESULT: "BCT09FP485N1 fin"

6/4/2009 08:27 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.496500	52.30	10.3	56	3.8	QP	N	GND
0.559500	51.60	10.2	56	4.4	QP	N	GND
0.627000	51.10	10.2	56	4.9	QP	N	GND
0.690000	51.20	10.2	56	4.8	QP	N	GND
0.748500	51.20	10.2	56	4.8	QP	N	GND
0.811500	50.80	10.2	56	5.2	QP	N	GND

#### MEASUREMENT RESULT: "BCT09FP485N1 fin2"

6/4/2009 08:2 Frequency MHz	7 Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.438000	40.50	10.3	47	6.6	AV	N	GND
0.496500	38.50	10.3	46	7.6	AV	N	GND
0.622500	40.20	10.2	46	5.8	AV	N	GND
0.685500	39.50	10.2	46	6.5	AV	N	GND
0.870000	38.50	10.2	46	7.5	AV	N	GND
1.113000	34.10	10.3	46	11.9	AV	N	GND

#### **Conducted Emission from Car Adaptor**

EUT: M/N:GPS-AV8OR-ACE Manufacturer:

Operating Condition: CAR ADAPTOR CHARGING SHIELDED ROOM


Test Site: Operator:

Test Specification: AC120V / 60Hz

N LINE Comment:

Temperature: 24 Humiuity: 60%

SCAN TABLE: "Voltage (150K-30M)FIN"
Short Description: 150K-30M Voltage

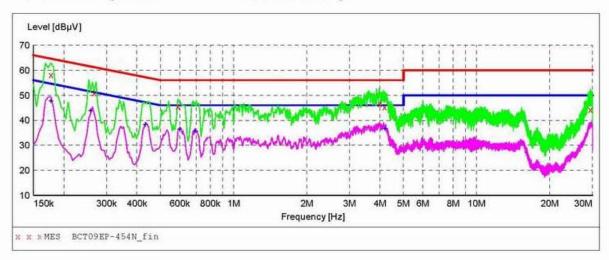

#### MEASUREMENT RESULT: "BCT09EP-454N fin"

6/4/2009 08:45 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.177000	58.20	11.1	65	6.4	QP	N	GND
0.267000	51.00	10.6	61	10.2	QP	N	GND
0.591000	45.50	10.2	56	10.5	QP	N	GND
3.997500	46.50	10.3	56	9.5	QP	N	GND
4.177500	45.30	10.3	56	10.7	QP	N	GND
29.341500	44.30	11.1	60	15.7	QP	N	GND

#### MEASUREMENT RESULT: "BCT09EP-454N fin2"

6/4/2009 08:45 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.177000	47.90	11.1	55	6.7	AV	N	GND
0.258000	44.00	10.7	52	7.5	AV	N	GND
0.433500	38.30	10.3	47	8.9	AV	N	GND
0.600000	36.60	10.2	46	9.4	AV	N	GND
0.694500	35.90	10.2	46	10.1	AV	N	GND
4.191000	36.80	10.3	46	9.2	AV	N	GND

#### **Conducted Emission from Car Adaptor**

EUT: M/N:GPS-AV8OR-ACE

Manufacturer: BCT Operating Condition: CAR ADAPTOR CHARGING


Test Site: SHIELDED ROOM Operator: CHI

CHI Operator:

Test Specification: AC120V / 60Hz

Comment: L LINE Temperature:24 Humiuity:60%

SCAN TABLE: "Voltage(150K-30M)FIN"
Short Description: 150K-30M Voltage

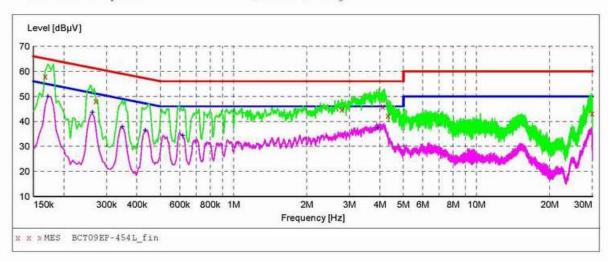

#### MEASUREMENT RESULT: "BCT09EP-454L fin"

6/4/2009 08:	49						
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.168000	58.10	11.2	65	7.0	QP	L1	GND
0.271500	48.20	10.6	61	12.9	QP	L1	GND
2.782500	44.90	10.2	56	11.1	QP	L1	GND
4.119000	46.00	10.3	56	10.0	QP	L1	GND
4.330500	42.30	10.3	56	13.7	QP	L1	GND
29.832000	43.30	11.1	60	16.7	QP	L1	GND

#### MEASUREMENT RESULT: "BCT09EP-454L fin2"


6/4/2009 08:49 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.172500	50.10	11.1	55	4.7	AV	L1	GND
0.262500	43.70	10.6	51	7.7	AV	L1	GND
0.348000	38.00	10.5	49	11.0	AV	L1	GND
0.433500	36.50	10.3	47	10.7	AV	L1	GND
0.618000	34.50	10.2	46	11.5	AV	L1	GND
3.907500	37.50	10.3	46	8.5	AV	L1	GND

#### 6. Test of Hopping Channel Bandwidth

#### 6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 6.2 EUT Setup



**Spectrum Analyzer** 

#### 6.3 Test Equipment List and Details

See section 2.4.

#### **6.4 Test Procedure**


- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
- 3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
- 4. The spectrum width with level higher than 20dB below the peak level.
- 5. Repeat above 1~3 points for the middle and highest channel of the EUT.

#### 6.5 Test Result

Temperature ( °C ) : 22~23	EUT: GPS-AV8OR-ACE
Humidity (%RH ): 50~54	M/N: 066-01209-0099
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode


Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
FHSS	Low	2401.00	961	>25
FHSS	Middle	2440.00	910	>25
FHSS	High	2479.00	960	>25

#### **Channel Low:**

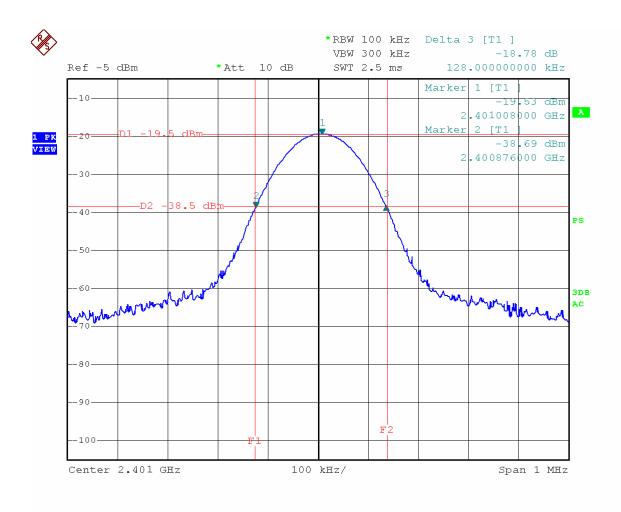


Date: 4.JUN.2009 22:18:12

#### **Channel Middle:**

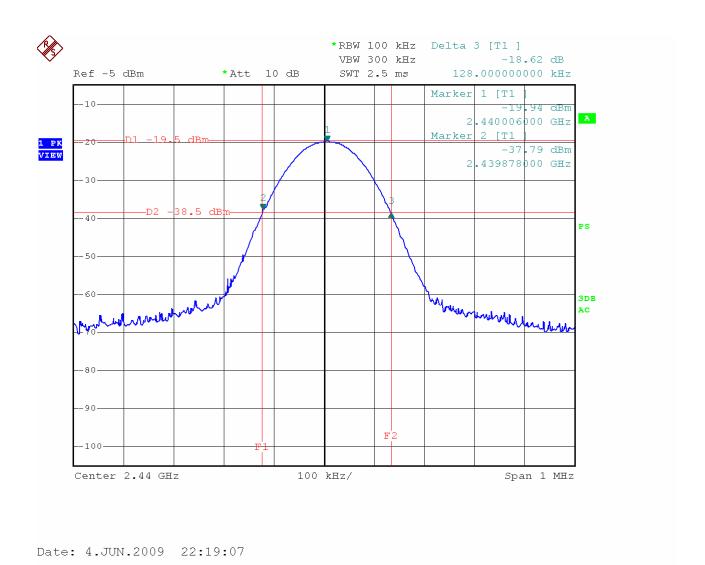

#### Channel High:

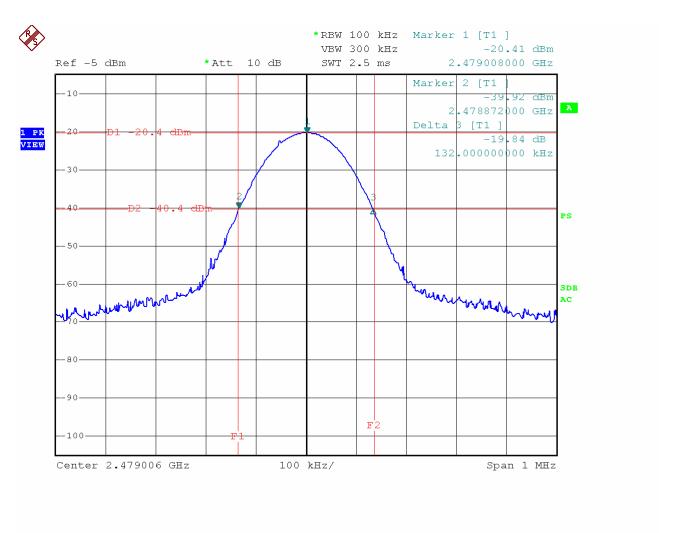


Date: 4.JUN.2009 22:20:29

#### 7. Test of Hopping Channel Separation

#### 7.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 7.2 EUT Setup



#### 7.3 Test Equipment List and Details

See section 2.4.


#### 7.4 Test Procedure

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
- 3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
- 4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
- 5. Repeat above 1~3 points for the middle and highest channel of the EUT.

#### 7.5 Test Result


Temperature ( °C ) : 22~23	EUT: GPS-AV8OR-ACE
Humidity (%RH ): 50~54	M/N: 066-01209-0099
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode

#### **Channel Low:**

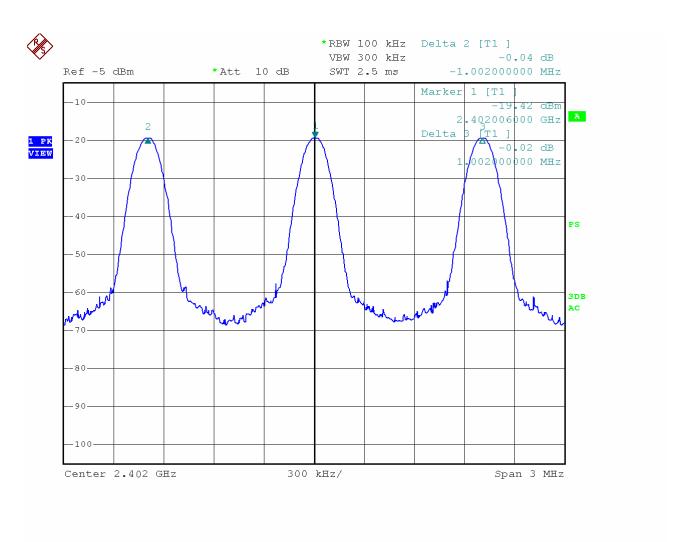


Date: 4.JUN.2009 22:23:12

#### **Channel Middle:**

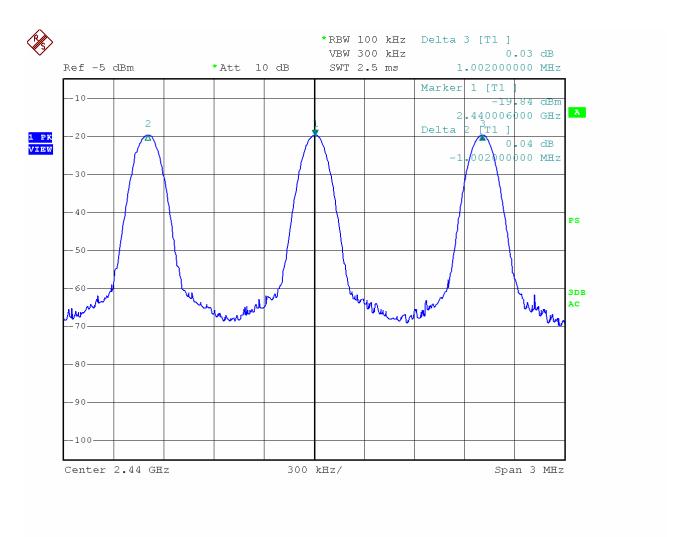

Date: 4.JUN.2009 22:24:02

#### Channel High:

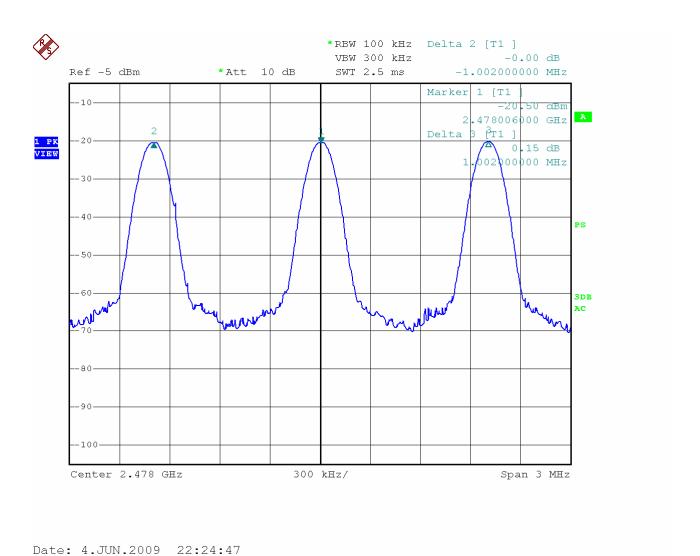


#### 8. Test of Number of Hopping Frequency

#### 8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

#### 8.2 EUT Setup



**Spectrum Analyzer** 

#### 8.3 Test Equipment List and Details

See section 2.4.


#### **8.4 Test Procedure**

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
- 3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
- 4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
- 5. Repeat above 1~3 points for the middle and highest channel of the EUT.

#### 8.5 Test Result

Temperature ( $^{\circ}$ ) : 22~23	EUT: GPS-AV8OR-ACE
Humidity (%RH ): 50~54	M/N: 066-01209-0099
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode

Modulation Type Frequency (MHz)		Number of Hopping Channels	Min. Limit (kHz)	
FHSS	2401.0~2479.0	79	>15	

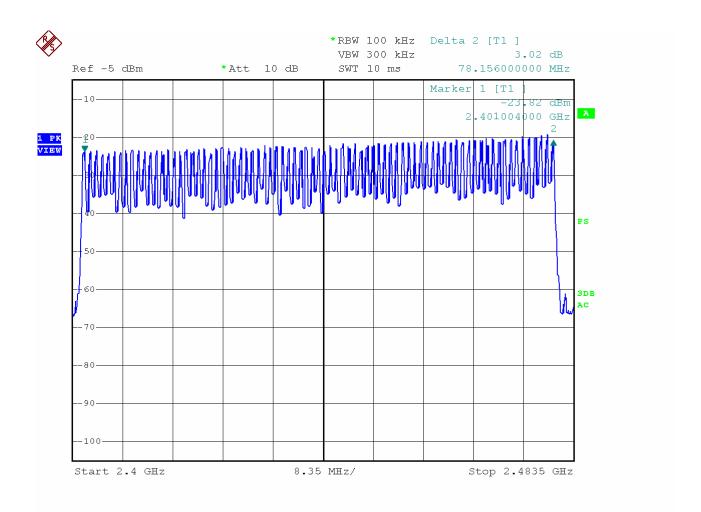


Date: 4.JUN.2009 22:14:54

#### 9. Test of Dwell Time of Each Frequency

#### 9.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

#### 9.2 EUT Setup



#### 9.3 Test Equipment List and Details

See section 2.4.

#### 9.4 Test Procedure

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
- 3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
- 4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- 5. Measure the maximum time duration of one single pulse.

#### 9.5 Test Result

Temperature ( °C ) : 22~23	EUT: GPS-AV8OR-ACE	
Humidity (%RH ): 50~54	M/N: 066-01209-0099	
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode	

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (ms)	Limit (ms)
FHSS	Low	2401.00	115.20	400
FHSS	Middle	2440.00	119.04	400
FHSS	High	2479.00	119.04	400

A period time = 0.4 (ms) \* 79 = 31.6 (s) CH Low:


DH1 time slot = 0.360 (ms) \* (1600/(2\*79)) \* 31.6 = 115.20 (ms)

CH Mid:


DH1 time slot = 0.372 (ms) \* (1600/(2\*79)) \* 31.6 = 119.04 (ms)

CH High: DH1 time slot = 0.372 (ms) \* (1600/(2\*79)) \* 31.6 = 119.04 (ms)


#### **Channel Low:**

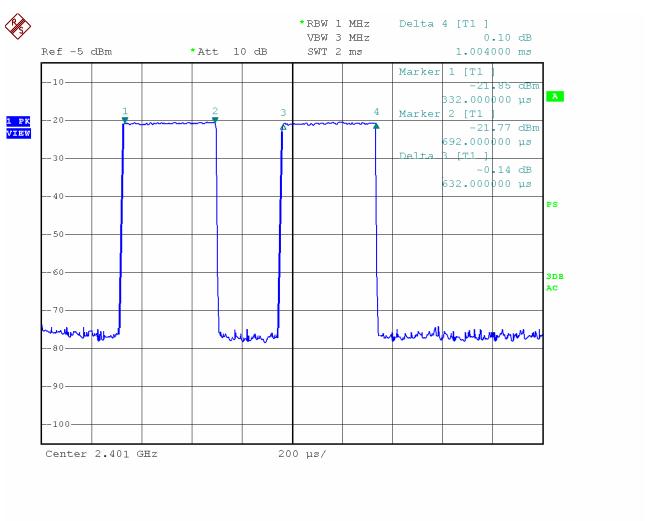

#### **Channel Middle:**

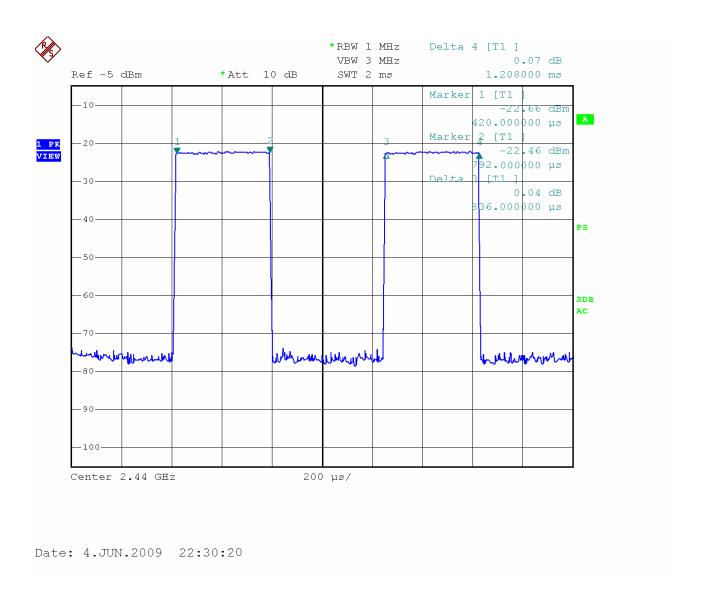

#### Channel High:

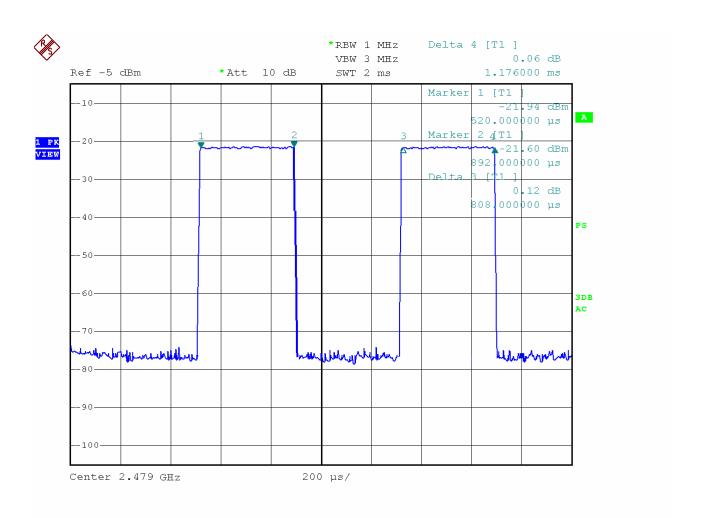


Date: 4.JUN.2009 23:30:54

#### 10. Test of Maximum Peak Output Power

#### 10.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

#### 10.2 EUT Setup



#### 10.3 Test Equipment List and Details

See section 2.4.

#### 10.4 Test Procedure


- 1. The transmitter output was connected to the peak power meter and recorded the peak value.
- 2. Peak power meter parameter set to auto attenuator and filter is the same as.
- 3. Repeated the 1 for the middle and highest channel of the EUT.

#### 10.5 Test Result

Temperature ( °C ) : 22~23	EUT: GPS-AV8OR-ACE
Humidity (%RH ): 50~54	M/N: 066-01209-0099
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode


Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Margin (dB)
FHSS	Low	2401.00	-19.78	20.9	40.68
FHSS	Middle	2440.00	-19.84	20.9	40.74
FHSS	High	2479.00	-20.72	20.9	41.62

#### **Channel Low:**

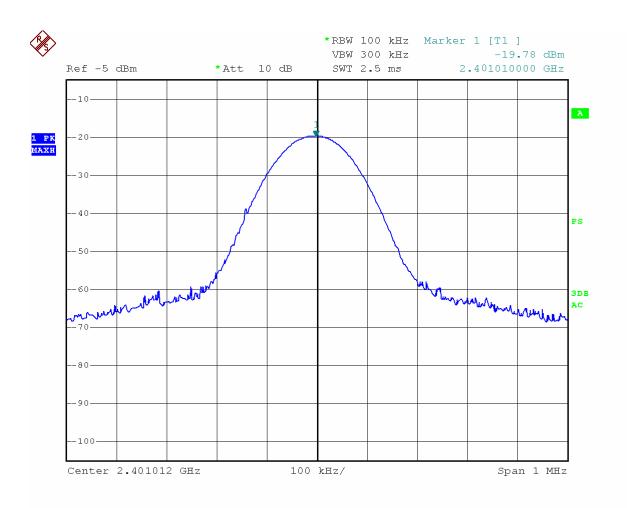


Date: 4.JUN.2009 22:10:57

#### **Channel Middle:**

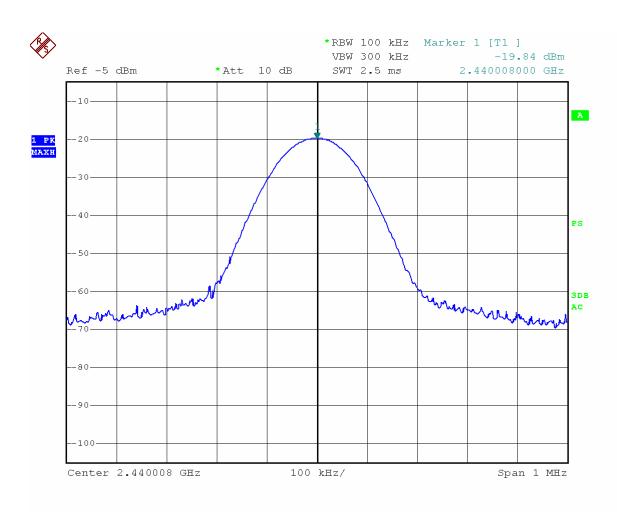

Date: 4.JUN.2009 22:16:05

## Channel High:

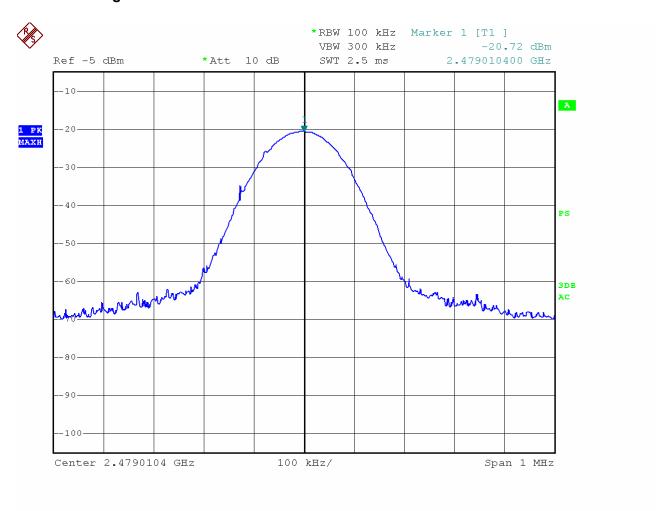

Date: 4.JUN.2009 22:15:36


#### 11. Test of Band Edges Emission

#### 11.1 Applicable Standard


Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

#### 11.2 EUT Setup

#### **Radiated Measurement Setup**

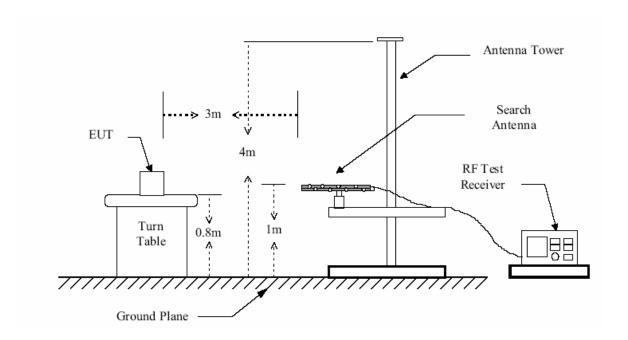

#### **Conducted Measurement Setup**



# 11.3 Test Equipment List and Details

See section 2.4.

### 11.4 Test Procedure

#### **Conducted Measurement**

- 1. The transmitter is set to the lowest channel.
- 2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
- 3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
- 4. The lowest band edges emission was measured and recorded.
- 5. The transmitter set to the highest channel and repeated 2~4.

#### **Radiated Measurement**

- 1. Configure the EUT according to ANSI C63.4.
- 2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
- 4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. For band edge emission, use 10Hz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.


#### 11.5 Test Result


Temperature ( °C ) : 22~23	EUT: GPS-AV8OR-ACE
Humidity (%RH ): 50~54	M/N: 066-01209-0099
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode

# **Radiated Test Result**


Frequency (MHz)	Antenna Polarization	Emission Read Value (dBµV/m)	Limits (dBµV/m)
<2400	Н	37.45	54
>2483.5	Н	38.56	54

# **Conducted Test Result**

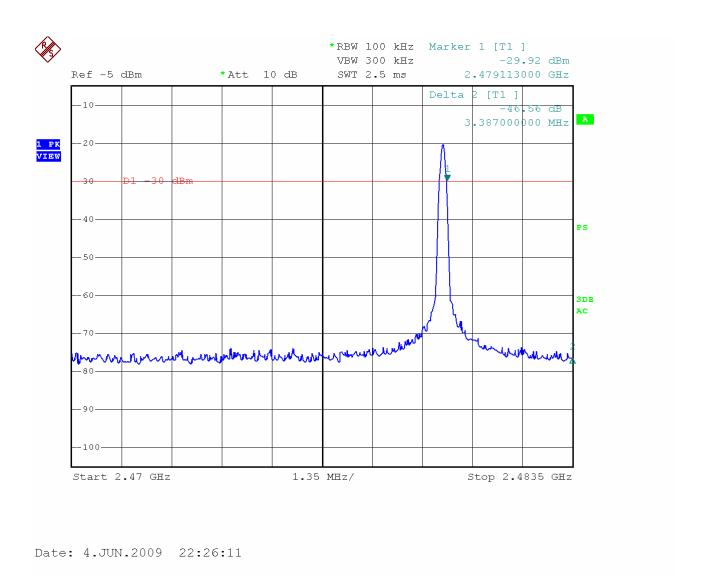

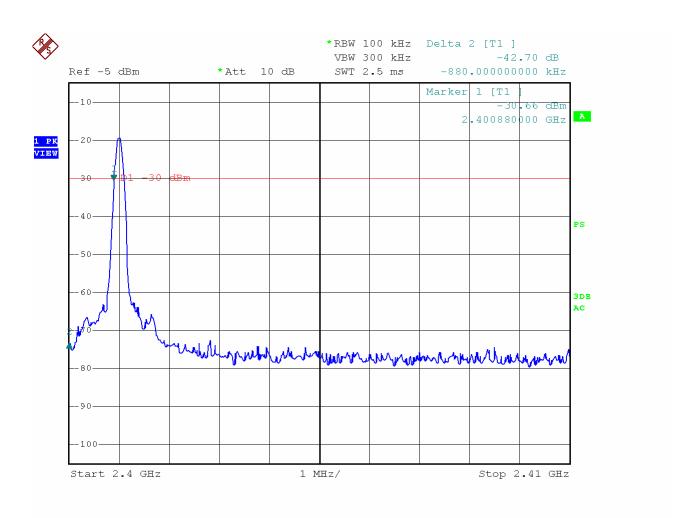

Date: 4.JUN.2009 22:28:24

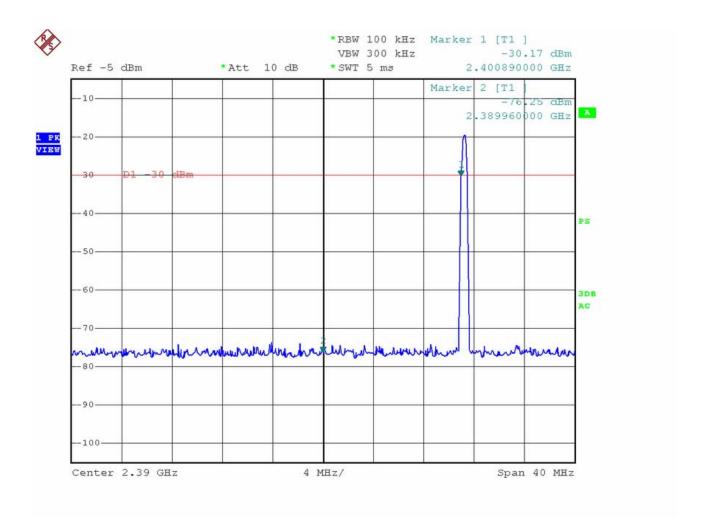

Date: 11.JUN.2009 16:47:33

# 12. Test of Spurious Radiated Emission

# 12.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

# 12.2 EUT Setup

## **Radiated Measurement Setup**

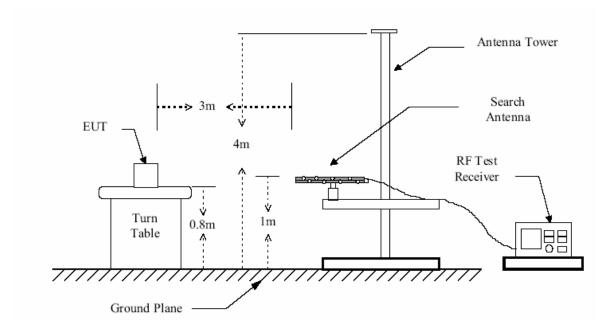


Figure 1: Frequencies measured below 1 GHz configuration


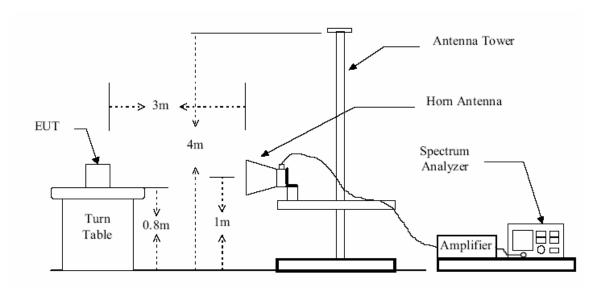


Figure 2: Frequencies measured above 1 GHz configuration

# **Conducted Measurement Setup**



# 12.3 Test Equipment List and Details

See section 2.4.

## 12.4 Test Procedure

#### **Radiated Measurement**

- 1. Configure the EUT according to ANSI C63.4.
- 2. The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 4. Power on the EUT and all the supporting units.
- 5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.

- 6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
- 7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

#### **Conducted Measurement**

- 1. For emission above 1GHz, conducted measurement method is used.
- 2. The transmitter is set to the lowest channel.
- 3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
- 4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
- 5. The lowest band edges emission was measured and recorded.
- 6. The transmitter set to the highest channel and repeated 2~4.

### 12.5 Test Result

Temperature ( °C ) : 22~23	EUT: GPS-AV8OR-ACE
Humidity (%RH ): 50~54	M/N: 066-01209-0099
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx / Rx & Charging Mode

# Spurious Emission (30~1000MHz)

#### RADIATED EMISSION TEST DATA OF MP4 PLAYING

EUT: M/N:GPS-AV8OR-ACE

Manufacturer: N/A

Operating Condition: MUSIC PLAYING

Test Site: CHAMBER Operator: CHEN


Test Specification: AC120V/60Hz
Comment: Polarisation:H
Start of Test: 6/3/2009 / 21:37:59

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength

Start Stop Detector Meas. IF Transducer

Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW

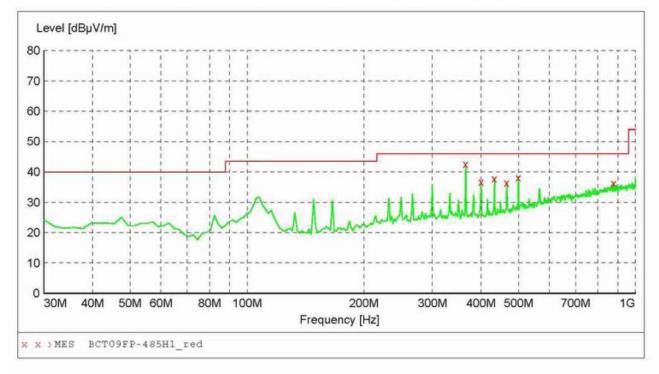

### MEASUREMENT RESULT: "BCT09FP-485H1 red"

6/3/2009 2	1:39							
Frequenc MH		Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
365.62000	0 42.60	20.8	46.0	3.4	QP	100.0	0.00	HORIZONTAL
400.54000	0 36.70	20.6	46.0	9.3	QP	100.0	0.00	HORIZONTAL
433.52000	0 37.80	21.3	46.0	8.2	QP	100.0	0.00	HORIZONTAL
466.50000	0 36.40	21.7	46.0	9.6	QP	100.0	0.00	HORIZONTAL
499.48000	0 38.10	22.7	46.0	7.9	QP	100.0	0.00	HORIZONTAL
879.72000	0 36.30	29.0	46.0	9.7	QP	100.0	0.00	HORIZONTAL

#### RADIATED EMISSION TEST DATA OF MP4 PLAYING

EUT: M/N:GPS-AV8OR-ACE

Manufacturer: N/A

Operating Condition: MUSIC PLAYING

Test Site: CHAMBER Operator: Test Specification: AC120V/60Hz


CHEN Polarisation: V

Comment: Start of Test: 6/3/2009 / 21:36:52

SWEEP TABLE: "test (30M-1G)" Field Strength Short Description:

Transducer Start Stop Detector Meas. IF

Frequency Frequency Time Bandw. 30.0 MHz VULB9163 NEW

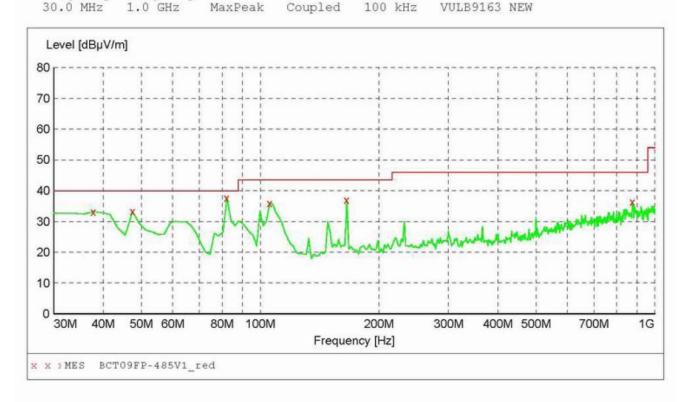

## MEASUREMENT RESULT: "BCT09FP-485V1 red"

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.760000	33.20	16.2	40.0	6.8	QP	100.0	0.00	VERTICAL
47.460000	33.30	16.7	40.0	6.7	QP	100.0	0.00	VERTICAL
82.380000	37.70	14.4	40.0	2.3	QP	100.0	0.00	VERTICAL
105.660000	36.00	17.9	43.5	7.5	OP	100.0	0.00	VERTICAL
165.800000	37.00	14.9	43.5	6.5	QP	100.0	0.00	VERTICAL
875.840000	36.50	29.0	46.0	9.5	OP	100.0	0.00	VERTICAL

#### RADIATED EMISSION TEST DATA OF CHARGING MODE

EUT: M/N:GPS-AV8OR-ACE

Manufacturer: N/A


Operating Condition: CHARGING Test Site: CHAMBER Operator: CHEN

Test Specification: AC120V/60Hz Comment: Polarisation:H Start of Test: 6/3/2009 / 21:43:26

SWEEP TABLE: "test (30M-1G)" Short Description: Fi Field Strength

Start Stop Detector Meas. Transducer

Frequency Frequency Bandw. Time 1.0 GHz 30.0 MHz MaxPeak Coupled 100 kHz VULB9163 NEW

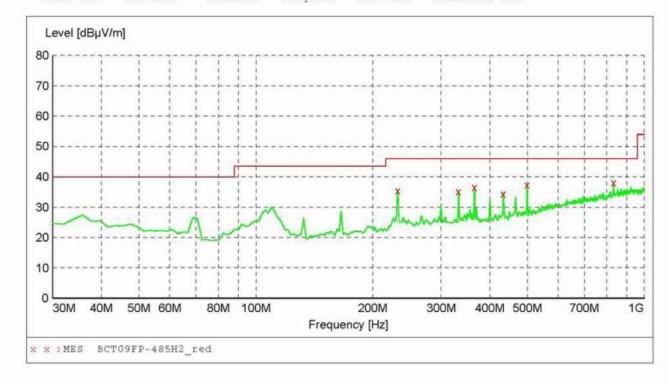

### MEASUREMENT RESULT: "BCT09FP-485H2 red"

6/3/2009 21:4 Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
MHz	dBµV/m	dB	dBµV/m	dB		cm	deg	
231.760000	35.50	17.7	46.0	10.5	QP	100.0	0.00	HORIZONTAL
332.640000	35.20	20.7	46.0	10.8	QP	100.0	0.00	HORIZONTAL
365.620000	36.60	20.8	46.0	9.4	QP	100.0	0.00	HORIZONTAL
433.520000	34.50	21.3	46.0	11.5	QP	100.0	0.00	HORIZONTAL
499.480000	37.30	22.7	46.0	8.7	QP	100.0	0.00	HORIZONTAL
833.160000	38.10	28.4	46.0	7.9	QP	100.0	0.00	HORIZONTAL

#### RADIATED EMISSION TEST DATA OF CHARGING MODE

EUT: M/N:GPS-AV8OR-ACE

Manufacturer: N/A


Operating Condition: CHARGING Test Site: CHAMBER Operator: CHEN

Test Specification: AC120V/60Hz Polarisation:V Comment: Start of Test: 6/3/2009 / 21:45:42

SWEEP TABLE: "test (30M-1G)"
Short Description: Fi Field Strength

Detector Meas. Start Stop IF Transducer

Frequency Frequency Time Bandw. 30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW

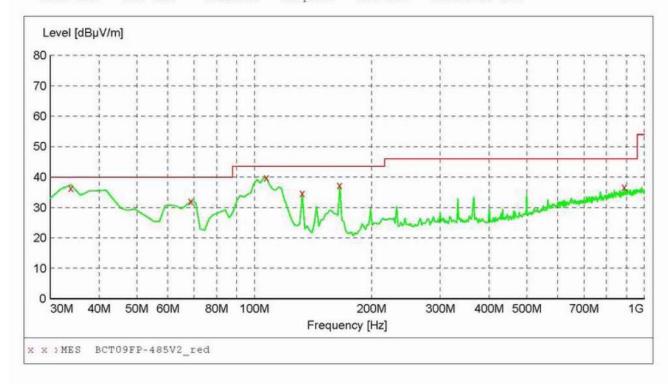

#### MEASUREMENT RESULT: "BCT09FP-485V2 red"

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
33.880000	36.50	15.4	40.0	3.5	QP	100.0	0.00	VERTICAL
68.800000	32.10	13.7	40.0	7.9	QP	100.0	0.00	VERTICAL
107.600000	39.90	17.8	43.5	3.6	QP	100.0	0.00	VERTICAL
132.820000	34.80	14.3	43.5	8.7	QP	100.0	0.00	VERTICAL
165.800000	37.40	14.9	43.5	6.1	QP	100.0	0.00	VERTICAL
889.420000	36.70	29.1	46.0	9.3	QP	100.0	0.00	VERTICAL

#### RADIATED EMISSION TEST DATA OF CONNECT TO PC

EUT: M/N:GPS-AV8OR-ACE

Manufacturer: N/A

Operating Condition: CONNECT TO PC

Test Site: CHAMBER Operator: Test Specification: AC120V/60Hz

Comment:


Start of Test:

CHEN Polarisation:H 6/3/2009 / 21:20:58

SWEEP TABLE: "test (30M-1G)"
Short Description: Fi Field Strength

Start Stop Detector Meas. Transducer

Frequency Frequency Bandw. Time 30.0 MHz 1.0 GHz Coupled 100 kHz VULB9163 NEW MaxPeak

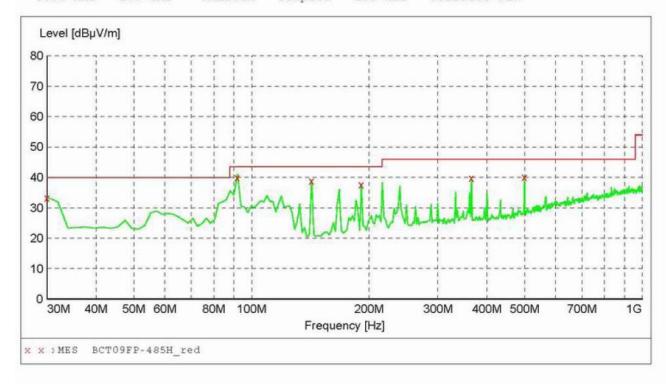

## MEASUREMENT RESULT: "BCT09FP-485H red"

6/3/2009 22:1	15							
Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	33.40	15.3	40.0	6.6	QP	300.0	0.00	HORIZONTAL
92.080000	40.00	17.4	43.5	3.5	QP	300.0	0.00	HORIZONTAL
142.520000	39.00	14.0	43.5	4.5	QP	300.0	0.00	HORIZONTAL
191.020000	37.70	16.8	43.5	5.8	QP	100.0	0.00	HORIZONTAL
365.620000	39.80	20.8	46.0	6.2	QP	100.0	0.00	HORIZONTAL
499.480000	40.20	22.7	46.0	5.8	QP	100.0	0.00	HORIZONTAL

#### RADIATED EMISSION TEST DATA OF CONNECT TO PC

EUT: M/N:GPS-AV8OR-ACE

Manufacturer: N/A

Operating Condition: CONNECT TO PC

Test Site: CHAMBER Operator: CHEN


Test Specification: AC120V/60Hz Comment: Polarisation:V

Comment: Polarisation:V Start of Test: 6/3/2009 / 21:24:36

# SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength

Start Stop Detector Meas. IF Transducer Frequency Frequency Time Bandw.

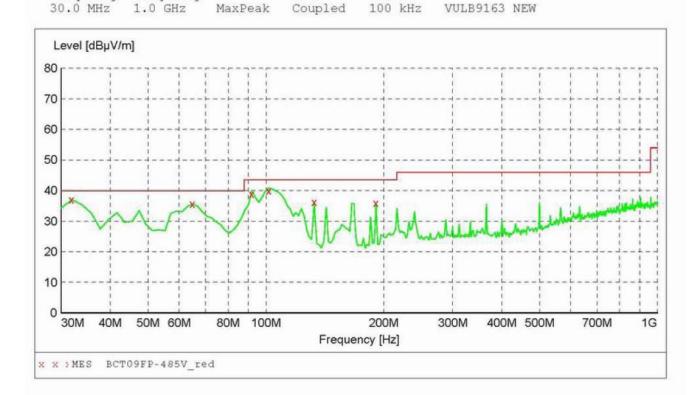

### MEASUREMENT RESULT: "BCT09FP-485V red"

17							
Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.00	15.4	40.0	3.0	QP	100.0	0.00	VERTICAL
35.60	14.4	40.0	4.4	QP	100.0	0.00	VERTICAL
39.00	17.4	43.5	4.5	QP	100.0	0.00	VERTICAL
40.00	18.2	43.5	3.5	QP	100.0	0.00	VERTICAL
36.20	14.3	43.5	7.3	QP	100.0	0.00	VERTICAL
35.90	16.8	43.5	7.6	QP	100.0	0.00	VERTICAL
	37.00 35.60 39.00 40.00 36.20	Level dBμV/m dB  37.00 15.4 35.60 14.4 39.00 17.4 40.00 18.2 36.20 14.3	Level Transd Limit dBμV/m dB dBμV/m  37.00 15.4 40.0 35.60 14.4 40.0 39.00 17.4 43.5 40.00 18.2 43.5 36.20 14.3 43.5	Level dBμV/m dB dBμV/m dB  37.00 15.4 40.0 3.0 35.60 14.4 40.0 4.4 39.00 17.4 43.5 4.5 40.00 18.2 43.5 3.5 36.20 14.3 43.5 7.3	Level Transd Limit Margin Det. dBμV/m dB dBμV/m dB  37.00 15.4 40.0 3.0 QP 35.60 14.4 40.0 4.4 QP 39.00 17.4 43.5 4.5 QP 40.00 18.2 43.5 3.5 QP 36.20 14.3 43.5 7.3 QP	Level dBμV/m         Transd dB dBμV/m         Limit dBμV/m         Margin dB         Det. Height cm           37.00         15.4         40.0         3.0         QP         100.0           35.60         14.4         40.0         4.4         QP         100.0           39.00         17.4         43.5         4.5         QP         100.0           40.00         18.2         43.5         3.5         QP         100.0           36.20         14.3         43.5         7.3         QP         100.0	Level dBμV/m         Transd dB dBμV/m         Limit dBμV/m         Margin dB         Det. Height cm         Azimuth deg           37.00         15.4         40.0         3.0         QP         100.0         0.00           35.60         14.4         40.0         4.4         QP         100.0         0.00           39.00         17.4         43.5         4.5         QP         100.0         0.00           40.00         18.2         43.5         3.5         QP         100.0         0.00           36.20         14.3         43.5         7.3         QP         100.0         0.00

### **Harmonics**

	Channel Low												
Maximum		F	Polarity and L	evel		Limit	Margin	Mark					
Frequency (MHz)	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m	(dBµV/m)	(dBµV/m)	(P/Q/A)					
4802.28	Н	1.00	23.8	24.2	48	74.0	26	Р					
4002.20	11	1.00	19.5	24.2	43.7	54.0	10.3	Α					
4802.28	٧	1.00	25.1	24.2	49.3	74.0	24.7	Р					
4002.20	V	1.00	21.5	24.2	45.9	54.0	28.9	Α					
7202 22	7203.32 H	1.00	24.0	24.8	48.8	74.0	25.2	Р					
7203.32		1.00	20.3	24.8	45.1	54.0	8.9	Α					
7203.32	V	1.00	25.2	24.8	50	74.0	24.0	Р					
7203.32	V	1.00	21.7	24.8	46.5	54.0	7.5	Α					
9604.36	Н	1.00	22.2	25.1	47.3	74.0	26.7	Р					
9604.36	П		16.8	25.1	41.9	54.0	12.1	Α					
9604.36	V	1.00	22.3	25.1	47.4	74.0	26.6	Р					
9604.36	V	1.00	19.1	25.1	44.2	54.0	9.8	Α					
12005.50													
14406.24													
16807.88													
19208.72													
21609.96													
24011.40													

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

- 2. Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.
- 4. The test limit distance is 3m limit

			C	hannel Mid				
Maximum		F	olarity and L	evel		Limit	Margin	Mark
Frequency (MHz)	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m	(dBµV/m)	(dBµV/m)	(P/Q/A)
4880.14	Н	1.00	24.2	24.3	48.5	74.0	25.5	Р
4000.14	11	1.00	19.1	24.3	43.4	54.0	10.6	Α
4880.14	V	1.00	24.6	24.3	48.9	74.0	25.1	Р
4000.14	V	1.00	20.4	24.3	44.7	54.0	9.3	Α
7320.21	Н	1.00	25.8	24.8	50.6	74.0	23.4	Р
7320.21		11 1.00	19.3	24.8	44.1	54.0	9.9	Α
7320.21 V	V	1.00	26.3	24.8	51.1	74.0	22.9	Р
7320.21	V	1.00	22.7	24.8	47.5	54.0	6.5	Α
9760.28	Н	1.00	18.7	25.0	43.7	74.0	30.3	Р
9700.28	11		18.8	25.0	53.8	54.0	10.2	Α
9760.28	V	1.00	19.3	25.0	44.3	74.0	29.7	Р
9700.20	V	1.00	16.9	25.0	41.9	54.0	12.1	Α
12200.35								
14640.42								
17080.49								
19520.56								
21960.63								
24400.70								

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

- 2. Data of measurement within this frequency range shown " -" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.
- 4. The test limit distance is 3m limit

	Channel High												
Maximum		F	olarity and L	evel		Limit	Margin	Mark					
Frequency (MHz)	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m	(dBµV/m)	(dBµV/m)	(P/Q/A)					
4958.30	Н	1.00	25.2	24.0	49.2	74.0	24.8	Р					
4930.30	11	1.00	21.8	24.0	45.8	54.0	8.2	Α					
4958.30	V	1.00	25.7	24.0	49.7	74.0	24.3	Р					
4930.30	V	1.00	22.9	24.0	46.9	54.0	7.1	Α					
7437.45	Н	1.00	25.2	25.2	50.4	74.0	23.6	Р					
7437.43	11 11	1.00	19.1	25.2	44.3	54.0	9.7	Α					
7437.45	V	1.00	27.6	25.2	52.8	74.0	21.2	Р					
7437.43	45 V	1.00	20.1	25.2	45.3	54.0	8.7	Α					
9916.60	Н	1.00	18.5	24.9	43.4	74.0	30.6	Р					
9910.00	"	1.00	16.4	24.9	41.3	54.0	12.7	Α					
9916.60	V	1.00	22.4	24.9	47.3	74.0	26.7	Р					
9910.00	V	1.00	19.9	24.9	44.8	54.0	9.2	Α					
12395.75													
12395.75													
14874.90													
17354.05													
19833.20													
22312.35													


Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value


- 2. Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.
- 4. The test limit distance is 3m limit

# CONDUCTED TEST RESULT(1~7GHz)


# **Channel Low:**

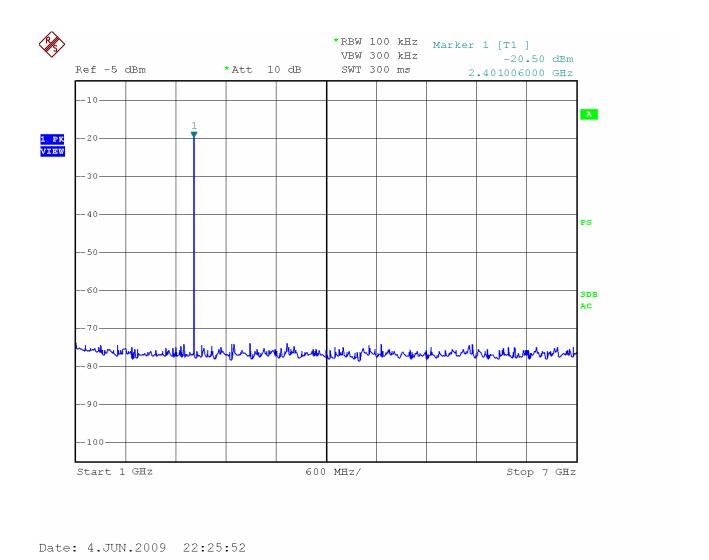

# **Channel Middle:**

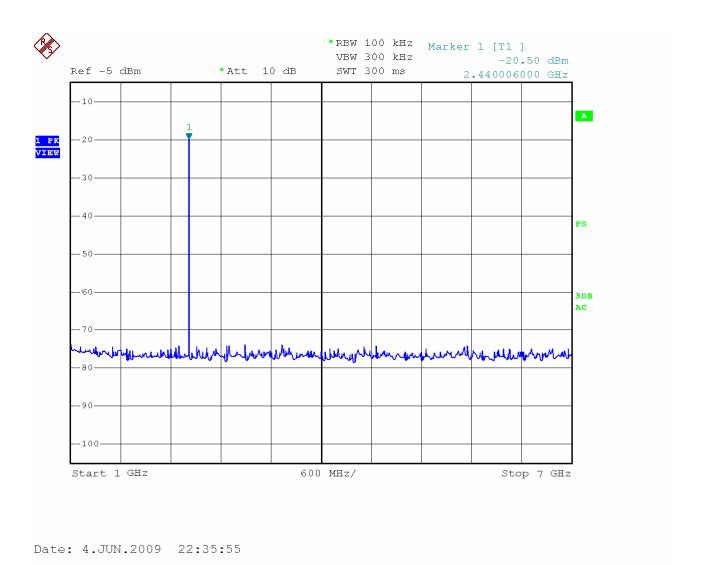


# Channel High:

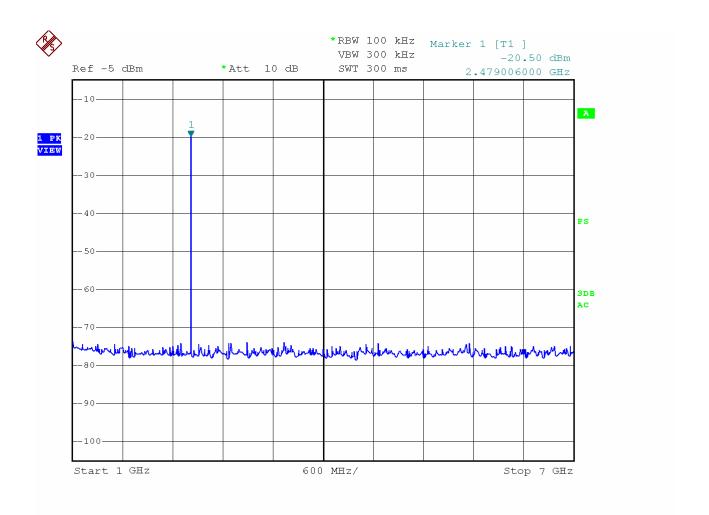

Date: 4.JUN.2009 22:30:54

# CONDUCTED TEST RESULT (7~26GHz)

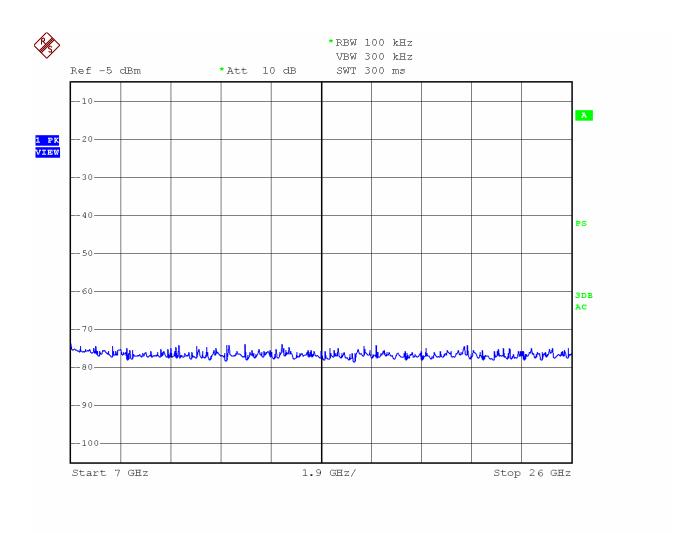


Date: 4.JUN.2009 23:30:34

# 13. Test of Peak Power Spectral Density

# 13.1 Applicable Standard

According to § 15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

# 13.2 EUT Setup



# 13.3 Test Equipment List and Details

See section 2.4.

# 13.4 Test Procedure


- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 300KHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

# 13.5 Test Result


Temperature ( °C ) : 22~23	EUT: GPS-AV8OR-ACE
Humidity (%RH ): 50~54	M/N: 066-01209-0099
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode

СН	RF Power Density Reading (dBm)	Cable loss (dB)	RF Power Density Level (dBm)	Maximum Limit (dBm)
Low	-32.00	1.20	-30.80	8
Mid	-31.88	1.20	-30.68	8
High	-32.09	1.20	-30.89	8


# **Channel Low:**

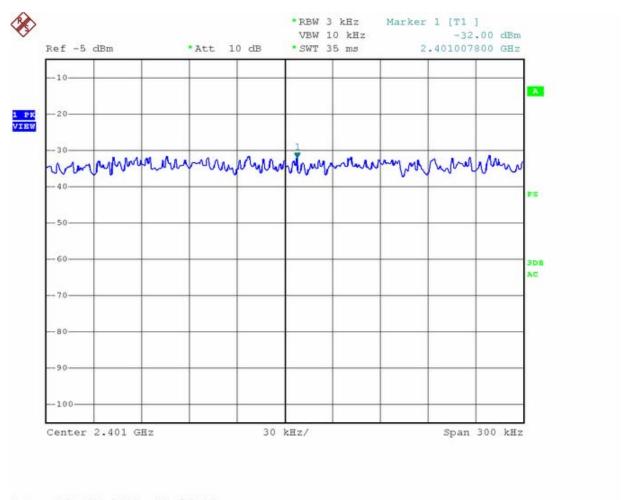

# Channel Mid:

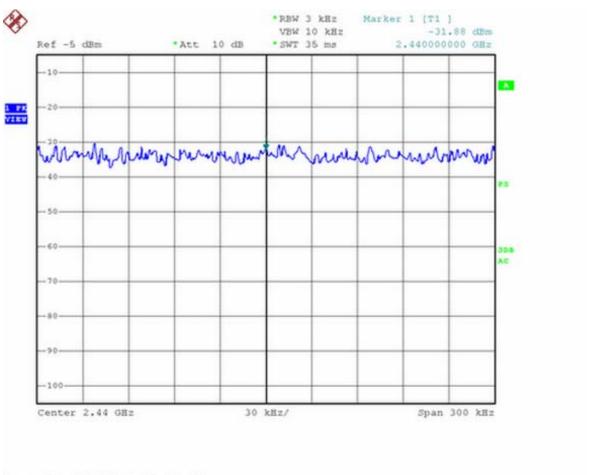

# Channel High:

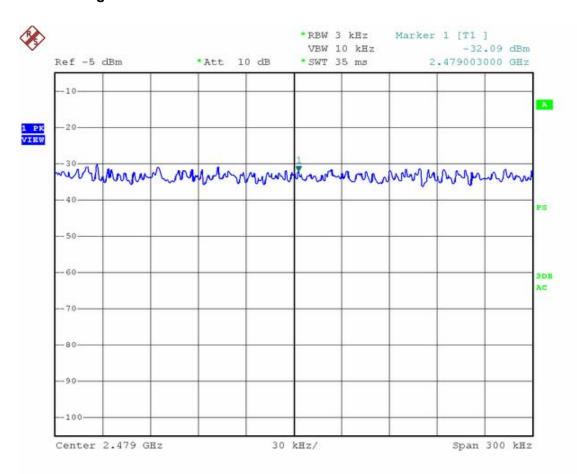

Date: 10.JUN.2009 14:57:25

# 14. RF EXPOSURE

# 14.1 Applicable Standard

According to § 15.247(b)(4) and § 1.1307(b)(1), systems operating under the provisions of this sec-tion shall be operated in a manner that ensure that the public is not exposed to radio frequency en-ergy level in excess of the Commission's guideline.

# 14.2 Test Result

This is a portable device and the Max peak output power is –19.78dBm (0.0105mW) lower than low threshold 60/fGHz mW (24.896mW), d<2.5cm in general population category. So the SAR measurement is not necessary.