



MEASUREMENT REPORT

FCC ID : XBG-APC-15WR2

APPLICANT : AVALUE TECHNOLOGY INCORPORATION

Application Type : Certification

Product : Panel PC

Model No. : APC-15WR2

Serial Model No. : APC-15WR2XXXXXXXXXX(where "X" may be any alphanumeric character, blank or "-")

Brand Name : AVALUE

FCC Classification : (DTS) Digital Transmission System

FCC Rule Part(s) : Part 15.247

Test Procedure(s) : ANSI C63.10-2013

Received Date : May 6, 2024

Test Date : June 17, 2024 ~ July 3, 2024

Test By : Owen Tsai
(Owen Tsai)

Reviewed By : Paddy Chen
(Paddy Chen)

Approved By : Chenz Ker
(Chenz Ker)



The test results only relate to the tested samples.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10 Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2405TW3101-U3	1.0	Original Report	2024-09-13	

CONTENTS

Description	Page
General Information.....	5
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Working Frequencies for this Report	8
2.3. Test Mode	10
2.4. Test Software	10
2.5. Test Configuration	11
2.6. Test System Details	13
2.7. EMI Suppression Device(s)/Modifications	13
2.8. Labeling Requirements	13
3. DESCRIPTION of TEST.....	14
3.1. Evaluation Procedure	14
3.2. AC Line Conducted Emissions	14
3.3. Radiated Emissions	15
4. ANTENNA REQUIREMENTS.....	16
5. TEST EQUIPMENT CALIBRATION DATE.....	17
6. MEASUREMENT UNCERTAINTY.....	18
7. TEST RESULT	19
7.1. Summary.....	19
7.2. 6dB Bandwidth Measurement	20
7.2.1. Test Limit.....	20
7.2.2. Test Procedure used	20
7.2.3. Test Setting	20
7.2.4. Test Setup	20
7.2.5. Test Result	21
7.3. Output Power Measurement.....	24
7.3.1. Test Limit.....	24
7.3.2. Test Procedure Used.....	24
7.3.3. Test Setting	24
7.3.4. Test Setup	24
7.3.5. Test Result of Output Power	25
7.4. Power Spectral Density Measurement	26
7.4.1. Test Limit.....	26
7.4.2. Test Procedure Used.....	26
7.4.3. Test Setting	26
7.4.4. Test Setup	26
7.4.5. Test Result	27

7.5.	Out-of-Band Spurious Emissions Measurement	32
7.5.1.	Test Limit	32
7.5.2.	Test Procedure Used	32
7.5.3.	Test Setting	32
7.5.4.	Test Setup	32
7.5.5.	Test Result	33
7.6.	Radiated Spurious Emission Measurement	43
7.6.1.	Test Limit	43
7.6.2.	Test Procedure Used	43
7.6.3.	Test Setting	43
7.6.4.	Test Setup	45
7.6.5.	Test Result	47
7.7.	Radiated Restricted Band Edge Measurement	75
7.7.1.	Test Limit	75
7.7.2.	Test Procedure Used	75
7.7.3.	Test Setting	75
7.7.4.	Test Setup	77
7.7.5.	Test Result	78
7.8.	AC Conducted Emissions Measurement	110
7.8.1.	Test Limit	110
7.8.2.	Test Setup	110
7.8.3.	Test Result	111
8.	CONCLUSION	115
	Appendix A : Test Photograph	116
	Appendix B : External Photograph	116
	Appendix C : Internal Photograph	116

General Information

Applicant	AVALUE TECHNOLOGY INCORPORATION
Applicant Address	7F, 228, Lian-cheng Road, Zhonghe Dist., New Taipei City 235, Taiwan
Manufacturer	AVALUE TECHNOLOGY INCORPORATION
Manufacturer Address	7F, 228, Lian-cheng Road, Zhonghe Dist., New Taipei City 235, Taiwan
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.247
Test Device Serial No.:	#1-1 ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

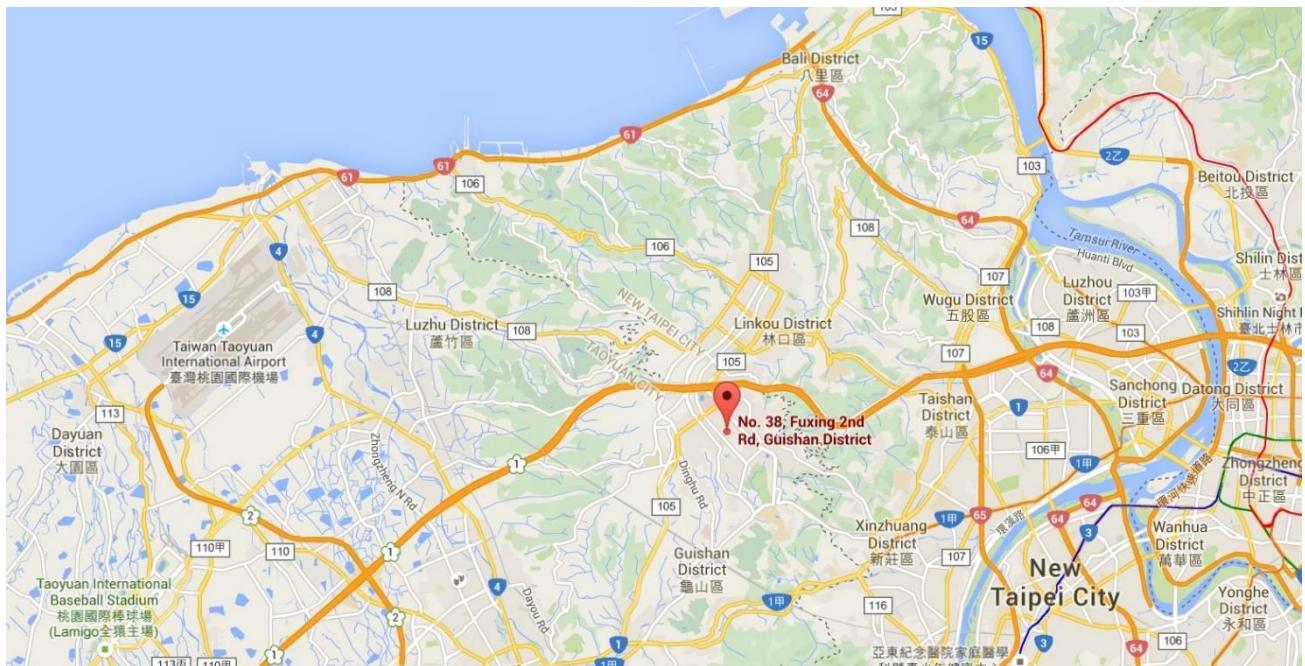

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Panel PC
Model No.	APC-15WR2
Serial Model No.	APC-15WR2XXXXXXXXXX(where "X" may be any alphanumeric character, blank or "-")
Brand Name	AVALUE
Supports Radios Spec.	WPAN: Bluetooth V5.1 WLAN: 2.4G: 802.11b/g/n-20/n-40 5G: 802.11a/n-20/ac-20/n-40/ac-40/ac-80, Band 1,4
Wi-Fi Specification	802.11 b/g/n (2TX / 2RX)
Frequency Range	2.4GHz: For 802.11b/g/n-20M: 2412 ~ 2462 MHz For 802.11n-40M: 2422 ~ 2452 MHz
Type of Modulation	802.11b: DSSS, DBPSK, DQPSK, CCK 802.11g/n-20M/n-40M: OFDM, BPSK, QPSK, 16QAM, 64QAM
Accessory	
Power Adapter	Brand: FSP Model No: FSP060-DHAN3 Input: AC 100-240V~1.8A, 50-60Hz Output: DC 12.0V, 5.0A 60.0W Cable Out: Non-shielding, 1.5m with Core*1

Note:

1. Model Difference: The difference of models only for marketing different, the other hardware was the same. (declared by the manufacturer)
2. The test was performed base on APC-15WR2.

2.2. Working Frequencies for this Report

802.11b/g/n-20M

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

Duty Cycle

Test Mode	Duty Cycle
802.11b	98.99%
802.11g	94.86%
802.11 n-HT20	94.38%
802.11 n-HT40	89.97%



2.3. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n-20M
	Mode 4: Transmit by 802.11n-40M
	Mode 5: Transmit by 802.11b (By PoE)

Note :


1. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
2. mode5 only tested for RE 30MHz-1GHz.

2.4. Test Software


The test utility software used during testing was “adb.exe”.

2.5. Test Configuration

This device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

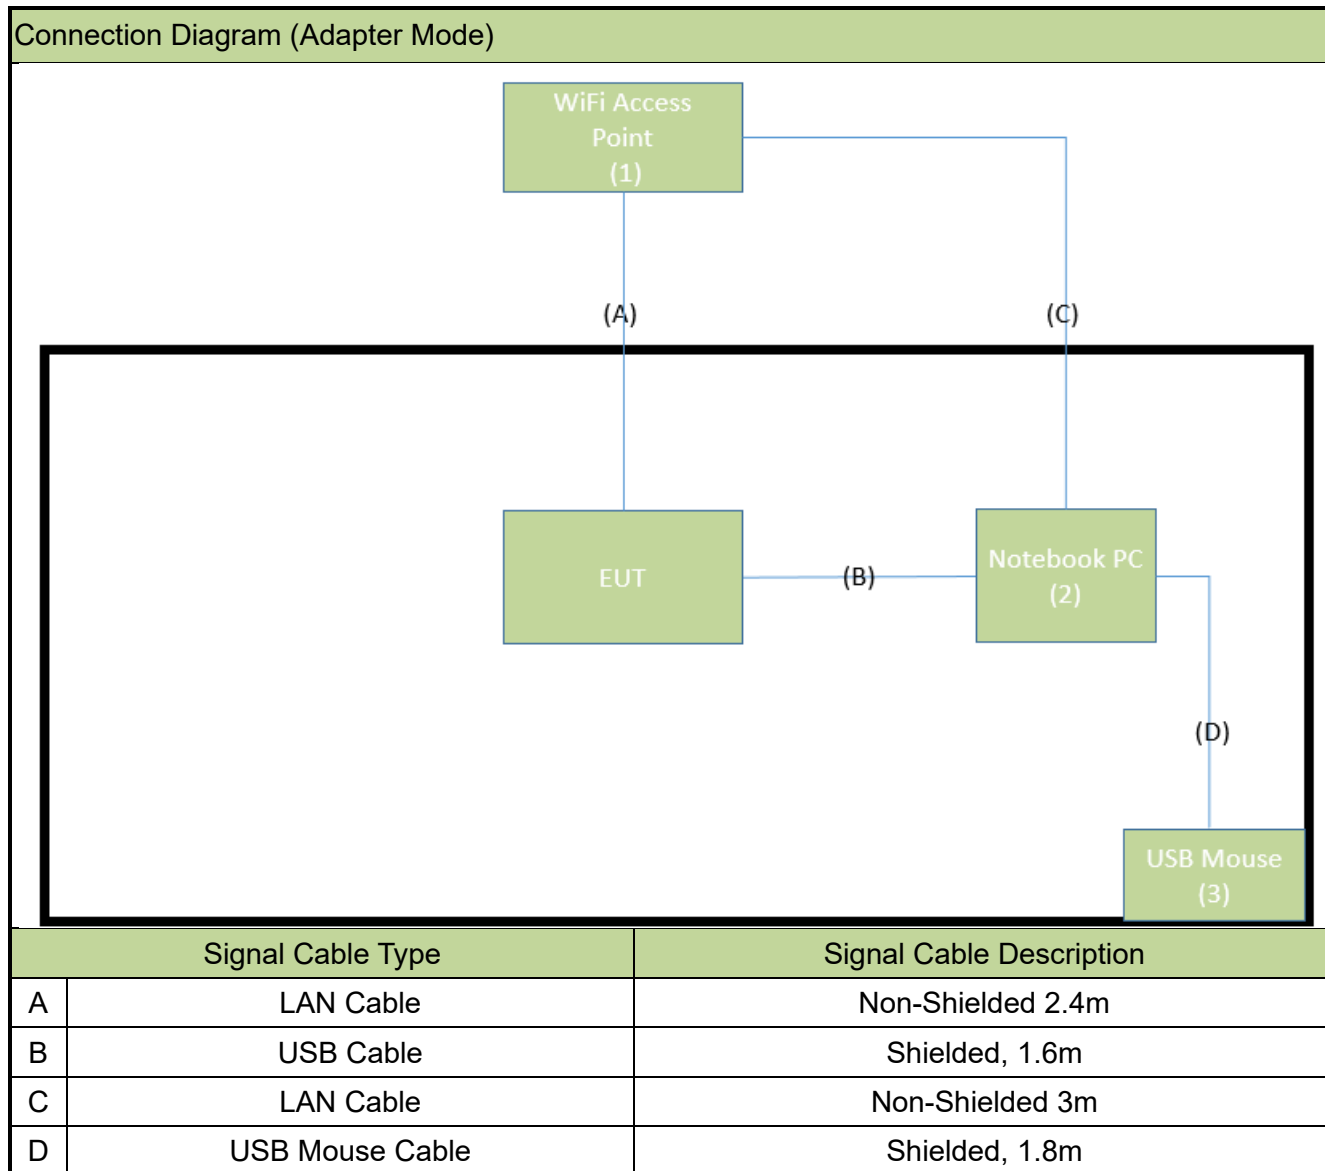

Connection Diagram (PoE Mode)

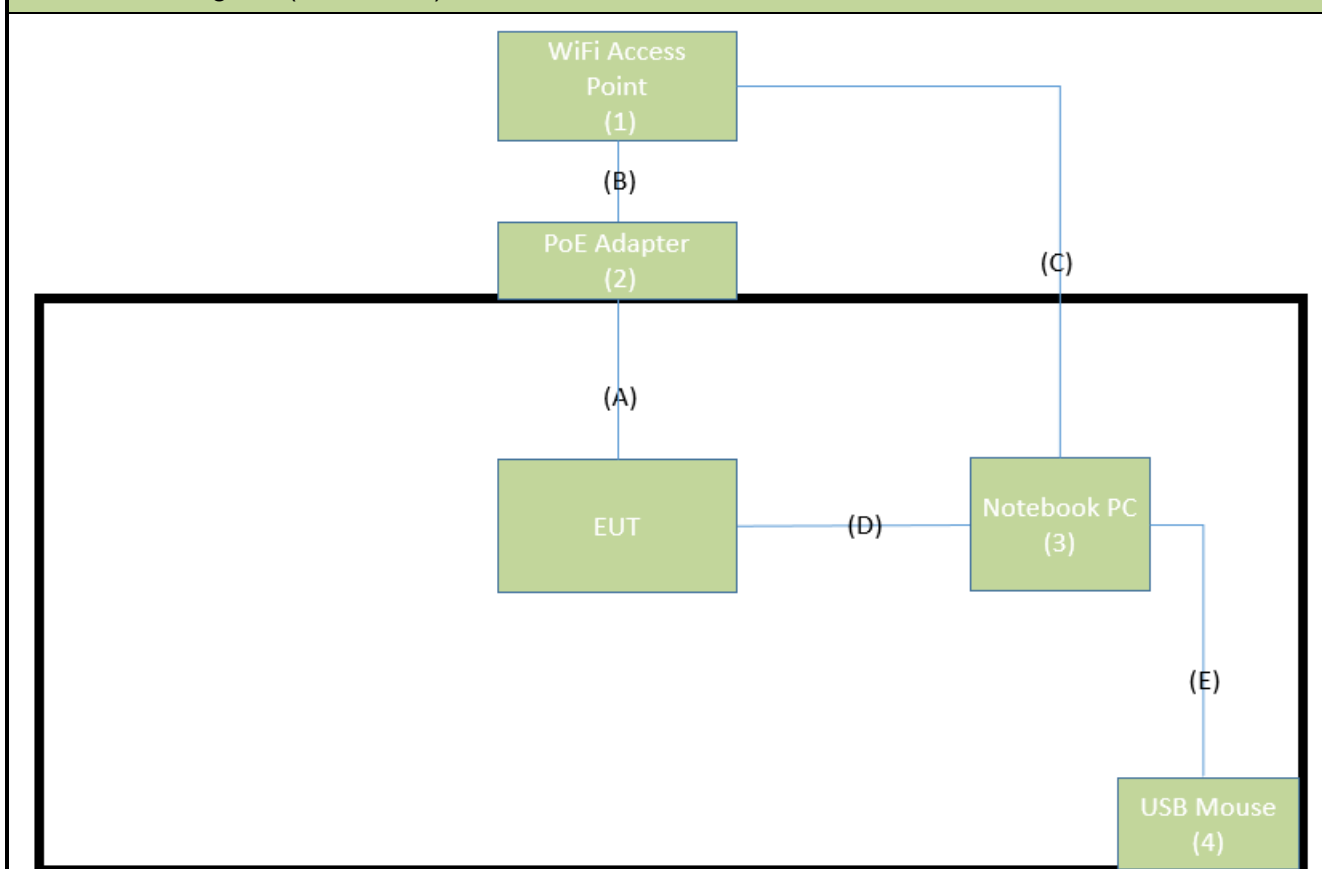

Signal Cable Type		Signal Cable Description
A	LAN Cable	Non-Shielded 2.4m
B	LAN Cable	Non-Shielded 3m
C	LAN Cable	Non-Shielded 3m
D	USB Cable	Shielded, 1.6m
E	USB Mouse Cable	Shielded, 1.8m

2.6. Test System Details

The types for all equipment, and descriptions of all cables used in the tested system (including inserted cards) are:

Adapter Mode:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	WiFi Access Point	D-LINK	DIR-612	N/A	Non-shielded, 1.5m
2	Notebook PC	Lenovo	V14 G3 ABA	N/A	Non-shielded, 0.8m
3	USB Mouse	Logitech	M90	N/A	N/A

PoE Mode:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	WiFi Access Point	D-LINK	DIR-612	N/A	Non-shielded, 1.5m
2	PoE Adapter	EUSSO	UPE5600-IHGE	N/A	Non-shielded, 1.8m
3	Notebook PC	Lenovo	V14 G3 ABA	N/A	Non-shielded, 0.8m
4	USB Mouse	Logitech	M90	N/A	N/A

2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.8. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v05 were used in the measurement of the device.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

Radiated emissions test results are shown in Section 7.6 & 7.7 .

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Panel PC**, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

Antenna List

Antenna Type	Frequency	TX	Max Antenna	BF Directional	CDD Directional Gain (dBi)	
	Band (MHz)	Paths	Gain (dBi)	Gain (dBi)	For Power	For PSD
Wi-Fi External Antenna						
PCB Antenna	2412 ~ 2462	2	1.13	--	1.13	4.14
	5150 ~ 5250	2	1.09	--	1.09	4.10
	5725 ~ 5850	2	2.11	--	2.11	5.12

Note 1: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB;
- For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;

Note 2: All information declared by manufacturer.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2025/3/5
Cable	Rosnol	N1C50-RG400- B1C50-500CM	MRTTWE00013	1 year	2025/6/14
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2025/3/5

Radiated Emissions – AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2025/5/7
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2024/10/31
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2025/5/20
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2025/5/14
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2025/3/26
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2025/3/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2025/3/5
Signal Analyzer	R&S	FSVA3044	MRTTWA00092	1 year	2025/6/20
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2025/6/25
Cable	HUBERSUHNER	EMC105-NM- NM-3000	MRTTWE00035	1 year	2025/6/25
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00050	1 year	2025/6/2

Conducted Test Equipment – SR6

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2025/4/16
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2025/3/12
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2024/10/17
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2025/8/12
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00050	1 year	2025/6/2

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C}/ \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

Product Name: Panel PC
FCC Classification: (DTS) Digital Transmission System
Data Rate(s) Tested: 1Mbps ~ 11Mbps (b); 6Mbps ~ 54Mbps (g);
6.5/7.2Mbps ~ 130/144.4Mbps (n-20M);
13.5/15Mbps ~ 270/300Mbps (n-40M)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8.00\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Out-of-Band Emissions	Conducted $\geq 20\text{dBc}$		Pass	Section 7.5
15.205 15.209	Spurious Emission	< FCC 15.209 limits	Radiated	Pass	Section 7.6
15.205 15.209	Band Edge Measurement	$\leq 74\text{dBuV/m(Peak)}$ $\leq 54\text{dBuV/m(Average)}$		Pass	Section 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

ANSI C63.10 - 2013 Section 11.8

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

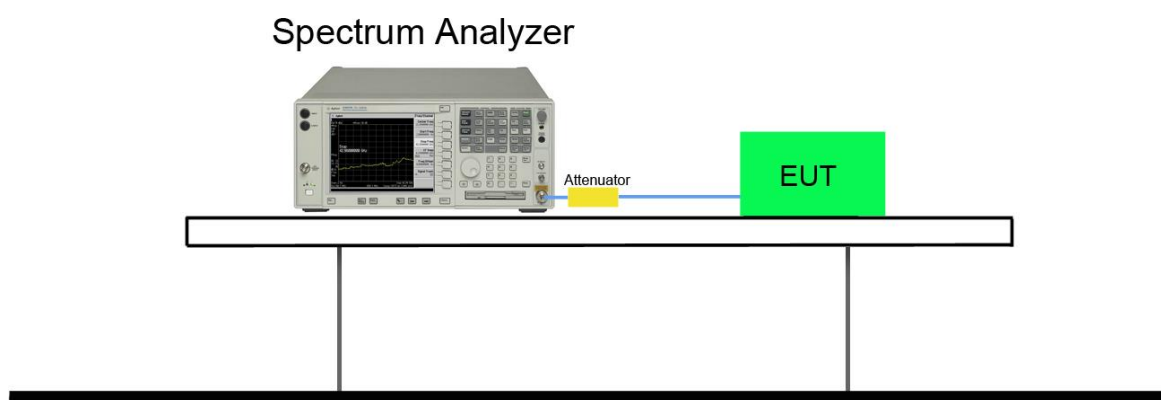


7.2.5. Test Result


Test Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
Ant 1						
802.11b	01	2412	10.06	13.483	≥ 0.5	Pass
802.11b	06	2437	10.09	13.502	≥ 0.5	Pass
802.11b	11	2462	10.04	13.445	≥ 0.5	Pass
802.11g	01	2412	16.39	16.437	≥ 0.5	Pass
802.11g	06	2437	16.41	16.443	≥ 0.5	Pass
802.11g	11	2462	16.40	16.442	≥ 0.5	Pass
802.11n-20M	01	2412	17.58	17.580	≥ 0.5	Pass
802.11n-20M	06	2437	17.59	17.585	≥ 0.5	Pass
802.11n-20M	11	2462	17.58	17.577	≥ 0.5	Pass
802.11n-40M	03	2422	36.28	36.061	≥ 0.5	Pass
802.11n-40M	06	2437	36.30	36.084	≥ 0.5	Pass
802.11n-40M	09	2452	36.30	36.062	≥ 0.5	Pass

Ant 1


802.11 b CH01 (2412MHz)

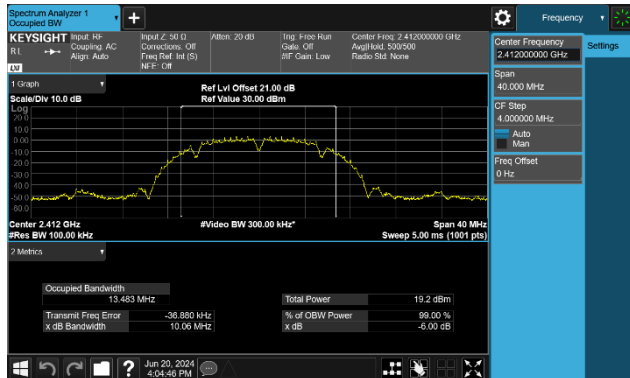


802.11 b CH06 (2437MHz)

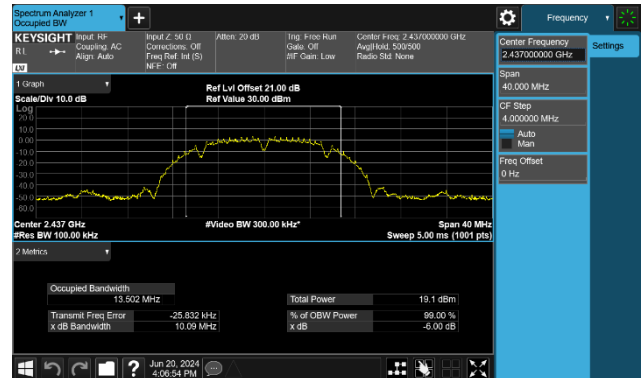


802.11 b CH11 (2462MHz)

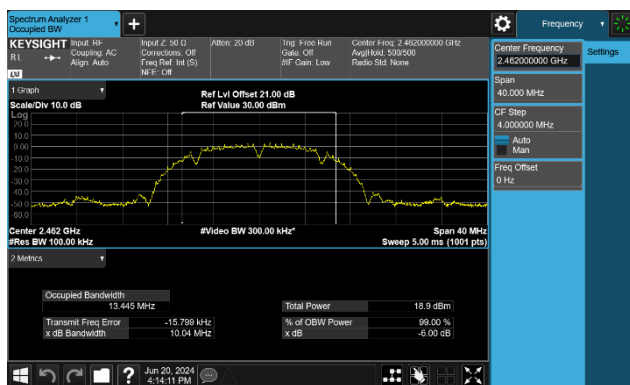


802.11 g CH01 (2412MHz)

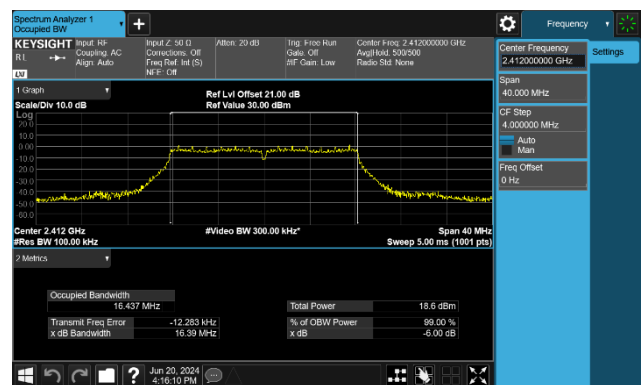


802.11 g CH06 (2437MHz)

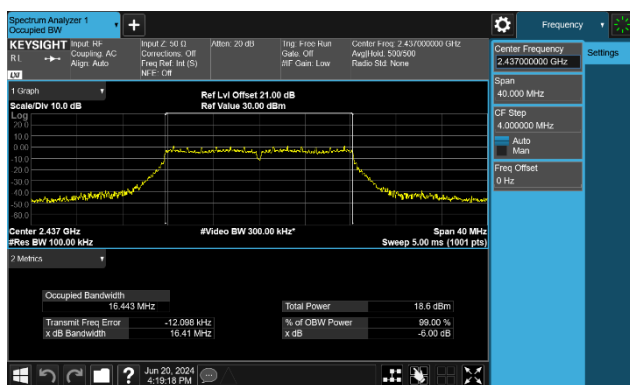


802.11 g CH11 (2462MHz)

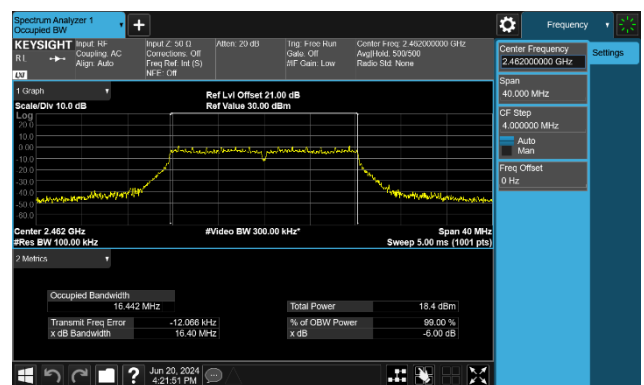


802.11 n-20M CH01 (2412MHz)

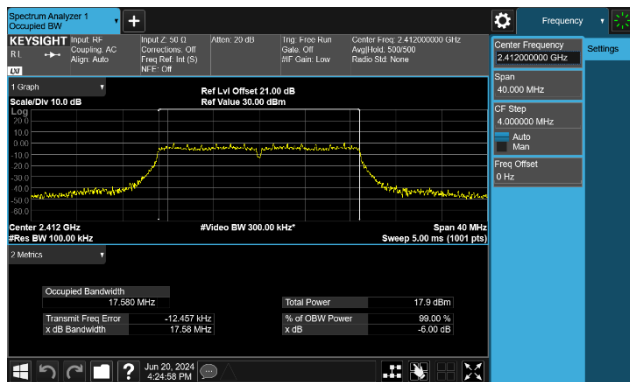


802.11 n-20M CH06 (2437MHz)

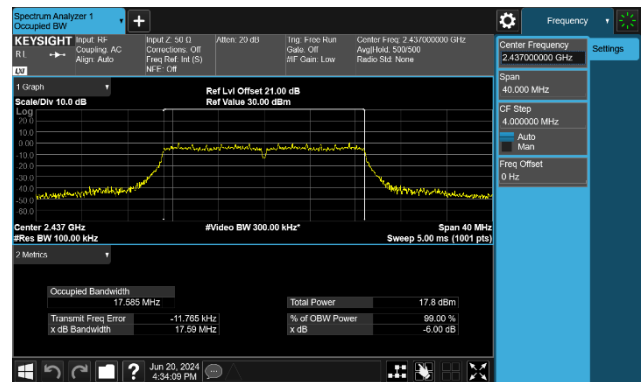


802.11 n-20M CH11 (2462MHz)

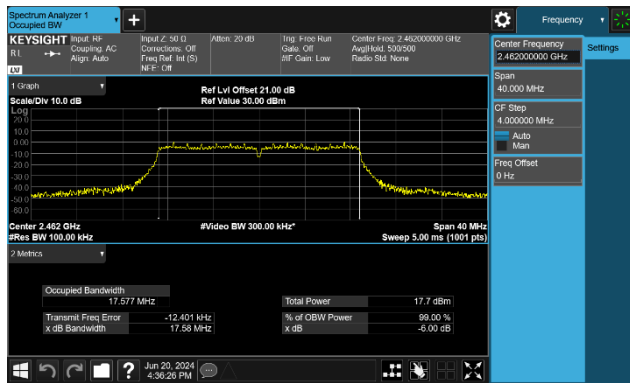


802.11 n-40M CH03 (2422MHz)

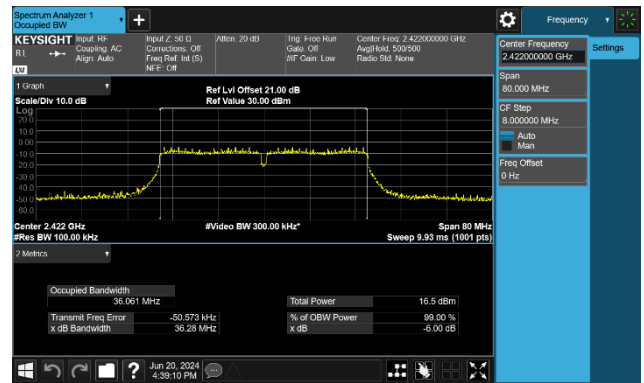

802.11 n-40M CH06 (2437MHz)

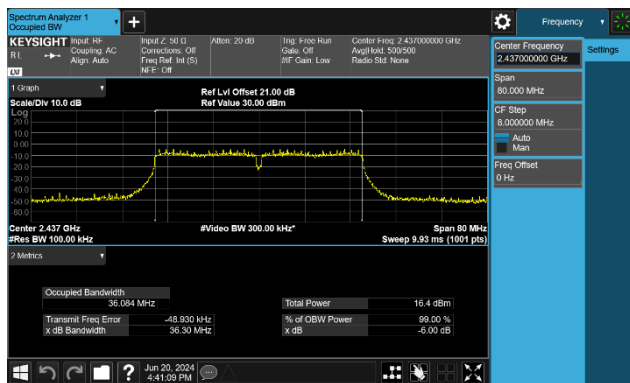

802.11 n-40M CH09 (2452MHz)

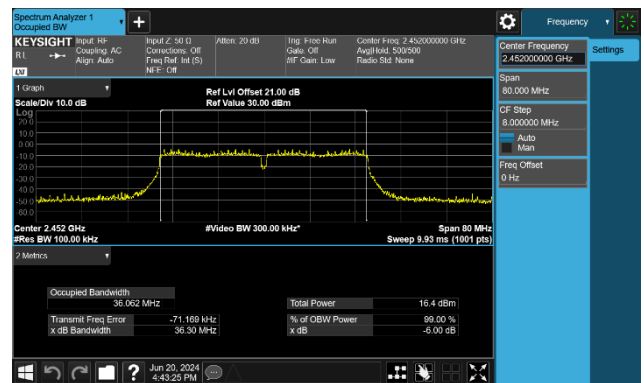

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.9.2.3.2

7.3.3. Test Setting


Peak Power Measurement

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4. Test Setup

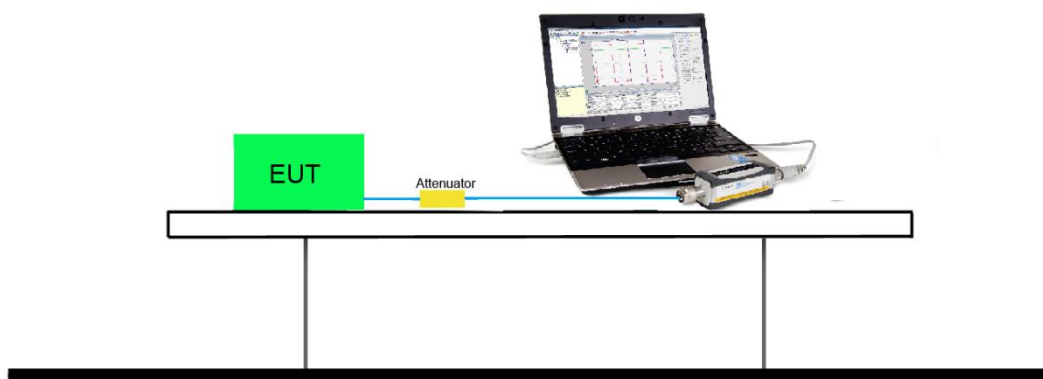

7.3.5. Test Result of Output Power

Model	Rate	Ch.	Freq. (MHz)	Ant 0 Average (dBm) [Report only]	Ant 1 Average (dBm) [Report only]	Total Average (dBm) [Report only]	Power Limit (dBm)
802.11b	1M	1	2412	14.75	14.94	17.86	30.00
	1M	6	2437	14.69	14.91	17.81	30.00
	1M	11	2462	14.57	14.80	17.70	30.00
802.11g	6M	1	2412	14.31	14.44	17.39	30.00
	6M	6	2437	14.19	14.42	17.32	30.00
	6M	11	2462	14.06	14.30	17.19	30.00
802.11n- HT20	MCS0	1	2412	13.58	13.77	16.69	30.00
	MCS0	6	2437	13.51	13.72	16.63	30.00
	MCS0	11	2462	13.39	13.65	16.53	30.00
802.11n- HT40	MCS0	3	2422	12.27	12.44	15.37	30.00
	MCS0	6	2437	12.15	12.40	15.29	30.00
	MCS0	9	2452	12.19	12.32	15.27	30.00

Model	Rate	Ch.	Freq. (MHz)	Ant 0 Peak (dBm)	Ant 1 Peak (dBm)	Total Peak (dBm)	Power Limit (dBm)
802.11b	1M	1	2412	17.12	17.26	20.20	30.00
	1M	6	2437	17.03	17.25	20.15	30.00
	1M	11	2462	16.95	17.12	20.05	30.00
802.11g	6M	1	2412	22.95	23.04	26.01	30.00
	6M	6	2437	22.88	23.07	25.99	30.00
	6M	11	2462	22.60	22.86	25.74	30.00
802.11n- HT20	MCS0	1	2412	22.71	22.94	25.84	30.00
	MCS0	6	2437	22.70	22.87	25.80	30.00
	MCS0	11	2462	22.63	22.83	25.74	30.00
802.11n- HT40	MCS0	3	2422	21.04	21.19	24.13	30.00
	MCS0	6	2437	20.73	21.03	23.89	30.00
	MCS0	9	2452	21.08	21.06	24.08	30.00

Note: The Total Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Power} / 10)} + 10^{(\text{Ant 1 Power} / 10)}\}$.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2. Test Procedure Used


ANSI C63.10 - 2013 Section 11.10.5

7.4.3. Test Setting

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: 3 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

7.4.4. Test Setup

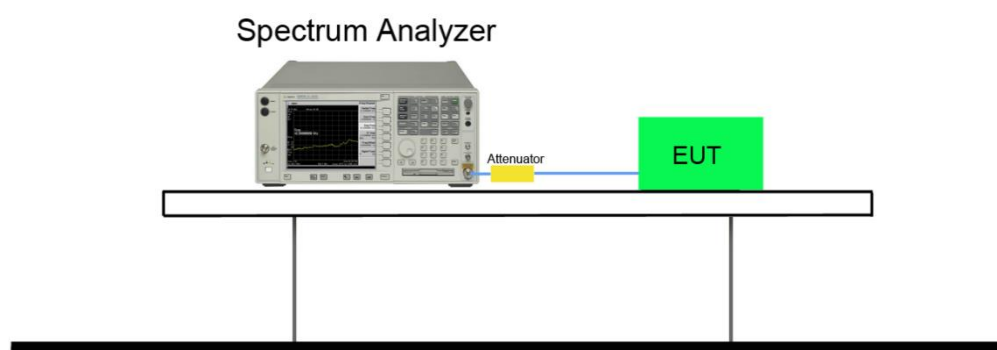

7.4.5. Test Result

Test Mode	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm)	Ant 1 PSD (dBm)	Ant 0+1 PSD (dBm)	Limit (dBm)	Result
802.11b	1	2412	-4.84	-4.68	-1.749	≤ 8	Pass
	6	2437	-4.89	-4.89	-1.880	≤ 8	Pass
	11	2462	-5.04	-4.81	-1.913	≤ 8	Pass
802.11g	1	2412	-11.40	-11.45	-8.415	≤ 8	Pass
	6	2437	-12.01	-10.93	-8.426	≤ 8	Pass
	11	2462	-11.41	-11.20	-8.293	≤ 8	Pass
802.11n-HT20	1	2412	-10.82	-12.34	-8.504	≤ 8	Pass
	6	2437	-11.66	-10.65	-8.115	≤ 8	Pass
	11	2462	-12.43	-10.88	-8.576	≤ 8	Pass
802.11n-HT40	3	2422	-15.47	-15.00	-12.218	≤ 8	Pass
	6	2437	-14.96	-15.03	-11.985	≤ 8	Pass
	9	2452	-15.40	-14.85	-12.106	≤ 8	Pass

Note 1: Total PSD = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$.

Ant 0


802.11 b CH01 (2412MHz)




802.11 b CH06 (2437MHz)




802.11 b CH11 (2462MHz)

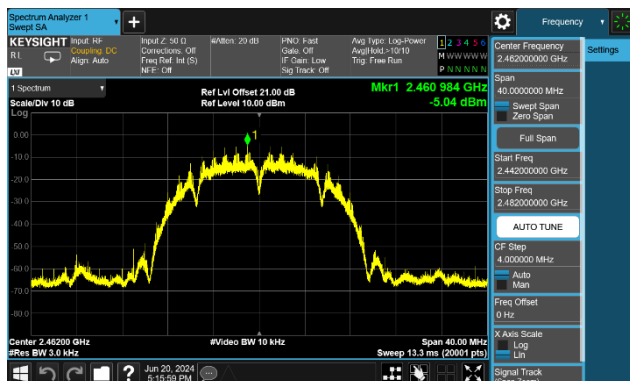


802.11 g CH01 (2412MHz)

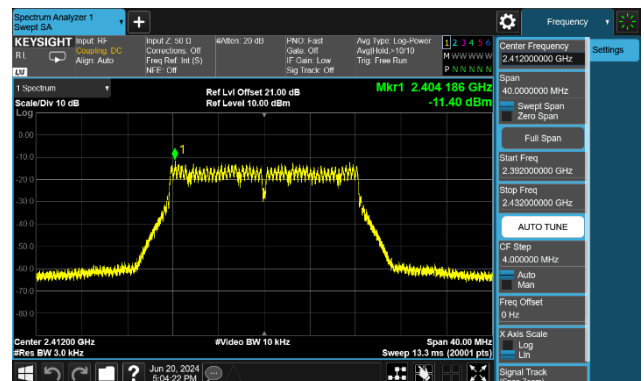


802.11 g CH06 (2437MHz)

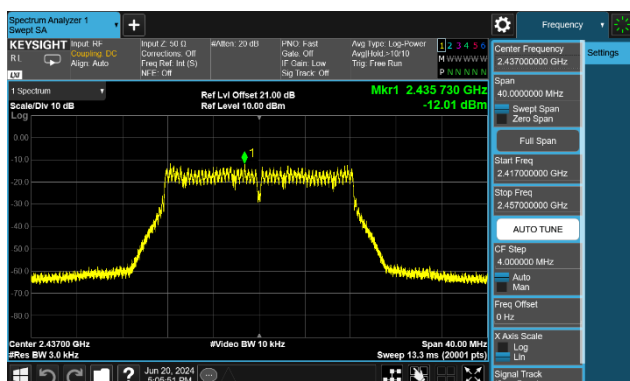


802.11 g CH11 (2462MHz)

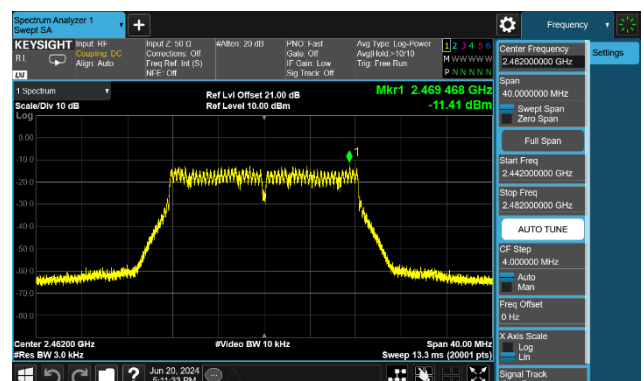


802.11 n-20M CH01 (2412MHz)

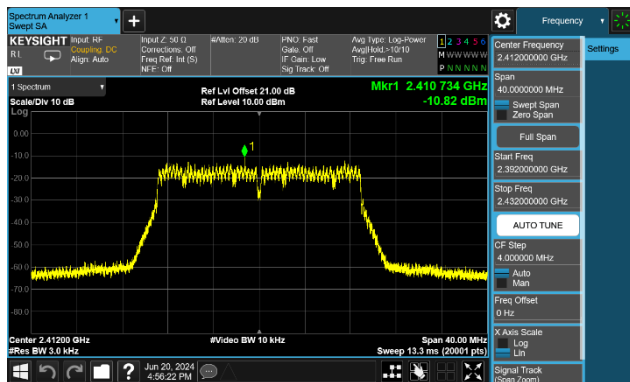


802.11 n-20M CH06 (2437MHz)

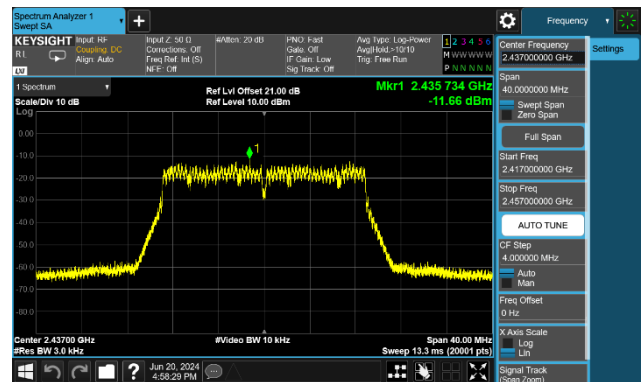


802.11 n-20M CH11 (2462MHz)

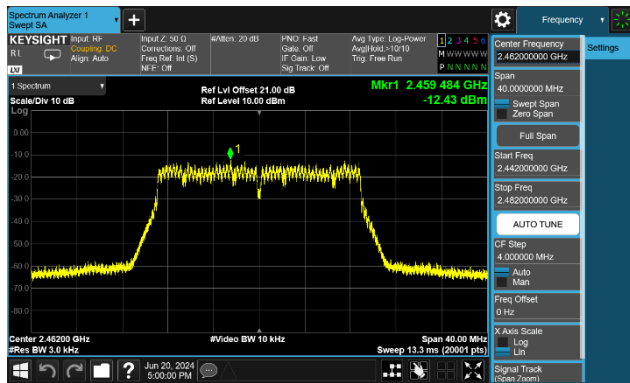


802.11 n-40M CH03 (2422MHz)

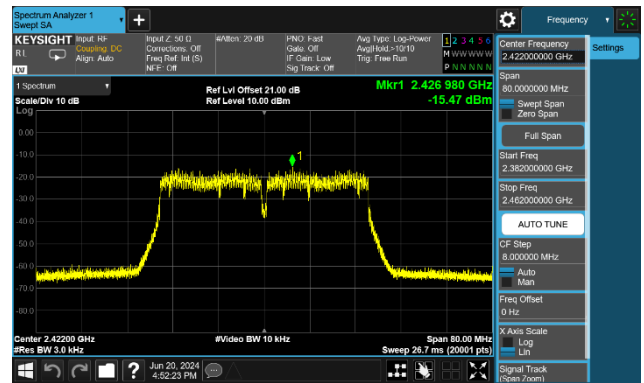

802.11 n-40M CH06 (2437MHz)

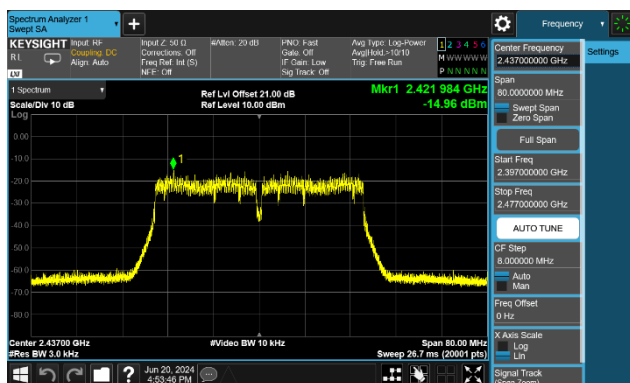

802.11 n-40M CH09 (2452MHz)

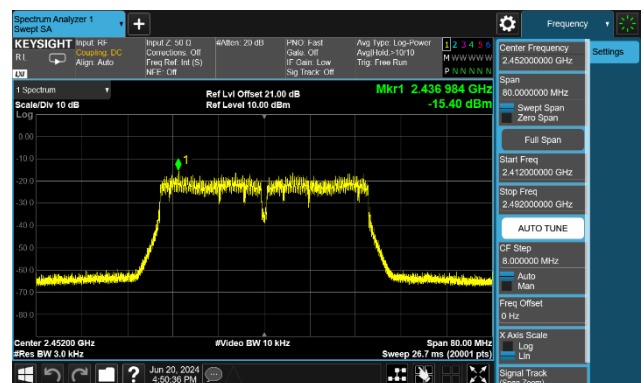

Ant 1

802.11 b CH01 (2412MHz)




802.11 b CH06 (2437MHz)




802.11 b CH11 (2462MHz)




802.11 g CH01 (2412MHz)

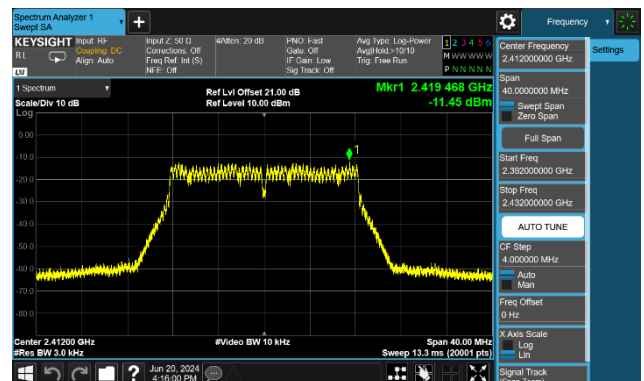


802.11 g CH06 (2437MHz)

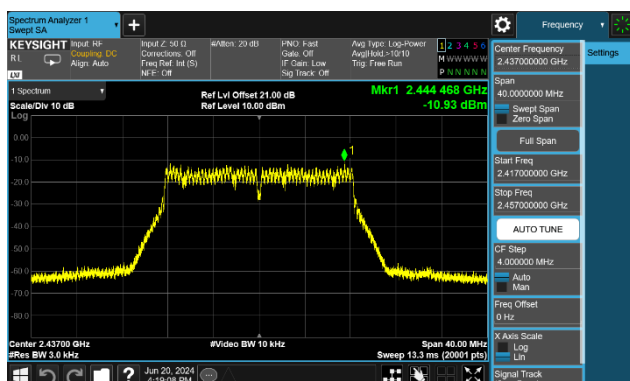


802.11 g CH11 (2462MHz)

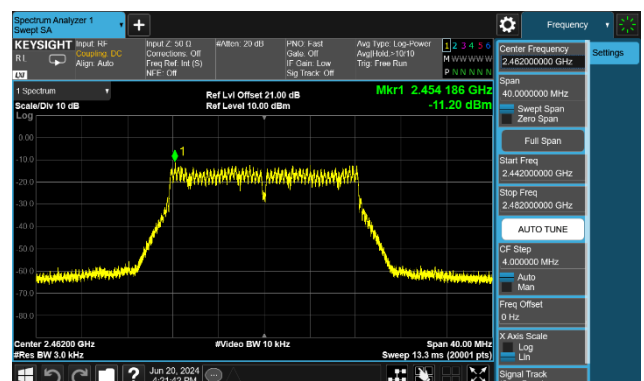


802.11 n-20M CH01 (2412MHz)

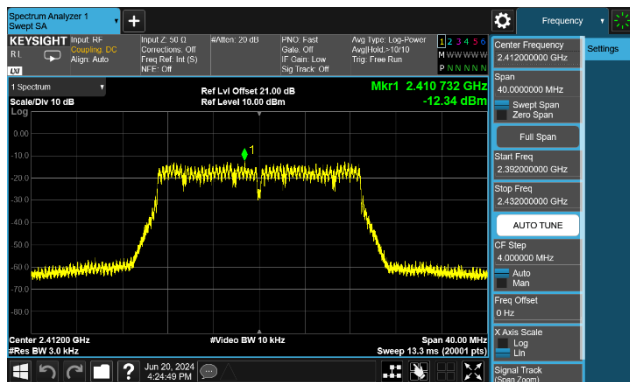


802.11 n-20M CH06 (2437MHz)

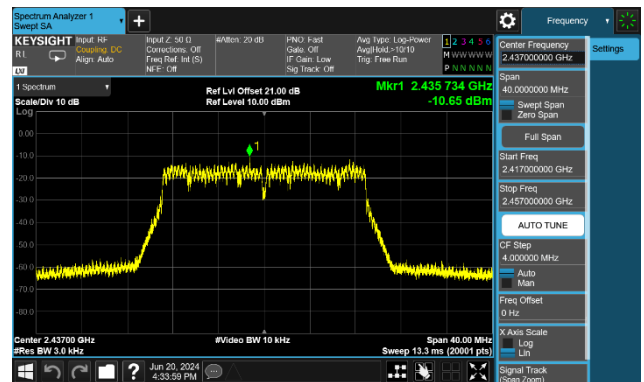


802.11 n-20M CH11 (2462MHz)

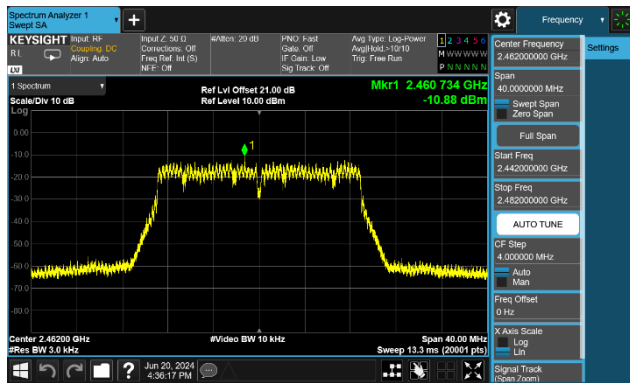


802.11 n-40M CH03 (2422MHz)

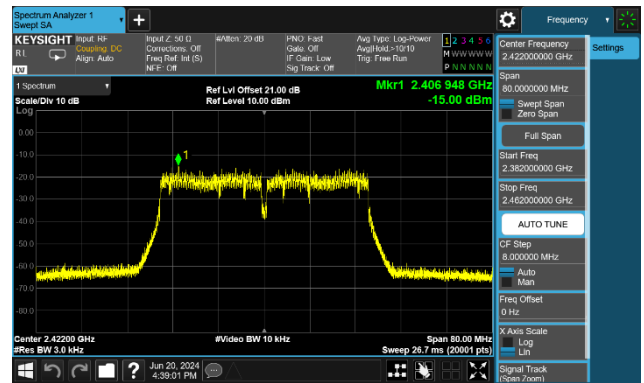

802.11 n-40M CH06 (2437MHz)

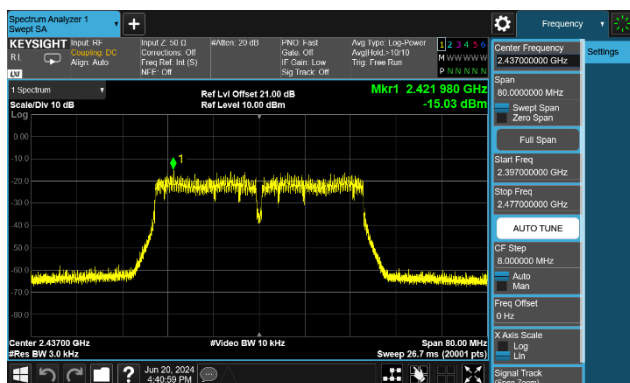

802.11 n-40M CH09 (2452MHz)

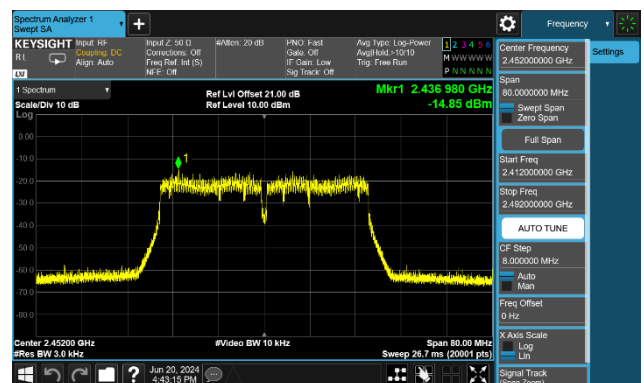

7.5. Out-of-Band Spurious Emissions Measurement

7.5.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 Db below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


7.5.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.11

7.5.3. Test Setting

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to ≥ 1.5 times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW $\geq 3 \times$ RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

7.5.4. Test Setup

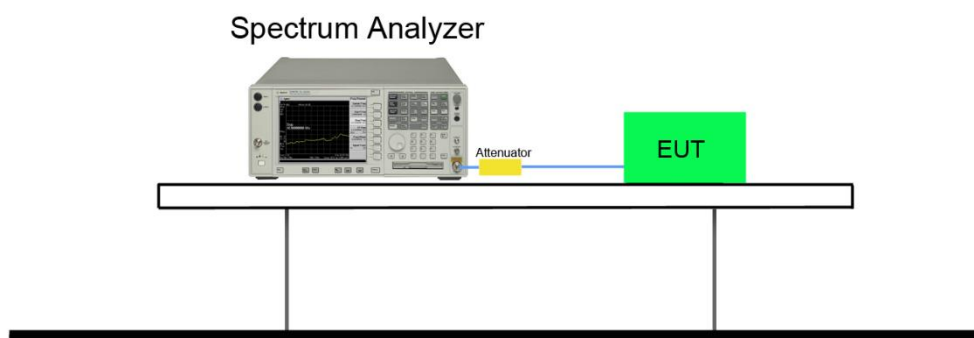


7.5.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Limit	Result
Ant 0				
802.11b	01	2412	20dBc	Pass
802.11b	06	2437	20dBc	Pass
802.11b	11	2462	20dBc	Pass
802.11g	01	2412	20dBc	Pass
802.11g	06	2437	20dBc	Pass
802.11g	11	2462	20dBc	Pass
802.11n-20M	01	2412	20dBc	Pass
802.11n-20M	06	2437	20dBc	Pass
802.11n-20M	11	2462	20dBc	Pass
802.11n-40M	03	2422	20dBc	Pass
802.11n-40M	06	2437	20dBc	Pass
802.11n-40M	09	2452	20dBc	Pass


Test Mode	Channel No.	Frequency (MHz)	Limit	Result
Ant 1				
802.11b	01	2412	20dBc	Pass
802.11b	06	2437	20dBc	Pass
802.11b	11	2462	20dBc	Pass
802.11g	01	2412	20dBc	Pass
802.11g	06	2437	20dBc	Pass
802.11g	11	2462	20dBc	Pass
802.11n-20M	01	2412	20dBc	Pass
802.11n-20M	06	2437	20dBc	Pass
802.11n-20M	11	2462	20dBc	Pass
802.11n-40M	03	2422	20dBc	Pass
802.11n-40M	06	2437	20dBc	Pass
802.11n-40M	09	2452	20dBc	Pass

Ant 0


802.11 b CH01 (2412MHz)

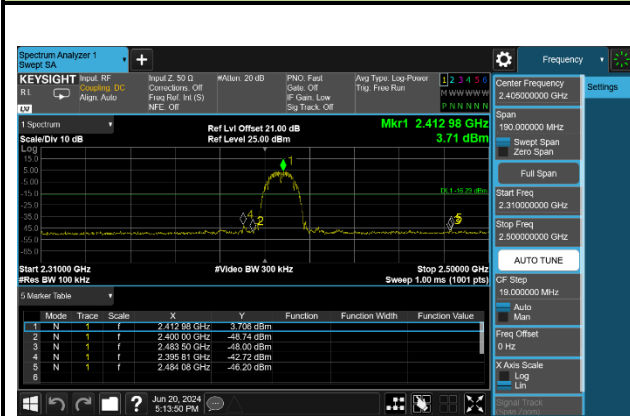


802.11 b CH01 (2412MHz)

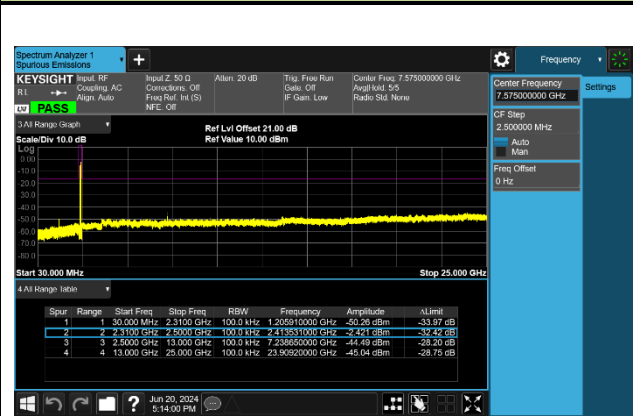


802.11 b CH06 (2437MHz)

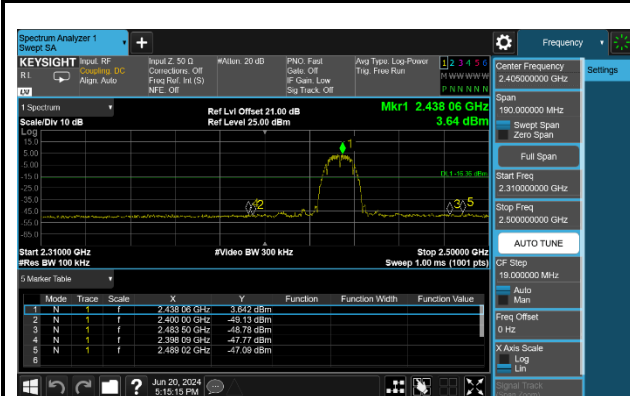


802.11 b CH06 (2437MHz)

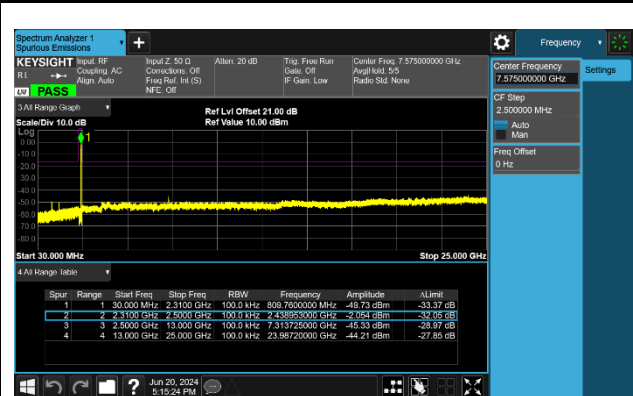

802.11 b CH11 (2462MHz)

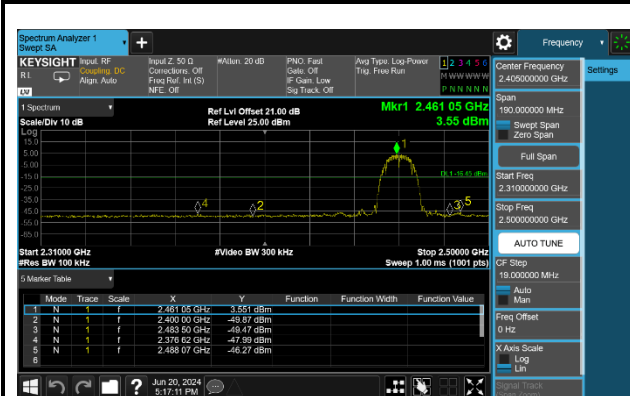


802.11 b CH11 (2462MHz)

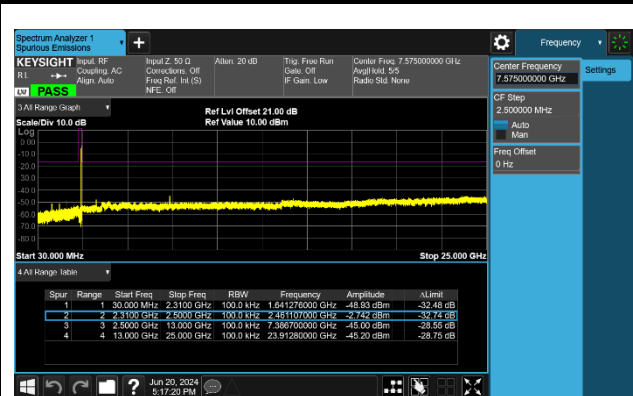


802.11 g CH01 (2412MHz)




802.11 g CH01 (2412MHz)

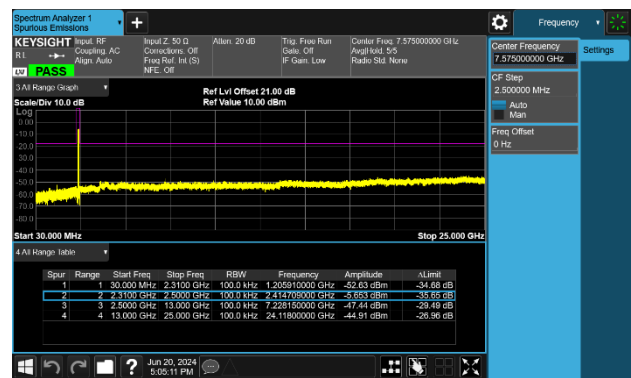


802.11 g CH06 (2437MHz)

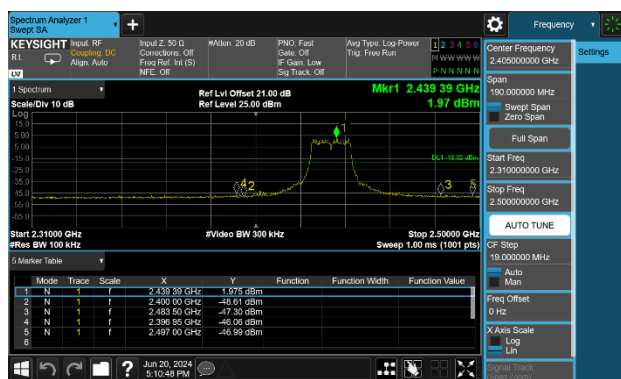


802.11 g CH06 (2437MHz)

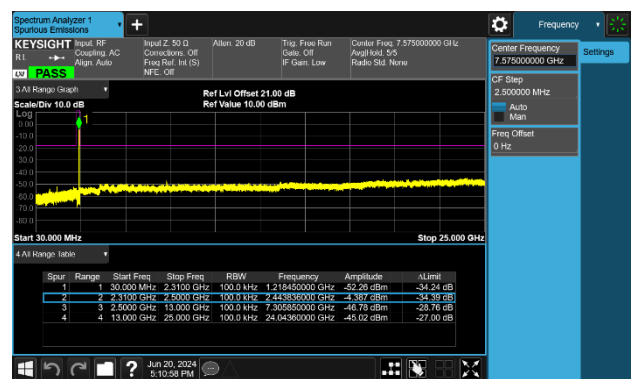


802.11 g CH11 (2462MHz)

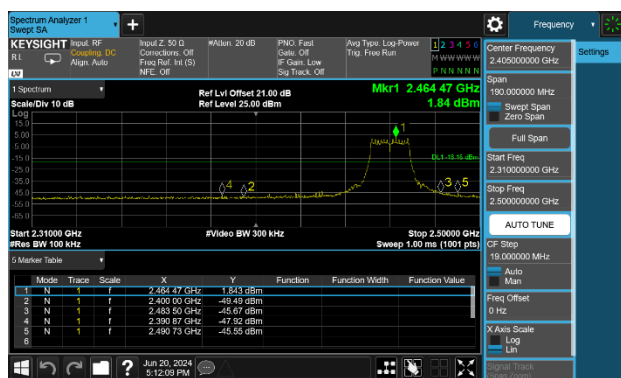


802.11 g CH11 (2462MHz)

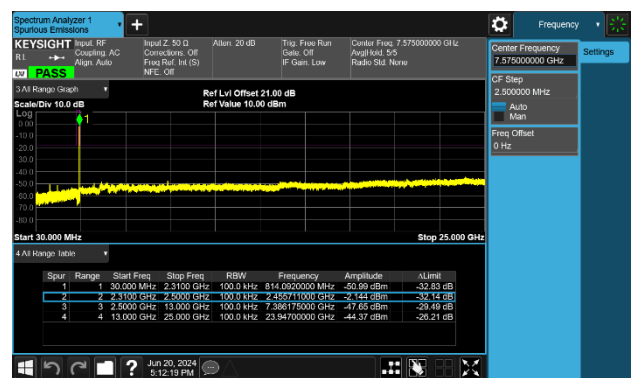


802.11 n20 CH01 (2412MHz)

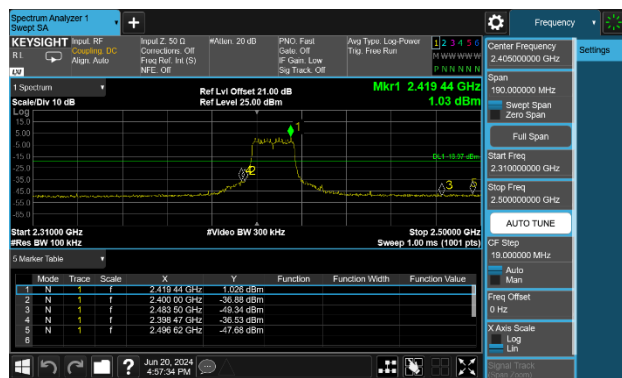


802.11 n20 CH01 (2412MHz)

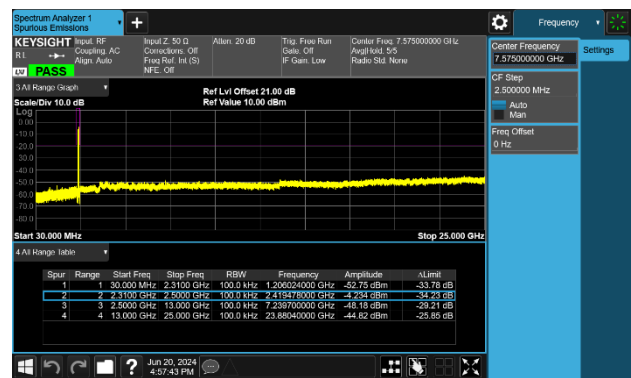


802.11 n20 CH06 (2437MHz)

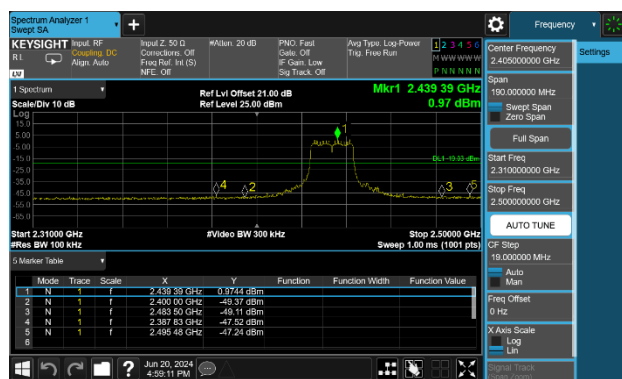


802.11 n20 CH06 (2437MHz)

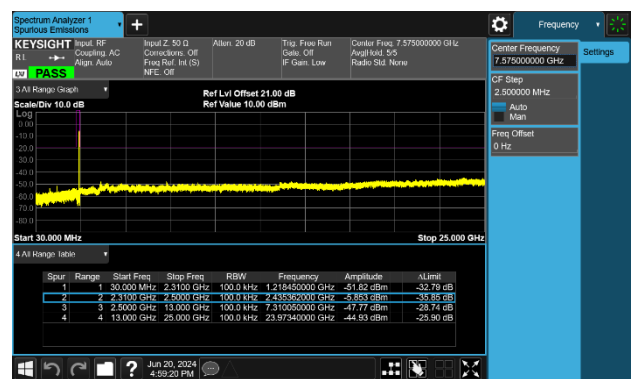

802.11 n20 CH11 (2462MHz)

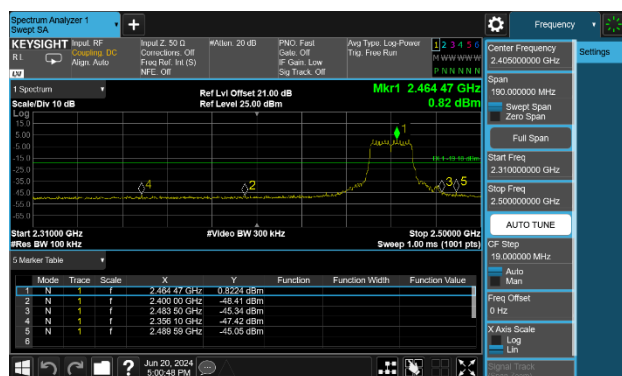


802.11 n20 CH11 (2462MHz)

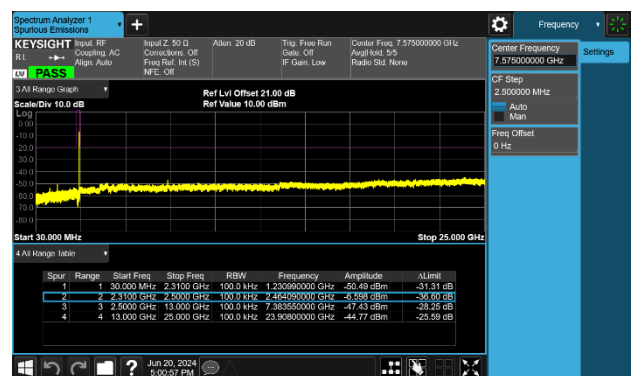


802.11 n40 CH03 (2422MHz)




802.11 n40 CH03 (2422MHz)

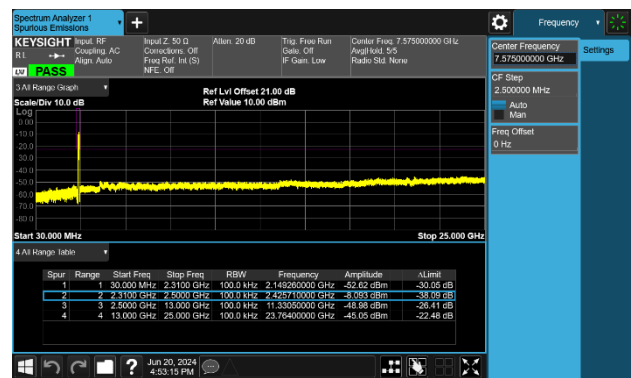


802.11 n40 CH06 (2437MHz)

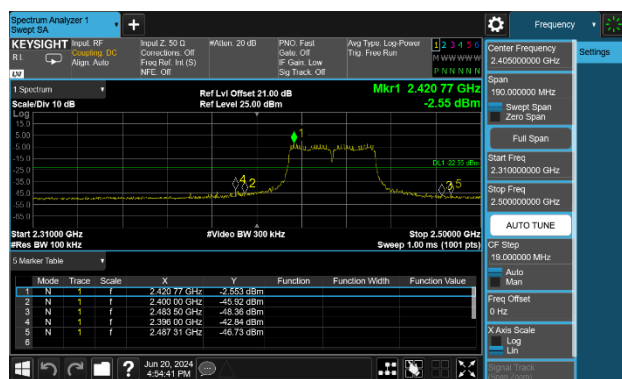

802.11 n40 CH06 (2437MHz)

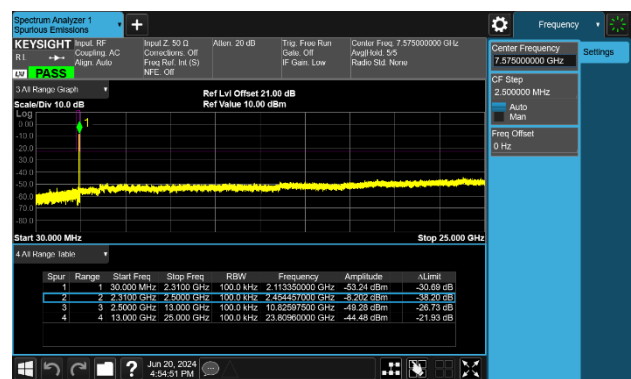

802.11 n40 CH09 (2452MHz)

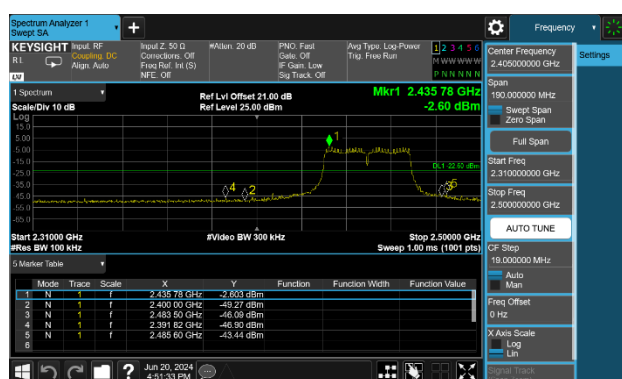

802.11 n40 CH09 (2452MHz)

