

243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822 Tel: +82-31-323-6008 Fax: +82-31-323-6010 http://www.ltalab.com



Dates of Tests: Sep 17~Oct 5, 2010 Test Report S/N: LR500191010A

Test Site: LTA CO., LTD

CERTIFICATION OF COMPLIANCE

FCC ID.

XBQ-N5PREMIUM

APPLICANT

YUKYUNG TECHNOLOGIES INC.

Equipment Class : Part 15 Spread Spectrum Transmitter (DSS)

Manufacturing Description : MID(MOBILE INTERNET DEVICE)
Manufacturer : YUKYUNG TECHNOLOGIES INC.

Model name : N5 Premium

Varient Model name : N5 EX

Test Device Serial No.: : Identical prototype

Rule Part(s) : FCC Part 15.247 Subpart C; ANSI C-63.4-2003

Frequency Range : 2402 ~ 2480MHz

RF power : Max -4.2dBm - Conducted

Data of issue : October 5, 2010

This test report is issued under the authority of:

The test was supervised by:

Kyung-Taek LEE, Technical Manager

Hyun-Chae You, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 TECHNICAL CHARACTERISTICS TEST	6
3.2.1 CARRIER FREQUENCY SEPARATION	6
3.2.2 NUMBER OF HOPPING FREQUENCIES	8
3.2.3 20 dB BANDWIDTH	10
3.2.4 TIME OF OCCUPANCY (Dwell Time)	17
3.2.5 TTANSMITTER OUTPUT POWER	22
3.2.6 BAND – EDGE & SPURIOUS	26
3.2.7 FIELD STRENGTH OF HARMONICS	32
3.2.8 AC CONDUCTED EMISSIONS	36
APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	41

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.

Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822

Web site : http://www.ltalab.com
E-mail : chahn@ltalab.com
Telephone : +82-31-323-6008
Facsimile +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competents of calibration and testing laboratory".

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2011-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2011-06-20	EMC accredited Lab.
FCC	U.S.A	610755	2011-04-22	FCC filing
VCCI	JAPAN	R2133, C2307	2011-06-21	VCCI registration
IC	CANADA	IC5799	2012-05-14	IC filing

2. Information's about test item

2-1 Client & Manufacturer

Company name : YUKYUNG TECHNOLOGIES INC.

Address : 200-11, Anyang-Dong, Manan-Ku, Anyang-Si, Kyunggi-Do, Korea

Tel / Fax : TEL No : +82-31-463-6906 / FAX No : +82-31-445-5995

2-2 Equipment Under Test (EUT)

Trade name : MID(MOBILE INTERNET DEVICE)

FCC ID : XBQ-N5PREMIUM

Model name : N5 Premium Varient Model name : N5 EX

Serial number : Identical prototype

Date of receipt : September 16, 2010

EUT condition : Pre-production, not damaged

Antenna type : Chip antenna with Max. 4.0 dBi gain

Frequency Range : $2402 \sim 2480 MHz$

RF output power : Max -4.2dBm - Conducted

Number of channels : 79 Channel spacing : 1MHz

Channel Access Protocol : Frequency Hopping Spread Spectrum (FHSS)

Type of Modulation : Basic Mode(GFSK), EDR Mode(Pi/4 DQPSK, 8DPSK)

Power Source for Batt. : Battery Pack: 3.7V (Polymer Lithium Ion Battery)

Power Source for Adaptor. : Input: 100-240VAC, 0.4A Output: 5.0VDC, 3A

2-3 Tested frequency

LOW		MID	HIGH
Frequency (MHz)	2402	2441	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
EARPHONE	N/A	N/A	N/A
SD CARD	N/A	N/A	Trans Flash
USB Memories N/A		N/A	IOCELL

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)		
15.247(a)	Carrier Frequency Separation	> 25 kHz		С		
15.247(a)	Number of Hopping Frequencies	> 15 hops		С		
15.247(a)	20 dB Bandwidth 99% Bandwidth	> 1.5 MHz		С		
15.247	Dwell Time	< 0.4 seconds	Conducted	С		
15.247(b)	Transmitter Output Power	< 250 mWatt		С		
15.247(d)	Conducted Spurious emission	> 20 dBc		С		
15.247(d)	Band Edge	> 20 dBc		С		
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	D. F I	С		
15.109	Field Strength	-	Radiated	С		
15.207 /15.107	AC Conducted Emissions	ted Emissions EN 55022 Line Conducted		С		
15.203	Antenna requirement	-	-	С		
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable						

→ Antenna Requirement

The YUKYUNG TECHNOLOGIES INC. FCC ID: XBQ-N5PREMIUM unit complies with the requirement of §15.203. The antenna is connected to inside of EUT. And type is Chip antenna.

The sample was tested according to the following specification:

Note 2: The data in this test report are traceable to the national or international standards.

FCC Parts 15.247; ANSI C-63.4-2003

3.2 Transmitter requirements

3.2.1 Carrier Frequency Separation

Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 10 kHz (1% of the span or more) Sweep = auto

VBW = 10 kHz Detector function = peak

Trace = max hold

Measurement Data:

Test Results			
Carrier Frequency Separation (MHz) Result			
0.998	Complies		

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of 20dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup






Figure 1: Measurement setup for the carrier frequency separation

<u>Carrier Frequency Separation</u> <u>Basic Mode</u>

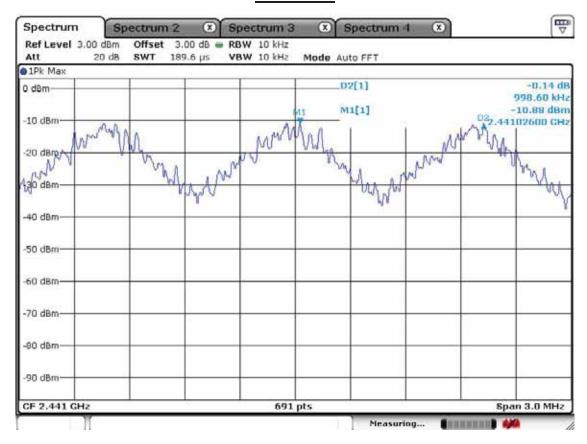

EDR Mode

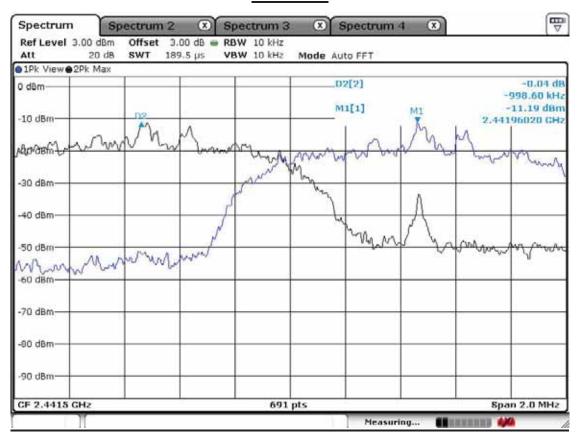

3.2.2 Number of Hopping Frequencies

Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to:

Frequency range 1: Start = 2400.0MHz, Stop = 2441.5 MHz

2: Start = 2441.5MHz, Stop = 2483.5 MHz

RBW = 100 kHz (1% of the span or more) Sweep = auto

 $VBW = 100 \text{ kHz} (VBW \ge RBW)$ Detector function = peak

Trace = $\max \text{ hold}$ Span > 40MHz

Measurement Data: Complies

Total number of Hopping Channels	79
----------------------------------	----

- See next pages for actual measured spectrum plots.


Minimum Standard:

At least 15 hopes

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Number of Hopping Frequencies

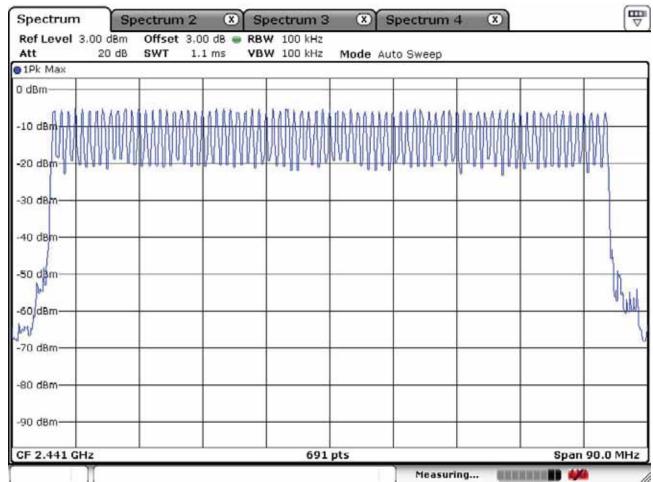

3.2.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels...

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz Sweep = auto

 $VBW = 30 \text{ kHz} (VBW \ge RBW)$ Detector function = peak

Measurement Data: Basic Mode

Frequency	Channel No.	Test Results(MHz)		
(MHz)	Channel No.	20dB Bandwidth	99% Bandwidth	
2402	0	0.91	0.88	
2441	39	0.89	0.88	
2480	78	0.91	0.89	

Measurement Data: EDR Mode

Frequency	Channel No.	Test Results(MHz)		
(MHz)	Channel No.	20dB Bandwidth	99% Bandwidth	
2402	0	1.28	1.22	
2441	39	1.29	1.21	
2480	78	1.28	1.20	

⁻ See next pages for actual measured spectrum plots.


Minimum Standard:


N/A

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Channel 1 of basic mode 20 dB Bandwidth

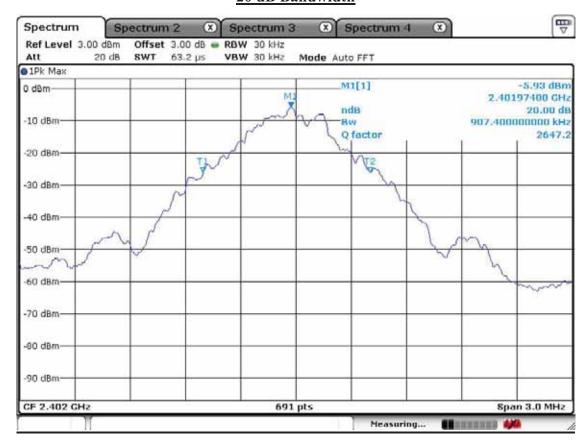

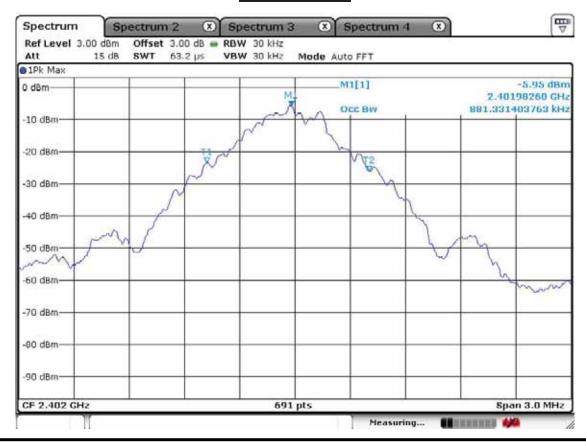



Channel 2 of basic mode 20 dB Bandwidth



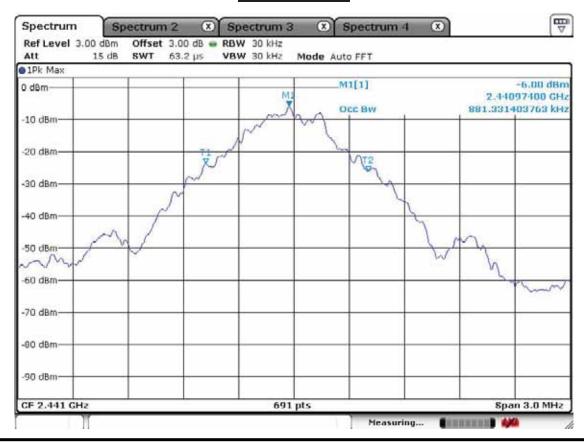


Channel 3 of basic mode 20 dB Bandwidth

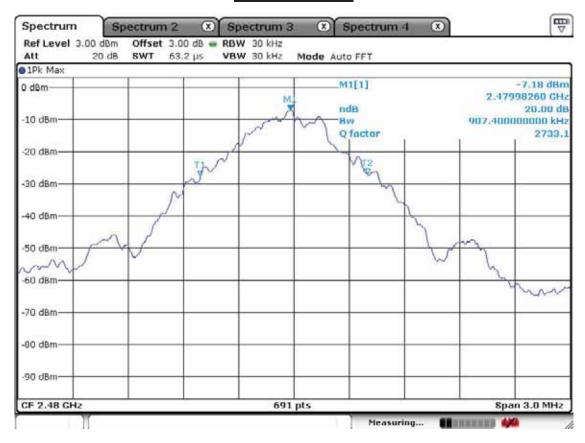

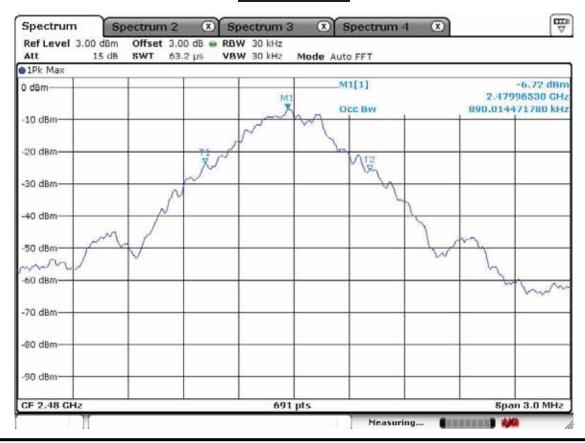



Channel 1 at EDR mode 20 dB Bandwidth



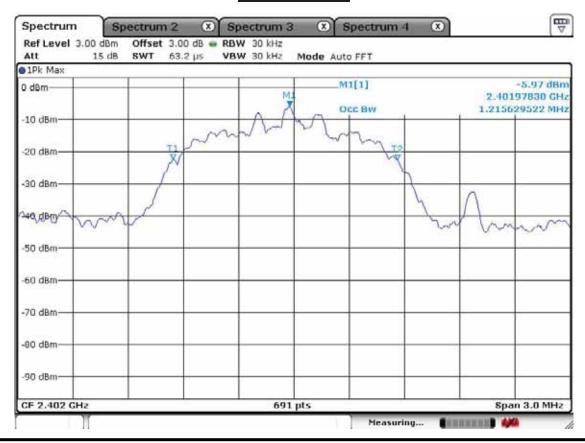



Channel 2 at EDR mode 20 dB Bandwidth

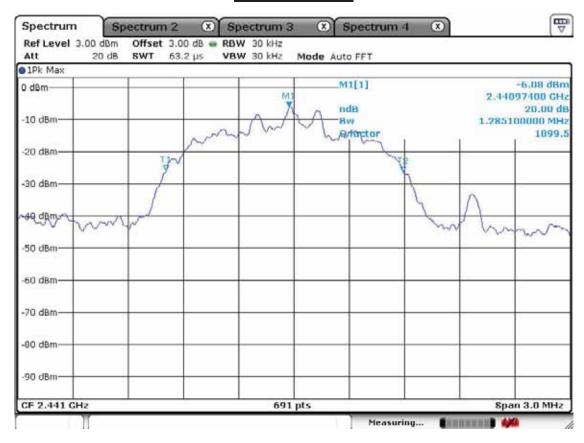

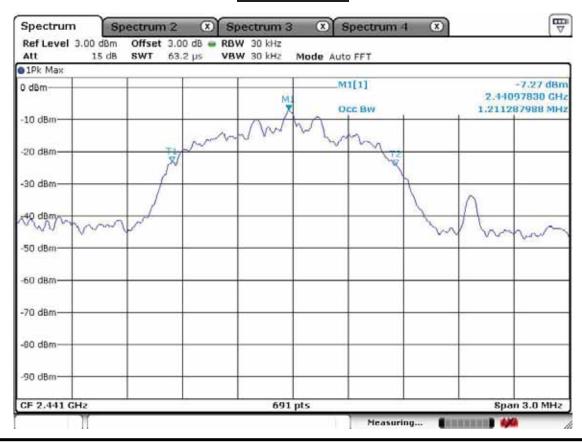

Channel 3 at EDR mode 20 dB Bandwidth

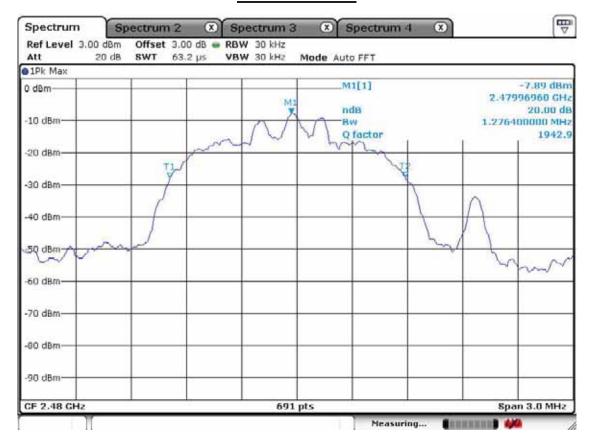

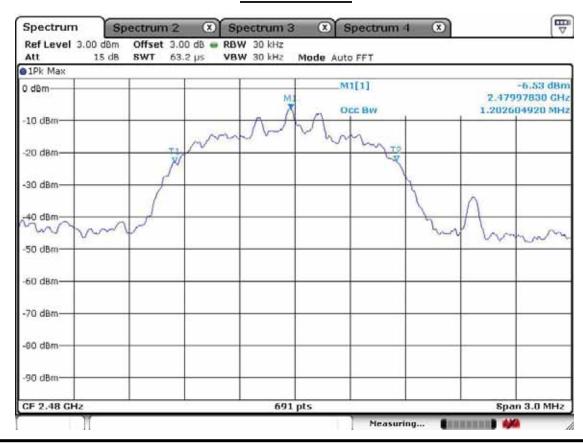

3.2.4 Time of Occupancy (Dwell Time)

Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz Span = zero

RBW = 1 MHz $VBW = 1 MHz (VBW \ge RBW)$

Trace = max hold Detector function = peak

Measurement Data:

Mode	Number of transmission ina 31.6s (79Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
DH1	30(Times / 3sec) *10.533 = 315.99	0.525	165.89	400
DH3	15(Times / 3sec) *10.533 = 158.00	1.757	277.61	400
DH5	10(Times / 3sec) *10.533 = 105.33	3.032	319.36	400
EDR 3Mbps DH5	10(Times / 3sec) *10.533 = 105.33	3.051	321.36	400

- See next pages for actual measured spectrum plots.
- dwell time = $\{(\text{number of hopping per second / number of slot}) \times \text{duration time per channel}\} \times 0.4 \text{ ms}$


Minimum Standard:

0.4 seconds within a 30 second period per any frequency

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

DH1 at basic mode T. Spectrum 4 Spectrum (X) X Spectrum 2 Spectrum 3 Ref Level 3.00 dBm Offset 3.00 dB - RBW 1 MHz 20 dB . SWT Att 2 ms VBW 1 MHz SGL 1Pk Clrw 0 dBm-D2[1] 2.14 dB 524.64 µs M1[1] -63.88 dBm -10 dBm-956.52 µs -20 dBm--30 dBm -40 dBm -50 dBm the party of the state of the s -60 dBm ANTHIP ENGINEER COMPRESSED TO -70 dBm--80 dBm -90 dBm-CF 2.441 GHz 691 pts 200.0 µs/ H Spectrum (X) X Spectrum 2 Spectrum 3 Spectrum 4 Ref Level 3.00 dBm Offset 3.00 dB - RBW 1 MHz Att 20 dB . SWT 3 s VBW 1 MHz SGL 1Pk Clrw 0 dBm 10 dBm 80 dBm O dBm 50 dBm 60 dBm -70 dBm -80 dBm -90 dBm CF 2.441 GHz 691 pts 300.0 ms/ Ready

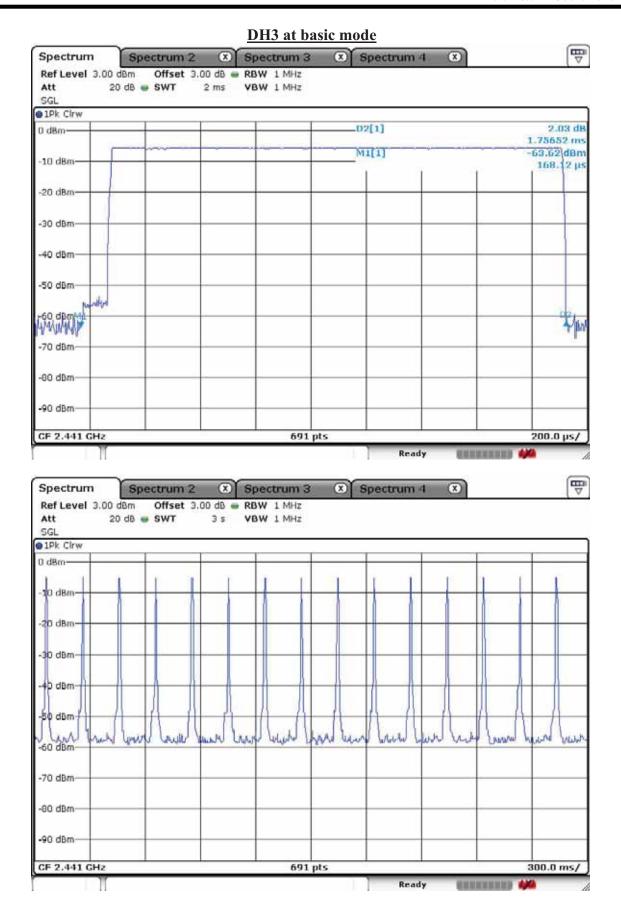

DH5 at basic mode T. Spectrum (8) Spectrum 2 Spectrum 3 Ref Level 3.00 dBm Offset 3.00 dB - RBW 1 MHz 20 dB . SWT Att 5 ms VBW 1 MHz SGL 1Pk Clrw 0 dBm-D2[1] 1.38 dB 3.03188 ms M1[1] -62,92 dBm -10 dBm-1.28406 ms -20 dBm--30 dBm--40 dBm--50 dBm -60 dBm action of the con Marylog 141 April -70 dBm--80 dBm -90 dBm-CF 2.441 GHz 691 pts 500.0 µs/ T Spectrum Spectrum 3 (X) X Spectrum 4 Spectrum 2 Ref Level 3.00 dBm Offset 3.00 dB - RBW 1 MHz Att 20 dB . SWT VBW 1 MHz 35 SGL 1Pk Clrw 0 dBm--10 dBr -20 dB -30 dB 40 dBn -50 dBm -60 dBm -70 dBm -80 dBm--90 dBm-CF 2.441 GHz 691 pts 300.0 ms/

Ready

DH5 at EDR mode with 3Mbps Spectrum (X) Spectrum 3 Spectrum 4 Spectrum 2 Ref Level 3.00 dBm Offset 3.00 dB - RBW 1 MHz 20 dB . SWT Att 5 ms VBW 1 MHz SGL 1Pk Clrw 0 dBm-D2[1] 0.31 dB 3.05072 ms our and hill the commences 701-70.den -10 dBm-594.20 µs -20 dBm--30 dBm--40 dBm--50 dBm-Estaplina various -70 dBm--80 dBm--90 dBm-CF 2.441 GHz 691 pts 500.0 µs/ T Spectrum Spectrum 2 Spectrum 3 (8) X Spectrum 4 Ref Level 3.00 dBm Offset 3.00 dB - RBW 1 MHz Att 20 dB . SWT VBW 1 MHz 35 SGL 1Pk Clrw 0 dBm--10 dBm -20 dBn -30 dBr 40 dBm -50 dBm -60 dBm -70 dBm -80 dBm--90 dBm-

691 pts

Ready

CF 2.441 GHz

300.0 ms/

3.2.5 Transmitter Output Power

Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 20 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20dB bandwidth of the emission being measured)

 $VBW = 3 MHz (VBW \ge RBW)$

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Basic Mode

Frequency	Ch.	Test Results				
(MHz)	CII.	dBm mW			dBm mW	
2402	0	-5.05	0.31	Complies		
2441	39	-5.34	0.29	Complies		
2480	78	-5.66	0.27	Complies		

Measurement Data: EDR Mode

Frequency	Ch.	Test Results			
(MHz)	CII.	dBm	mW	Result	
2402	0	-4.20	0.38	Complies	
2441	39	-4.42	0.36	Complies	
2480	78	-6.83	0.21	Complies	


⁻ See next pages for actual measured spectrum plots.


Minimum Standard:	< 250 mW

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)


Channel 1 Basic mode

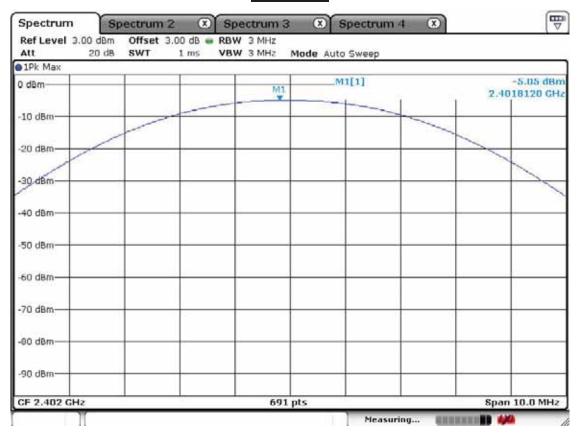

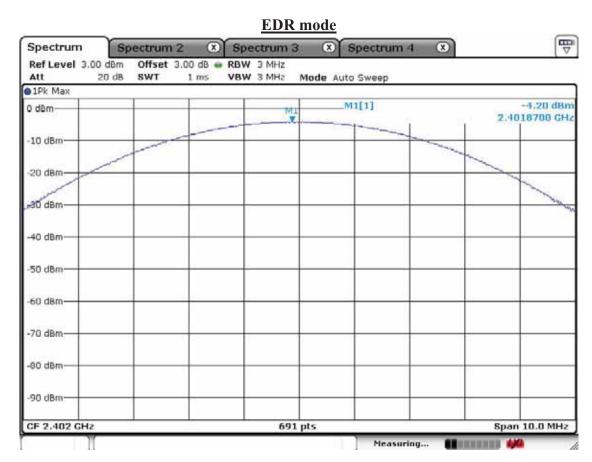


Channel 2 Basic mode

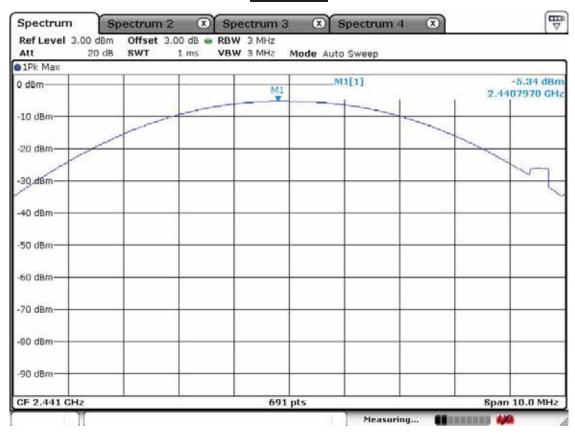


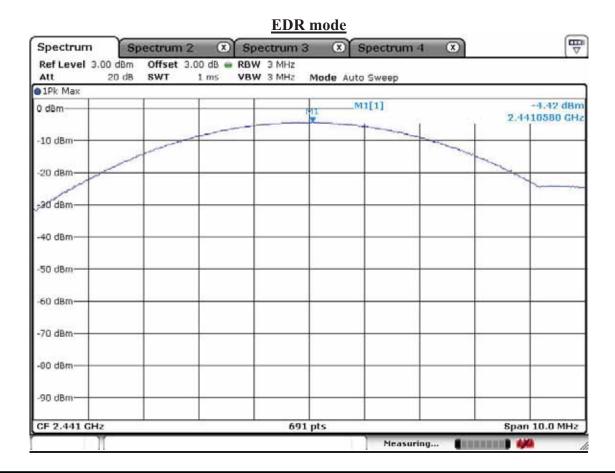

Channel 3 Basic mode

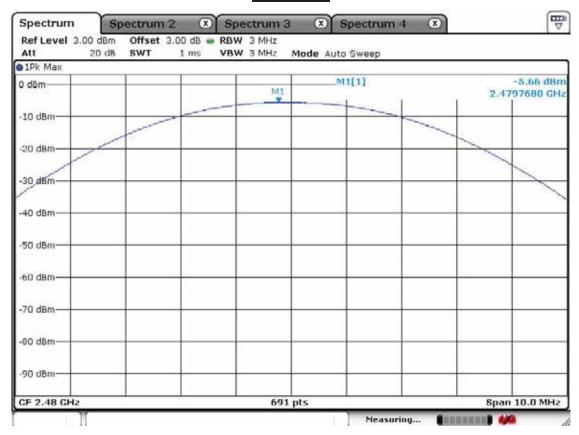

EDR mode

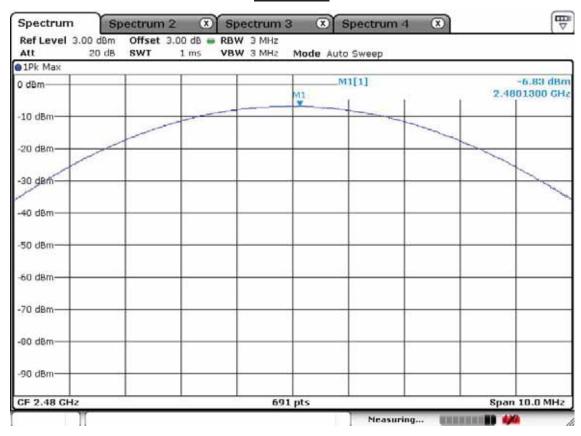

3.2.6 Band Edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz VBW = 100 kHz

Span = 10 MHz Detector function = peak

Trace = \max hold Sweep = auto

Measurement Data: Complies


- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Band – edge Lower edge

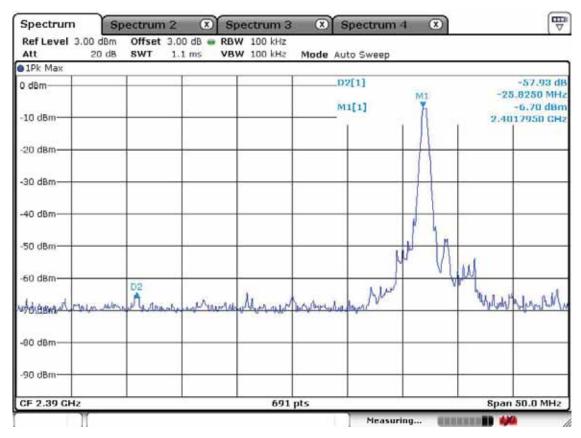

Upper edge

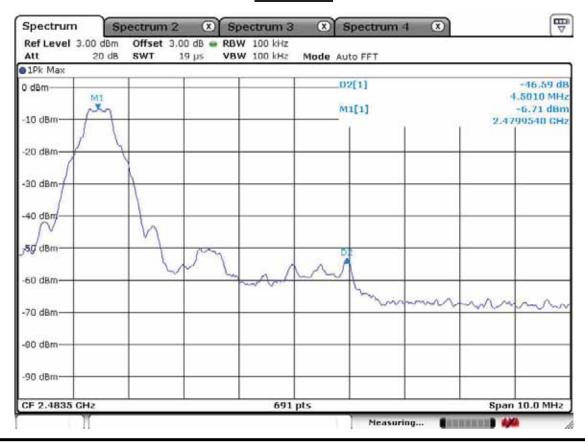

Band-edges in the restricted band 2310-2390 MHz measurement


Frequency	Frequency Reading [dBuV/m] [MHz] AV / Peak		Pol.	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
[MHz]			POI.	Antenna	Amp. Gain	Cable	AV /	Peak	AV /	Peak	AV /	Peak
2390	35.3	45.9	Н	26.0	36.0	8.2	54.0	74.0	33.5	44.1	20.5	29.9

Band-edges in the restricted band 2483.5-2500 MHz measurement


Frequency	requency [dBuV/m]		Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]	
[MHz]	AV / Peak	Pol.	Antenna	Amp. Gain	Cable	AV / Peak	AV / Peak	AV / Peak	
2483.5	34.2 46.8	Н	26.0	36.0	8.2	54.0 74.0	32.4 45.0	21.6 29.0	

Note: This EUT was tested in 3 orthogonal positions and the worst-case data was presented.


<u>Unwanted Emission – Low channel</u> <u>Frequency Range = 30 MHz ~ 26.5 GHz</u>

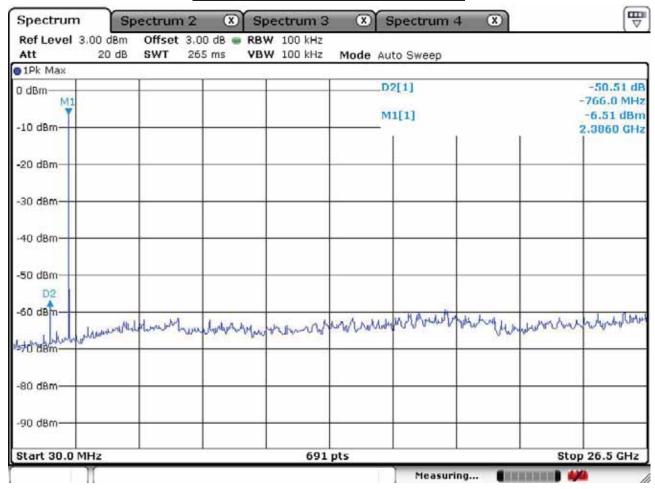

<u>Unwanted Emission – Middle channel</u> Frequency Range = 30 MHz ~ 26.5 GHz

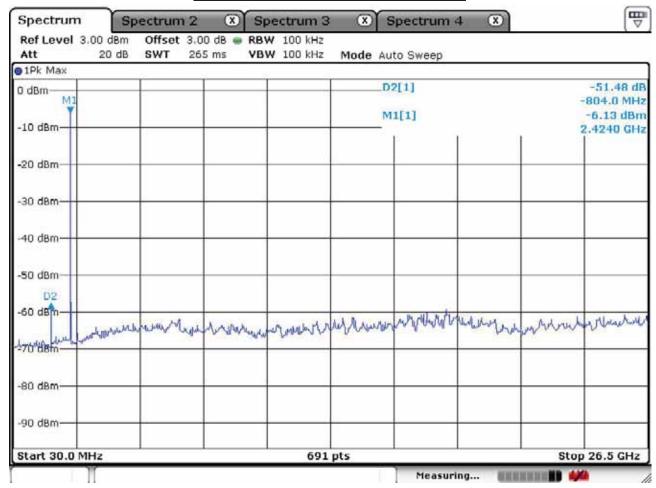

<u>Unwanted Emission – High channel</u> <u>Frequency Range = 30 MHz ~ 26.5 GHz</u>

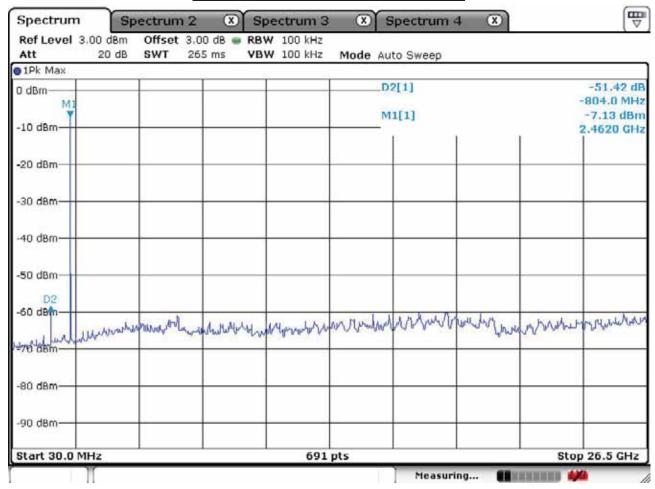

3.2.7 Field Strength of Harmonics

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = $30 \text{ MHz} \sim 10^{\text{th}}$ harmonic.

 $RBW = 100 \text{ kHz} (30 \text{MHz} \sim 1 \text{ GHz})$ Peak:VBW $\geq RBW$

= 1 MHz (1 GHz ~ 10th harmonic) Average:VBW=10Hz

Span = 100 MHz Detector function = Peak and Average

Trace = \max hold Sweep = auto

Measurement Data: Complies

- Refer to the next page.
- No other emissions were detected at a level greater than 10dB below limit.
- The three antennas were used with this EUT during the Testing.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

^{**} Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data:

Eroguoney	Read	ding		(Correction	Limits		Result		Margin		
Frequency	[dBu	V/m]	Pol.	Factor			[dBuV/m]		[dBuV/m]		[dB]	
[MHz]	AV /	Peak		Antenna	Amp.Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	_	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
Frequency	Read	ding		(Correction		Lin	nits	Res	sult	Mai	rgin
rrequency	[dBuV/m] Po		Pol.	Factor			[dBu	BuV/m] [dBuV/m]			[dB]	
[MHz]	AV /	Peak		Antenna	Amp.Gain	Cable	AV /	Peak	AV /	Peak	AV /	Peak
-	-	-	-	-	-	-	-	-	-	-	-	_
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	_	-	-	-	_
-	Read	ding		(Correction		Lin	nits	Res	sult	Mai	rgin
Frequency	[dBu	V/m]	Pol.		Factor		[dBu	V/m]	[dBu	V/m]	[d	В]
[MHz]	AV /	Peak		Antenna	Amp.Gain	Cable	AV /	Peak	AV /	Peak	AV /	Peak
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	_

No other emissions were detected at a level greater than 20dB below limit.


Radiated Emissions - "H"+File UP/DOWN+MP3 PLAY Mode



243 Jubug-ri, yangji-Myeon, Youngin-si, Gyeonggi-do 449-822 Korea Tel +82-31-3236008,9 Fax:+82-31-3236010

EUT/Model No.: N5 Premium TEST MODE: "H"+FILE UP/DOWN+MP3 PLAY mode

Temp Humi : 23 / 59 Tested by: PARK.H.W

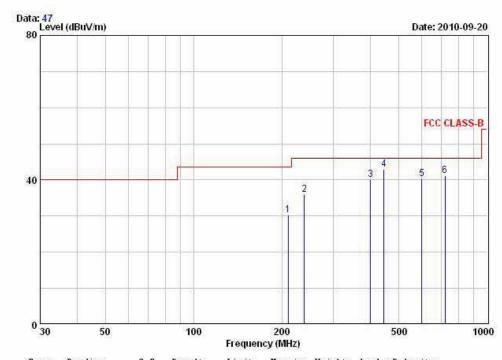

	Freq	Freq Reading		Freq Reading C.F Re		Result	esult Limit QP		Height	Angle	Polarity	
	MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dВ	CIV.	deg				
1	210.12	42.20	-12.00	30.20	43.50	13.30	142	94	HORIZONTAL			
2	238.41	46.80	-10.74	36.06	46.00	9.94	106	298	HORIZONTAL			
3	400.96	46.80	-6.71	40.09	46.00	5.91	164	116	HORIZONTAL			
4	445.00	49.00	-6.04	42.96	46.00	3.04	100	307	HORIZONTAL			
5	600.10	42.90	-2.65	40.25	46.00	5.75	124	173	VERTICAL			
6	720.16	41.90	-0.63	41.27	46.00	4.73	122	319	HORIZONTAL			

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Radiated Emissions - BT Mode



243 Jubug-ri, yangji-Myeon, Youngin-si, Gyeonggi-do 449-822 Korea Tel:+82-31-3236008,9 Fax:+82-31-3236010

EUT/Model No.: N5 Premium TEST MODE: BT mode

Temp Humi : 23 / 59 Tested by: PARK.H.W

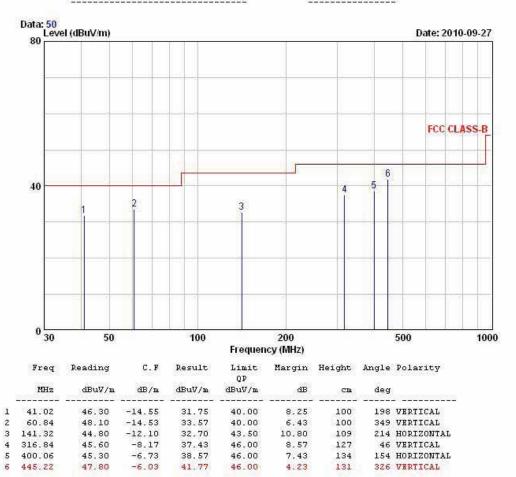

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.8 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 10dB below limit.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range	Conducted Limit (dBuV)					
(MHz)	Quasi-Peak	Average				
0.15 ~ 0.5	66 to 56 *	56 to 46 *				
0.5 ~ 5	56	46				
5~30	60	50				

^{*} Decreases with the logarithm of the frequency

AC Conducted Emissions - "H"+File UP/DOWN+MP3 PLAY - Line



243 Jubug-ri, yangji-Myeon, Youngin-si, Gyeonggi-do 449-822 Korea Tel:+82-31-3236008,9 Fax:+82-31-3236010

EUT / Model No. : N5 Premium Phase : LINE

Test Mode : "H"+FILE UP/DOWN+ MP3 PLAY mode Test Power : 120 / 60

Temp./Humi: : 24 / 58 Test Engineer : PARK H W



AC Conducted Emissions - "H"+File UP/DOWN+MP3 PLAY - Neutral




243 Jubug-ri, yangji-Myeon, Youngin-si, Gyeonggi-do 449-822 Korea Tel:+82-31-3236008,9 Fax:+82-31-3236010

EUT / Model No. : N5 Premium Phase : NEUTRAL

Test Mode : "H"+FILE UP/DOWN+ MP3 PLAY mode Test Power : 120 / 60

Temp./Humi: 24 / 58 Test Engineer : PARK H W

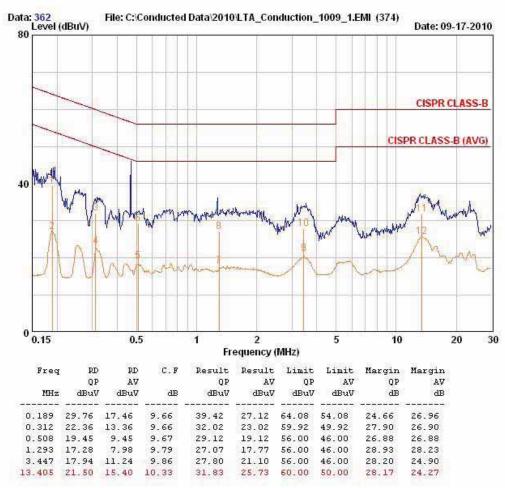

AC Conducted Emissions – BT – Line




243 Jubug-ri, yangji-Myeon, Youngin-si, Gyeonggi-do 449-822 Korea Tel:+82-31-3236008,9 Fax:+82-31-3236010

EUT / Model No.: N5 Premium Phase : LINE

Test Mode : BT mode Test Power : 120 / 60

Temp./Humi. : 26 / 53 Test Engineer : KIM.K.I

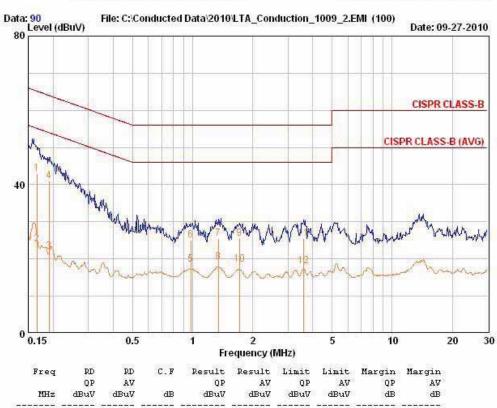

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
	QP	AV		QP	AV	QP	AV	QP	AV
MHz	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.166	33.35	14.25	9.65	43.00	23.90	65.16	55.16	22.15	31.25
0.191	31.26	12.46	9.65	40.91	22.11	63.99	53.99	23.08	31.88
0.978	15.26	8.66	9.79	25.05	18.45	56.00	46.00	30.95	27.55
1.345	15.78	9.28	9.80	25.58	19.08	56.00	46.00	30.42	26.92
1.713	15.61	8.81	9.81	25.42	18.62	56.00	46.00	30.58	27.38
3.607	15.63	8.23	9.87	25.50	18.10	56.00	46.00	30.50	27.90

AC Conducted Emissions - BT - Neutral




243 Jubug-ri, yangji-Myeon, Youngin-si, Gyeonggi-do 449-822 Korea Tel:+82-31-3236008,9 Fax:+82-31-3236010

EUT / Model No. : N5 Premium Phase : NEUTRAL

Test Mode : BT mode Test Power : 120 / 60

Temp./Humi. : 26 / 53 Test Engineer : KIM.K.I

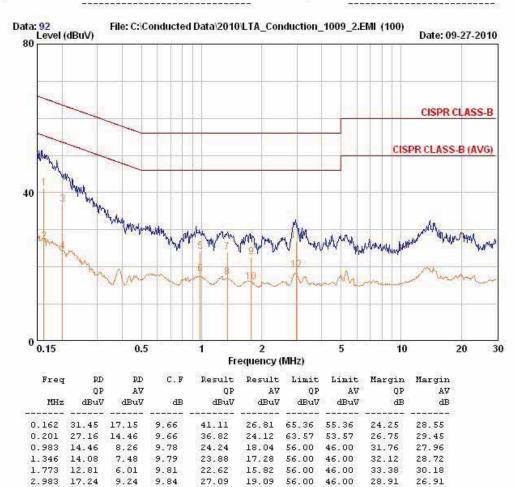

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	FSV-30	100757	R&S	Feb-11
2	Spectrum Analyzer	8563E	3425A02505	HP	Mar-11
3	Spectrum Analyzer	8594E	3710A04074	НР	Oct-10
4	Signal Generator	8648C	3623A02597	НР	Mar-11
5	Signal Generator	83711B	US34490456	НР	Mar-11
6	Attenuator (3dB)	8491A	37822	НР	Oct-10
7	Attenuator (10dB)	8491A	63196	НР	Oct-10
8	Attenuator (30dB)	8498A	1801A06689	НР	Oct-10
9	EMI Test Receiver	ESVD	843748/001	R&S	Mar-11
10	Horn Antenna(18 ~ 40GHz)	SAS-574	154	Schwarzbeck	Nov-10
11	Horn Antenna(18 ~ 40GHz)	SAS-574	155	Schwarzbeck	Nov-10
12	RF Amplifier	8447D	2949A02670	НР	Oct-10
13	RF Amplifier	8449B	3008A02126	HP	Mar-11
14	Test Receiver	ESHS10	828404/009	R&S	Mar-11
15	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	Apr-11
16	LogPer. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Apr-11
17	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Apr-11
18	Horn Antenna	3115	00055005	ETS LINDGREN	Mar-11
19	Horn Antenna	BBHA 9120D	9120D122	SCHWARZBECK	Dec-11
20	Dipole Antenna	VHA9103	2116	SCHWARZBECK	Nov-10
21	Dipole Antenna	VHA9103	2117	SCHWARZBECK	Nov-10
22	Dipole Antenna	VHA9105	2261	SCHWARZBECK	Nov-10
23	Dipole Antenna	VHA9105	2262	SCHWARZBECK	Nov-10
24	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Mar-11
25	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-
26	RF Switch	MP59B	6200414971	ANRITSU	-
27	Power Divider	11636A	6243	НР	Oct-10
28	DC Power Supply	6622A	3448A03079	HP	Oct-10
29	Frequency Counter	5342A	2826A12411	HP	Mar-11
30	Power Meter	EPM-441A	GB32481702	НР	Mar-11
31	Power Sensor	8481A	2702A64048	HP	Mar-11
32	Audio Analyzer	8903B	3729A18901	HP	Oct-10
33	Modulation Analyzer	8901B	3749A05878	HP	Oct-10
34	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	Oct-10
35	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	Mar-11
36	Stop Watch	HS-3	601Q09R	CASIO	Mar-11
37	LISN	ENV216	100408	R&S	Oct-10
38	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	May-12