

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
UNINTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 18 REQUIREMENT**

for

Self-ballasted lamp

M/N: EF-16W BR30

FCC ID: XBSEF16WBR30

Trade Name: Not Applicable

REPORT NO.: SZEE090422400202

Issue Date: May 25, 2009

Prepared for

**Sunny World (HK) Limited
Rm 302-306, Hewlett Centre, 54 Hoi Yuen Road,
Kwun Tong, Kowloon, H.K
TEL: 00 852 23452772
FAX: 00 852 23574860**

Prepared by

**CENTRE TESTING INTERNATIONAL CO., LTD.
1F., BUILDING C, HONGWEI INDUSTRIAL ZONE,
BAOAN 70 DISTRICT, SHENZHEN, CHINA
TEL: 86-755-3368 3365
FAX: 86-755-3368 3365**

**This report shall not be reproduced, except in full, without the written approval of
CENTRE TESTING INTERNATIONAL**

TABLE OF CONTENTS

| | | |
|------------|---|----|
| 1. | CERTIFICATION INFORMATION | 3 |
| 2. | SUMMARY OF TEST RESULTS..... | 4 |
| 3. | TEST UNCERTAINTY | 4 |
| 4. | PRODUCT INFORMATION | 4 |
| 4.1. | PRODUCT INFORMATION | 4 |
| 4.2. | TEST SETUP CONFIGURATION | 4 |
| 4.3. | SUPPORT EQUIPMENT | 4 |
| 5. | FACILITIES AND ACCREDITATIONS..... | 5 |
| 5.1. | TEST FACILITY | 5 |
| 5.2. | TEST EQUIPMENT LIST | 5 |
| 5.3. | LABORATORY ACCREDITATIONS AND LISTINGS..... | 5 |
| 6. | EQUIPMENT MODIFICATIONS | 5 |
| 7. | TEST CONDITION..... | 6 |
| 7.1 | Test Configuration | 6 |
| 7.2 | EUT operation..... | 6 |
| 7.3 | Limit | 6 |
| 8. | CONDUCTED EMISSIONS TEST | 7 |
| 8.1. | Measurement Procedure..... | 7 |
| 8.2. | Block Diagram of Test Setup..... | 7 |
| 8.3. | Test Results | 7 |
| 9. | RADIATED EMISSION TEST | 9 |
| 9.1. | TEST PROCEDURE | 9 |
| 9.2. | BLOCK DIAGRAM OF TEST SETUP | 9 |
| 9.3. | TEST RESULTS | 10 |
| APPENDIX 1 | PHOTOGRAPHS OF EUT | 12 |
| APPENDIX 2 | EXTERNAL PHOTOGRAPHS OF EUT | 13 |
| APPENDIX 3 | INTERNAL PHOTOGRAPHS OF EUT | 14 |

(Note: N/A means not applicable)

1. CERTIFICATION INFORMATION

Applicant: Sunny World (HK) Limited
Rm 302~306 Hewlett Centre, 54 hoi Yuen Road, Kwun Tong,
Kowloon, H.K

Manufacturer: Ningbo Zuoming Electronic Co., Ltd.
No. 709 Yangmuqi Road, Ningbo, Zhejiang 315040, P.R.
China

Test Type: FCC Part 18 for Lighting Device (Certification)

Trade Name: Not Applicable

Product Name : Self-ballasted lamp

M/N: EF-16W BR30


Report No.: SZEE090422400202

Date of Test: Apr. 22, 2009 to May 25, 2008


The above equipment was tested by Centre Testing International (CTI), The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 18.

The test results of this report relate only to the tested sample identified in this report.


Prepared by :


Lily Yan

Inspected by :


Christy Chen

Approved by:


Jim Zhang
Manager

Date :

May 25, 2009

2. SUMMARY OF TEST RESULTS

| FCC Rules | Description Of Test | Result |
|------------|---------------------|-----------|
| §18.307(c) | Conducted Emission | Compliant |
| §18.305(c) | Radiated Emission | Compliant |

3. TEST UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Test item | Value |
|--------------------|--------|
| Conducted emission | 3.2 dB |
| Radiated emission | 4.6 dB |

4. PRODUCT INFORMATION

4.1. PRODUCT INFORMATION

Product name: Self-ballasted lamp
Model name: EF-16W BR30
Trade name: Not Applicable
Technical data: Self-ballasted lamp, 16W, AC 120V/60Hz
Function: Lighting
Operation Frequency: 60kHz

4.2. TEST SETUP CONFIGURATION

See test photographs attached in APPENDIX 1 PHOTOGRAPHS OF TEST SETUP for the actual connections between EUT and support equipment.

4.3. SUPPORT EQUIPMENT

| No. | Device Type | Brand | Model | Series No. | Data Cable | Power Cord |
|-----|-------------|-------|-------|------------|------------|------------|
| 1. | --- | --- | --- | --- | --- | --- |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5. FACILITIES AND ACCREDITATIONS

5.1. TEST FACILITY

The 3m Semi-Anechoic chamber test site and conducted measurement facility used to collect the radiated data is located on the address:

1F., Building C, Hongwei Industrial Zone 70 District., Baoan, Shenzhen, Guangdong, China. The Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 requirements. The test site Registration Number: 510007.

5.2. TEST EQUIPMENT LIST

Instrumentation: The following list contains equipments used at CTI for testing. The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

Equipment used during the tests:

| 3M Semi-anechoic Chamber - RE Test | | | | |
|------------------------------------|--------------|-----------|------------|------------|
| Equipment | Manufacturer | Model | Serial No. | Due Date |
| Spectrum Analyzer | Agilent | E4443A | MY46185649 | 01/29/2010 |
| Biconilog Antenna | A.H.System | SAS-521-2 | 487 | 06/05/2009 |
| Multi device Controller | ETS-LINGREN | 2090 | 00057230 | 01/29/2010 |

| Shielding Room No. 1 - CE Test | | | | |
|--------------------------------|--------------|--------|------------|------------|
| Equipment | Manufacturer | Model | Serial No. | Due Date |
| Receiver | R&S | ESCI | 100435 | 01/29/2010 |
| LISN | R&S | ENV216 | 100098 | 06/13/2009 |

5.3. LABORATORY ACCREDITATIONS AND LISTINGS

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

7. TEST CONDITION

7.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.

7.2 EUT operation

EUT was tested according to the following operation modes provided by the specifications given by the manufacturer, and reported the worst emissions.

7.3 Limit

Conducted Emission:

According to section 18.307(c) Conducted Emission Limits is as following:

| Frequency (MHz) | Maximum RF Line Voltage | |
|--------------------|-------------------------|------|
| | Q.P.(dBuV) | |
| 0.45-2.51 | | 48 |
| 2.51-3.0 | | 69.5 |
| 3.0-30 | | 48 |

Radiated Emission:

According to section 18.305(c) Radiated Emission Limits is as following:


| Frequency (MHz) | Distance (m) | Maximum Field Strength Limit (dBuV/m Q.P.) |
|--------------------|-----------------|---|
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-1000 | 3 | 46.0 |

8. CONDUCTED EMISSIONS TEST

8.1. Measurement Procedure

- The EUT was placed on a non-conductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from EUT in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

8.2. Block Diagram of Test Setup

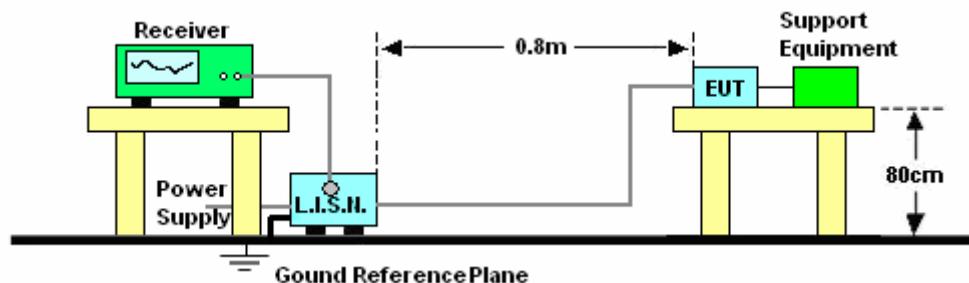

8.3. Test Results

Power : AC 120V/60Hz
Temperature : 24 °C

Mode : Normal
Humidity : 53%


| CE Test Result | | | | | | | | | | |
|-----------------|------------------------|-------|---------------------|----------------------|-------|----------------|-------------|--------------|---------------|--|
| Frequency (MHz) | Reading Level (dBuV/m) | | Correct Factor (dB) | Measurement (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Result (P/F) | Remarks (H/V) | |
| | Peak | Q.P. | | Peak | Q.P. | | | | | |
| 0.5380 | 24.98 | 22.02 | 10.00 | 34.98 | 32.02 | 48.00 | -15.98 | P | L | |
| 0.6860 | 25.35 | 23.57 | 9.95 | 35.30 | 33.52 | 48.00 | -14.48 | P | L | |
| 0.8860 | 25.50 | 22.79 | 9.89 | 35.39 | 32.68 | 48.00 | -15.32 | P | L | |
| 0.5340 | 25.82 | -- | 10.00 | 35.82 | -- | 48.00 | <-10 | P | N | |
| 0.7860 | 26.07 | -- | 9.92 | 35.99 | -- | 48.00 | <-10 | P | N | |
| 0.9780 | 24.61 | -- | 9.86 | 34.47 | -- | 48.00 | <-10 | P | N | |

Correct Factor
 Measurement
 Margin
 "--"


= Cable loss + Antenna Factor
 = Reading level + Factor
 = Reading in reference to limit
 = The emission level complied with the limits, with sufficient margin, so no further recheck.

Graph:

L:

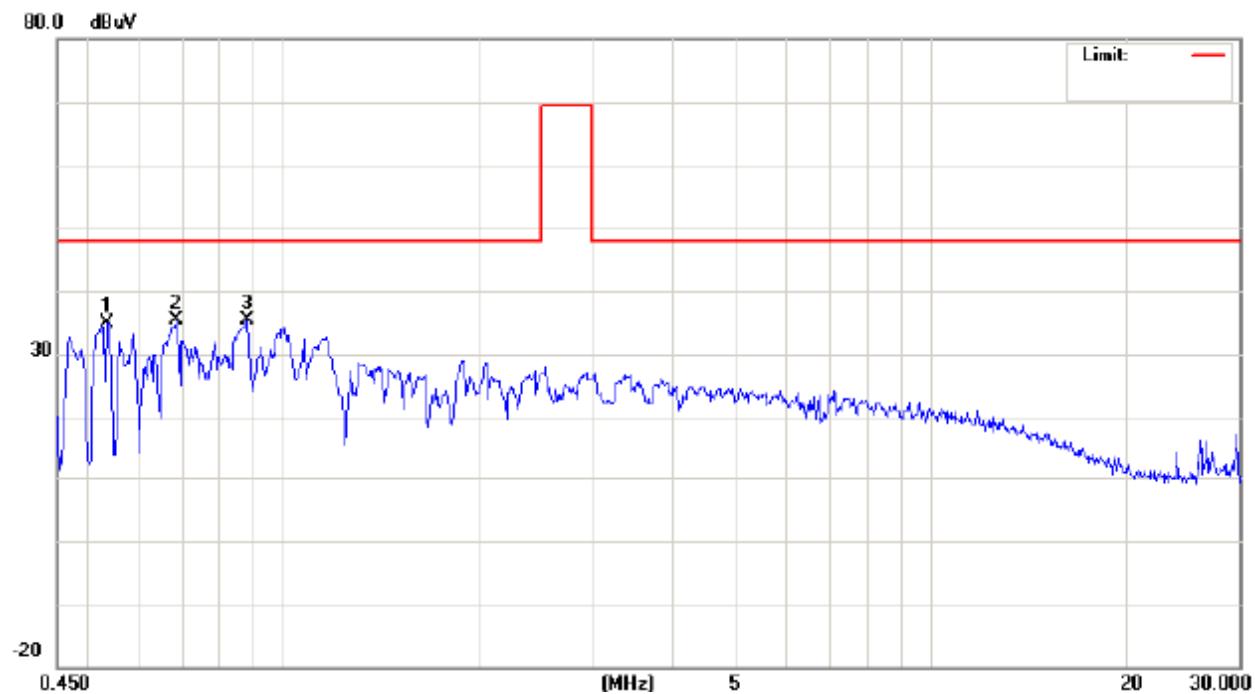

N:

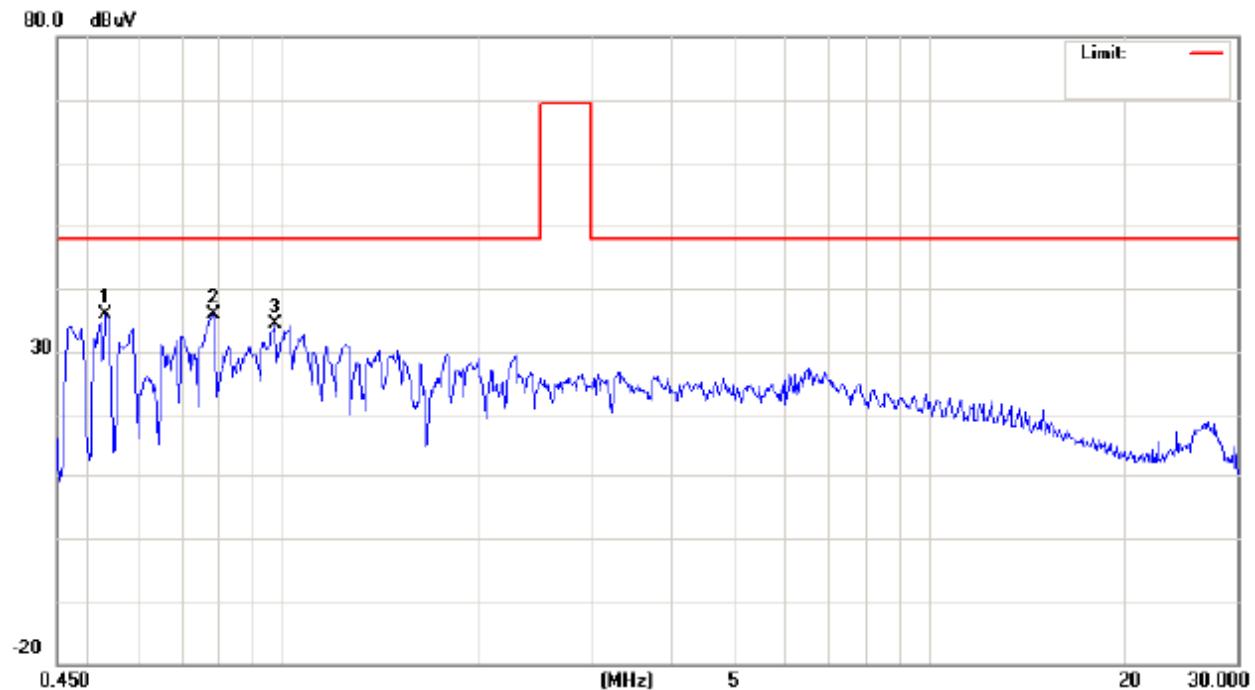


9. RADIATED EMISSION TEST

9.1. TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3-meter chamber, and 3 meters away from the antenna mounted on a variable-height tower.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW in 30 MHz ~ 1 GHz. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied from 1 m to 4 m above the ground in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: scan the antenna from 1 meter to 4 meters and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum QP value.

9.2. BLOCK DIAGRAM OF TEST SETUP

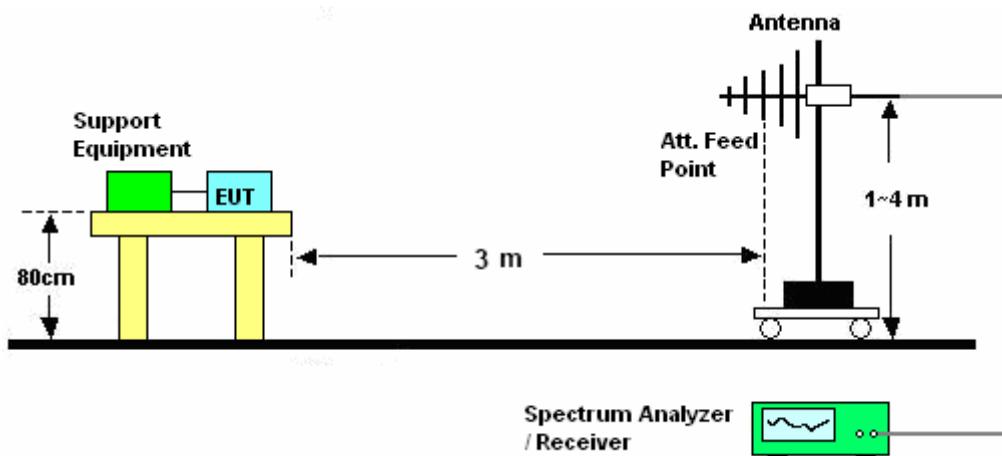

9.3. TEST RESULTS

Power : AC 120V/60Hz

Temperature : 24°C

Mode : Normal

Humidity : 53%

| RE Test Result | | | | | | | | | |
|--------------------|---------------------------|-------|---------------------------|-------------------------|-------|-------------------|----------------|-----------------|------------------|
| Frequency (MHz) | Reading Level (dBuV/m) | | Correct Factor (dB) | Measurement (dBuV/m) | | Limit (dBuV/m) | Margin (dB) | Result (P/F) | Remarks (H/V) |
| | Peak | Q.P. | | Peak | Q.P. | | | | |
| 34.8500 | -1.25 | -- | 18.89 | 17.64 | -- | 40.00 | <-10 | P | H |
| 164.4833 | 0.88 | -- | 18.18 | 19.06 | -- | 43.50 | <-10 | P | H |
| 246.6333 | 4.72 | -- | 15.30 | 20.02 | -- | 46.00 | <-10 | P | H |
| 33.2333 | 6.07 | 4.11 | 18.83 | 24.90 | 22.94 | 40.00 | -17.06 | P | V |
| 44.5500 | 16.08 | 13.95 | 14.00 | 30.08 | 27.95 | 40.00 | -12.05 | P | V |
| 154.4832 | 5.14 | -- | 18.90 | 24.04 | -- | 43.50 | <-10 | P | V |
| 164.1833 | 8.16 | -- | 18.48 | 26.64 | -- | 43.50 | <-10 | P | V |
| 266.0333 | 9.05 | -- | 15.28 | 24.33 | -- | 46.00 | <-10 | P | V |
| 445.4833 | 5.58 | -- | 19.58 | 25.16 | -- | 46.00 | <-10 | P | V |

Correct Factor

= Cable loss + Antenna Factor

Measurement



= Reading level + Factor

Margin

= Reading in reference to limit

"--"

= The emission level complied with the limits, with sufficient margin, so no further recheck.

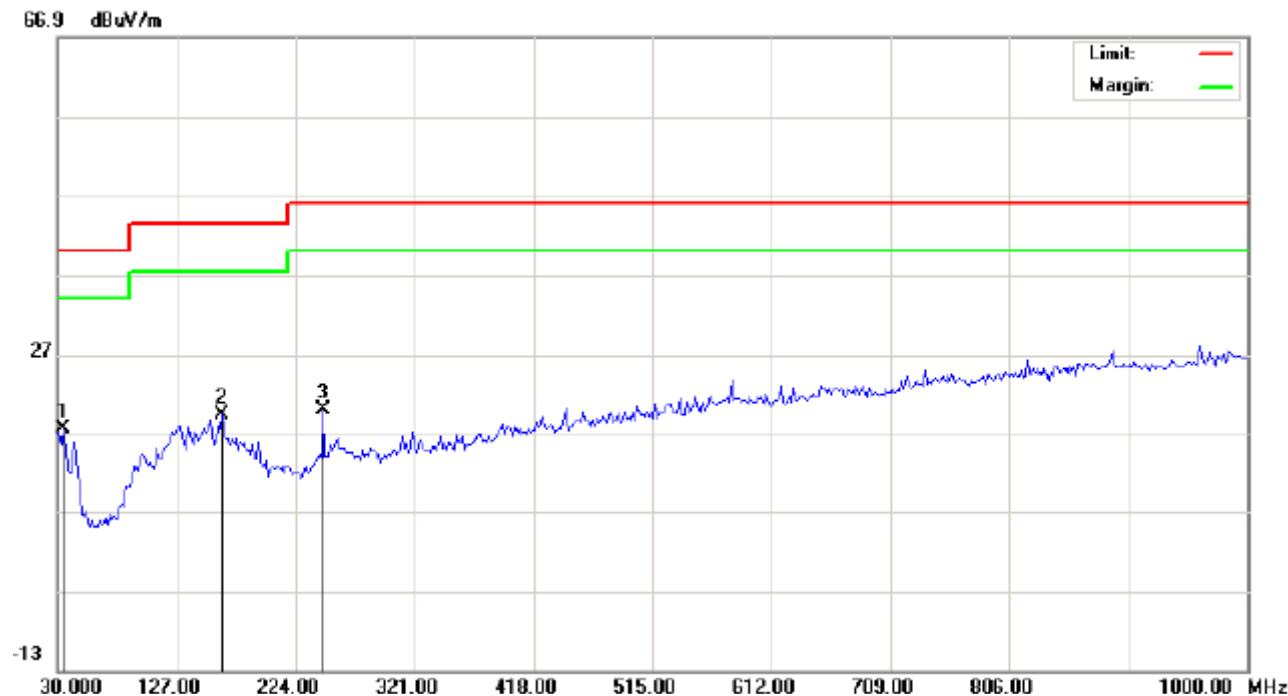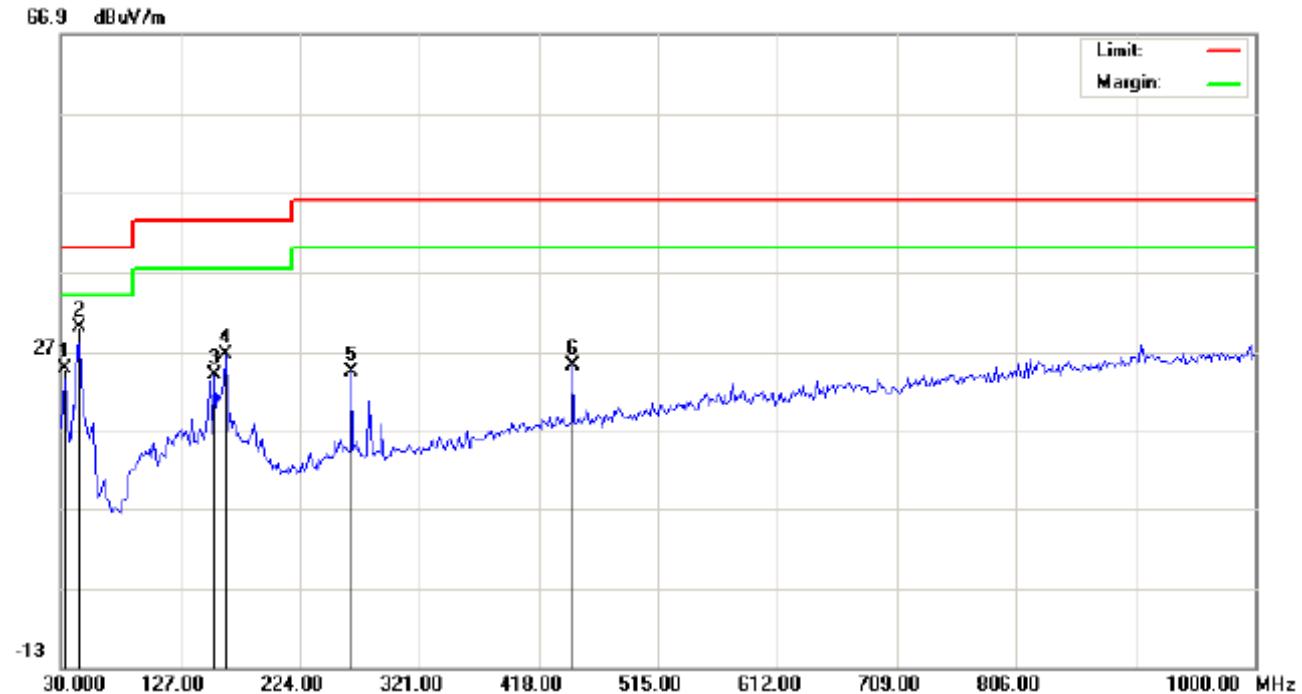Graphs:**H:****V:**


APPENDIX 1 PHOTOGRAPHS OF EUT
CONDUCTED EMISSION TEST**RADIATED EMISSION TEST**

APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT


View of EUT -1




View of EUT -2

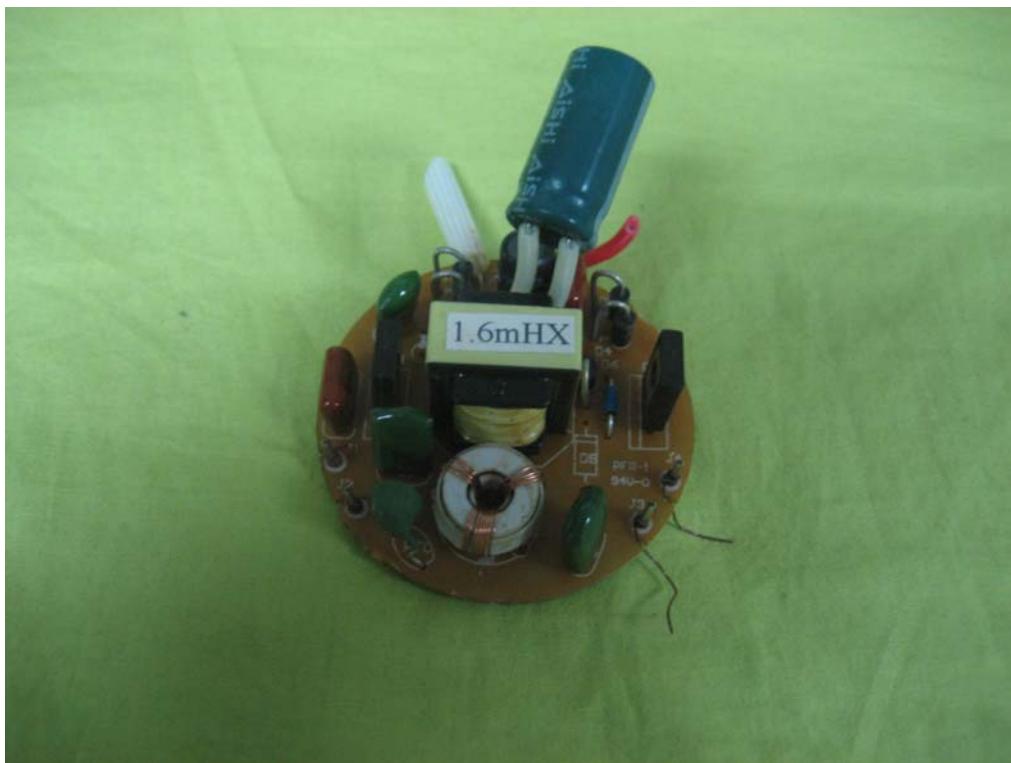APPENDIX 3 INTERNAL PHOTOGRAPHS OF EUT

View of PCB – 1

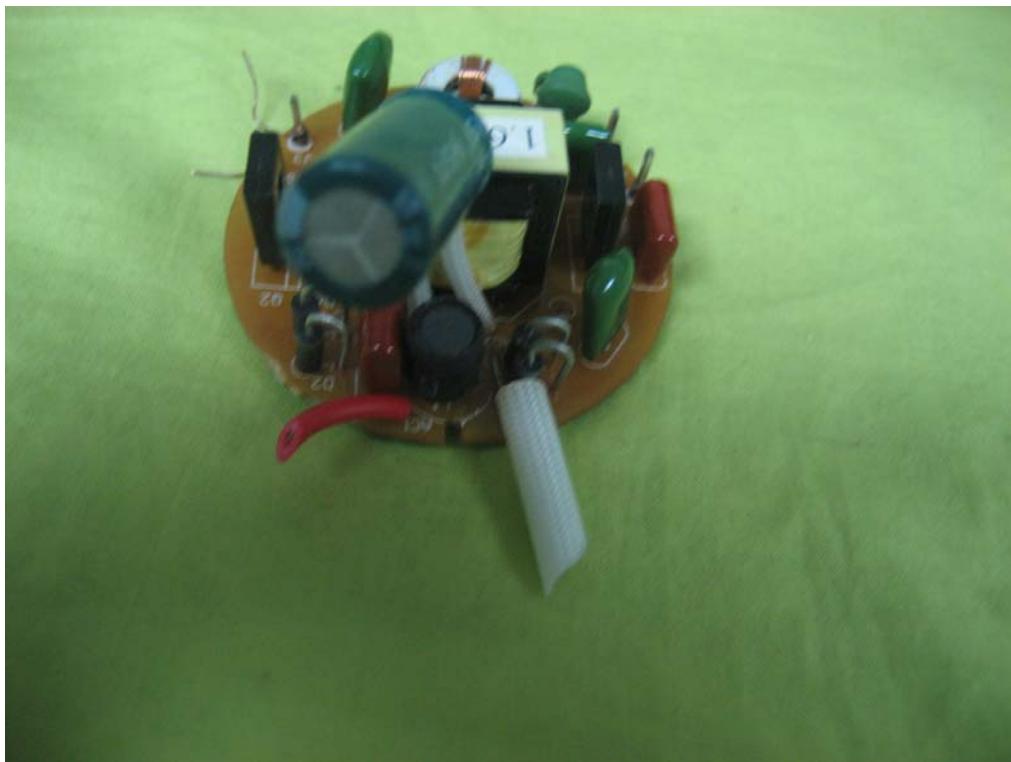

View of PCB – 2

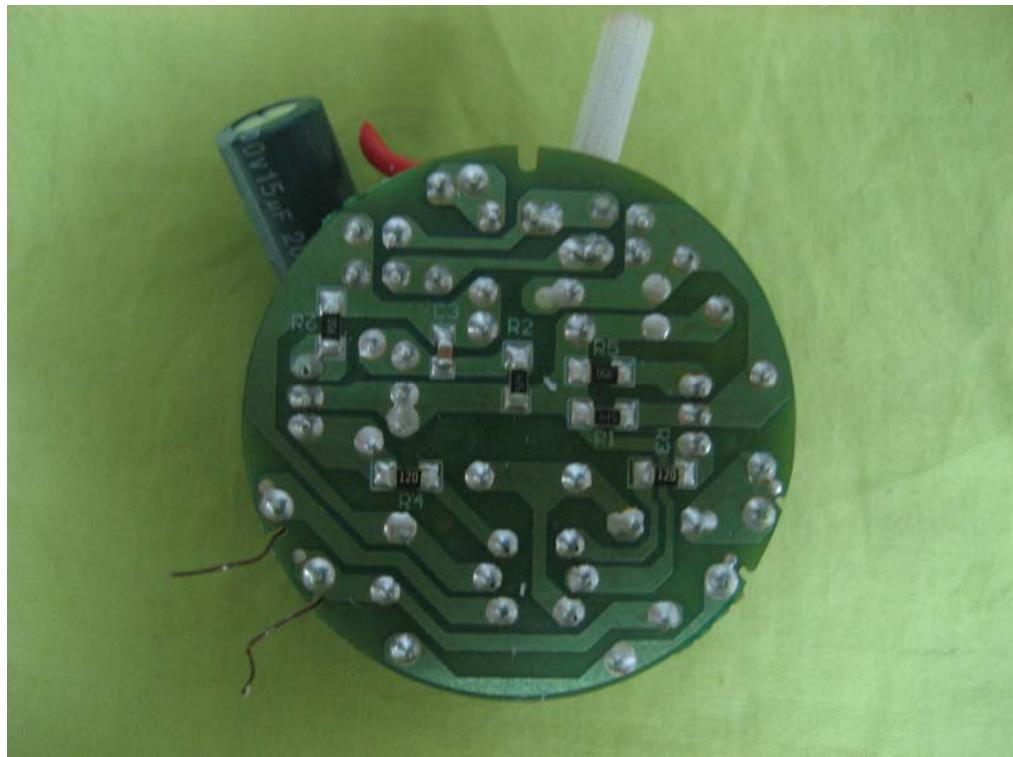

View of PCB – 3

----End of the report----