

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
UNINTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 18 REQUIREMENT**

for

**Self-ballasted lamp**

**M/N: EU-13W**

**FCC ID: XBSEU13W**

**Trade Name: Not Applicable**

**REPORT NO.: SZEE090817400222**

**Issue Date: Oct. 15, 2009**

Prepared for

**Sunny World (HK) Limited  
Rm 302-306, Hewlett Centre, 54 Hoi Yuen Road,  
Kwun Tong, Kowloon, H.K  
TEL: 00 852 23452772  
FAX: 00 852 23574860**

Prepared by

**CENTRE TESTING INTERNATIONAL CO., LTD.  
1F., BUILDING C, HONGWEI INDUSTRIAL ZONE,  
BAOAN 70 DISTRICT, SHENZHEN, CHINA  
TEL: 86-755-3368 3365  
FAX: 86-755-3368 3365**

**This report shall not be reproduced, except in full, without the written approval of  
CENTRE TESTING INTERNATIONAL**

## TABLE OF CONTENTS

1.	<b>CERTIFICATION INFORMATION .....</b>	3
2.	<b>SUMMARY OF TEST RESULTS.....</b>	4
3.	<b>TEST UNCERTAINTY .....</b>	4
4.	<b>PRODUCT INFORMATION .....</b>	4
4.1.	<b>PRODUCT INFORMATION .....</b>	4
4.2.	<b>TEST SETUP CONFIGURATION .....</b>	4
4.3.	<b>SUPPORT EQUIPMENT .....</b>	4
5.	<b>FACILITIES AND ACCREDITATIONS.....</b>	5
5.1.	<b>TEST FACILITY .....</b>	5
5.2.	<b>TEST EQUIPMENT LIST .....</b>	5
5.3.	<b>LABORATORY ACCREDITATIONS AND LISTINGS.....</b>	5
6.	<b>EQUIPMENT MODIFICATIONS .....</b>	5
7.	<b>TEST CONDITION.....</b>	6
7.1	<b>Test Configuration .....</b>	6
7.2	<b>EUT operation.....</b>	6
7.3	<b>Limit .....</b>	6
8.	<b>CONDUCTED EMISSIONS TEST .....</b>	7
8.1.	<b>Measurement Procedure.....</b>	7
8.2.	<b>Block Diagram of Test Setup.....</b>	7
8.3.	<b>Test Results .....</b>	7
9.	<b>RADIATED EMISSION TEST .....</b>	9
9.1.	<b>TEST PROCEDURE .....</b>	9
9.2.	<b>BLOCK DIAGRAM OF TEST SETUP .....</b>	9
9.3.	<b>TEST RESULTS .....</b>	10
APPENDIX 1	<b>PHOTOGRAPHS OF EUT .....</b>	12
APPENDIX 2	<b>EXTERNAL PHOTOGRAPHS OF EUT .....</b>	13
APPENDIX 3	<b>INTERNAL PHOTOGRAPHS OF EUT .....</b>	14

(Note: N/A means not applicable)

## 1. CERTIFICATION INFORMATION

**Applicant:** Sunny World (HK) Limited  
Rm 302~306 Hewlett Centre, 54 hoi Yuen Road, Kwun Tong,  
Kowloon, H.K

**Manufacturer:** Ningbo Zuoming Electronic Co., Ltd.  
No. 709 Yangmuqi Road, Ningbo, Zhejiang 315040, P.R.  
China

**Test Type:** FCC Part 18 for Lighting Device (Certification)

**Trade Name:** Not Applicable

**Product Name :** Self-ballasted lamp

**M/N:** EU-13W


**Report No.:** SZEE090817400222

**Date of Test:** Aug. 17, 2009 to Sep. 18, 2009

The above equipment was tested by Centre Testing International (CTI). The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 18.

The test results of this report relate only to the tested sample identified in this report.

Prepared by :



Lily Yan

Reviewed by :

  
Christy Chen

Approved by :

  
Jim Zhang

Manager

Date :

Oct. 15, 2009

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§18.307(c)	Conducted Emission	Compliant
§18.305(c)	Radiated Emission	Compliant

## 3. TEST UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value
Conducted emission	3.2 dB
Radiated emission	4.6 dB

## 4. PRODUCT INFORMATION

### 4.1. PRODUCT INFORMATION

**Product name:** Self-ballasted lamp  
**Model name:** EU-13W  
**Trade name:** Not Applicable  
**Technical data:** Self-ballasted lamp, 13W, AC 120V/60Hz  
**Function:** Lighting  
**Operation Frequency:** 60kHz

### 4.2. TEST SETUP CONFIGURATION

See test photographs attached in APPENDIX 1 PHOTOGRAPHS OF TEST SETUP for the actual connections between EUT and support equipment.

### 4.3. SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	---	---	---	---	---	---

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1. TEST FACILITY

The 3m Semi-Anechoic chamber test site and conducted measurement facility used to collect the radiated data is located on the address:

1F., Building C, Hongwei Industrial Zone 70 District., Baoan, Shenzhen, Guangdong, China. The Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 requirements. The test site Registration Number: 510007.

### 5.2. TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipments used at CTI for testing. The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

#### Equipment used during the tests:

3M Semi-anechoic Chamber - RE Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
Spectrum Analyzer	Agilent	E4443A	MY46185649	01/29/2010
Biconilog Antenna	ETS-LINGREN	3142C	00044562	07/31/2010
Multi device Controller	ETS-LINGREN	2090	00057230	01/29/2010

Shielding Room No. 1 - CE Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
Receiver	R&S	ESCI	100435	08/25/2010
LISN	R&S	ENV216	100098	08/25/2010

### 5.3. LABORATORY ACCREDITATIONS AND LISTINGS

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

## 6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

## 7. TEST CONDITION

### 7.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.

### 7.2 EUT operation

EUT was tested according to the following operation modes provided by the specifications given by the manufacturer, and reported the worst emissions.

### 7.3 Limit

#### Conducted Emission:

According to section 18.307(c) Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage	
	Q.P.( dBuV)	
0.45-2.51		48
2.51-3.0		69.5
3.0-30		48

#### Radiated Emission:

According to section 18.305(c) Radiated Emission Limits is as following:


Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m Q.P.)
30-88	3	40.0
88-216	3	43.5
216-1000	3	46.0

## 8. CONDUCTED EMISSIONS TEST

### 8.1. Measurement Procedure

- The EUT was placed on a non-conductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from EUT in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 8.2. Block Diagram of Test Setup

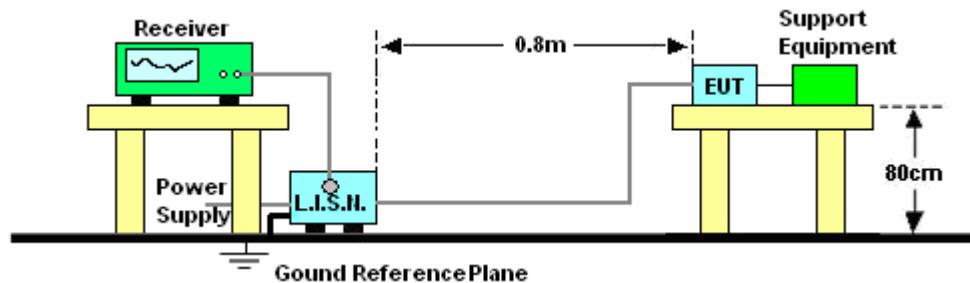

### 8.3. Test Results

**Power** : AC 120V/60Hz  
**Temperature** : 24

**Mode** : Normal  
**Humidity** : 53%


CE Test Result									
Frequency (MHz)	Reading Level (dBuV/m)		Correct Factor (dB)	Measurement (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Result (P/F)	Remarks (H/V)
	Peak	Q.P.		Peak	Q.P.				
0.6140	31.10	--	9.97	41.07	--	48.00	<-6	P	L
3.6100	31.60	--	9.80	41.40	--	48.00	<-6	P	L
6.3180	29.96	--	9.78	39.74	--	48.00	<-6	P	L
0.4780	32.78	--	10.01	42.79	--	48.00	<-3	P	N
3.6800	31.62	--	9.80	41.42	--	48.00	<-6	P	N
6.6780	29.49	--	9.78	39.27	--	48.00	<-6	P	N

Correct Factor  
 Measurement  
 Margin  
 “--”


= Cable loss + Antenna Factor  
 = Reading level + Factor  
 = Reading in reference to limit  
 = The emission level complied with the limits, with sufficient margin, so no further recheck.

**Graph:**

L:

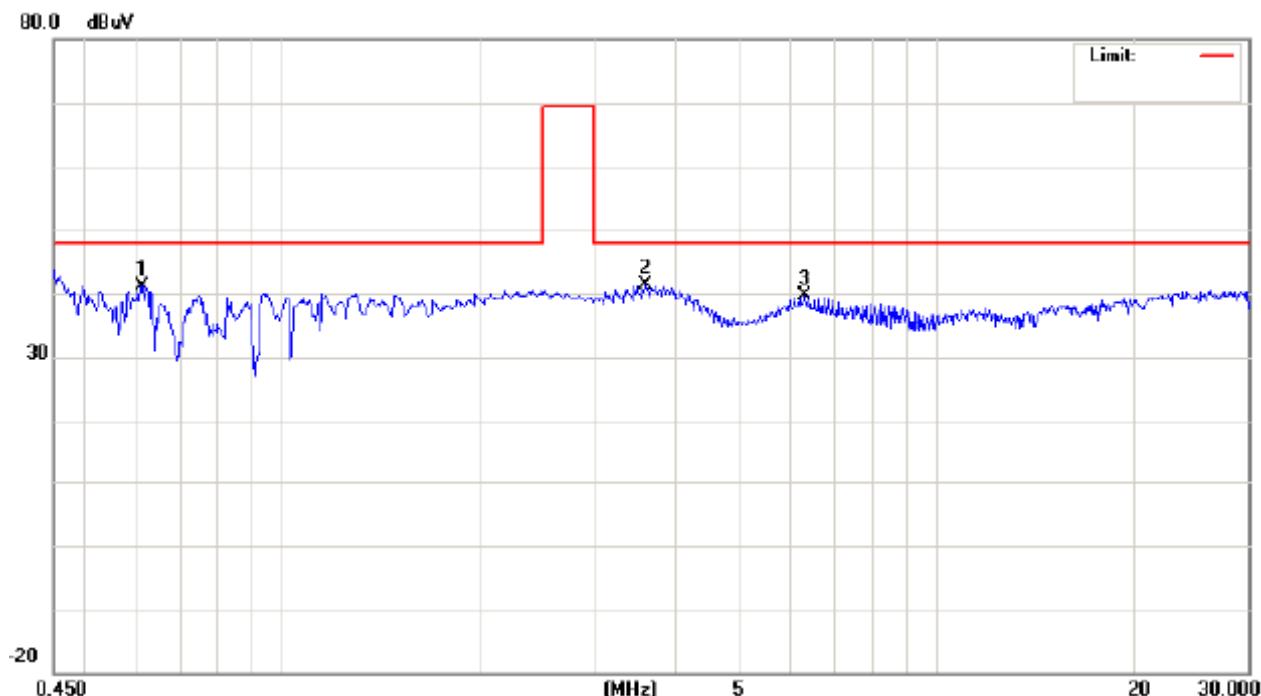

N:

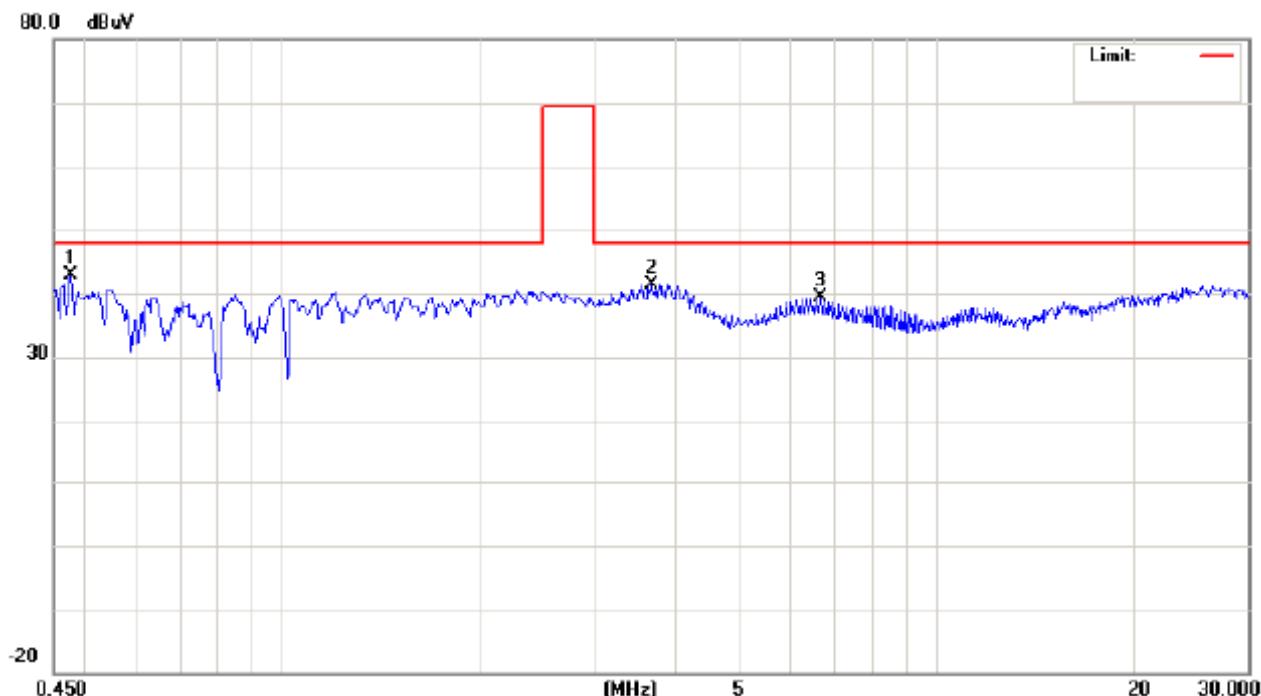


## 9. RADIATED EMISSION TEST

### 9.1. TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3-meter chamber, and 3 meters away from the antenna mounted on a variable-height tower.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW in 30 MHz ~ 1 GHz. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied from 1 m to 4 m above the ground in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: scan the antenna from 1 meter to 4 meters and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum QP value.

### 9.2. BLOCK DIAGRAM OF TEST SETUP

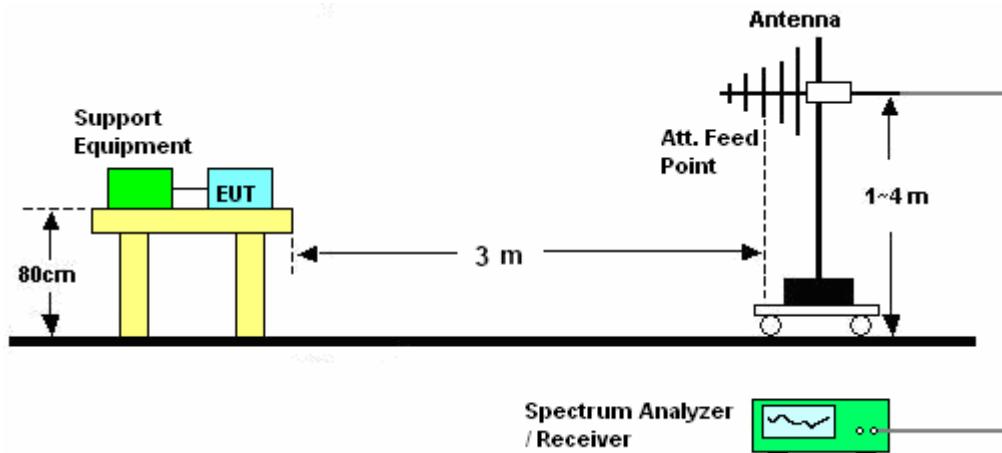

### 9.3. TEST RESULTS

**Power** : AC 120V/60Hz  
**Temperature** : 24

**Mode** : Normal  
**Humidity** : 53%

RE Test Result									
Frequency (MHz)	Reading Level (dBuV/m)		Correct Factor (dB)	Measurement (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Result (P/F)	Remarks (H/V)
	Peak	Q.P.		Peak	Q.P.				
36.4667	12.80	--	13.78	26.58	--	40.00	<-10	P	H
39.7000	30.44	27.78	11.85	42.29	39.63	40.00	-0.37	P	V

Correct Factor

= Cable loss + Antenna Factor

Measurement



= Reading level + Factor

Margin

= Reading in reference to limit

--

= The emission level complied with the limits, with sufficient margin, so no further recheck.

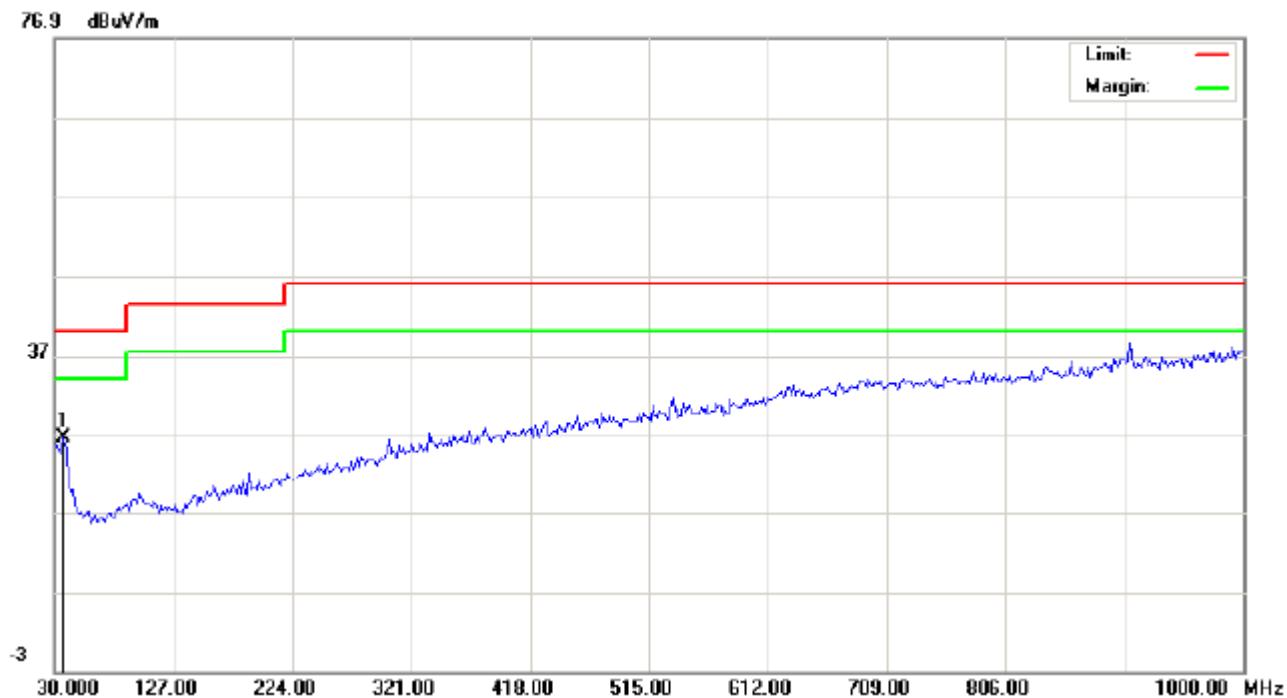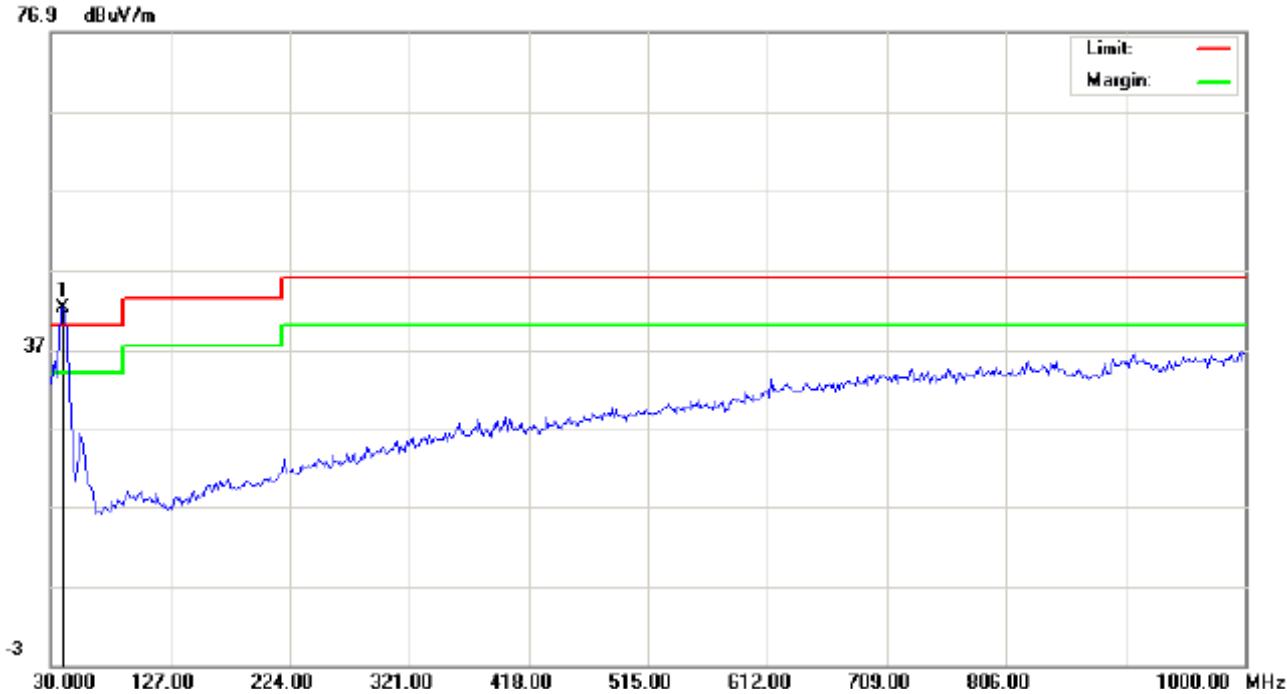
**Graphs:****H:****V:**

## APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

### CONDUCTED EMISSION TEST




### RADIATED EMISSION TEST

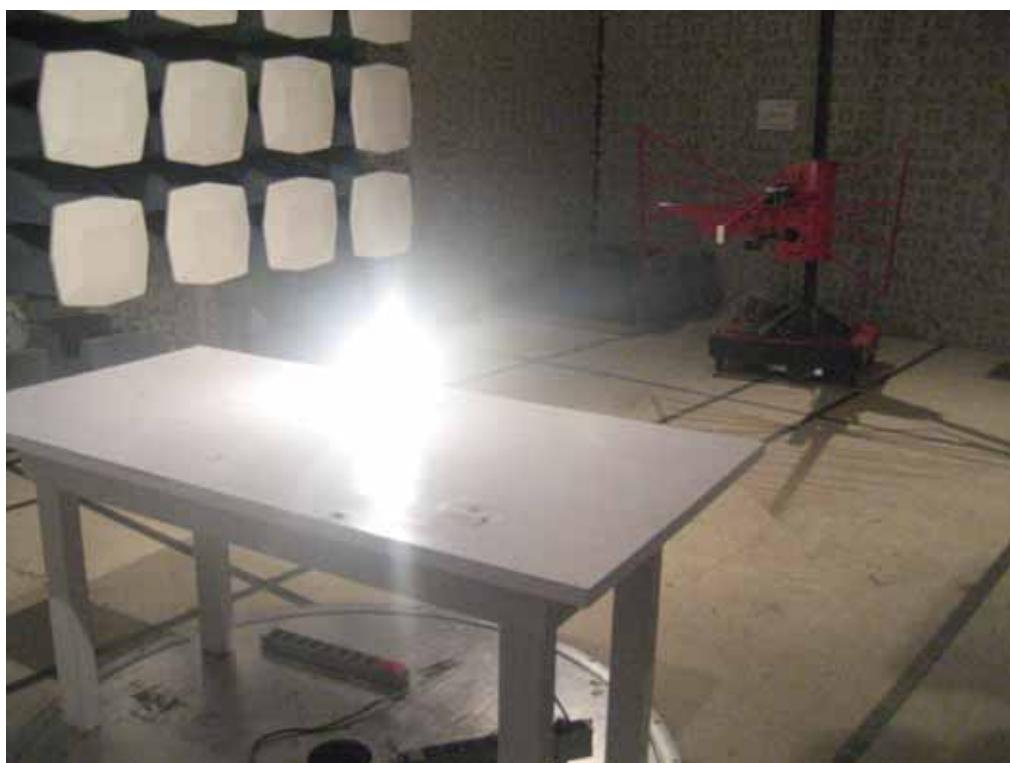


**APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT**

View of EUT

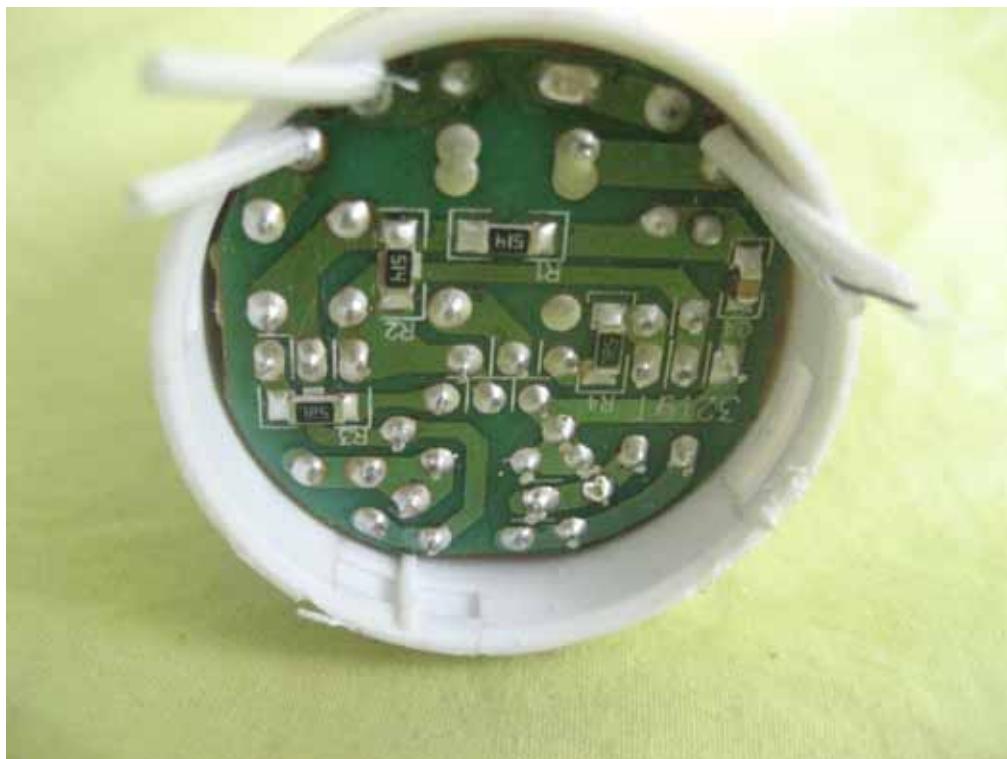**APPENDIX 3 INTERNAL PHOTOGRAPHS OF EUT**

View of PCB – 1

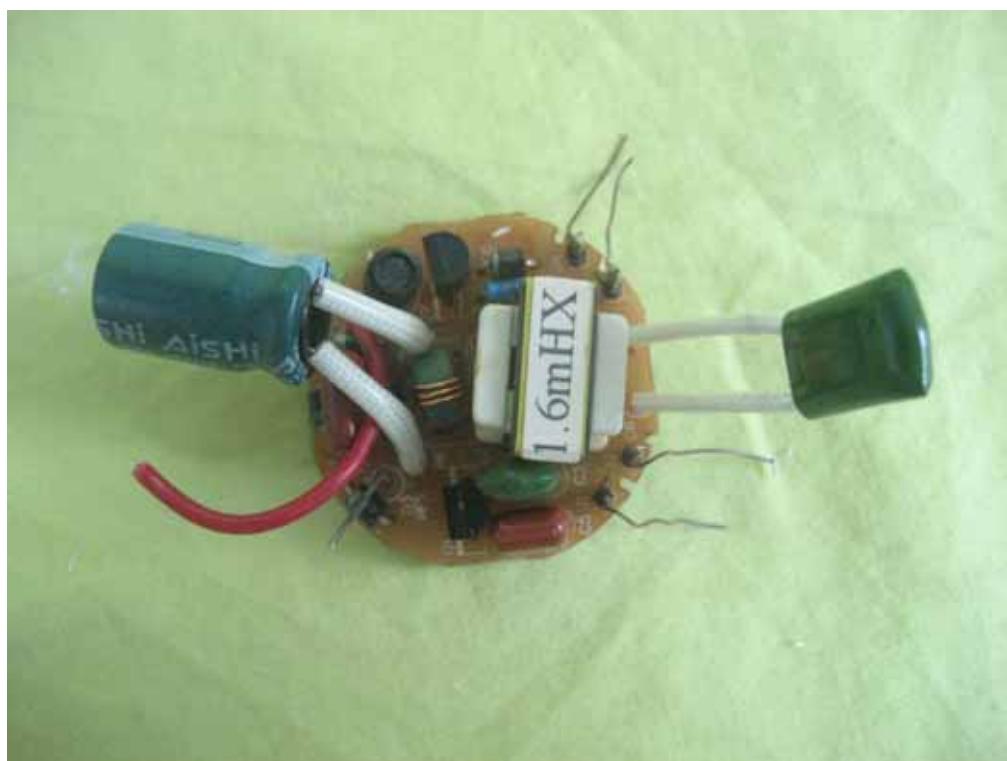View of PCB – 2  
----End of the report----