

386-1, Ho-dong, Cheoin-gu, Yongin-si, Ĝyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

# **TEST REPORT For FCC**

| 2009050025 |
|------------|
|            |

Date of Issue : MAY 12, 2009

FCC ID : XBWSC-100T

Model/Type No. : SC-100T

Applicant : SJ system

Applicant Address : #362-15, Daeya-dong, Siheung-si, Gyeonggi-do, Korea

Manufacturer : SJ system

Manufacturer Address : #362-15, Daeya-dong, Siheung-si, Gyeonggi-do, Korea

Contact Person : Mr. Bok-Kyun, Oh

Telephone : +82-31-311-1593

Received Date : April 20, 2009

J. C.

Test period : Start : MAY 01, 2009 End : MAY 12, 2009

The test results presented in this report relate only to the object tested.

Tested by

Kyu-Chul, Shin Test Engineer

Date: MAY 12, 2009

Reviewed by

Young-Joon, Park Technical Manager

Date: MAY 12, 2009



386-1, Ho-dong, Cheoin-gu, Yongin-si, Ĝyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

## REPORT REVISION HISTORY

| Date         | Revision            | Page No |
|--------------|---------------------|---------|
| MAY 12, 2009 | Issued (2009050025) | All     |
|              |                     |         |
|              |                     |         |
|              |                     |         |
|              |                     |         |
|              |                     |         |
|              |                     |         |
|              |                     |         |
|              |                     |         |

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

Test Report No.: 2009050025

Date: May 12, 2009

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



# **TABLE OF CONTENTS**

| REPORT        | REVISION HISTORY  | 2 |
|---------------|---|---|
| 1.0           | General Product Description                                       | 4 |
|               | Tested Frequency  |   |
| 1.3           | Model Differences   | 5 |
| 1.4           | Device Modifications  | 5 |
| 1.5           | Peripheral Devices  | 5 |
| 1.6           | Calibration Details of Equipment Used for Measurement             | 6 |
|               | Test Facility   |   |
|               | Laboratory Accreditations and Listings                            |   |
| 2.0           | Summary of tests  | 7 |
| 2.1           | Technical Characteristic Test                                     |   |
| 2.1.          |   |   |
| 2.1.          | - ·Jr·· · · · · · · · · · · · · · · · ·                           |   |
| 2.1.          |   |   |
| 2.1.          |   |   |
| 2.1.          |   |   |
| 2.1.          | 4 Frequency Stability   | 0 |
| 2.1.          | 5 TRANSIENT FREQUENCY BEHAVIOR                                    | 2 |
| 2.1.          | 6 Radiated Spurious Emission , 30MHz to 5.0GHz오류! 책갈피가 정의되어 있지 않습 | ᅬ |
| 다.            |   |   |
| 2.1.          | 6 Conducted Emissions   | 7 |
| <b>APPEND</b> | IX A – Test Equipment Used For Tests                              | O |

Test Report No.: 2009050025



# 1.0 General Product Description

| EUT Type                | : Pager Transmitter          |
|-------------------------|------------------------------|
| FCC Rule Part(s)        | : §2; §90                    |
| Model name              | : SC-100T                    |
| Serial number           | : Identical prototype        |
| Tx Freq. Range          | : 450.025 ~ 467.850          |
| Channel Space Bandwidth | 25kHz                        |
| Type of Modulation      | : 18K6F1D                    |
| Frequency Tolerance:    | : ± 0.00025 % (2.5ppm)       |
| Maximum Output Power    | : ERP : 0.85W                |
| Power Source            | : 12 Vdc                     |
| Antenna type            | : Helical antenna Gain: OdBi |

#### 1.1 **Tested Frequency**

|                 | LOW     | MID     | HIGH    |
|-----------------|---------|---------|---------|
| Frequency (MHz) | 450.025 | 457.575 | 467.850 |

Test Report No.: 2009050025 Page 4 of 30



386-1, Ho-dong, Cheoin-gu, Yongin-si, Ĝyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

## 1.3 Model Differences

#### 1.4 Device Modifications

The following modifications were necessary for compliance: Not applicable

# 1.5 Peripheral Devices

|      | Device   |   | Manufacturer |                         | Model No. | Serial No. |   |      |           |   |         |   |
|------|----------|---|--------------|-------------------------|-----------|------------|---|------|-----------|---|---------|---|
| E    | U        | Т | S            | J                       | S         | у          | S | t    | е         | m | SC-100T | - |
| PS/2 | Keyboard |   | Не           | Hewlett-Packard Company |           |            |   | 5219 | BN5017686 |   |         |   |

Test Report No.: 2009050025 Page 5 of 30



386-1, Ho-dong, Cheoin-gu, Yongin-si, Ĝyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

#### 1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

## 1.7 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 1.8 Laboratory Accreditations and Listings

| Country       | Agency | Scope of Accreditation  | Logo                         |
|---------------|--------|---|------------------------------|
| USA           | FCC    | 3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.  | FC 93250                     |
| JAPAN         | VCCI   | 10 meter Open Area Test Site and one conducted site.  | <b>P</b> -948, C-986         |
| KOREA         | ксс    | EMI (10 meter Open Area Test Site and two conducted sites) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)  | No. 51, KR0025               |
| International | KOLAS  | EMC   | KOLAS 90 TESTING NO. 119 BHT |
| Europe        | GLAS   | EMC EN 55011, EN 55022, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, EN 50130-4, EN 55024, EN 61204-3, EN 60601-1-2, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11 | <b>TÜV</b> No.13000796-02    |

Test Report No.: 2009050025 Page 6 of 30



386-1, Ho-dong, Cheoin-gu, Yongin-si, Ĝyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

# 2.0 Summary of tests

| FCC Part<br>Section(s) | Parameter                            | Test Condition | Status<br>(note 1) |
|------------------------|--------------------------------------|----------------|--------------------|
| 90.205                 | Power Limit                          |                | С                  |
| 90.207                 | Type of Emission                     |                | С                  |
| 90.209                 | Banddwidth Limitation                | Conducted      | С                  |
| 90.210                 | Emissions Mask                       |                | С                  |
| 90.213                 | Frequency Stability                  |                | С                  |
| 90.214                 | Transient Frequency Behavior         |                | С                  |
| 90.210                 | Field Strength of Spurious Radiation | Radiated       | С                  |
| 15.207                 | Conducted Emissions                  | Line Conducted | С                  |

<u>Note 1</u>: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

*Note 2*: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

Test Report No.: 2009050025 Page 7 of 30



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

#### 2.1 Technical Characteristic Test

#### 2.1.1 Power Limit

According to 90.205(g) 450–470 MHz. The maximum allowable station effective radiated power(ERP) is dependent upon the station's antenna HAAT and required service area and will beauthorized in accordance with table 2. (I.e. 2W for service area less than 3 km.) Table 2-450-470 MHz-Maximum ERP/Reference HAAT for a Specific Service Area Radius

|                                 | Service area radius (km) |     |     |     |     |     |     |     |     |      |
|---------------------------------|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|------|
|                                 | 3                        | 8   | 13  | 16  | 24  | 32  | 40  | 48  | 64  | 80   |
| Max.<br>ERP(W)1                 | 2                        | 100 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500  |
| Up to<br>reference<br>HAAT (m)3 | 15                       | 15  | 15  | 27  | 63  | 125 | 250 | 410 | 950 | 2700 |

- 1 Maximum ERP indicated provides for a 39 dBu signal strength at the edge of the service area per FCCReport R-6602, Fig. 29 (See Sec. 73.699, Fig. 10 b).
- 3 When the actual antenna HAAT is greater than the reference HAAT, the allowable ERP will be reduced in accordance with the following equation:

ERP allow = ERPmax X (HAATref / HAATactual)

#### **Test Setup Layout**




Figure 1: Measurement setup for the carrier frequency seperation

Limit: 2Watts

#### **Test Results**


#### CONDUCTED OUTPUT POWER

| Frequency<br>(MHz) | Peak output<br>power(dBm) | Peak output<br>power(W) | Result   |
|--------------------|---------------------------|-------------------------|----------|
| 450.025            | 31.45                     | 1.396                   | Complies |
| 457.575            | 31.38                     | 1.374                   | Complies |
| 467.850            | 30.86                     | 1.219                   | Complies |


See next pages for actual measured spectrum plots.

Test Report No.: 2009050025 Page 8 of 30

#### **Maximum peak Conducted Output Power**

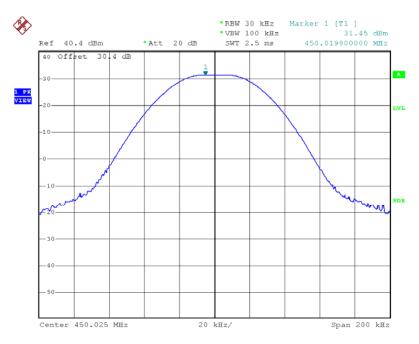


Date: 21.MAY.2009 17:00:55

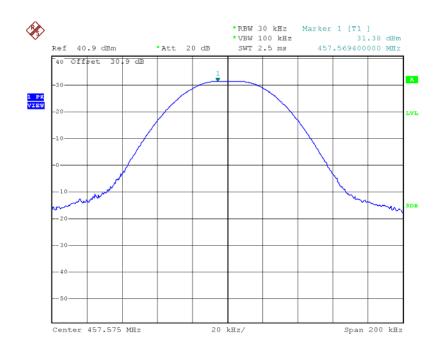

Date: 21.MAY.2009 16:59:47

Test Report No.: 2009050025 Page 9 of 30



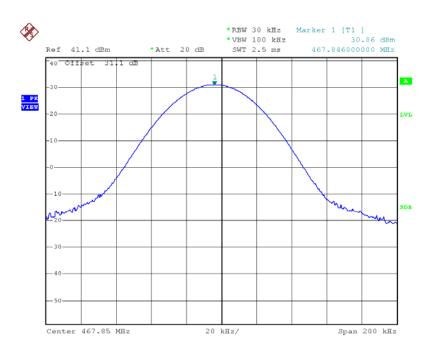

Date: 21.MAY.2009 17:02:43

Test Report No.: 2009050025 Page 10 of 30 Date: May 12, 2009



386-1, Ho-dong, Cheoin-gu, Yongin-si, Ĝyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

## 2.1.2 Type of Emission

According to 90.207(e) for non-voice paging operations, only A1A, A1D, A2B, A2D, F1B, F1D,F2B, F2D, G1B, G1D, G2B, or G2D emissions will be authorized.

SC-100T: F1D

This equipment is non-voice only paging operations

This equipment without audio low pass filter

2.1003 (4) Type of Emission: 18K6F1D

Bn = 2M + 2DK

M = 9600 bits per second

D = 4.5 KHz (Peak Deviation)

K =

Bn = 2(9600bps/2) + 2(4500) = 18.6k

Test Report No.: 2009050025 Page 11 of 30



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

#### 2.1.3 Banddwidth Limitation

According to 90.210 For all other types of emissions, the maximum authorized bandwidth shall not be more than that normally authorized for voice operations.


According to 90.210, unless specified elsewhere, channel spacings and bandwidths that willbe authorized in the following frequency bands are given in the following "STANDARDCHANNEL SPACING/BANDWIDTH" table.

Standard Channel Spacing/Bandwidth

|                        | <u> </u> |                 |  |
|------------------------|----------|-----------------|--|
| Fraguerous band (MIII) | Channel  | Authorizod      |  |
| Frequency band (MHz)   | spacing  | Authorized      |  |
|                        | (kHz)    | bandwidth (kHz) |  |
| Below 25               |          |                 |  |
| 25-50.                 | 20       | 20              |  |
| 72-76                  | 20       | 20              |  |
| 150-174                | 17.5     | 1,320/11.25/6   |  |
| 220-222                | 5        | 4               |  |
| 406-512                | 6.25     | 20/11.25/6      |  |
| 806-809/851-854        | 12.5     | 20              |  |
| 809-824/854-869        | 25       | 20              |  |
| 896-901/935-940        | 12.5     | 13.6            |  |
| 902-928                |          |                 |  |
| 929-930                | 25       | 20              |  |
| 1427-1432              | 12.5     | 12.5            |  |
| 2450-2483.5            |          |                 |  |
| Above 2500             |          |                 |  |

<sup>1)</sup> For stations authorized on or after August 18, 1995.

#### **Test Setup Layout**



Limit

20kHz

#### **Test Results**

| Frequency<br>(MHz) | Measured Bandwidth (kHz) | Result   |
|--------------------|--------------------------|----------|
| 457.575            | 17.80                    | Complies |


See next pages for actual measured spectrum plots.

Test Report No.: 2009050025 Page 12 of 30

<sup>3)</sup> Operations using equipment designed to operate with a 25 kHz channel bandwidth will be authorized a20 kHz bandwidth. Operations using equipment designed to operate with a 12.5 kHz channel bandwidth will be authorized an 11.25 kHz bandwidth. Operations using equipment designed to operate with a 6.25kHz channel bandwidth will be authorized a 6 kHz bandwidth. All stations must operate on channels with a band-width of 1.5KHz or less beginning January 1,2013, unless the operations meet the efficiency standard of 90.203(j)(3).



#### **Bandwidth**

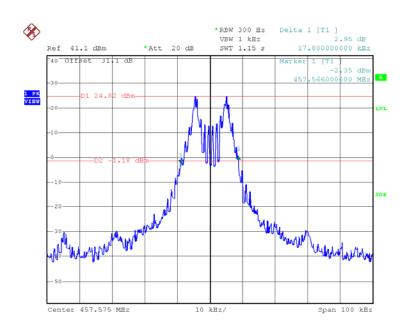

Date: 21.MAY.2009 17:33:22

Test Report No.: 2009050025 Page 13 of 30 Date: May 12, 2009



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com


#### 2.1.3 Emissions Mask

- \* This equip-ment without audio low pass filter
- \* This equip-ment Paging-only

90.210(g) Emission Mask G.

- (g)Emission Mask G For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:
- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in KHz) of more than 10 kHz, but no more than 250 percent of the authorized band-width: At least 116log (fd /6.1) dB or 50+10log(P) dB or 70dB, whichever is the lesser attenuation;
- (2) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.

#### **Test Setup Layout**




See next pages for actual measured spectrum plots.


Test Report No.: 2009050025 Page 14 of 30



#### Low Frequency

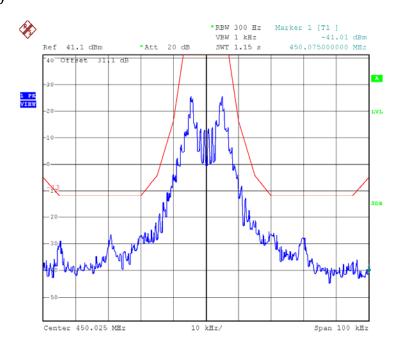


#### Mid Frequency

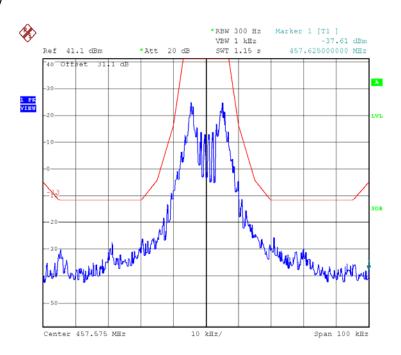

Page 15 of 30 Test Report No.: 2009050025



#### High Frequency

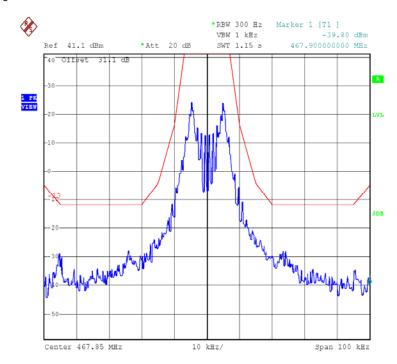

Test Report No.: 2009050025 Page 16 of 30



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

#### 2.1.4 Transmitter Spurious Conducted Emission

#### 2.1.4.1 Test Procedures

#### The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels


RBW = 100 kHz

 $VBW = 100 \text{ kHz} (\geq RBW)$ 

Span = 100 MHz Detector function = peak

Trace =  $\max$  hold Sweep = auto

#### **Test Setup Layout**



#### Limit


-13dBm

See next pages for actual measured spectrum plots.


Test Report No.: 2009050025 Page 17 of 30



#### (Low Frequency)

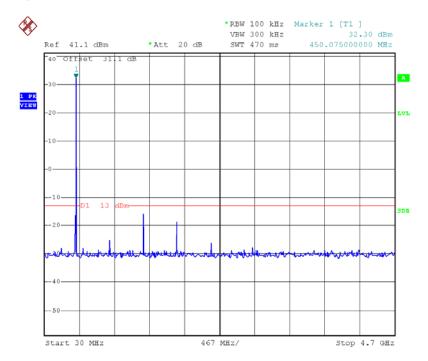



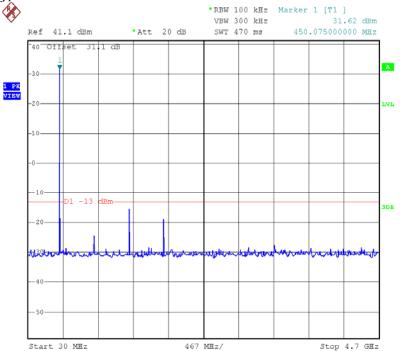


Test Report No.: 2009050025


Date: May 12, 2009

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)

Page 18 of 30





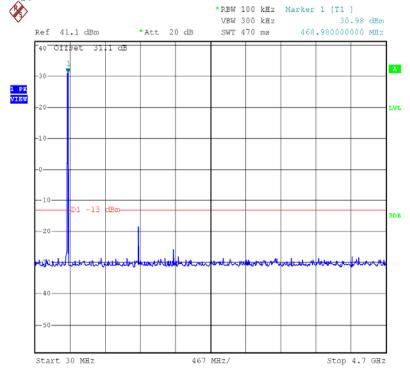

Test Report No.: 2009050025 Page 19 of 30



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

#### 2.1.4 Frequency Stability

Minimum Frequency Stability[Parts per million (ppm)

| Frequency range | Fixed and base | Mobile               | e Stations                   |
|-----------------|----------------|----------------------|------------------------------|
| (MHz)           | Stations       | Over 2W output power | 2 waits or less output power |
| Below 25        | 1.13-100       | 100                  | 100                          |
| 25-50           | 20             | 20                   | 50                           |
| 72-76           | 5              | 5 70gg               | 50                           |
| 150-174         | 5.11.5         | 4. 5                 | **50                         |
| 220-222         | 0.1            | 1.5                  | 1.5                          |
| 421-512         | 1.11.15.25     | E <sub>5</sub>       | <sup>5</sup> 5               |
| 806-821         | 1.5            | 2.5                  | 2.5                          |
| 821-824         | 1.0            | 1.5                  | 1.5                          |
| 851-866         | 1.5            | 2.5                  | 2.5                          |
| 866-869         | 1.0            | 1.5                  | 1.5                          |
| 896-901         | 1.0.1          | 1.5                  | 1.5                          |
| 902-928         | 2.5            | 2.5                  | 2.5                          |
| 902-928         | 2.5            | 2.5                  | 2.5                          |
| 929-930         | 1.5            |                      | 4.50                         |
| 935-940         | 0.1            | 1.5                  | 1.5                          |
| 1427-1435       | 300            | 300                  | 300                          |
| Above 2450      | 12             | •                    | 3-1                          |

- 1 Fixed and base stations with over 200 watts transmitter power must have a frequency stability of 50 ppm except for equipment used in the Public Safety Pool where the frequency stability is 100 ppm.
- 2 For single sideband operations below 25 MHz, the carrier frequency must be maintained within 50 Hz of the authorized carrier frequency.
- 3 Travelers information station transmitters operating from 530–1700 kHz and transmitters exceeding 200 watts peak envelope power used for disaster communications and long distance circuit operations pursuant to §§ 90.242 and 90.264must maintain the carrier frequency to within 20 Hz of the authorized frequency.
- 4 Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of5 ppm.
- 5 In the 150–174 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.
- 6 In the 150–174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm. Mobile stations de-signed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.
- 7 In the 421–512 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 1.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 0.5 ppm.
- 8 In the 421–512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have afrequency stability of 1.0 ppm.
- 9 Fixed stations with output powers above 120 watts and necessary bandwidth less than 3 kHz must operate with a frequency stability of 100 ppm. Fixed stations with output powers less than 120 watts and using time-division multiplex, must operate with a frequency stability of 500 ppm.

10 Frequency stability to be specified in the station authorization.


Test Report No.: 2009050025 Page 20 of 30 Date: May 12, 2009

#### CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

- 11 Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150–174 MHz band and 2.5 ppm in the 421–512 MHz band.
- 12 Mobile units may utilize synchronizing signals from associated base stations to achieve the specified carrier stability.
- 13 Fixed non-multilateration transmitters with an authorized bandwidth that is more than 40 kHz from the band edge, intermittently operated hand-held readers, and mobile transponders are not subject to frequency tolerance restrictions.
- 14 Control stations may operate with the frequency tolerance specified for associated mobile frequencies.
  - (a) Unless noted elsewhere, transmitters used in the services governed by this part must have minimum frequency stability as specified in the following table.
  - 8 In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.
  - (b) For the purpose of determining the frequency stability limits, the power of a transmitter is considered to be the maximum rated output power as specified by the manufacturer.

#### **Test Setup Layout**



#### **MEASUREMENT DATA:**

Assigned Frequency (Ref. Frequency): 457.575MHz

| TEMPERATURE  | FREQUENCY(MHz) | PPM   | LIMIT(ppm) |
|--------------|----------------|-------|------------|
| -30          | 457.57465      | -0.76 | 2.5        |
| -20          | 457.57492      | -0.10 | 2.5        |
| -10          | 457.57504      | 0.09  | 2.5        |
| 0            | 457.57501      | 0.02  | 2.5        |
| 10           | 457.57488      | -0.24 | 2.5        |
| 20           | 457.57575      | 1.64  | 2.5        |
| 30           | 457.57485      | -0.34 | 2.5        |
| 40           | 457.57498      | -0.04 | 2.5        |
| 50           | 457.57509      | 0.19  | 2.5        |
| +15% : 13.8V | 457.57479      | -0.46 | 2.5        |
| -15% : 10.2V | 457.574862     | -0.30 | 2.5        |

#### Limit

2.5ppM

Test Report No.: 2009050025

Date: May 12, 2009

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



386-1, Ho-dong, Cheoin-gu, Yongin-si, Ĝyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

#### 2.1.5 TRANSIENT FREQUENCY BEHAVIOR

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time Intervals                                | Maximum Frequency             | All Equipment            |               |  |
|---|-------------------------------|--------------------------|---------------|--|
|   | Difference                    | 150 to 174MHz            | 421 to 512MHz |  |
| Transient frequency                           | Behavior for Equipment Design | ed to Operate on 25kHz ( | Charmels      |  |
| tı <sup>4</sup>                               | ±25.0 kHz                     | 5.0 ms                   | 10.0 ms       |  |
| t <sub>2</sub>                                | ±12.5 kHz                     | 20.0 ms                  | 25.0 ms       |  |
| t <sub>2</sub><br>t <sub>3</sub> <sup>4</sup> | ±25.0 kHz                     | 5.0 ms                   | 10.0 ms       |  |
|   | Behavior for Equipment Design | ed to Operate on 12.5kH  | z Channels    |  |
| tı <sup>4</sup>                               | ±12.5 kHz                     | 5.0 ms                   | 10.0 ms       |  |
| <b>t</b> <sub>2</sub>                         | ±6.25 kHz                     | 20.0 ms                  | 25.0 ms       |  |
| ts <sup>4</sup>                               | ±12.5 kHz                     | 5.0 ms                   | 10.0 ms       |  |
|   | Behavior for Equipment Design | ed to Operate on 6.25kH  | z Channels    |  |
| tı <sup>4</sup>                               | ±6.25 kHz                     | 5.0 ms                   | 10.0 ms       |  |
| t <sub>2</sub>                                | ±3.125 kHz                    | 20.0 ms                  | 25.0 ms       |  |
| t₅⁴   | ±6.25 kHz                     | 5.0 ms                   | 10.0 ms       |  |

- 1 ton is the instant when a 1 kHz test signal is completely suppressed, including any capture time due tophasing.
- 4 If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period
- t1. is the time period immediately following ton
- t2 is the time period immediately following
- t3 is the time period immediately before to ff


Test Report No.: 2009050025 Page 22 of 30 Date: May 12, 2009

Form No.: CTK-RF-EF-Part15 SubpartC(Rev.2)



386-1, Ho-dong, Cheoin-gu, Yongin-si, Ĝyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

#### **Test Setup Layout**

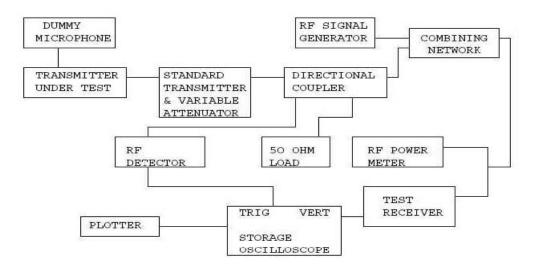

#### Limit


t2=25ms; during time interval t2 the maximum frequency different=±12.5KHz


See next pages for actual measured spectrum plots.

Test Report No.: 2009050025 Page 23 of 30



#### TRANSIENT FREQUENCY BEHAVIOR

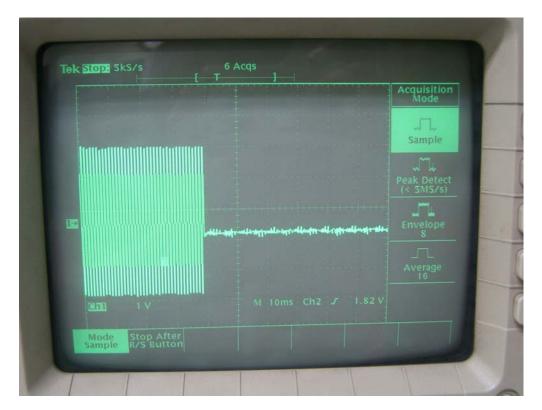

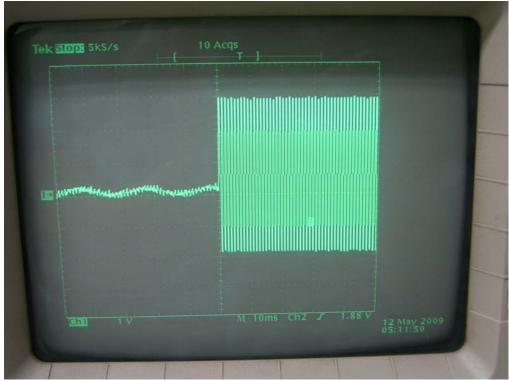

Page 24 of 30 Test Report No.: 2009050025



386-1, Ho-dong, Cheoin-gu, Yongin-si, Ĝyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

#### 2.1.6 Field Strength of Surious Radiation

REGULATIONS : 47CFR2.1053 , 90.210

TEST METHOD/GUIDE: ANSI/TIA-603-C

#### Test Procedure

1. Adjust the spectrum analyzer for the following Setting:

a) WBW: 10kHz(<1GHz), 1MHz(>1GHz).

b) VBW: 300kHz(<1GHz), 3MHz(>1GHz).


C) Sweep Speed: 50mS

d) Detector mode: Positive Peak

- 2. The transmitter was placed on a wooden turntable, and it was transmitting into non-radiation load which was also placed on the turntable.
- 3. The measurement antenna was placed at a distance of 3meters from the EUT. During test, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT The test was performed by placing the EUT on 3-orthogonal axis.
- 4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 5. Remove the EUT and replace it with substitution antenna A signal generator was connected to the substitution antenna by a non-radiating cable.

  The absolute levels of the spurious emissions were measured by the substitution.

#### Measuring Equipment Configuration

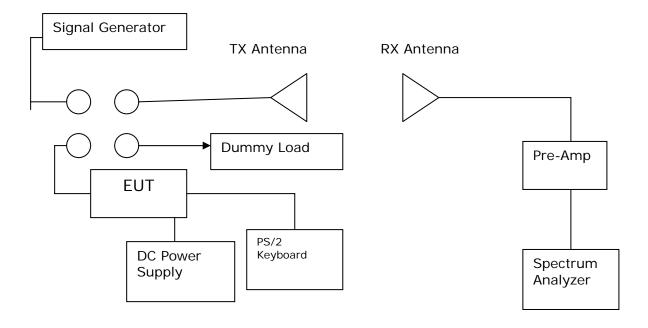

Test Report No.: 2009050025 Page 25 of 30



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

-Test result : Low Frequency

P=31.83dBm

| Frequency<br>(MHz) | Pol | Correct Level<br>(dBm) | Emission Level<br>(dBc) | Limit<br>(dBc) |
|--------------------|-----|------------------------|-------------------------|----------------|
| 899.874            | V   | -79.40                 | -47.57                  | -44.82         |
| 1350.217           | V   | -82.17                 | -50.34                  | -44.82         |

Test result: mid Frequency

P=31.46dBm

| Frequency | Pol | Correct Level | Emission Level | Limit  |
|-----------|-----|---------------|----------------|--------|
| (MHz)     | POI | (dBm)         | (dBc)          | (dBc)  |
| 918.020   | V   | -80.70        | -49.24         | -44.46 |
| 1372.725  | V   | -84.22        | -52.76         | -44.46 |

Test result: High Frequency

P=31.13dBm

| Frequency<br>(MHz) | Pol | Correct Level<br>(dBm) | Emission Level<br>(dBc) | Limit<br>(dBc) |
|--------------------|-----|------------------------|-------------------------|----------------|
| 937.217            | V   | -80.18                 | -49.05                  | -44.14         |
| 1401.53            | V   | -83.05                 | -51.92                  | -44.14         |

Mask G Limit(dBc) = 43+10Log(P)

Correct Level(dBm) = SG(dBm) + Ant Gain(dBi)-Loss(Cable)(dB)

Emission Level(dBc) = Correct Level(dBm) - Power(dBm)

P= Carrier Level

Test Report No.: 2009050025 Page 26 of 30



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea Tel: +82-31-339-9970 Fax: +82-31-339-9855 www.e-ctk.com

#### 2.1.6 Conducted Emissions

#### **Test Location**

Shielded Room

#### **Frequency Range of Measurement**

150 kHz to 30 MHz

#### **Instrument Settings**

IF Band Width: 9 kHz

#### **Test Procedures**

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

#### Limit

#### - 15.207(a)

| Frequency  | Conducted Limit (dBuV) |           |  |  |
|------------|------------------------|-----------|--|--|
| (MHz)      | Quasi-peak             | Average   |  |  |
| 0.15 ~ 0.5 | 66 to 56*              | 56 to 46* |  |  |
| 0.5 ~ 5    | 56                     | 46        |  |  |
| 5 ~ 30     | 60                     | 50        |  |  |

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### **Test Results**

The requirements are:

□ Complies

| Frequency<br>(MHz) | Measured Data<br>(dBuV/m) | Margin<br>(dB) | Remark     |
|--------------------|---------------------------|----------------|------------|
| 0.44               | 40.4                      | 16.5           | Quasi-peak |

Test Report No.: 2009050025 Page 27 of 30




#### **Test Data**

| Frequency | Corre | orrection |      |        | Quasi   | -peak  |        |        | Ave     | rage   |        |
|-----------|-------|-----------|------|--------|---------|--------|--------|--------|---------|--------|--------|
| . ,       | Fac   | tor       | Line | Limit  | Reading | Result | Margin | Limit  | Reading | Result | Margin |
| [MHz]     | LISN  | Cable     |      | [dBuV] | [dBuV]  | [dBuV] | [dB]   | [dBuV] | [dBuV]  | [dBuV] | [dB]   |
| 0.19      | 0.1   | 0.2       | Н    | 64.0   | 40.0    | 40.3   | 23.8   | 54.0   | 26.4    | 26.7   | 27.4   |
| 0.44      | 0.1   | 0.2       | N    | 57.1   | 40.1    | 40.4   | 16.6   | 47.1   | 35.2    | 35.5   | 11.6   |
| 0.50      | 0.1   | 0.3       | N    | 56.0   | 38.4    | 38.8   | 17.2   | 46.0   | 34.0    | 34.4   | 11.6   |
| 12.63     | 0.5   | 0.7       | N    | 60.0   | 41.4    | 42.6   | 17.4   | 50.0   | 28.7    | 29.9   | 20.1   |
| 12.74     | 0.5   | 0.7       | N    | 60.0   | 40.8    | 42.0   | 18.0   | 50.0   | 28.8    | 30.0   | 20.0   |
| 12.76     | 0.5   | 0.7       | N    | 60.0   | 41.3    | 42.5   | 17.5   | 50.0   | 29.4    | 30.6   | 19.5   |
|           |       |           |      |        |         |        |        |        |         |        |        |
|           |       |           |      |        |         |        |        |        |         |        |        |
|           |       |           |      |        |         |        |        |        |         |        |        |
|           |       |           |      |        |         |        |        |        |         |        |        |
|           |       |           |      |        |         |        |        |        |         |        |        |
|           |       |           |      |        |         |        |        |        |         |        |        |
|           |       |           |      |        |         |        |        |        |         |        |        |
|           |       |           |      |        |         |        |        |        |         |        |        |
|           |       |           |      |        |         |        |        |        |         |        |        |
|           |       |           |      |        |         |        |        |        |         |        |        |

H: HOT, N: NEUTRAL

Page 28 of 30 Test Report No.: 2009050025



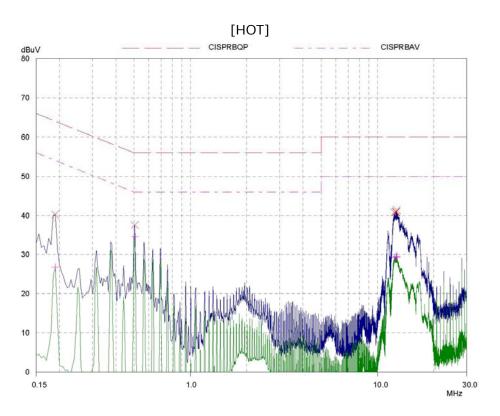

# [NEUTRAL] CISPRBQP CISPRBAV dBuV 80 70 60 50 40 30 20 10 0 30.0 MHz 1.0 0.15 10.0

Test Report No.: 2009050025



# **APPENDIX A – Test Equipment Used For Tests**

|    | Name of Equipment                | Manufacturer              | Model No. | Serial No.   | Due Date   |
|----|----------------------------------|---------------------------|-----------|--------------|------------|
| 1  | Spectrum Analyzer                | HP                        | E4403B    | US39440619   | 2009-09-03 |
| 2  | Spectrum Analyzer                | Rohde & Schwarz           | FSP-30    | 100994       | 2009-10-31 |
| 3  | EMI Test Receiver                | Rohde & Schwarz           | ESVS30    | 826638/008   | 2010-03-07 |
| 4  | ULTRA Broadband Antenna          | Rohde & Schwarz           | HL562     | 361324/014   | 2010-06-12 |
| 5  | LOOP ANTENNA                     | EMCO                      | 6502      | 9107-2652    | 2010-10-17 |
| 6  | LOOP ANTENNA                     | EMCO                      | 6502      | 9607-3020    | 2010-03-06 |
| 7  | System Power Supply              | HP                        | 6032A     | 3440A-10521  | 2009-07-07 |
| 8  | <b>EPM Series Power Meter</b>    | HP                        | E4418A    | GB38272734   | 2009-10-31 |
| 9  | Power Sensor                     | HP                        | 8481A     | 331BA92056   | 2009-10-31 |
| 10 | Audio Analyzer                   | HP                        | 8903B     | 2747A03432   | 2009-11-03 |
| 11 | ESG-D Series Signal<br>Generator | Agilent                   | E4432B    | US40054094   | 2009-10-31 |
| 12 | SYNTHESIZED SWEEPER              | HP                        | 8341B     | 2819A01563   | 2009-10-31 |
| 13 | Modulation Analyzer              | HP                        | 8901B     | 3438A05228   | 2009-11-03 |
| 14 | Attenuator                       | HP                        | 8494A     | 3308A33351   | 2009-10-31 |
| 15 | Temp&Humi Chamber                | Kunpoong                  | KP-1000   | 2002KP050041 | 2010-01-21 |
| 16 | Temp&Humi Chamber                | Kunpoong                  | KP-RC2000 | 2002KP650042 | 2010-01-21 |
| 17 | EMC Analyzer                     | Agilent                   | E7403A    | MY42000054   | 2009-09-03 |
| 18 | Horn Antenna                     | ETS-Lindgren              | 3115      | 00078894     | 2009-11-29 |
| 19 | Horn Antenna                     | ETS-Lindgren              | 3115      | 00078895     | 2009-11-29 |
| 20 | Horn Antenna                     | ETS-Lindgren              | 3116      | 00062504     | 2009-11-27 |
| 21 | Horn Antenna                     | ETS-Lindgren              | 3116      | 00062916     | 2009-11-27 |
| 22 | Dipole Antenna                   | SCHWARZBECK               | VHA 9103  | VHA91032557  | 2009-11-27 |
| 23 | Dipole Antenna                   | SCHWARZBECK               | UHA 9105  | UHA91052417  | 2009-11-27 |
| 24 | OPT H64 AMPLIFIER                | HP                        | 8447F     | 3113A06814   | 2010-02-28 |
| 25 | PREAMPLIFIER                     | Agilent                   | 8449B     | 3008A02307   | 2009-10-31 |
| 26 | Radio Communication<br>Tester    | Rohde & Schwarz           | CMU200    | 106765       | 2010-02-09 |
| 27 | Band Reject Filter               | Wainwright<br>Instruments | WRCG824   | -            | 2010-04-16 |
| 28 | Band Reject Filter               | Wainwright<br>Instruments | WRCG1750  | -            | 2010-04-16 |
| 29 | Field Strength Meter             | Rohde & Schwarz           | ESHS30    | 862024/001   | 2010-03-04 |
| 30 | LISN                             | Rohde & Schwarz           | ESH3-Z5   | 100207       | 2008-12-20 |
| 31 | LISN                             | EMCO                      | 3825/2    | 9206-1971    | 2009-12-20 |
| 32 | DC POWER SUPPLY                  | Agilent                   | E3632A    | MY40000004   | 2009-07-07 |

Test Report No.: 2009050025 Page 30 of 30