

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666 Fax: +86 (0) 21 6191 5678

ee.shanghai@sgs.com

Report No.: SHEM150200036302

Page: 1 of 85

1 Cover Page

RF TEST REPORT

Application No.:	SHEM1502000363RF				
Applicant:	Hansong (Nanjing) Technology Ltd.				
FCC ID:	XCO-EDWIN				
IC:	7756A-EDWIN				
Equipment Under Test NOTE: The following sa	t (EUT): ample(s) was/were submitted and identified by the client as				
Product Name:	Edwin the Duck				
Model No.(EUT):	EDW-001				
Standards: FCC PART 15 Subpart C: 2014 RSS-247 Issue 1 (May 2015) RSS-Gen Issue 4 (November 2014)					
Date of Receipt:	February 06, 2015				
Date of Test:	March 24, 2015 to March 30, 2015				
Date of Issue:	May 27, 2015				
Test Result:	Pass*				

^{*} In the configuration tested, the EUT (Equipment under test) complied with the standards specified above.

Parlam Zhan E&E Section Manager SGS-CSTC (Shanghai) Co., Ltd.

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Report No.: SHEM150200036302

Page: 2 of 85

2 Version

	Revision Record									
Version	Chapter	Date	Modifier	Remark						
00	/	May 27, 2015	1	Original						

Authorized for issue by:		
Engineer	Eddy Zong	Eddy Zong
	Print Name	
Clerk	Susie Liu	Suire Liu
	Print Name	
Reviewer	Keny Xu	Keny. xu
	Print Name	



Report No.: SHEM150200036302

Page: 3 of 85

3 Test Summary

Test Item	FCC Test Requirement	IC Test Requirement	Test method	Result
Antenna Requirement	FCC Part 15, Subpart C Section 15.203/15.247 (c)	RSS-Gen Section 8.1.3		PASS
AC Power Line Conducted Emission	FCC Part 15, Subpart C Section 15.207	RSS-Gen Section 8.8	ANSI C63.10 (2013) Section 6.2	N/A
20dB Occupied Bandwidth	FCC Part 15, Subpart C Section 15.247 (a)(1)	RSS-247 Issue 1 Clause 5.1(1)	ANSI C63.10 (2013) Section 6.9.2	PASS
Conducted Peak Output Power	FCC Part 15, Subpart C Section 15.247 (b)(1)	RSS-247 Issue 1 Clause 5.4(2)	ANSI C63.10 (2013) Section 7.8.5	PASS
Carrier Frequencies Separation	FCC Part 15, Subpart C Section 15.247 (a)(1)	RSS-247 Issue 1 Clause 5.1(2))	ANSI C63.10 (2013) Section 7.8.2	PASS
Hopping Channel Number	FCC Part 15, Subpart C Section 15.247 (b)	RSS-247 Issue 1 Clause 5.1(3)	ANSI C63.10 (2013) Section 7.8.3	PASS
Dwell Time	FCC Part 15, Subpart C Section 15.247 (a)(1)	RSS-247 Issue 1 Clause 5.1(4)	ANSI C63.10 (2013) Section 7.8.4	PASS
RF Conducted Spurious Emissions and Band-edge	FCC Part 15, Subpart C Section 15.247(d)	RSS-247 Issue 1 Clause 5.5	ANSI C63.10 (2013) Section 7.8.6&7.8.8	PASS
Radiated Spurious Emissions and Band- edge	FCC Part 15, Subpart C Section 15.209&15.205	RSS-247 Issue 1 Clause 5.5	ANSI C63.10 (2013) Section 6.4&6.5&6.6&6.10	PASS
99% Occupied Bandwidth		RSS-Gen Section 6.6	RSS-Gen section 6.6	PASS



Report No.: SHEM150200036302

Page: 4 of 85

4 Contents

			Page
1	CO	OVER PAGE	1
2	VI	ERSION	2
3	TF	EST SUMMARY	3
4		ONTENTS	4
5		ENERAL INFORMATION	
		CLIENT INFORMATION	
		GENERAL DESCRIPTION OF E.U.T.	
		TECHNICAL SPECIFICATIONS	
		DESCRIPTION OF SUPPORT UNITS	
		TEST MODE	
	5.6	TEST CHANNEL	6
		TEST LOCATION	
		TEST FACILITY	
	5.9	MEASUREMENT UNCERTAINTY	7
6	E(QUIPMENTS USED DURING TEST	8
7	TF	EST RESULTS	9
	7.1	E.U.T. TEST CONDITIONS	9
	7.2	FREQUENCY HOPPING SYSTEM REQUIREMENT	
	7.3	ANTENNA REQUIREMENT	
		CONDUCTED EMISSIONS ON MAINS TERMINALS	
		20dB Occupied Bandwidth	
		CONDUCTED PEAK OUTPUT POWER	
		CARRIER FREQUENCIES SEPARATED	
		HOPPING CHANNEL NUMBER	
		DWELL TIME	
	7.10		
		10.1 Conducted spurious emission	
	7.11	Ü	
	, , ,	11.1 Radiated Spurious Emissions:	
		11.2 Radiated Band edge	
	7.12	O .	
8	TF	EST SETUP PHOTOGRAPHS	85
q	ΕI	UT CONSTRUCTIONAL DETAILS	85



Report No.: SHEM150200036302

Page: 5 of 85

5 General Information

5.1 Client Information

Applicant: Hansong (Nanjing) Technology Ltd.

Address of Applicant: 8th Kangping Road, Jiangning Economy and Technology Development

Zone, Nanjing, 211106, China

Manufacturer: pi lab, LLC

Address of Manufacturer: 252 West Main Street, Carmel, IN 46032, USA

Factory: Hansong (Nanjing) Technology Ltd.

Address of Factory: 8th Kangping Road, Jiangning Economy and Technology Development

Zone, Nanjing, 211106, China

5.2 General Description of E.U.T.

Product Description: Portable product

Brand Name: pi lab

Adapter: Model No.: ASUC32a-050100

Rated Input: AC 100V-240V 50/60Hz 0.3A

Rated Output: DC 5.0V 1.0A

Cable length: AC port: 2 wires

DC port: 200 cm

Rechargeable Batteries: DC 3.7V Li-on Rechargeable Battery

Supply the EUT with fully charged battery during the testing.

5.3 Technical Specifications

Operation Frequency: 2402MHz~2480MHz

Bluetooth Version: 3.0+HS

Modulation Technique: FHSS(GFSK, π/4DQPSK, 8DPSK)

Number of Channel: 79

Antenna Type Integral
Antenna Gain 2 dBi

5.4 Description of Support Units

The EUT has been tested independently, or The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Supplied by
Laptop	Lenovo	ThinkPad X100e	SGS
BT test board	/	/	SGS

Software name	Manufacturer	Version	Supplied By
Blue Test3 (For CSR)	/	2.5.0	SGS



Report No.: SHEM150200036302

Page: 6 of 85

5.5 Test Mode

Test Mode	Description of Test Mode
Hopping disabled mode	Using test software to control EUT working in continuous transmitting, and select channel and modulation type.
Hopping enabled mode	Using test software to control EUT working in continuous transmitting, and hopping on status.

The packet type used for the final test:

Test Item		Packet Type							Hopping Status		
rest item	DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3DH5	Disabled	Enabled
CE	-	-		-	-	V	-	-	V	\checkmark	$\sqrt{}$
20dB OBW	-	-		-	-		-	-	√	\checkmark	-
Peak Power	-	-	\checkmark	-	-	V	-	-	V	\checkmark	-
CFS	-	-	\checkmark	-	-	V	-	-	V	-	\checkmark
HCN	-	-	\checkmark	-	-	V	-	-	V	-	\checkmark
Dwell Time	V	V		V		V	V	V	V	1	$\sqrt{}$
CSE	-	-	\checkmark	-	-	√	-	-	√	\checkmark	-
Conducted Band-edge	-	-		-	-	V	-	-	√	\checkmark	$\sqrt{}$
RSE & Band-edge	-	-	√	-	-	V	-	-	V	√	-
99% OBW	-	-		-	-	V	-	-	V	V	-

5.6 Test Channel

Using test software was control EUT work in continuous transmitter mode. And select test channel as below:

Channel	Frequency (MHz)
Low Channel	2402
Middle Channel	2441
High Channel	2480

5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

No.588 West Jindu Road, Songjiang District, Shanghai, China.201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678



Report No.: SHEM150200036302

Page: 7 of 85

5.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L0599)

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2017-07-14.

FCC – Registration No.: 402683

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2017-09-16.

Industry Canada (IC) – IC Assigned Code: 8617A

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A-1. Expiry Date: 2017-06-18.

VCCI (Member No.: 3061)

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.

5.9 Measurement Uncertainty

No.	Parameter	Measurement Uncertainty
1	Radio Frequency	< ±1 x 10 ⁻⁵
2	Total RF power, conducted	< ±1.5 dB
3	RF power density, conducted	< ±3 dB
4	Spurious emissions, conducted	< ±3 dB
5	All emissions, radiated	< ±6 dB (30MHz – 1GHz) < ±6 dB (above 1GHz)
6	Temperature	< ±1°C
7	Humidity	< ±5 %
8	DC and low frequency voltages	< ±3 %



Report No.: SHEM150200036302

Page: 8 of 85

6 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2015-01-22	2016-01-21
2	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127490	2015-01-22	2016-01-21
3	Line impedance stabilization network	ETS	3816/2	00034161	2015-01-22	2016-01-21
4	Spectrum Analyzer	Rohde & Schwarz	FSP-30	2705121009	2015-01-22	2016-01-21
5	EMI test receiver	Rohde & Schwarz	ESU40	100109	2015-02-13	2016-02-12
6	Active Loop Antenna (9kHz to 30MHz)	Schwarzbeck - Mess-Elektronik	FMZB 1519	1519-034	2015-02-07	2016-02-06
7	Broadband UHF-VHF ANTENNA (25MHz to 2GHz)	SCHWARZBEC K	VULB9168	9168-313	2015-02-07	2016-02-06
8	Ultra broadband antenna (25MHz to3GHz)	Rohde & Schwarz	HL562	100227	2014-08-30	2015-08-29
9	Horn Antenna (1GHz to 18GHz)	Rohde & Schwarz	HF906	100284	2015-02-07	2016-02-06
10	Horn Antenna (1GHz to 18GHz)	SCHWARZBEC K	BBHA9120D	9120D-679	2015-02-07	2016-02-06
11	Horn Antenna (14GHz to 40GHz)	SCHWARZBEC K	BBHA 9170	BBHA917037 3	2015-02-13	2016-02-12
12	Pre-amplifier (9KHz – 2GHz)	LNA6900	TESEQ	71033	2014-12-27	2015-12-27
13	Pre-amplifier (1GHz – 26.5GHz)	Rohde & Schwarz	SCU-F0118- G40-BZ4- CSS(F)	10001	2015-01-22	2016-01-21
14	Pre-amplifier (14GHz – 40GHz)	Rohde & Schwarz	SCU-F1840- G35-BZ3- CSS(F)	10001	2015-01-22	2016-01-21
15	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT800.0/8 80.0-0.2/40- 5SSK	9170397	/	/
16	High pass Filter	FSCW	HP 12/2800- 5AA2	19A45-02	/	/
17	High-low temperature cabinet	Suzhou Zhihe	TL-40	50110050	2014-09-11	2015-09-10
18	AC power stabilizer	WOCEN	6100	51122	2015-01-02	2016-01-01
19	DC power	QJE	QJ30003SII	611145	2015-01-02	2016-01-01
20	Signal Generator (Interferer)	Agilent	SMR40	100555	2014-08-10	2015-08-09
21	Signal Generator (Blocker)	Rohde & Schwarz	SMJ100A	02.20.360.142	2015-01-22	2016-01-21
22	Splitter	Anritsu	MA1612A	M12265	/	/
23	Coupler	e-meca	803-S-1	900-M01	/	/



Report No.: SHEM150200036302

Page: 9 of 85

7 Test Results

7.1 E.U.T. test conditions

Test Power: AC 120V, 60Hz

Requirements: 15.31(e) For intentional radiators, measurements of the variation of the input

power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a

new battery.

Operating Environment:

Temperature:	20.0 -25.0 °C
Humidity:	35-75 % RH
Atmospheric Pressure:	99.2 -102 kPa

Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. if required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over	Number of	Location in the range of	
which device operates	frequencies	operation	
1 MHz or less	z or less 1		
1 to 10 MHz	2	1 near top and 1 near bottom	
More than 10 MHz	3	1 near top. 1 near middle and 1 near bottom	

Pursuant to Part 15.31(c) For swept frequency equipment, measurements shall be made with the frequency sweep stopped at those frequencies chosen for the measurements to be reported.

Test frequency is the lowest channel: 0 channel (2402MHz), middle channel: 39 channel (2441MHz) and highest channel: 78 channel (2480MHz) with fixed at channel.



Report No.: SHEM150200036302

Page: 10 of 85

7.2 Frequency Hopping System Requirement

Test Requirement: Section 15.247 (a)(1), (g), (h) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SHEM150200036302

Page: 11 of 85

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Report No.: SHEM150200036302

Page: 12 of 85

7.3 Antenna Requirement

Standard requirement:

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The BT antenna is Plug-in antenna. The gain of the antenna is less than 2.0 dBi.

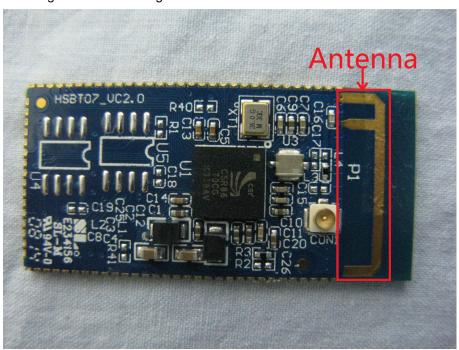



Report No.: SHEM150200036302

Page: 13 of 85

7.4 Conducted Emissions on Mains Terminals

Frequency Range: 150 KHz to 30 MHz

Class/Severity: Class B

Limit:

Frequency range	Class B Limits: dB (μV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note1: The limit decreases linearly with the logarithm of the frequency in the range


0.15 MHz to 0.50MHz.

Note2: The lower limit is applicable at the transition frequency.

Test site/setup:

Test instrumentation set-up:

Frequency Range	Detector	RBW	VBW
9KHz to 150Hz	Quasi-peak	200Hz	500Hz
150KHz to 30MHz	Quasi-peak	9kHz	30kHz

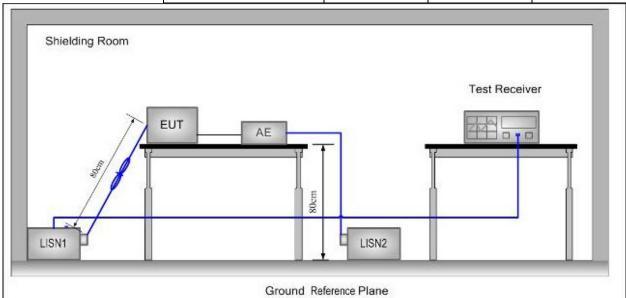

Test Procedure:

- 1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
- 2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides $50\Omega/50\mu H + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded
- 3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to thesample(s) tested and such sample(s) are retained for 90 days only



Report No.: SHEM150200036302

Page: 14 of 85

plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment were at least 0.8 m from the LISN.

Test Result: N/A

Test Data:

This EUT in working mode is powered by battery only; therefore the AC Conducted Emission test is not applicable.




Report No.: SHEM150200036302

Page: 15 of 85

7.5 20dB Occupied Bandwidth

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
- 2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centred on the hopping channel;
- 3. Set the spectrum analyzer: RBW >= 1% of the 20dB bandwidth (set 30 kHz). VBW >= RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
- 4. Mark the peak frequency and -20dB points.

Test Result: PASS

Test date:


Test Channel	Channel Frequency(MHz)	Modulation	Bandwidth(MHz)
Low	2402	GFSK	1.044
Middle	2441	GFSK	1.041
High	2480	GFSK	1.044
Low	2402	π/4DQPSK	1.176
Middle	2441	π/4DQPSK	1.119
High	2480	π/4DQPSK	1.119
Low	2402	8DPSK	1.188
Middle	2441	8DPSK	1.179
High	2480	8DPSK	1.179



Report No.: SHEM150200036302

Page: 16 of 85


Test plot as follows:

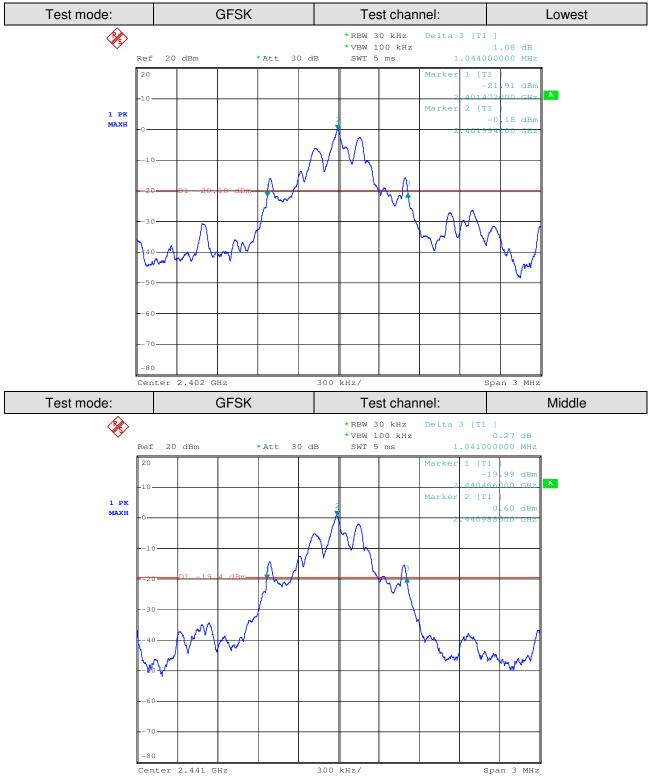



Report No.: SHEM150200036302


Page: 17 of 85

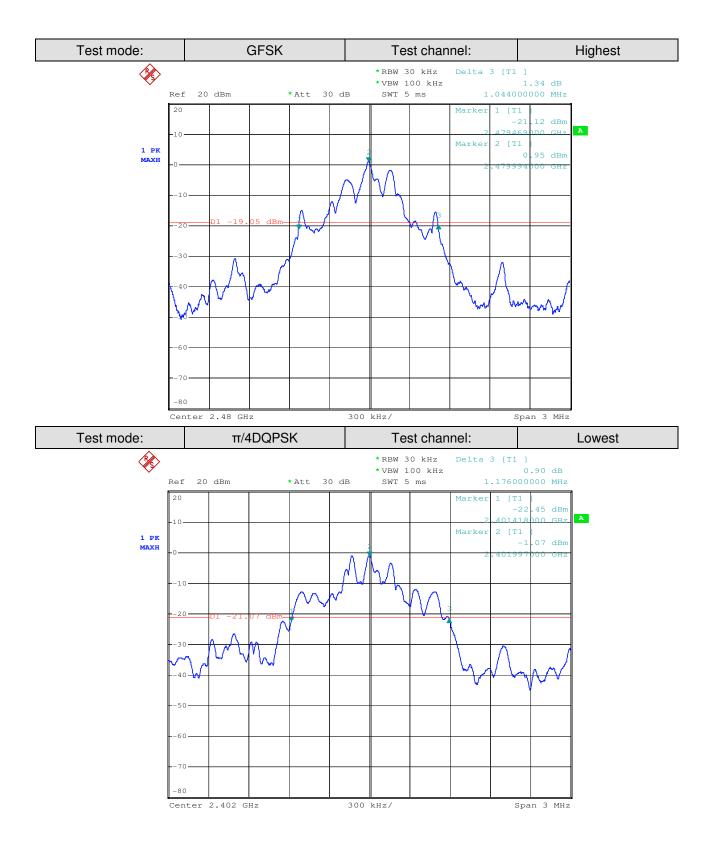



Report No.: SHEM150200036302


Page: 18 of 85

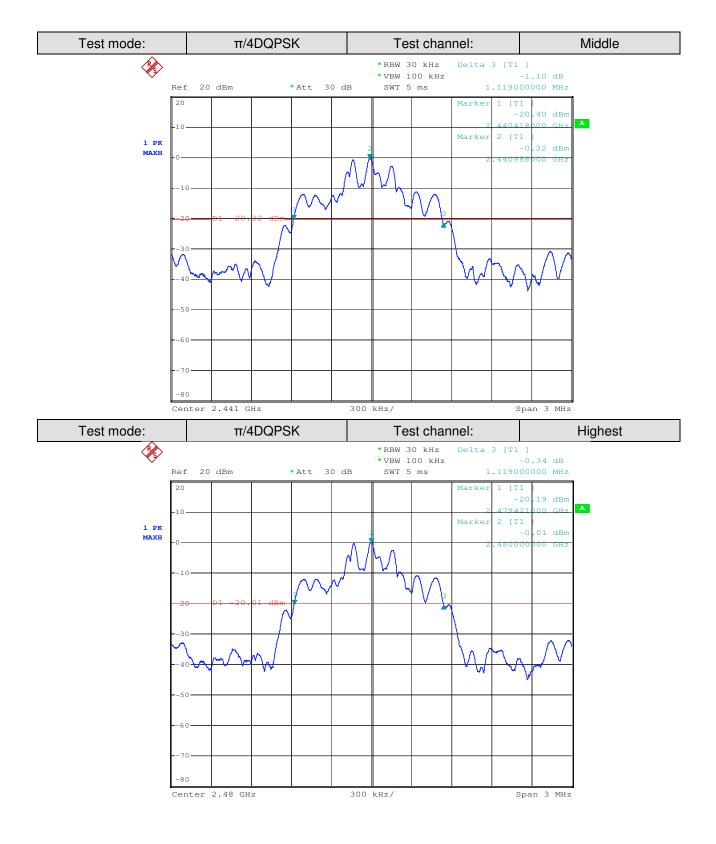



Report No.: SHEM150200036302


Page: 19 of 85

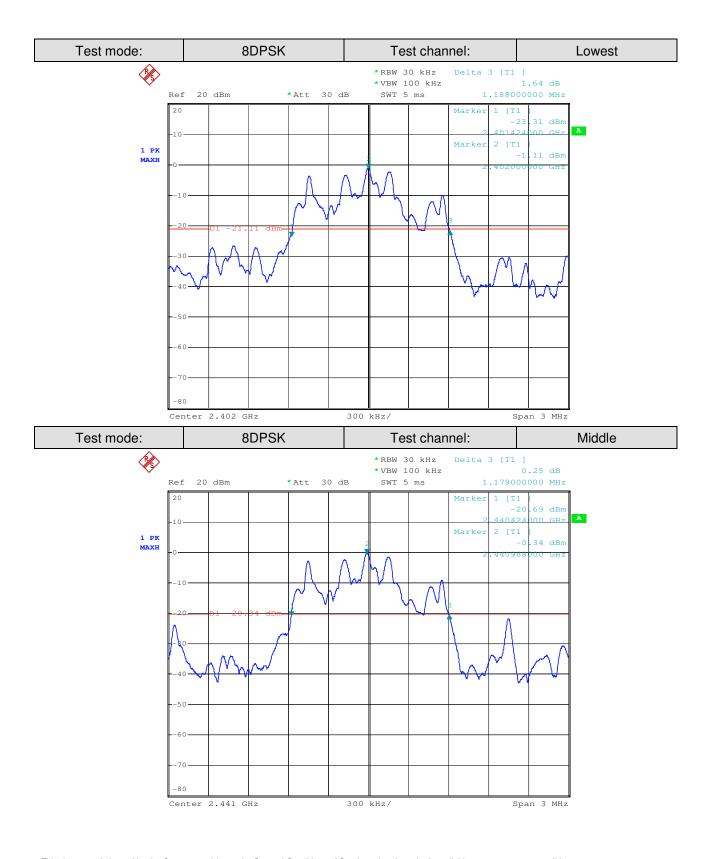



Report No.: SHEM150200036302

Page: 20 of 85

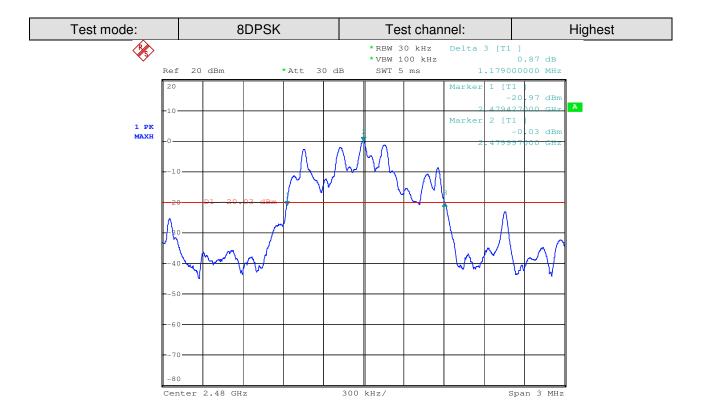



Report No.: SHEM150200036302

Page: 21 of 85

7.6 Conducted Peak Output Power

Test Limit: Regulation 15.247 (b)(1)For frequency hopping systems operating in the


2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz

band: 0.125 watts.

Refer to the result "Hopping channel number" of this document. The 1 watt

(30.0dBm) limit applies.

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 3 MHz, VBW = 3 MHz, Sweep = auto; Detector Function = Peak.
- 3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

Test Result: Pass



Report No.: SHEM150200036302

Page: 22 of 85

Test Data:

	Tool Batai						
Test Channel	Modulation	Fundamental Frequency (MHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Lowest	GFSK	2402	1.44	0.5	1.94	30	32.97
Middle	GFSK	2441	1.31	0.5	1.81	30	30.38
Highest	GFSK	2480	-0.50	0.5	0.00	30	29.02
Lowest	π/4DQPSK	2402	2.12	0.5	2.62	30	32.49
Middle	π/4DQPSK	2441	1.52	0.5	2.02	30	29.98
Highest	π/4DQPSK	2480	1.06	0.5	1.56	30	28.78
Lowest	8DPSK	2402	1.88	0.5	2.38	30	32.52
Middle	8DPSK	2441	1.94	0.5	2.44	30	30.02
Highest	8DPSK	2480	1.50	0.5	2.00	30	28.79


Remark: Output Power=Reading Power + Cable loss



Report No.: SHEM150200036302

Page: 23 of 85



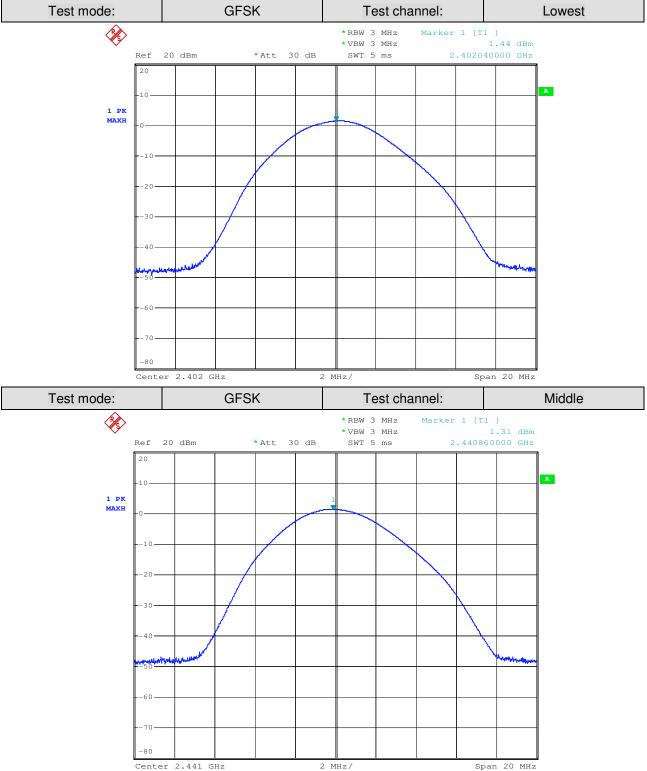


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to thesample(s) tested and such sample(s) are retained for 90 days only"



Report No.: SHEM150200036302


Page: 24 of 85

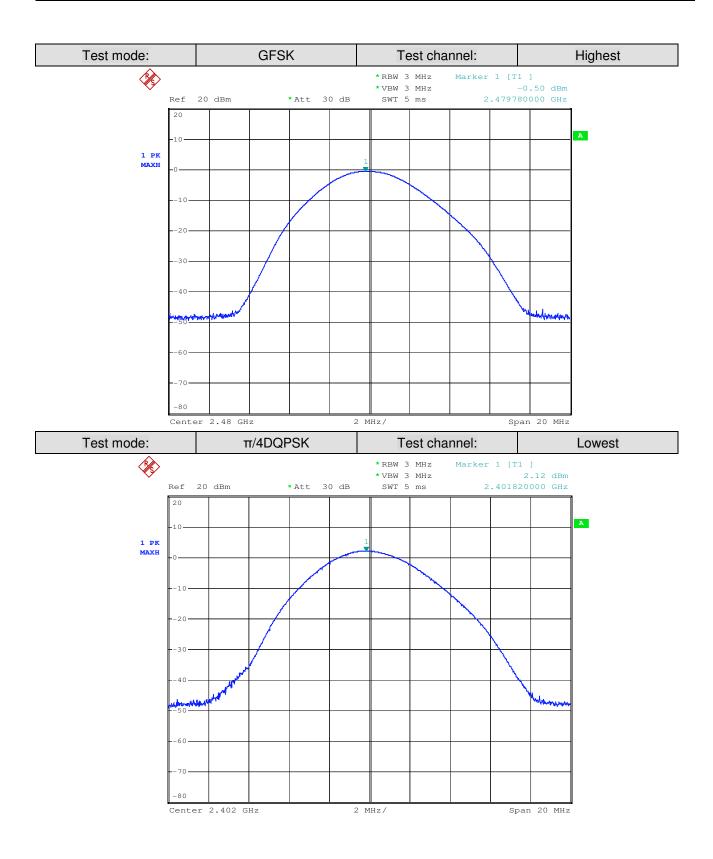



Report No.: SHEM150200036302


Page: 25 of 85

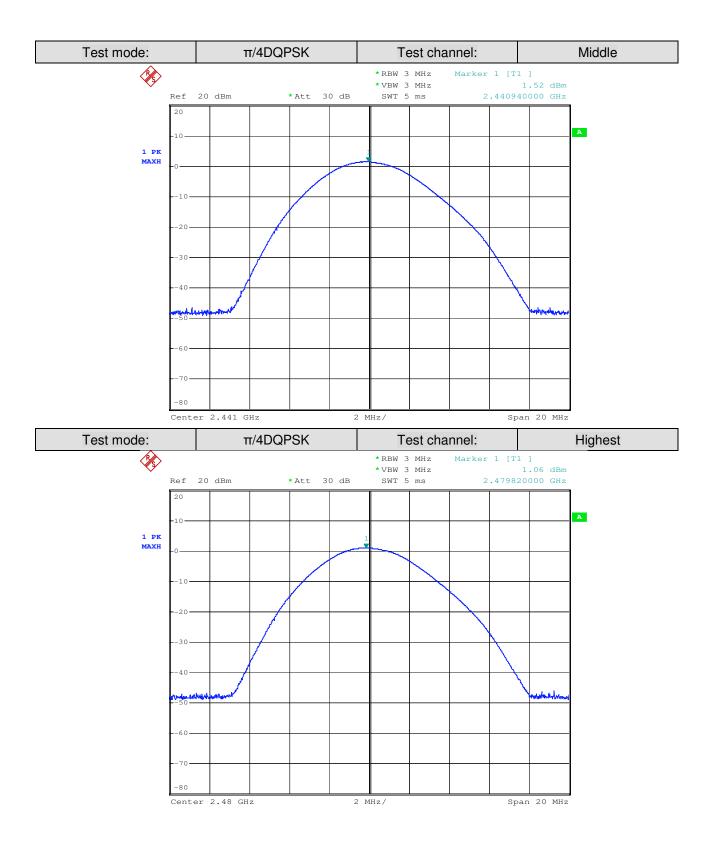



Report No.: SHEM150200036302


Page: 26 of 85

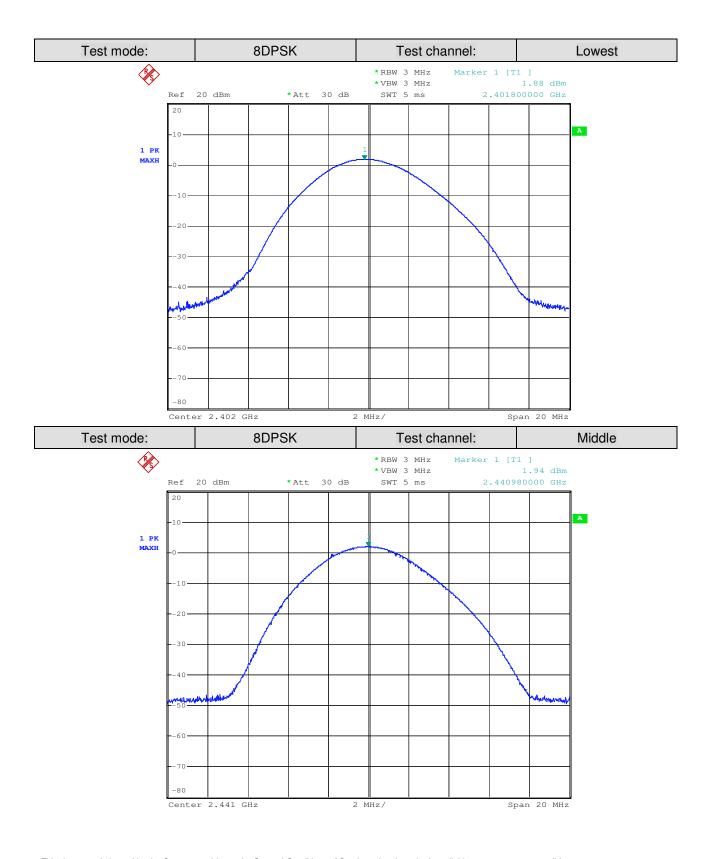



Report No.: SHEM150200036302

Page: 27 of 85

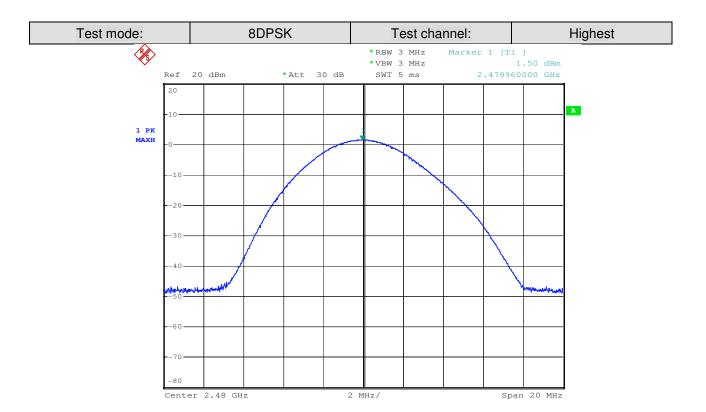




Report No.: SHEM150200036302

Page: 28 of 85

7.7 Carrier Frequencies Separated

Limit: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW >= 1% of the span (set 30 kHz). VBW >= RBW, Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Maxhold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test result: Pass

Test data:

Test Channel	Modulation	Carrier Frequencies Separated (MHz)	Limit (25kHz or two-thirds of the 20 dB bandwidth)	Results
Middle Channels (channel 39 and channel 40)	GFSK	0.996	25kHz/700kHz	PASS
Middle Channels (channel 39 and channel 40)	π/4DQPSK	1.008	25kHz/780kHz	PASS
Middle Channels (channel 39 and channel 40)	8DPSK	1.002	25kHz/788kHz	PASS

Remark: 1. According to the section 7.6, the conducted power measured is less than 125mW and 2/3 of 20dB bandwidth is used for limit.


2. 20dB bandwidth reference Section 7.5



Report No.: SHEM150200036302

Page: 29 of 85

Test plot as follows:

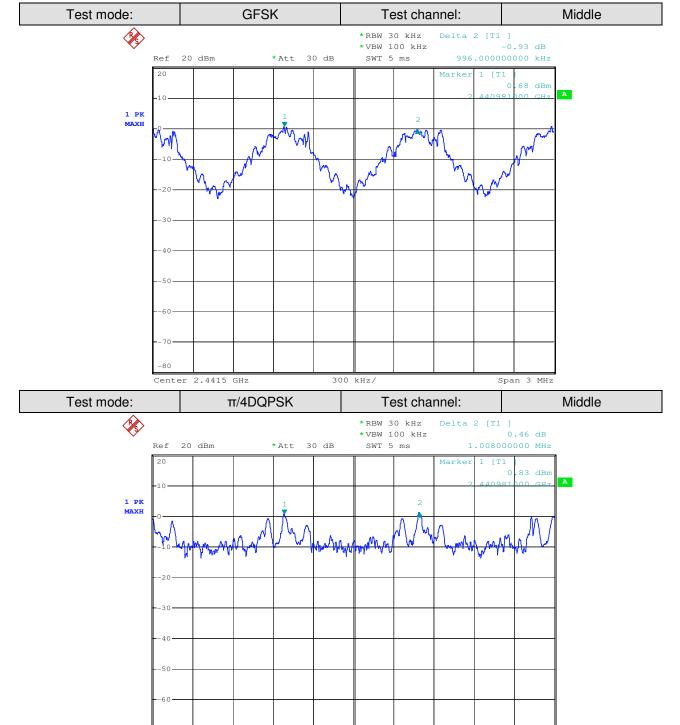

300 kHz/


Span 3 MHz

Center 2.4415 GHz



Report No.: SHEM150200036302

Page: 30 of 85

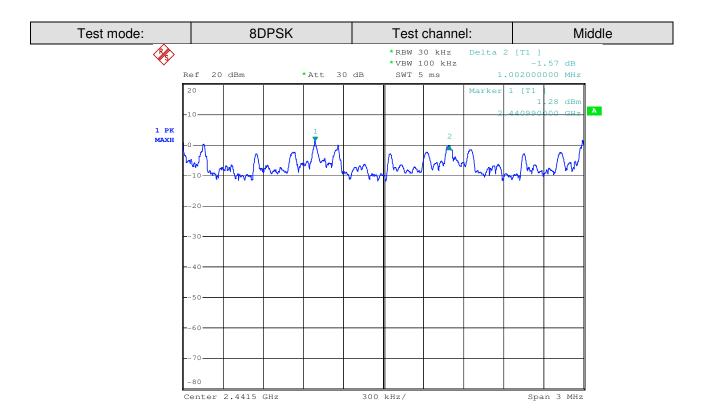




Report No.: SHEM150200036302

Page: 31 of 85

7.8 Hopping Channel Number

Limit: At least 15 channels

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: start frequency = 2400MHz. stop frequency = 2483.5MHz. Submit the test result graph.

Test Result: Pass


Test Data:

Mode	Hopping channel numbers	Limit	Results
8DPSK	79	≥15	Pass
GFSK	79	≥15	Pass
π/4DQPSK	79	≥15	Pass



Report No.: SHEM150200036302


Page: 32 of 85

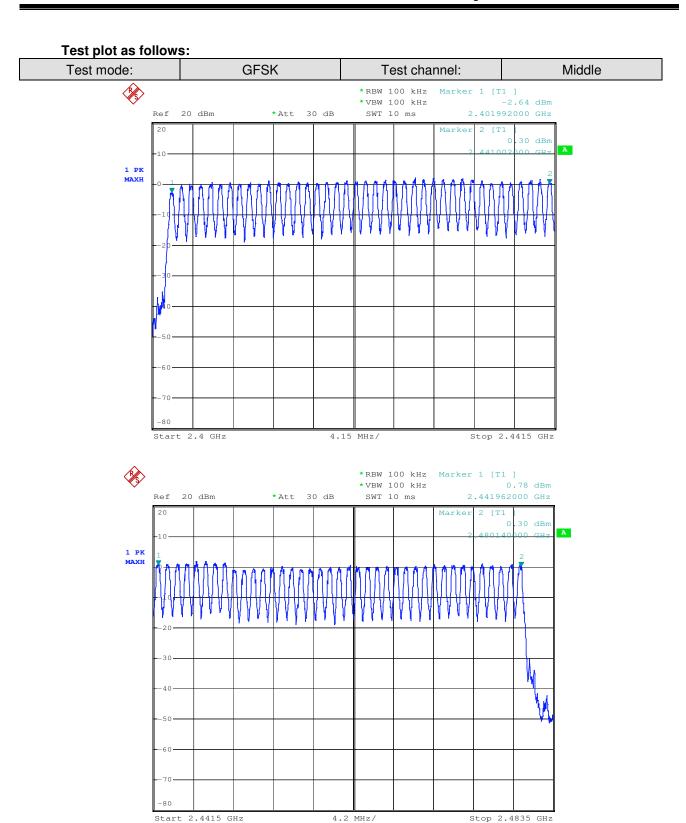



Report No.: SHEM150200036302


Page: 33 of 85

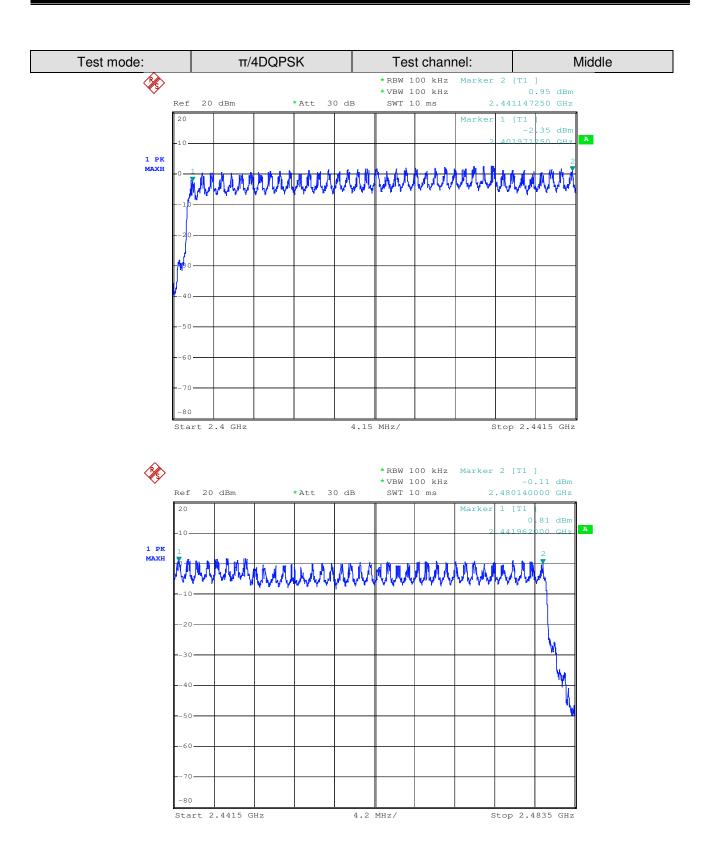



Report No.: SHEM150200036302

Page: 34 of 85

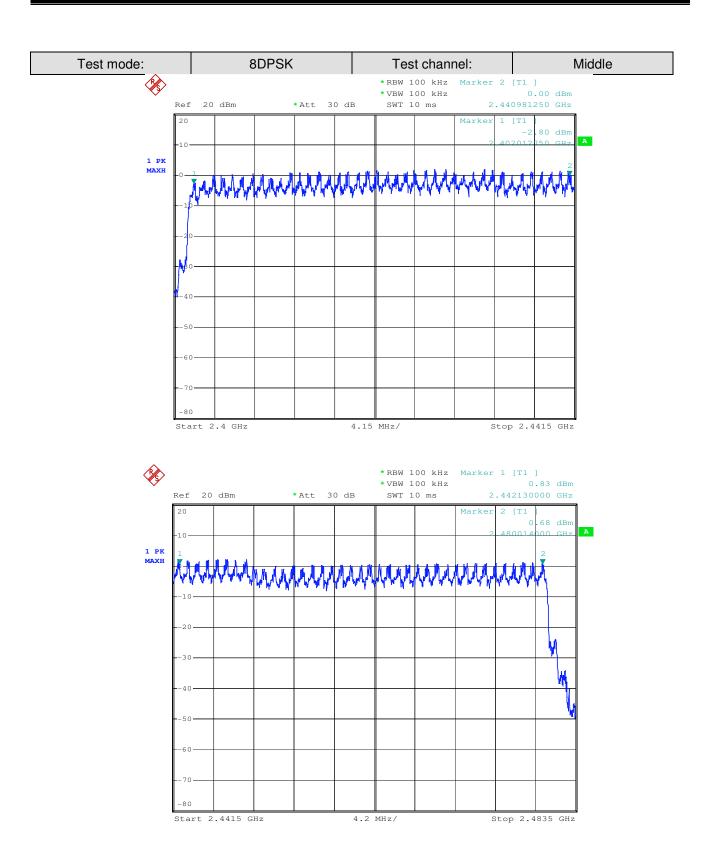



Report No.: SHEM150200036302

Page: 35 of 85

7.9 Dwell Time


Limit: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5

MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are

used.

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. Keep EUT in Hopping transmitting with all kind of modulation.
- 2. Set spectrum analyzer span = 0. centered on a hopping channel;
- 3. Use Emission width * No. of Hopping Channels in 31.6s to determine the dwell time.

Test Result: Pass

Test Data:


Frequency (MHz)	Modulation	Packet	Emission Width (ms)	Number of Hopping Channel in 31.6s	Average Time of Occupancy(s)	Limit(s)	Result
		DH1	6.13	310	1.90	0.4	Pass
	GFSK	DH3	5.91	150	0.89	0.4	Pass
2441		DH5	0.60	100	0.06	0.4	Pass
	π/4DQPSK 8DPSK	DH1	-0.98	310	-0.30	0.4	Pass
		DH3	0.89	150	0.13	0.4	Pass
		DH5	-0.40	150	-0.06	0.4	Pass
		DH1	0.23	310	0.07	0.4	Pass
		DH3	1.09	150	0.16	0.4	Pass
		DH5	1.67	100	0.17	0.4	Pass




Report No.: SHEM150200036302

Page: 36 of 85

Test plot as follows:

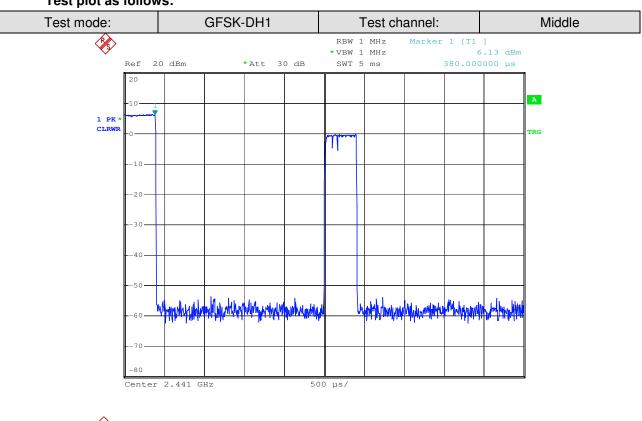


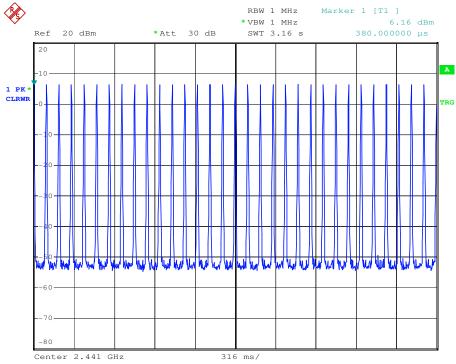



Report No.: SHEM150200036302


Page: 37 of 85

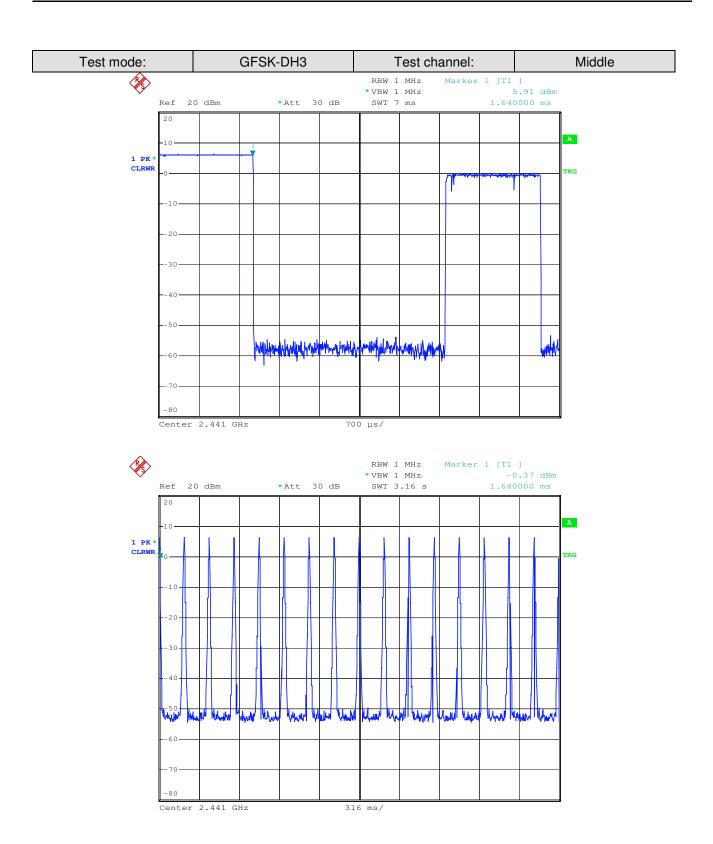



Report No.: SHEM150200036302


Page: 38 of 85

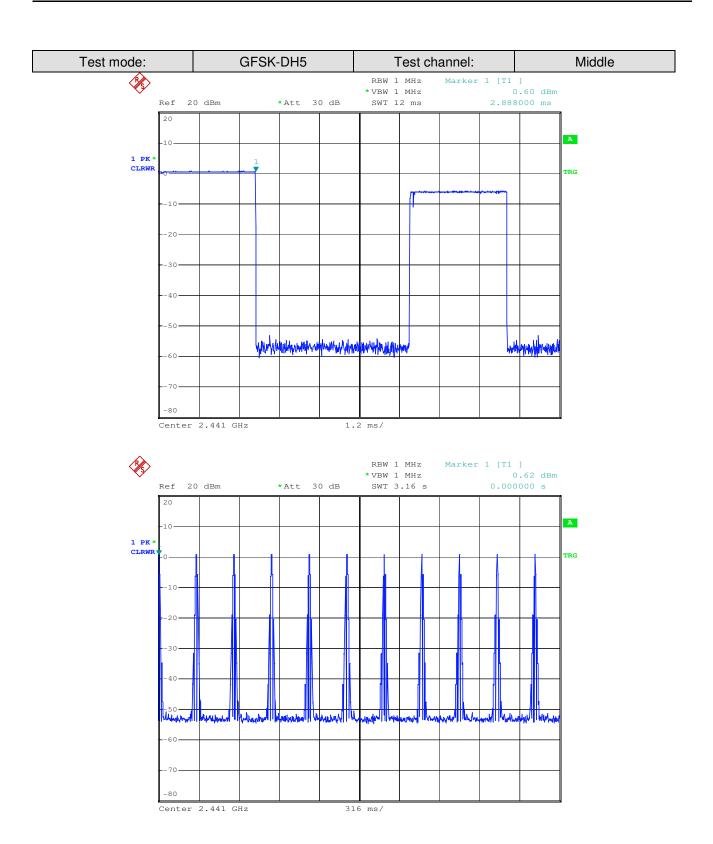



Report No.: SHEM150200036302


Page: 39 of 85

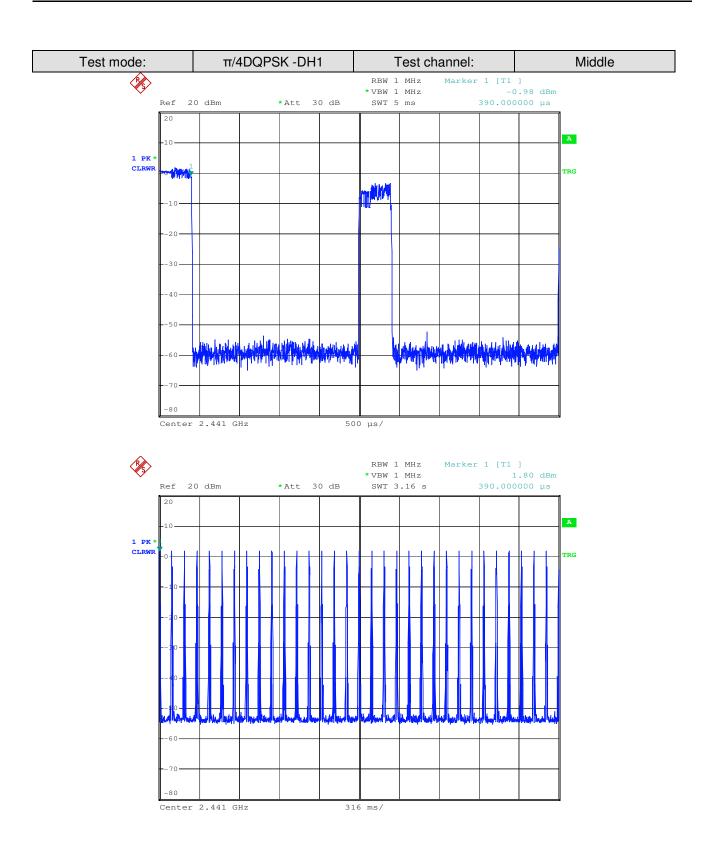



Report No.: SHEM150200036302


Page: 40 of 85

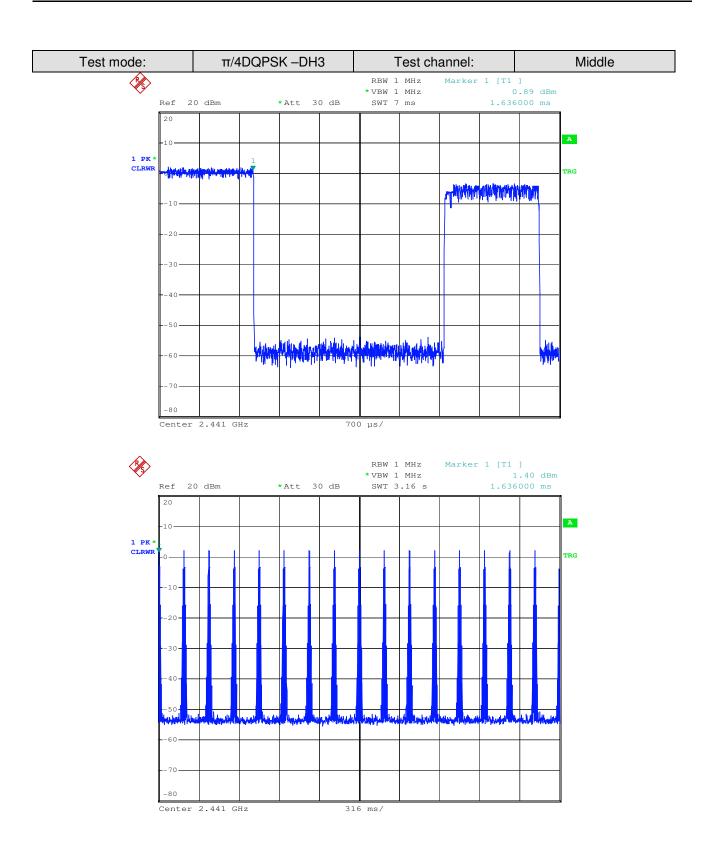



Report No.: SHEM150200036302


Page: 41 of 85

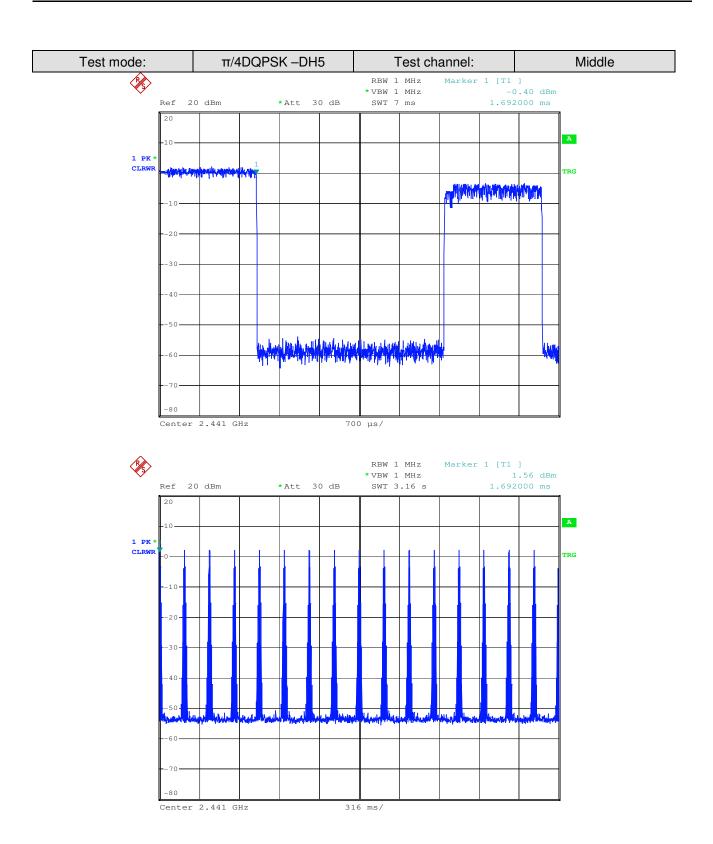



Report No.: SHEM150200036302


Page: 42 of 85

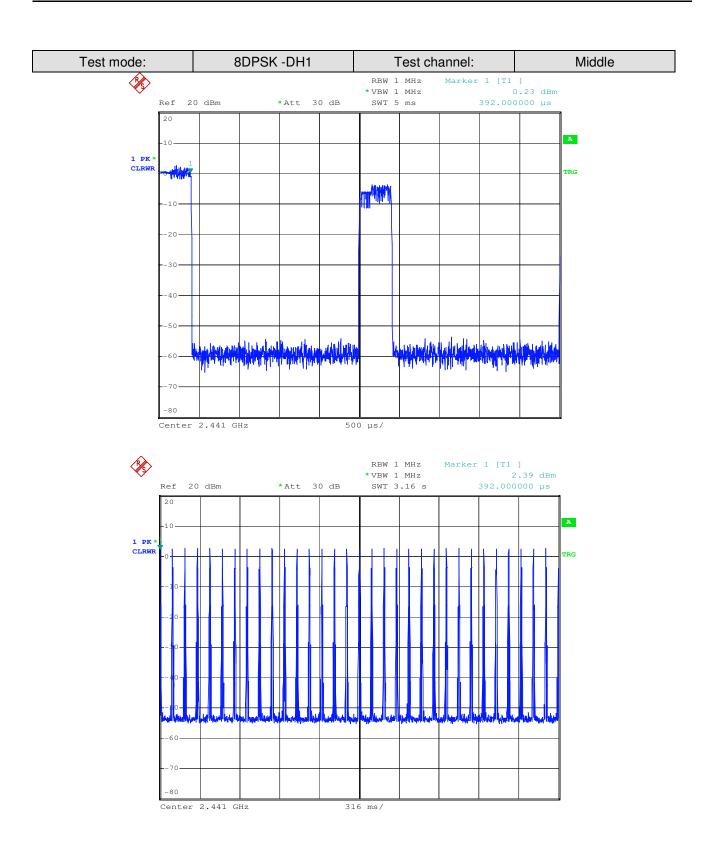



Report No.: SHEM150200036302


Page: 43 of 85

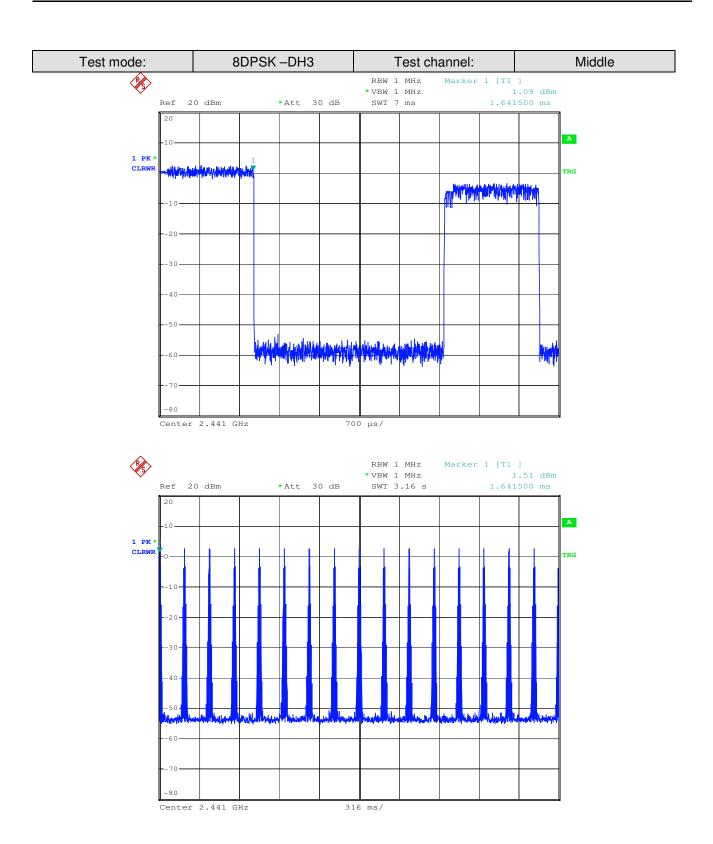



Report No.: SHEM150200036302

Page: 44 of 85

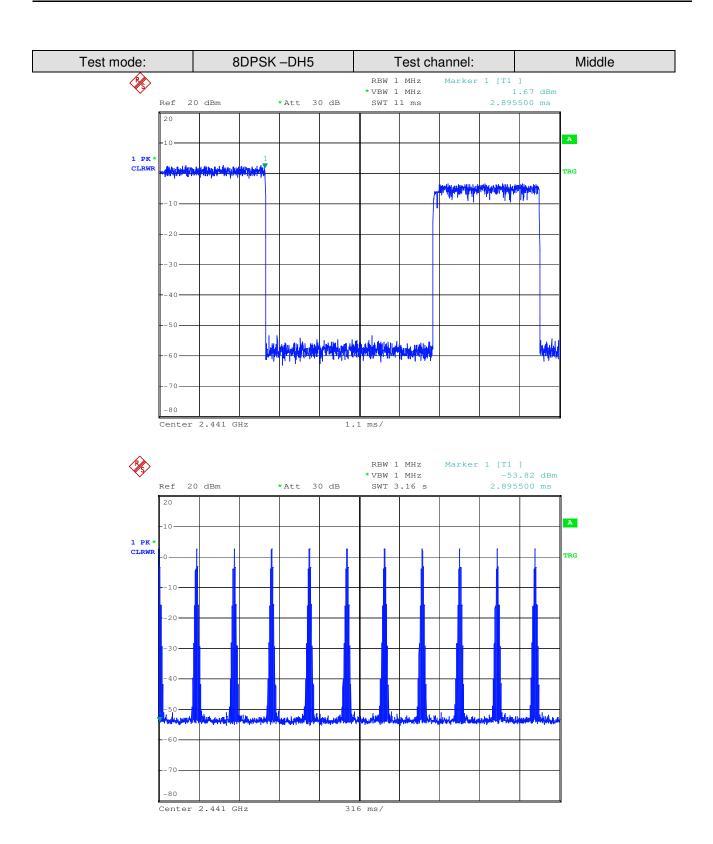



Report No.: SHEM150200036302


Page: 45 of 85

7.10 Conducted Spurious Emissions and Band-edge

Limit:

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration:



Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from

the antenna port to the spectrum.

2. Set the spectrum analyzer: RBW = 100KHz. VBW >= RBW. Sweep = auto;

Detector Function = Peak (Max. hold).

Test Result: Pass




Report No.: SHEM150200036302

Page: 46 of 85

7.10.1 Conducted spurious emission

Test plot as follows:

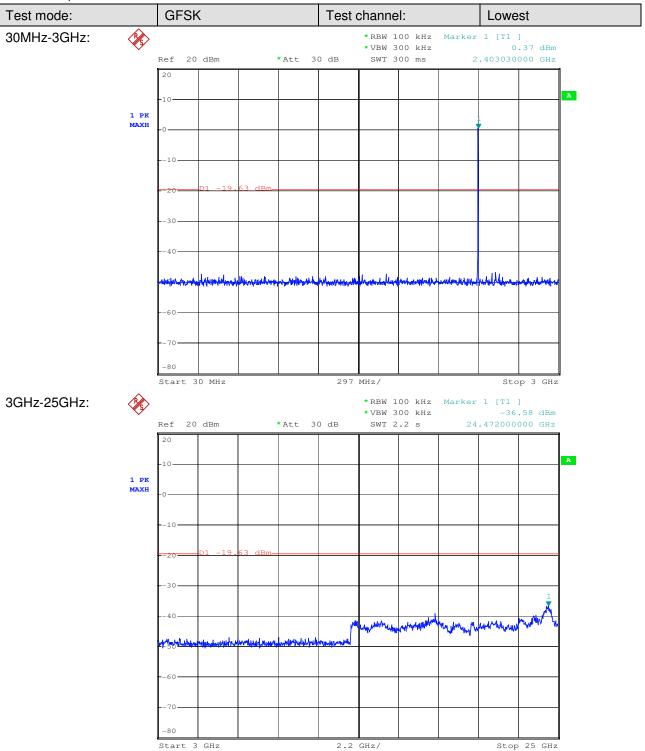


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to thesample(s) tested and such sample(s) are retained for 90 days only



Report No.: SHEM150200036302


Page: 47 of 85

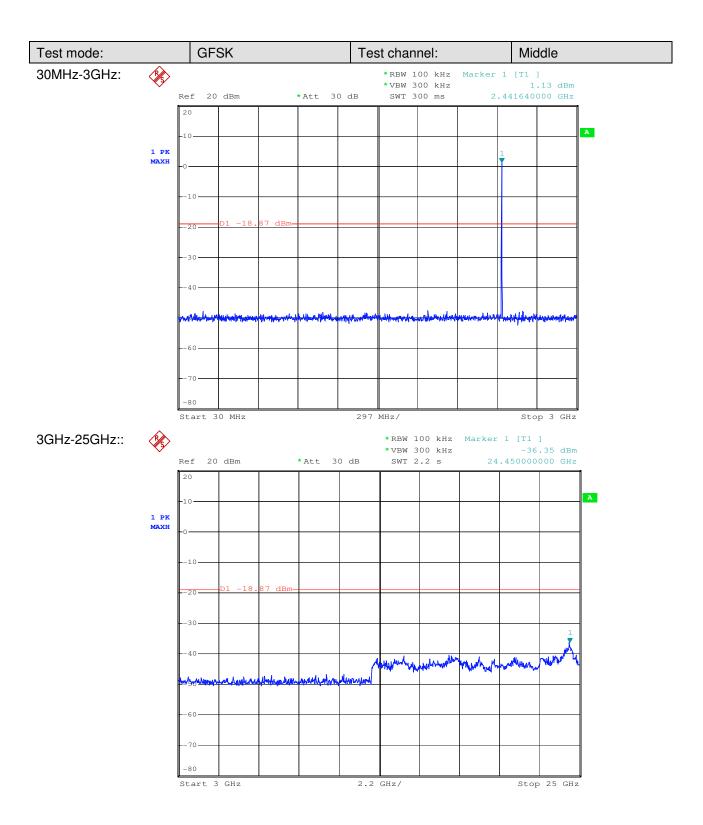



Report No.: SHEM150200036302


Page: 48 of 85

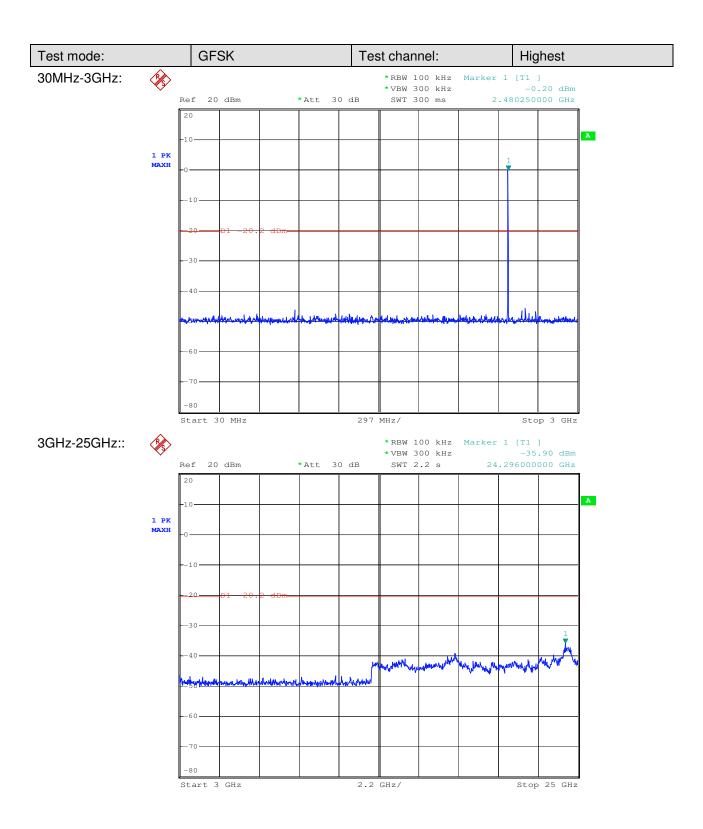



Report No.: SHEM150200036302


Page: 49 of 85

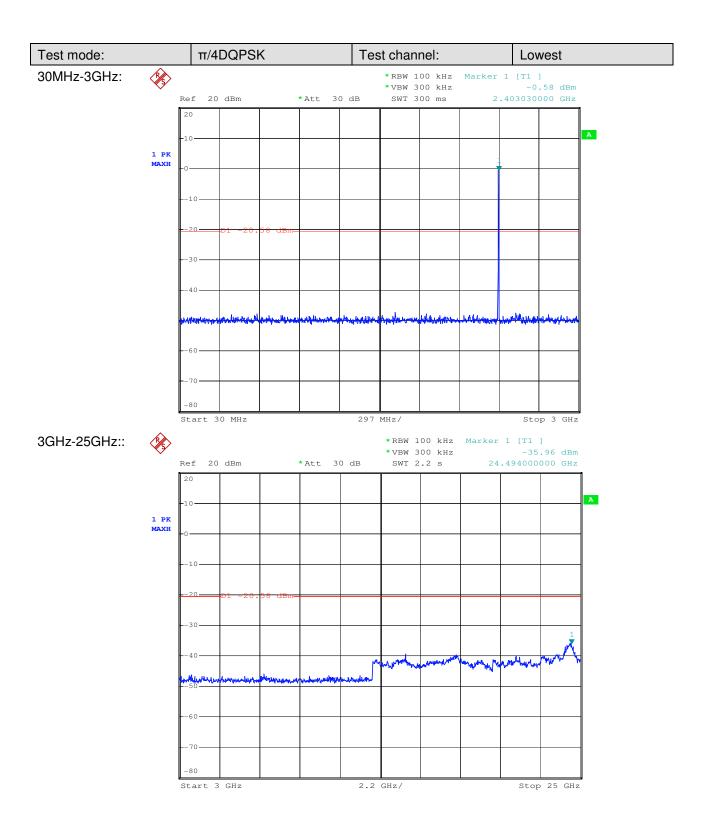



Report No.: SHEM150200036302


Page: 50 of 85

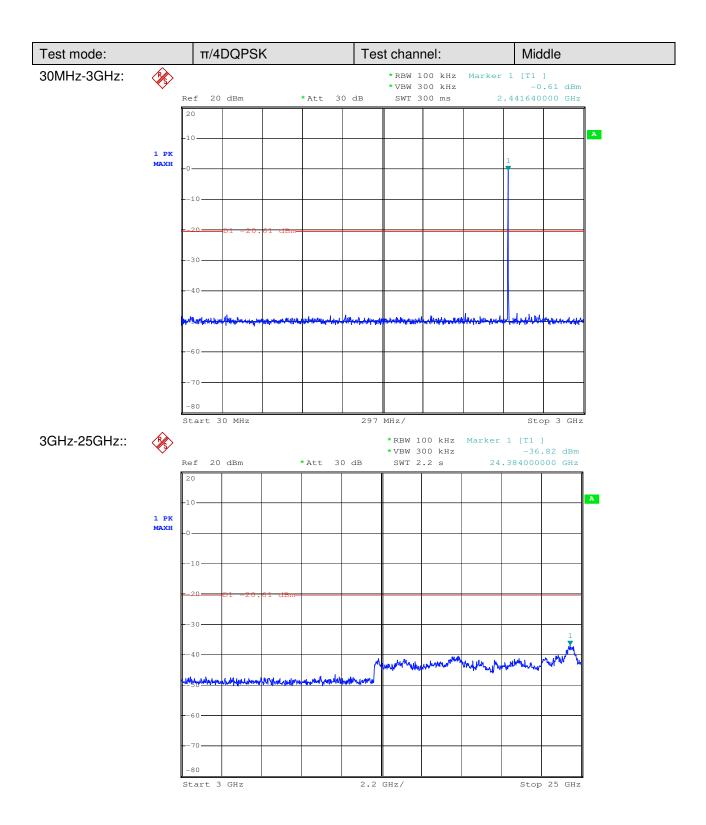



Report No.: SHEM150200036302


Page: 51 of 85

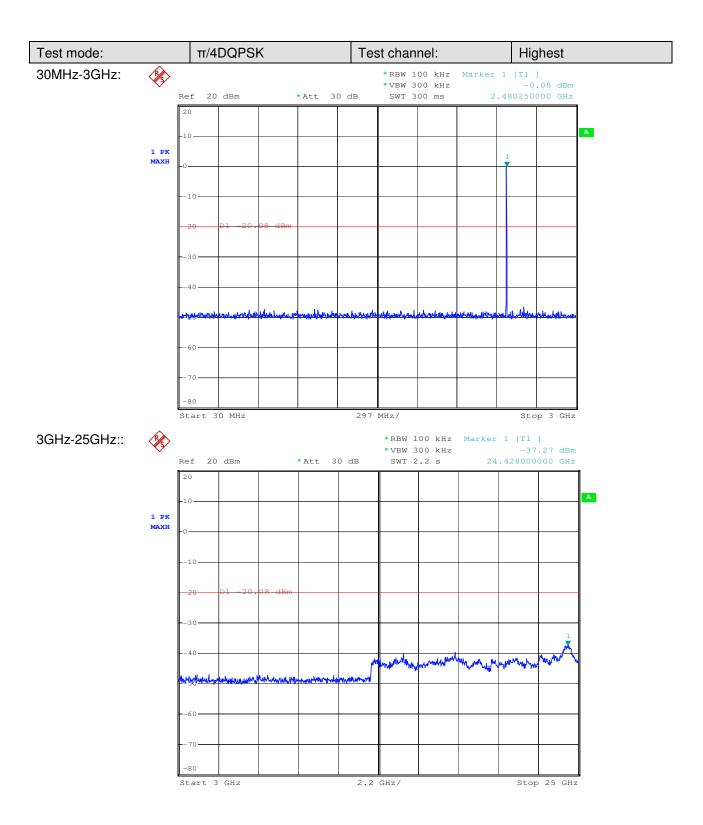



Report No.: SHEM150200036302


Page: 52 of 85

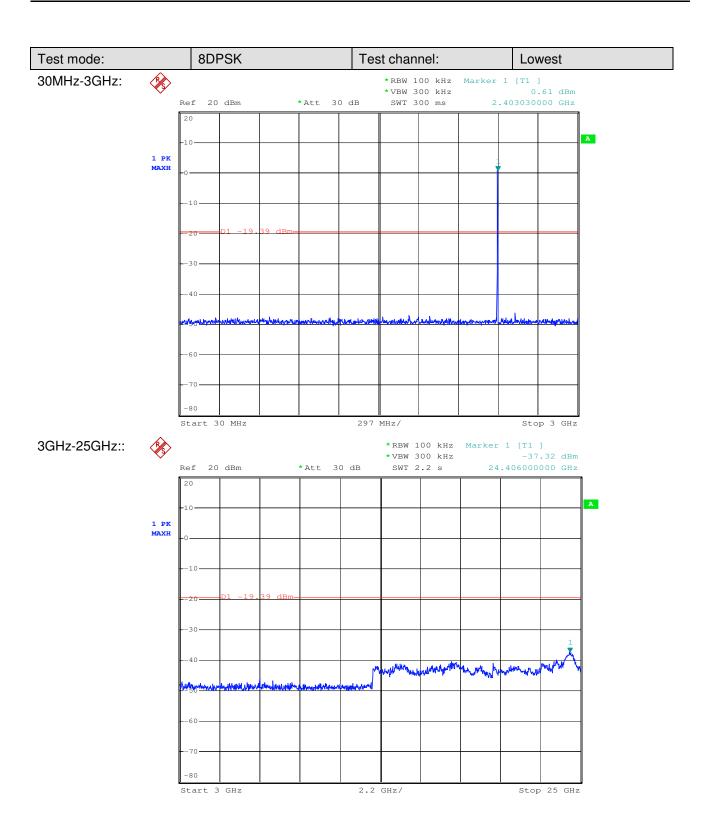



Report No.: SHEM150200036302


Page: 53 of 85

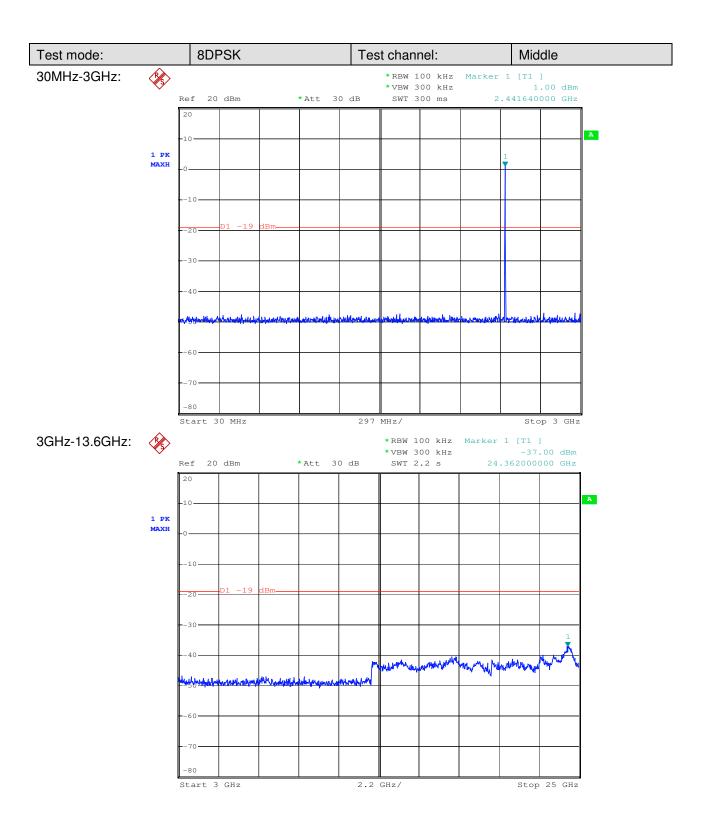



Report No.: SHEM150200036302

Page: 54 of 85

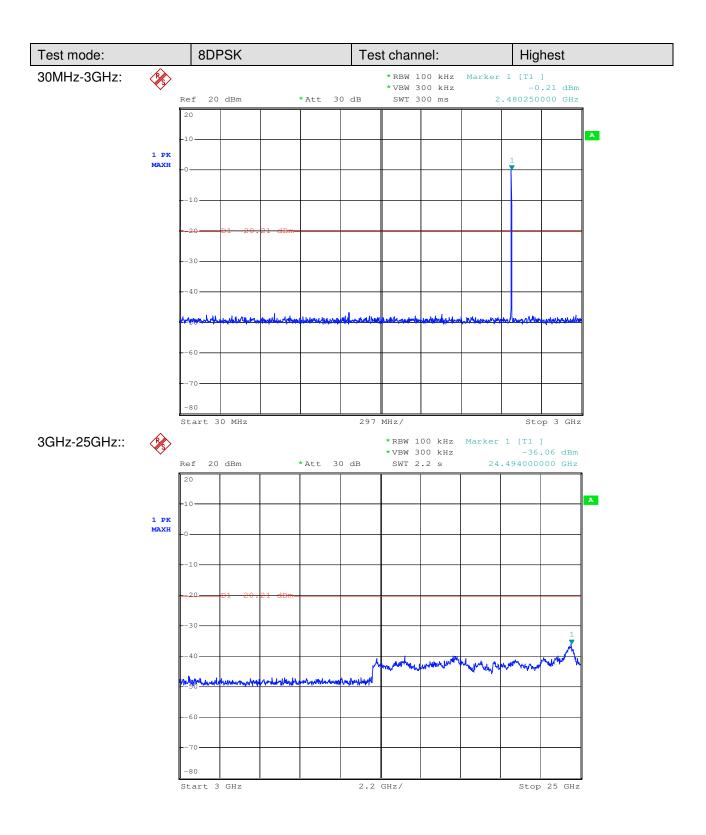




Report No.: SHEM150200036302

Page: 55 of 85

7.10.2 Conducted Band-edge

Test plot as follows:

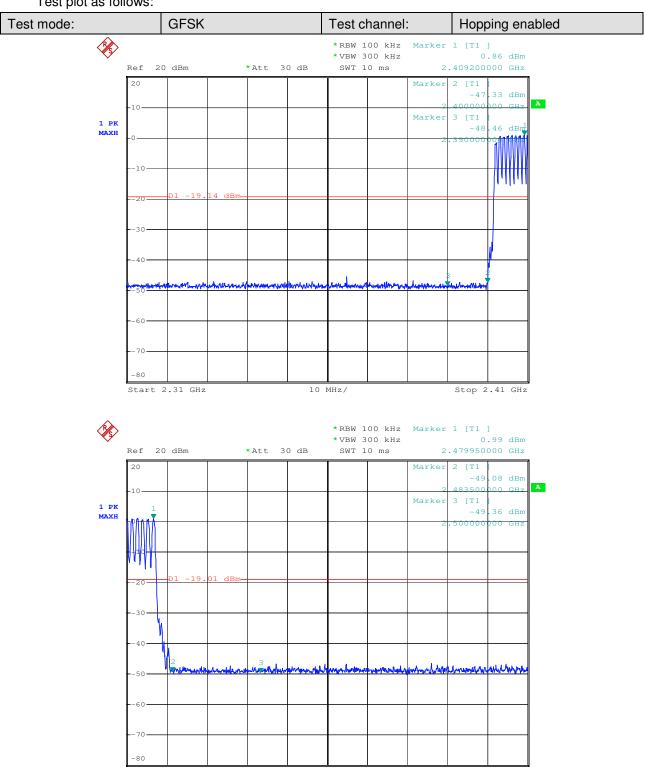


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Report No.: SHEM150200036302


Page: 56 of 85

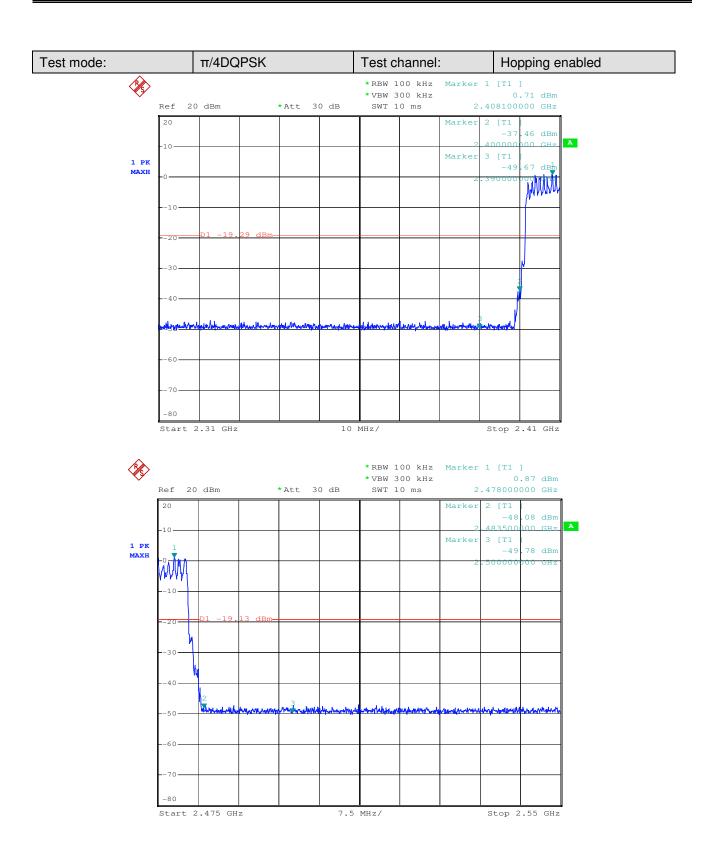



Report No.: SHEM150200036302


Page: 57 of 85

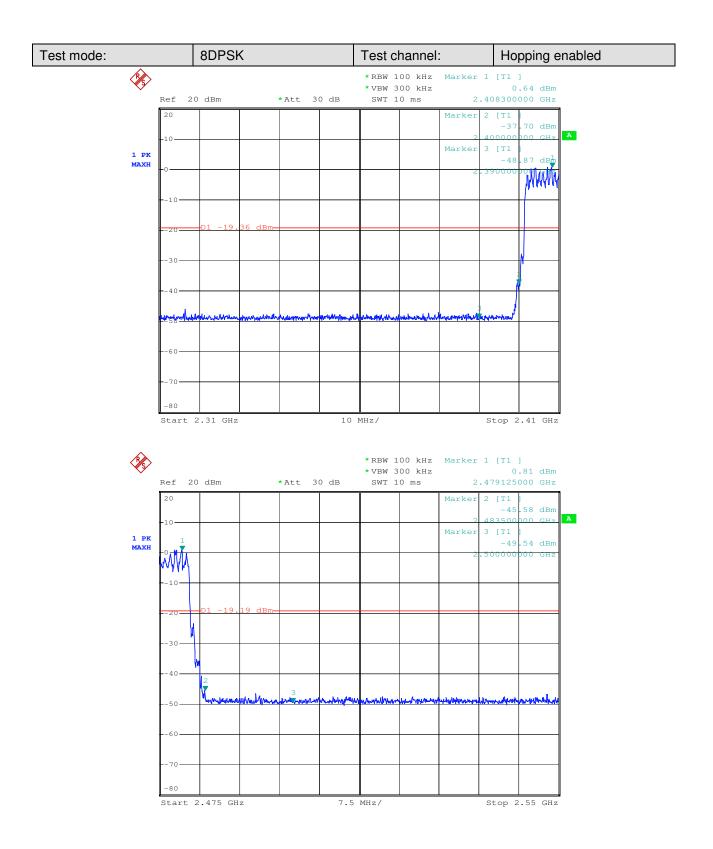



Report No.: SHEM150200036302


Page: 58 of 85

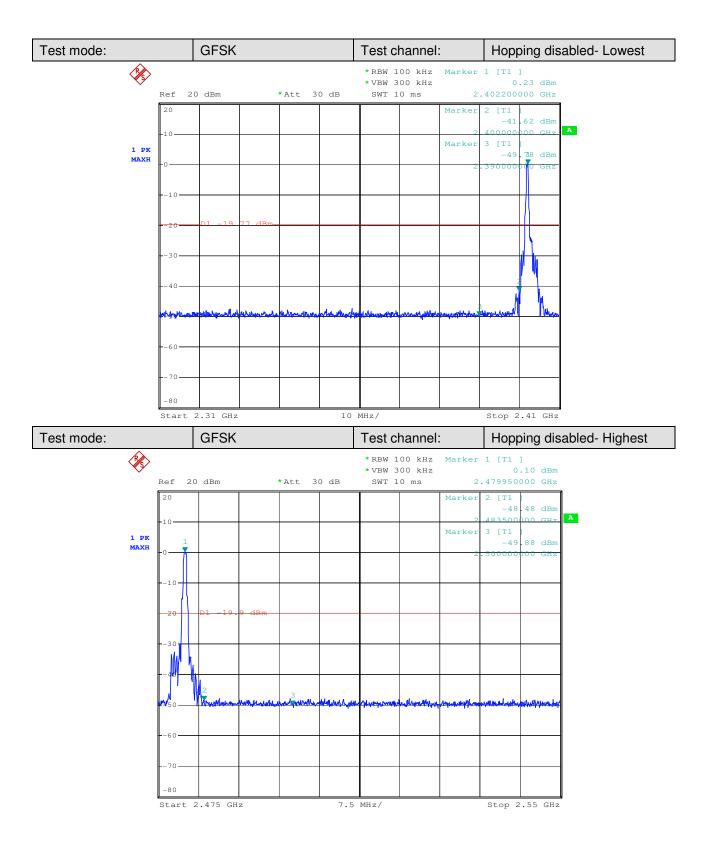



Report No.: SHEM150200036302


Page: 59 of 85

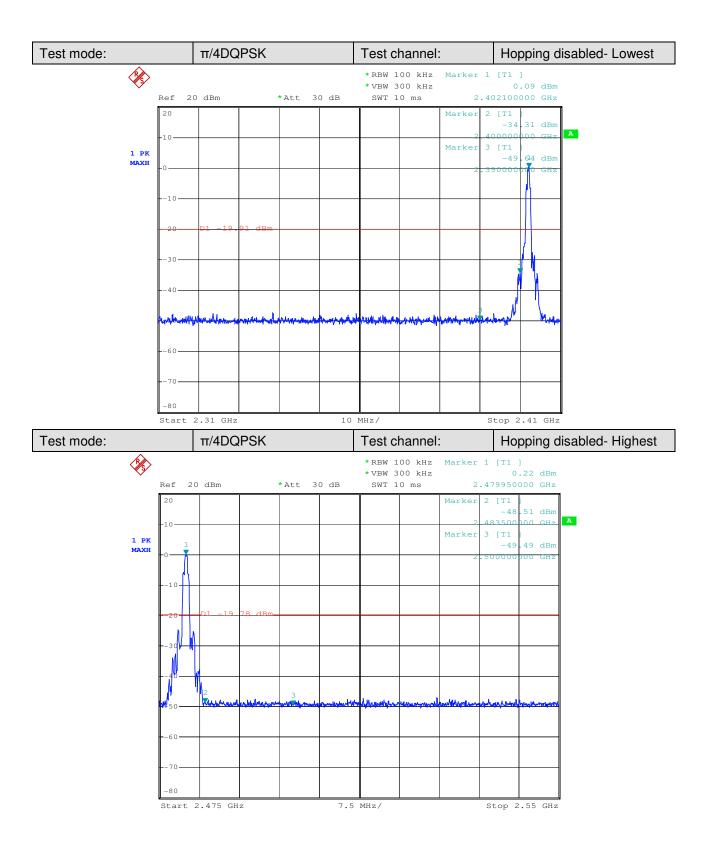



Report No.: SHEM150200036302

Page: 60 of 85

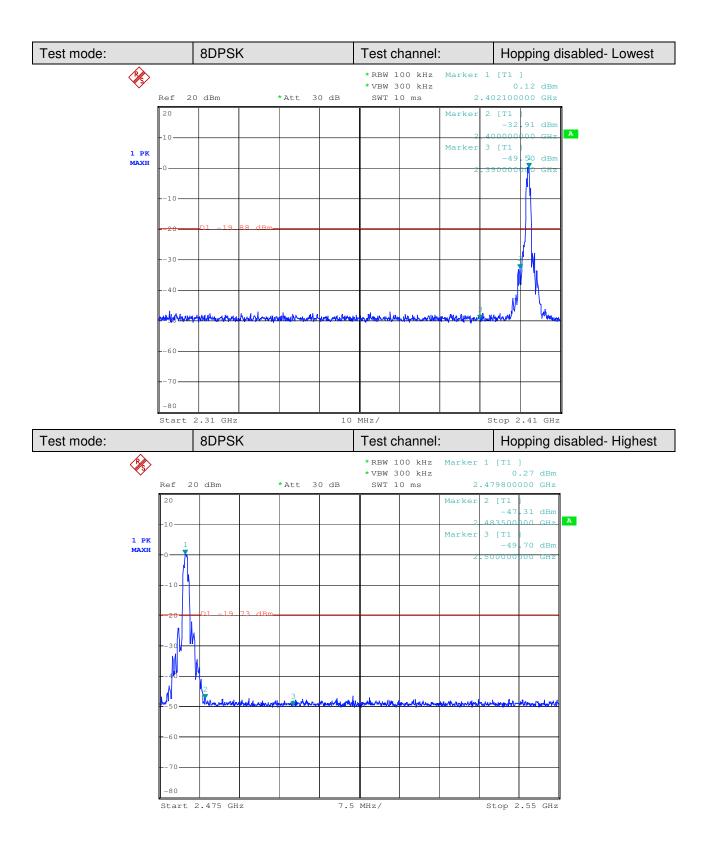



Report No.: SHEM150200036302

Page: 61 of 85

7.11 Radiated Spurious Emissions and Band-edge

Frequency Range: 9KHz to 25GHz

Test site/setup:

Measurement Distance: 3m (Semi-Anechoic Chamber)

Test instrumentation set-up:

1 est instrumentation se	ot up.		
Frequency Range	Detector	RBW	VBW
0.009MHz-0.090MHz	Peak	10kHz	30kHz
0.009MHz-0.090MHz	Average	10kHz	30kHz
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz
0.110MHz-0.490MHz	Peak	10kHz	30kHz
0.110MHz-0.490MHz	Average	10kHz	30kHz
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz
30MHz-1GHz	Quasi-peak	100kHz	300kHz
Above 1GHz	Peak	RBW=1MHz	VBW≥RBW
Above IGHZ	Average	novv=livinz	VBW=10Hz

Sweep=Auto

15.209 Limit:

Frequency	Limit (dBuV/m)			
0.009MHz-0.490MHz	128.5 ~ 93.8			
0.490MHz-1.705MHz	73.8 ~63.0			
1.705MHz-30MHz	69.5			
30MHz-88MHz	40.0			
88MHz-216MHz	43.5			
216MHz-960MHz	46.0			
960MHz-1GHz	54.0			
Above 1GHz	54.0			

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



Report No.: SHEM150200036302

Page: 62 of 85

Test Configuration: Receive antenna scan height 1 m - 4 m. polarization Vertical / Horizontal

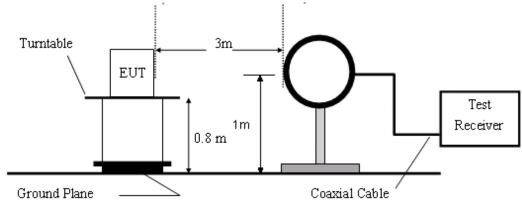


Figure 1. 30MHz to 1GHz radiated emissions test configuration

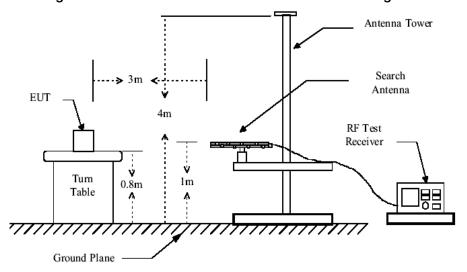


Figure 2. 30MHz to 1GHz radiated emissions test configuration

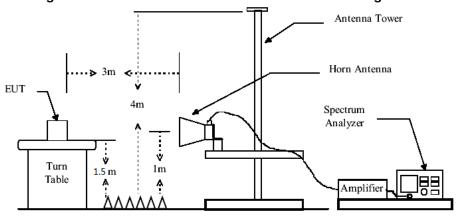


Figure 3. Above 1GHz radiated emissions test configuration



Report No.: SHEM150200036302

Page: 63 of 85

Test Procedure:

The procedure used was ANSI Standard C63.10:2009. The receiver was scanned from 9KHz to 25GHz.When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Low noise amplifier was used below 1GHz, High pass Filter was used above 3GHz.

Between 1G and 3GHz, we did not use any amplifier or filter.

Pre-test was performed on all modes, Compliance test was performed on worse case (8DPSK mode).

Test were performed for their spatial orthogonal(X, Y, Z), the worst test data (X orthogonal) was submitted.

- For this intentional radiator operates below 25 GHz. the spectrum shall be investigated to the tenth harmonic of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 5rd harmonic.
- 2) As shown in Section, for frequencies above 1000MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test Result: Pass



Report No.: SHEM150200036302

Page: 64 of 85

7.11.1 Radiated Spurious Emissions

30MHz-1GHz:

lowest Channel

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
1	31.949	23.72	12.54	23.71	0.13	12.68	40.00	-27.32	QP	Horizontal
2	38.722	23.89	12.98	23.71	0.25	13.41	40.00	-26.59	QP	Horizontal
3	224.736	26.24	9.14	23.63	1.47	13.22	46.00	-32.78	QP	Horizontal
4	782.905	21.31	22.11	23.92	3.18	22.68	46.00	-23.32	QP	Horizontal
5	955.549	22.11	23.77	23.94	3.58	25.52	46.00	-20.48	QP	Horizontal
6	993.011	21.37	24.37	23.94	3.68	25.48	54.00	-28.52	QP	Horizontal
1	32.957	28.37	12.56	23.71	0.15	17.37	40.00	-22.63	QP	Vertical
2	38.664	28.77	12.96	23.71	0.25	18.27	40.00	-21.73	QP	Vertical
3	41.157	27.15	13.10	23.70	0.29	16.84	40.00	-23.16	QP	Vertical
4	43.811	27.42	13.10	23.70	0.31	17.13	40.00	-22.87	QP	Vertical
5	46.152	26.54	13.00	23.70	0.34	16.18	40.00	-23.82	QP	Vertical
6	939.392	23.01	23.44	23.94	3.56	26.07	46.00	-19.93	QP	Vertical

Middle Channel

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
1	30.211	24.89	12.51	23.72	0.55	14.23	40.00	-25.77	QP	Horizontal
2	653.568	22.86	19.71	23.84	2.85	21.58	46.00	-24.42	QP	Horizontal
3	740.944	22.16	21.10	23.89	3.06	22.43	46.00	-23.57	QP	Horizontal
4	805.593	21.62	21.81	23.93	3.23	22.73	46.00	-23.27	QP	Horizontal
5	857.755	21.24	22.23	23.93	3.33	22.87	46.00	-23.13	QP	Horizontal
6	955.629	21.86	23.77	23.94	3.58	25.27	46.00	-20.73	QP	Horizontal
1	30.000	39.17	12.50	23.72	0.55	28.50	40.00	-11.50	QP	Vertical
2	38.481	31.43	12.94	23.71	0.25	20.91	40.00	-19.09	QP	Vertical
3	43.966	29.08	13.10	23.70	0.31	18.79	40.00	-21.21	QP	Vertical
4	105.272	34.26	9.91	23.66	0.96	21.47	43.50	-22.03	QP	Vertical
5	151.067	31.71	12.30	23.64	1.17	21.54	43.50	-21.96	QP	Vertical
6	185.788	34.67	11.72	23.62	1.36	24.13	43.50	-19.37	QP	Vertical



Report No.: SHEM150200036302

Page: 65 of 85

Highest Channel

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
1	49.707	39.25	12.73	23.69	0.41	28.70	40.00	-11.30	QP	Horizontal
2	61.995	39.05	11.85	23.68	0.54	27.76	40.00	-12.24	QP	Horizontal
3	98.487	44.25	9.05	23.66	0.90	30.54	43.50	-12.96	QP	Horizontal
4	150.011	43.82	12.30	23.64	1.17	33.65	43.50	-9.85	QP	Horizontal
5	184.490	43.23	11.78	23.62	1.35	32.74	43.50	-10.76	QP	Horizontal
6	332.519	44.03	13.13	23.68	1.92	35.40	46.00	-10.60	QP	Horizontal
1	123.698	40.67	11.16	23.65	1.05	29.23	43.50	-14.27	QP	Vertical
2	150.011	38.43	12.30	23.64	1.17	28.26	43.50	-15.24	QP	Vertical
3	233.349	47.26	9.54	23.64	1.51	34.67	46.00	-11.33	QP	Vertical
4	282.985	47.03	11.28	23.66	1.78	36.43	46.00	-9.57	QP	Vertical
5	332.519	45.45	13.13	23.68	1.92	36.82	46.00	-9.18	QP	Vertical
6	492.469	41.26	16.20	23.73	2.42	36.15	46.00	-9.85	QP	Vertical


Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor




Report No.: SHEM150200036302

Page: 66 of 85

Below is the plot of worst case on lowest channel: Vertical:

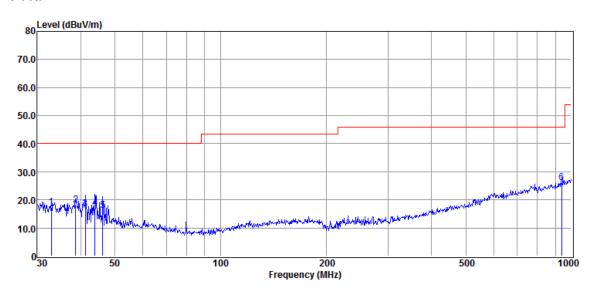

Horizontal:

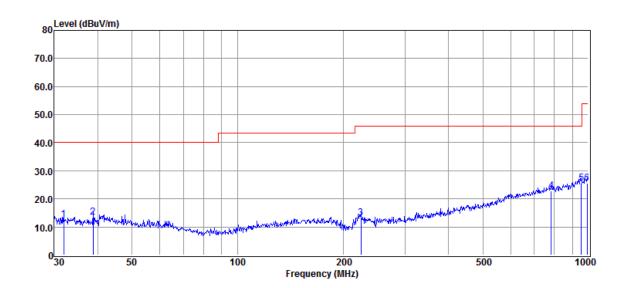



Report No.: SHEM150200036302

Page: 67 of 85

Above 1GHz:

Lowest Channel (2402MHz)

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4804	36.25	6.18	42.43	54	-11.57	peak	Horizontal
2	7206	35.96	10.63	46.59	54	-7.41	peak	Horizontal
3	9608	33.31	14.38	47.69	54	-6.31	peak	Horizontal
4	4804	33.20	6.18	39.38	54	-14.62	peak	Vertical
5	7206	33.20	10.63	43.83	54	-10.17	peak	Vertical
6	9608	32.09	14.38	46.47	54	-7.53	peak	Vertical

Middle Channel(2441MHz)

	made Chame(244 mm2)										
Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization			
1	4882	35.52	7.00	42.52	54	-11.48	peak	Horizontal			
2	7323	36.55	11.13	47.68	54	-6.32	peak	Horizontal			
3	9764	34.13	14.36	48.49	54	-5.51	peak	Horizontal			
4	4882	32.17	7.00	39.17	54	-14.83	peak	Vertical			
5	7323	33.61	11.13	44.74	54	-9.26	peak	Vertical			
6	9764	31.48	14.36	45.84	54	-8.16	peak	Vertical			

Highest Channel(2480MHz)

9	righest onarrie(2400wiriz)										
Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization			
1	4960	37.59	7.49	45.08	54	-8.92	peak	Horizontal			
2	7440	37.61	11.65	49.26	54	-4.74	peak	Horizontal			
3	9920	34.05	14.40	48.45	54	-5.55	peak	Horizontal			
4	4960	34.32	7.49	41.81	54	-12.19	peak	Vertical			
5	7440	33.56	11.65	45.21	54	-8.79	peak	Vertical			
6	9920	32.40	14.40	46.80	54	-7.20	peak	Vertical			

Remark: 1. Test Level = Receiver Reading + Antenna Factor + Cable Loss - Preamplifier Factor.

- 2. No any other emissions level which are attenuated less than 20dB below the limit. According to 15.31(o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.
- 3. If the Peak value below the AV Limit, the AV test doesn't perform for this submission.



Report No.: SHEM150200036302

Page: 68 of 85


7.11.2 Radiated Band edge

Lowest Channel(2402MHz)


Modulation:	GFSK
-------------	------

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2390.0	43.40	-3.89	39.51	54	-14.49	Peak	Horizontal
2	2402.3	95.09	-3.92	91.17	54	37.17	Peak	Horizontal
1	2390.0	40.70	-3.89	36.81	54	-17.19	Peak	Vertical
2	2402.1	89.43	-3.92	85.51	54	31.51	Peak	Vertical
	110.	0 dBuV/m						



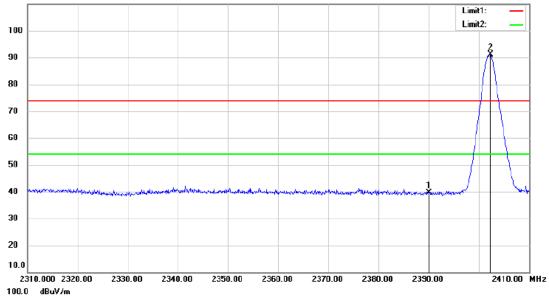

Vertical:

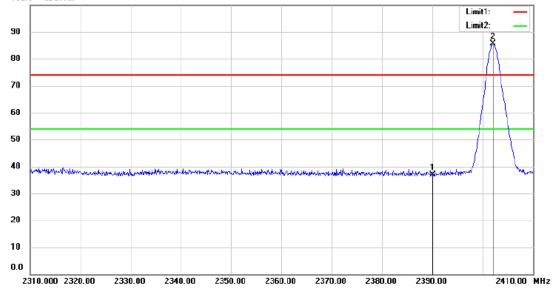



Report No.: SHEM150200036302


Page: 69 of 85

Lowest Channel(2402MHz)


Mac	duila	tion	/	4D(PSK
IVIO	JUIZ	ition	: TT/	4U(ろんシア

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2390.0	41.40	-3.89	37.51	54	-16.49	Peak	Horizontal
2	2401.9	94.99	-3.91	91.08	54	37.08	Peak	Horizontal
1	2390.0	41.17	-3.89	37.28	54	-16.72	Peak	Vertical
2	2402.1	90.33	-3.92	86.41	54	32.41	Peak	Vertical
	110.	0 dBuV/m						<u> </u>

Horizontal:

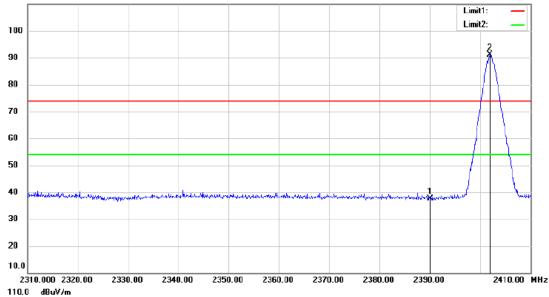

Vertical:

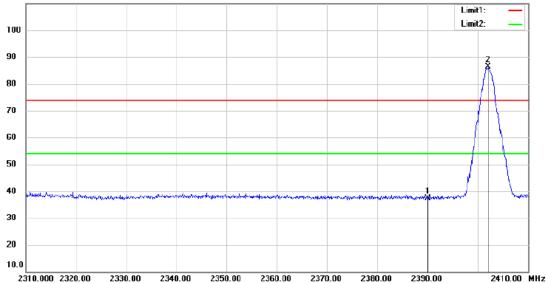



Modulation: 8DDSK

Report No.: SHEM150200036302

Page: 70 of 85


Lowest Channel (2402MHz)

Frequency Reading Corrected


Modulation: obl or								
Result Limit		Over Limit	Detector					
BuV/m)	(dBuV/m)	(dB)	Detector					

IVIN.	(MHz)	(dBuV/m)	factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	Detector	Polarization
1	2390.0	42.21	-3.89	38.32	54	-15.68	Peak	Horizontal
2	2402.1	95.18	-3.92	91.26	54	37.26	Peak	Horizontal
1	2390.0	42.14	-3.89	38.25	54	-15.75	Peak	Vertical
2	2401.9	90.64	-3.91	86.73	54	32.73	Peak	Vertical

Horizontal:

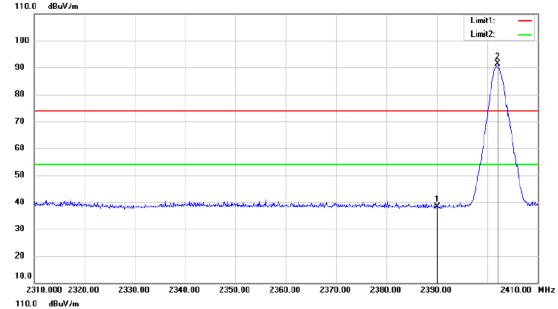

Vertical:

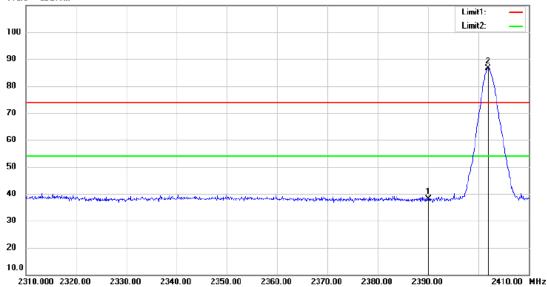



Report No.: SHEM150200036302


Page: 71 of 85

CH Low 2480MHz


Modulation: GFSK

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2479.875	100.75	-4.00	96.75	74	22.75	Peak	Horizontal
2	2483.5	63.36	-4.01	59.35	74	-14.65	Peak	Horizontal
3	2500.0	43.02	-4.03	38.99	74	-35.01	Peak	Horizontal
1	2480.025	96.40	-4.00	92.40	54	38.40	Average	Horizontal
2	2483.5	55.77	-4.01	51.76	54	-2.24	Average	Horizontal
3	2500.0	30.83	-4.03	26.80	54	-27.20	Average	Horizontal

Peak:

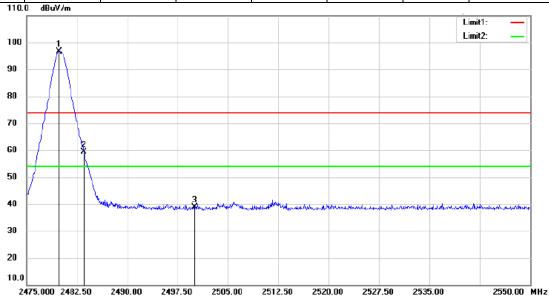

Average:

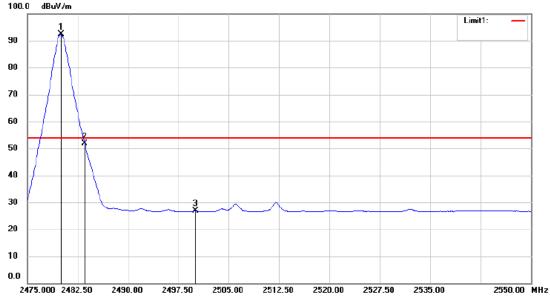



Report No.: SHEM150200036302


Page: 72 of 85

CH Low 2480MHz

Modulation: GFSK Frequency Reading Corrected Result Limit Over Limit Resolutions in the Indian Resolution of the

IVIP	(MHz)	(dBuV/m)	factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	Detector	Polarization
1	2479.95	92.61	-4.00	88.61	54	34.61	Peak	Vertical
2	2483.5	55.36	-4.01	51.35	54	-2.65	Peak	Vertical
3	2500.0	41.51	-4.03	37.48	54	-16.52	Peak	Vertical

Peak:

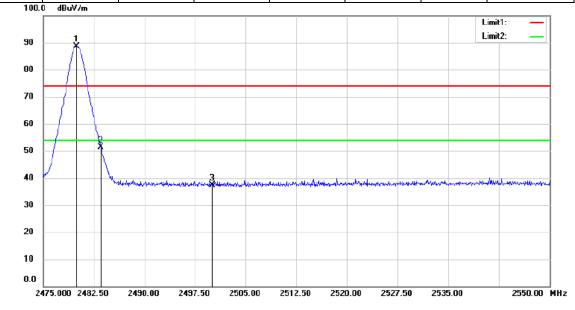



110.0

dBuV/m

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.


Report No.: SHEM150200036302

Page: 73 of 85


CH Low 2480MHz

Modulation: π/4DQPSK Frequency Reading Corrected Over Limit Result Limit MK. Polarization Detector (MHz) (dBuV/m) factor(dB) (dBuV/m) (dBuV/m) (dB) 101.66 Horizontal 2479.95 -4.00 97.66 74 23.66 Peak 2 2483.5 65.73 -4.01 61.72 74 -12.28Peak Horizontal 3 2500.0 42.39 -4.0338.36 74 -35.64Peak Horizontal 1 2479.875 92.81 -4.00 88.81 54 34.81 Average Horizontal 2 2483.5 51.17 -4.0147.16 54 Average -6.84Horizontal 3 -4.03 54 2500.0 30.72 26.69 -27.31Average Horizontal

Peak:

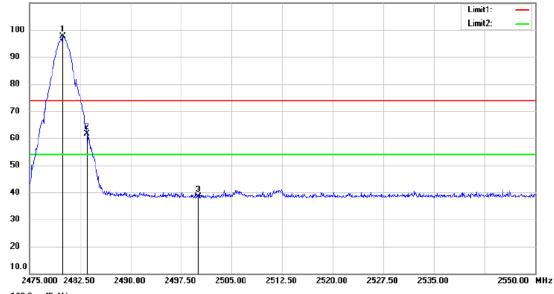

Average:

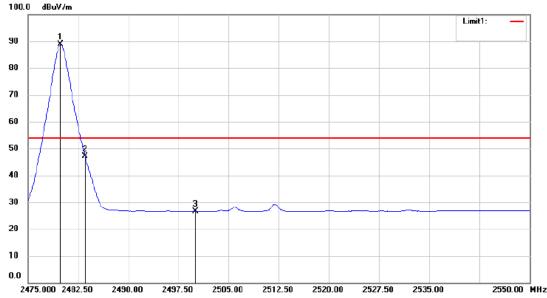



Report No.: SHEM150200036302


Page: 74 of 85

CH Low 2480MHz


Modulation: π/4DQPSK

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2479.875	93.86	-4.00	89.86	74	15.86	Peak	Vertical
2	2483.5	59.16	-4.01	55.15	74	-18.85	Peak	Vertical
3	2500.0	41.45	-4.03	37.42	74	-36.58	Peak	Vertical
1	2479.875	91.96	-4.00	87.96	54	33.96	Average	Vertical
2	2483.5	50.83	-4.01	46.82	54	-7.18	Average	Vertical
3	2500.0	31.29	-4.03	27.26	54	-26.74	Average	Vertical

Peak:

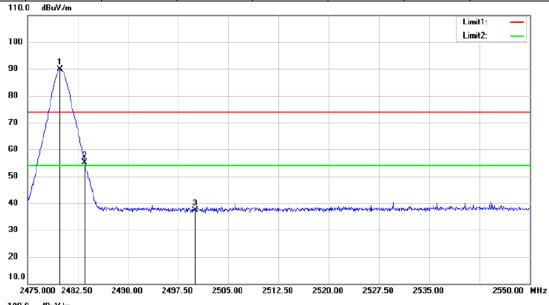

Average:

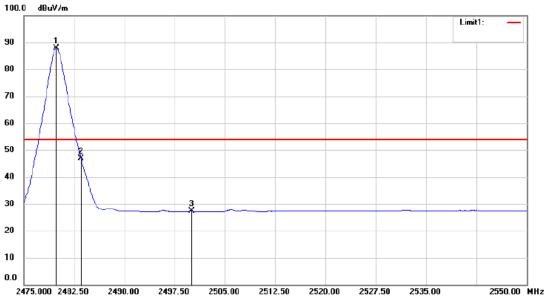

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to thesample(s) tested and such sample(s) are retained for 90 days only



Report No.: SHEM150200036302


Page: 75 of 85

CH Low 2480MHz

Modulation: 8DPSK

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2479.95	101.51	-4.00	97.51	74	23.51	Peak	Horizontal
2	2483.5	65.54	-4.01	61.53	74	-12.47	Peak	Horizontal
3	2500.0	42.06	-4.03	38.03	74	-35.97	Peak	Horizontal
1	2479.725	92.77	-4.01	88.76	54	34.76	Average	Horizontal
2	2483.5	53.99	-4.01	49.98	54	-4.02	Average	Horizontal
3	2500.0	30.78	-4.03	26.75	54	-27.25	Average	Horizontal

Peak:

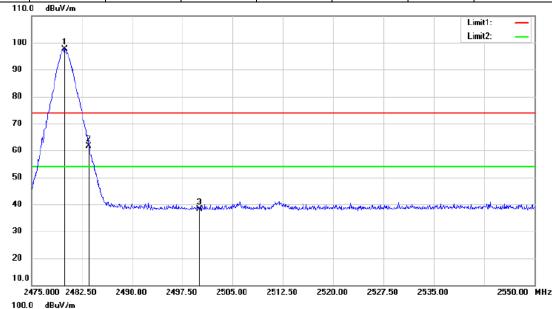

Average:





Report No.: SHEM150200036302


Page: 76 of 85

CH Low 2480MHz


Modulation: 8DPSK

MK.	Frequency (MHz)	Reading (dBuV/m)	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2479.95	97.95	-4.00	93.95	74	19.95	Peak	Vertical
2	2483.5	63.32	-4.01	59.31	74	-14.69	Peak	Vertical
3	2500.0	43.27	-4.03	39.24	74	-34.76	Peak	Vertical
1	2479.725	90.27	-4.01	86.26	54	32.26	Average	Vertical
2	2483.5	51.91	-4.01	47.9	54	-6.10	Average	Vertical
3	2500.0	30.96	-4.03	26.93	54	-27.07	Average	Vertical

Peak:

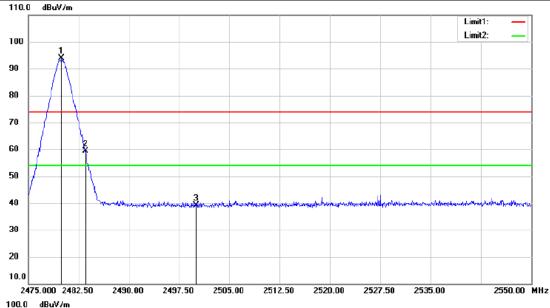

Average:

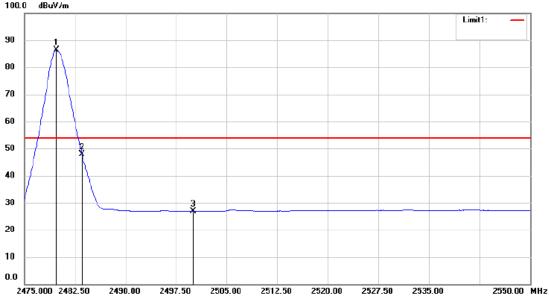



Report No.: SHEM150200036302

Page: 77 of 85

Remark: 1. Test Level = Receiver Reading + Antenna Factor + Cable Loss - Preamplifier Factor.

- 2. No any other emissions level which are attenuated less than 20dB below the limit. According to 15.31(o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.
- 3. If the Peak value below the AV Limit, the AV test doesn't perform for this submission.

All frequencies within the "Restricted bands" have been evaluated to compliance.

Except as shown in paragraph of this section, only spurious emissions are permitted in any of the frequency bands listed below:

1. FCC Part 15, Subpart C Section 15.205 Restricted bands of operation.

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.5 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			



108-138 156.52475-156.52525 156.7-156.9

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM150200036302

Page: 78 of 85

MHz	MHz	GHz
0.090-0.110	240-285	9.0-9.2
2.1735-2.1905	322-335.4	9.3-9.5
3.020-3.026	399.9-410	10.6-12.7
4.125-4.128	608-614	13.25-13.4
4.17725-4.17775	960-1427	14.47-14.5
4.20725-4.20775	1435-1626.5	15.35-16.2
5.677-5.683	1645.5-1646.5	17.7-21.4
6.215-6.218	1660-1710	22.01-23.12
6.26775-6.26825	1718.8-1722.2	23.6-24.0
6.31175-6.31225	2200-2300	31.2-31.8
8.291-8.294	2310-2390	36.43-36.5
8.362-8.366	2655-2900	Above 38.6
8.37625-8.38675	3260-3267	
8.41425-8.41475	3332-3339	
12.29-12.293	3345.8-3358	
2.51975-12.52025	3500-4400	
2.57675-12.57725	4500-5150	
13.36-13.41	5350-5460	
16.42-16.423	7250-7750	
6.69475-16.69525	8025-8500	
6.80425-16.80475		•
25.5-25.67		
37.5-38.25		
73-74.6		
74.8-75.2		




Report No.: SHEM150200036302

Page: 79 of 85

7.12 Occupied Bandwidth Test

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
- 2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centred on the hopping channel;
- Set the spectrum analyzer: RBW >= 1% of the selected span (set 30 kHz). VBW >= RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
- 4. Mark the peak frequency and 99% bandwidth points.

Test Result: Pass

Test Data:

Test Mode	Channel	Frequency (MHz)	Bandwidth (MHz)
	LOW	2402	1.020
GFSK	MID	2441	0.999
	HIGH	2480	0.996
	LOW	2402	1.101
π/4DQPSK	MID	2441	1.092
	HIGH	2480	1.092
	LOW	2402	1.137
8DPSK	MID	2441	1.128
	HIGH	2480	1.128





Report No.: SHEM150200036302

Page: 80 of 85

Span 3 MHz

Test plot as follows:

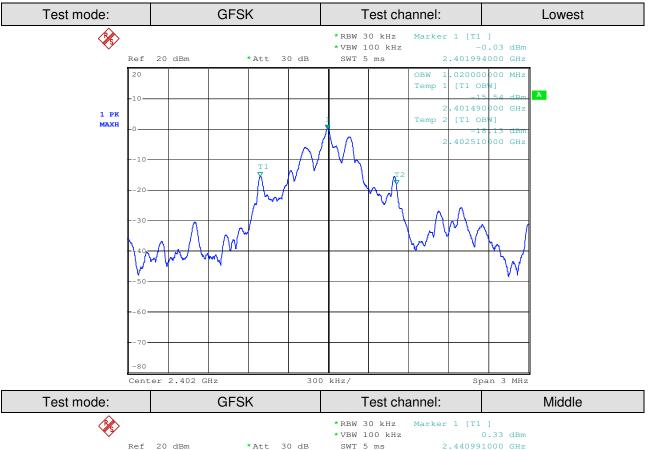

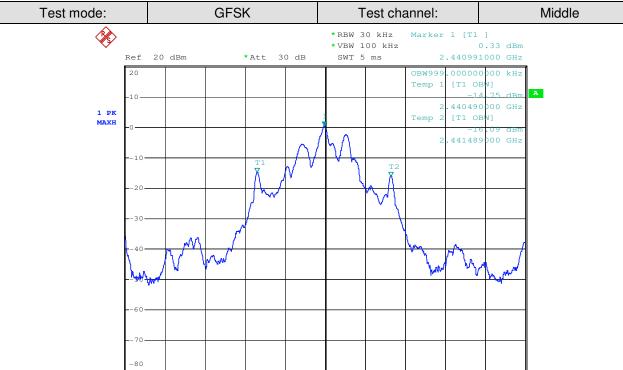


300 kHz/

Center 2.441 GHz



Report No.: SHEM150200036302


Page: 81 of 85

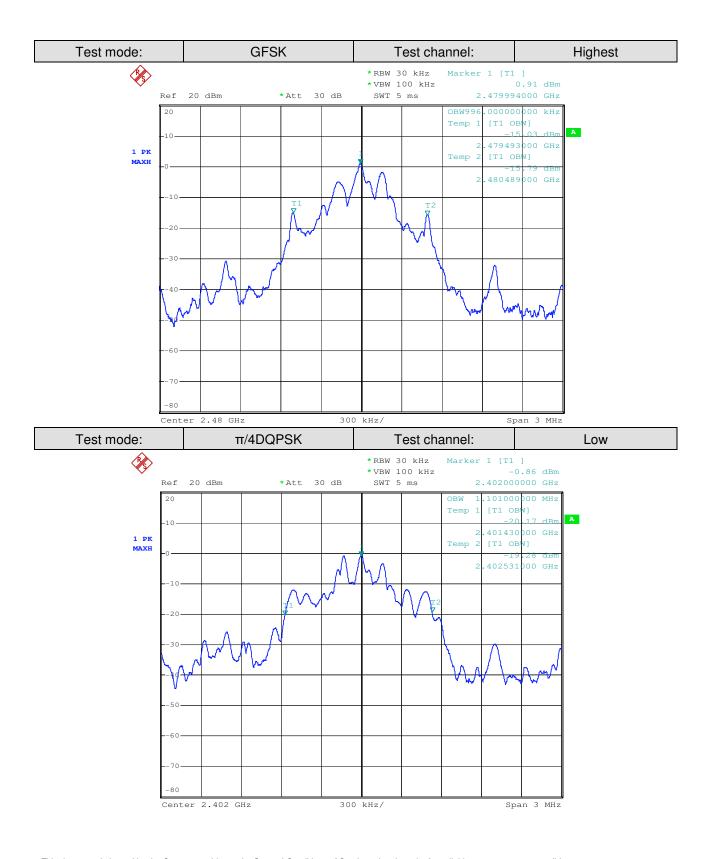



Report No.: SHEM150200036302


Page: 82 of 85

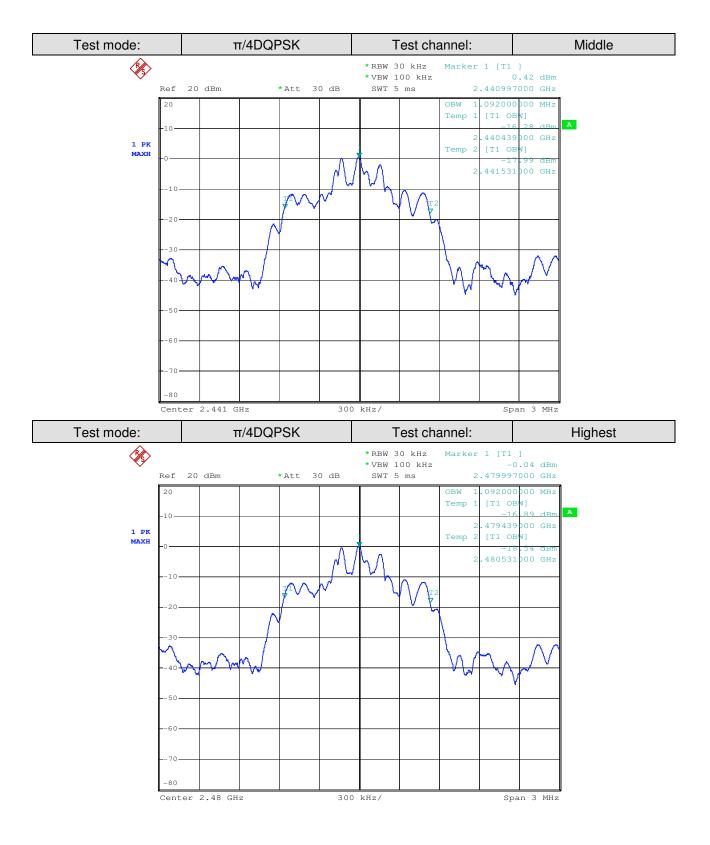



Report No.: SHEM150200036302


Page: 83 of 85

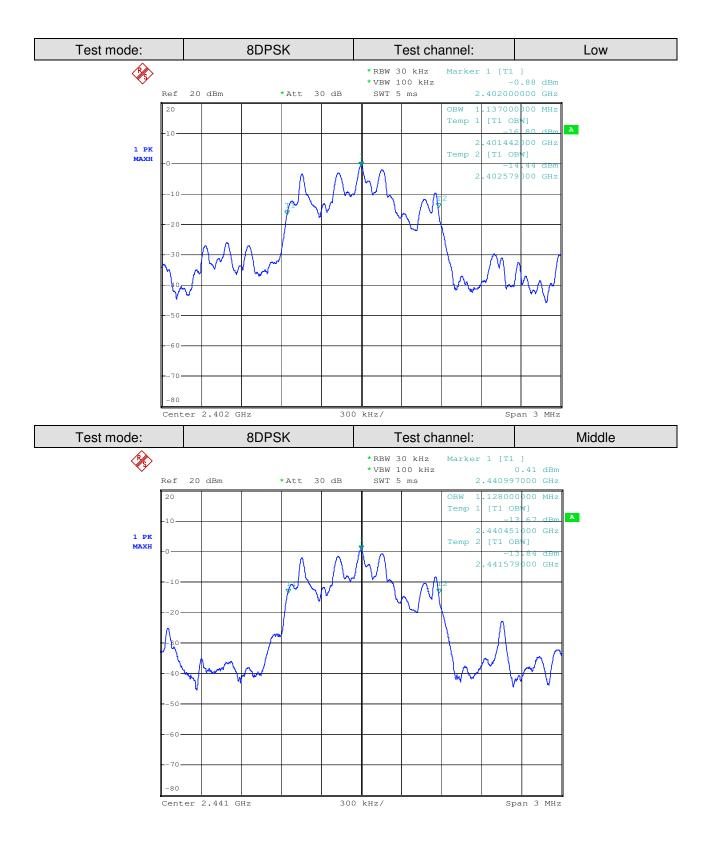



Report No.: SHEM150200036302

Page: 84 of 85

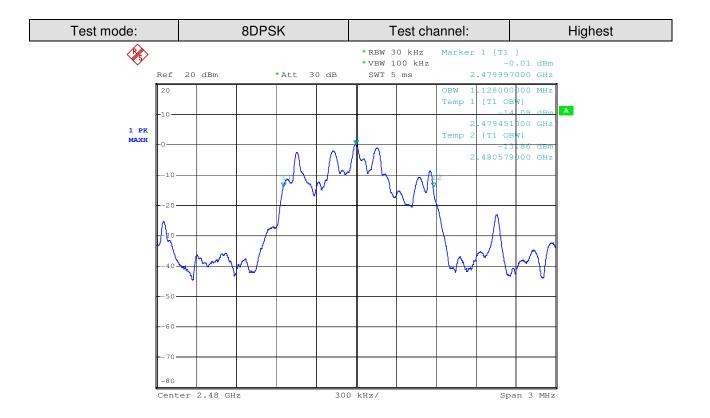



Report No.: SHEM150200036302

Page: 85 of 85

8 Test Setup Photographs

Refer to the < Edwin _Test Setup photos-FCC>.

9 EUT Constructional Details

Refer to the < Edwin _External Photos-FCC > & < Edwin _Internal Photos-FCC>.

-- End of the Report--